


Ayachi Zammel — spatial clusters

local Moran's I, imada level · Benjamini-Hochberg q = 0.05

- LISA class
- high in a high neighbourhood — HH (47)
 - low in a low neighbourhood — LL (0)
 - high in a low neighbourhood — HL (0)
 - not significant (1990)
 - low in a high neighbourhood — LH (5)

2042 mapped units

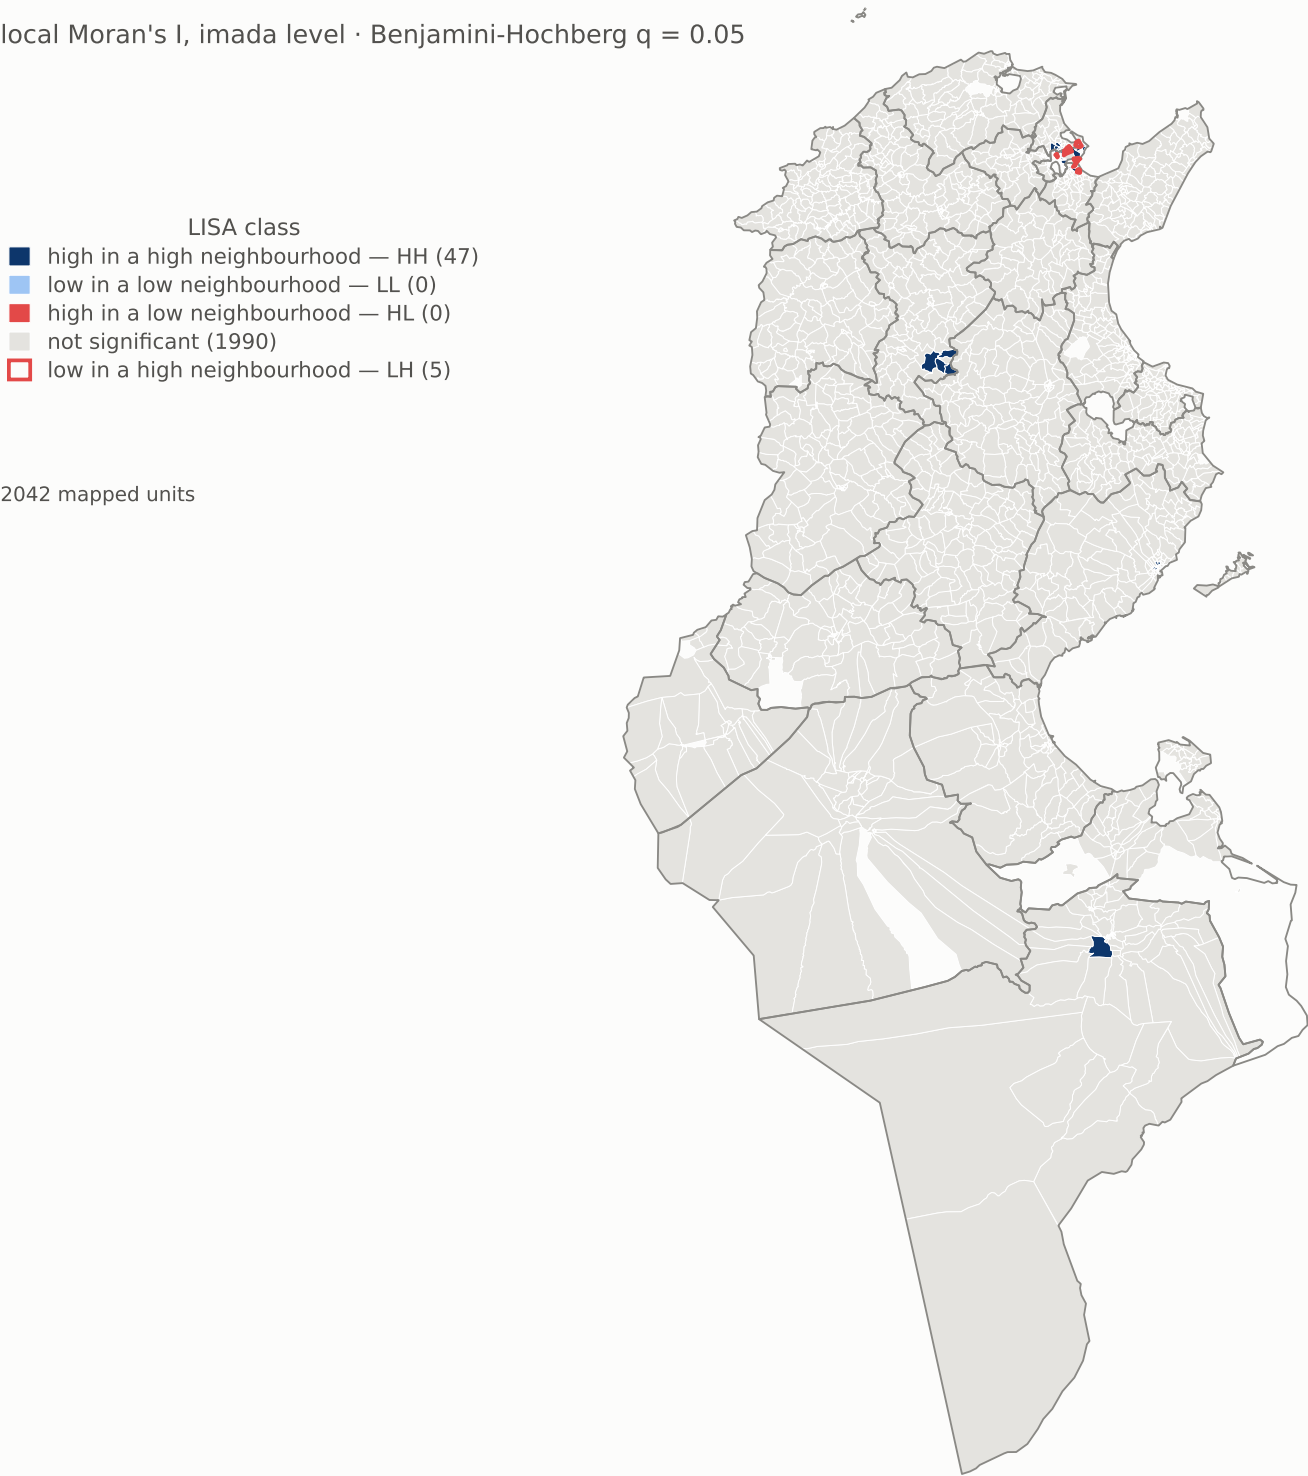

global Moran's I = +0.591 (p < 0.0001, 9,999 permutations, pseudo z = +44.0). The map localises that: a class is assigned only where the unit's own neighbourhood is more extreme than 9,999 random neighbourhoods drawn from the same values, after Benjamini-Hochberg correction across all 2,042 units (threshold actually applied: $p \leq 0.0012$). Uncorrected, 409 units reach $p \leq 0.05$ — which is what an uncorrected LISA map would shade, and at 2,042 tests about 102 of those are expected by chance alone. Empirical-Bayes standardising the rate, so a small unit's noisy share is not read as geography, reclassifies 3 unit(s). Source: ISIE procès-verbaux, 9,419 certified stations · boundaries OCHA/HDX COD-AB (CC BY-IGO) · queen contiguity from shared boundary vertices