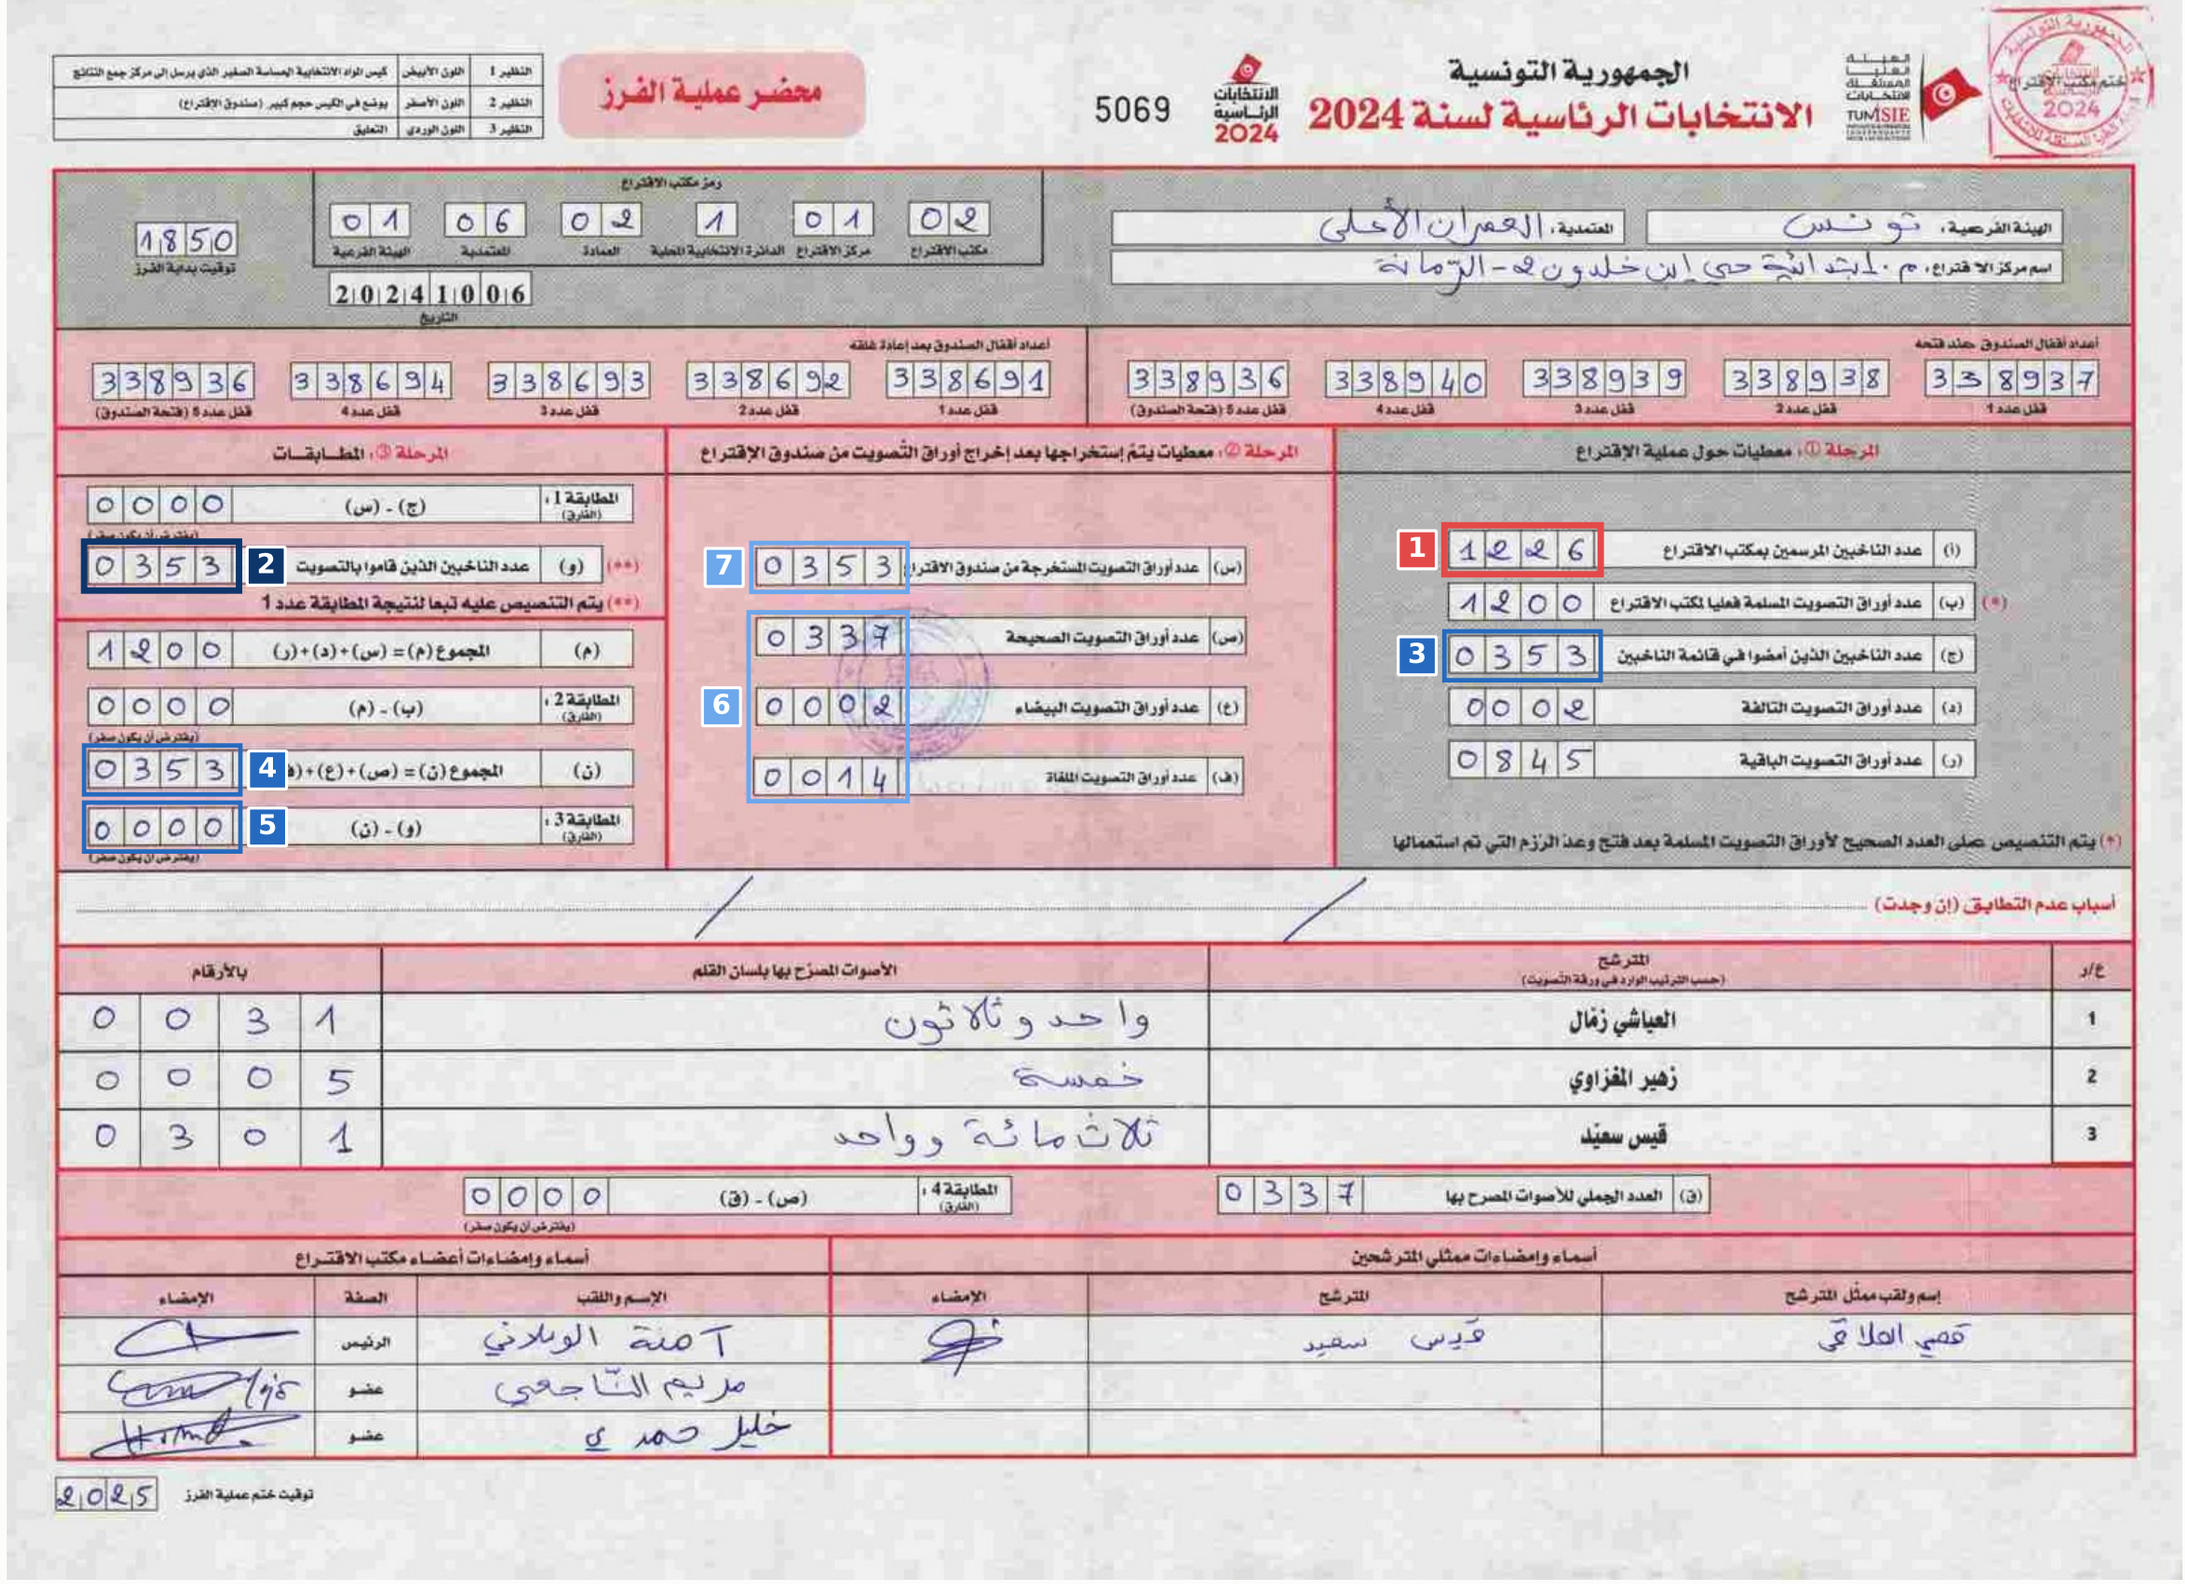

Where turnout comes from on the form

Bureau 01060210102 · 1,226 registered · 353 voted · turnout 28.79%

1	**(a)**	a_registered	= 1226	DENOMINATOR — registered voters at this station Constrained by NOTHING. It appears in none of the form's eight identities, so no other number on the paper can contradict it and the decoder cannot correct it. This is the one field read by classifier alone.
2	**(w)**	w_voted	= 353	NUMERATOR — voters who voted Constrained twice: line (c) must equal it, and the form prints their difference itself on line 3.
3	**(c)**	c_signed	= 353	voters who signed the register Identity c_eq_w: (c) must equal (w). Here both read 353.
4	**(n)**	n_total	= 353	total papers accounted for — a form line, not a published column Identity match3: (w) − (n) is printed on the form as line 3, and reads 0000 here.
5	**(3)**	match3	= 0	the form's printed check on (w) − (n) — also not published Pre-printed for the clerk to fill. A non-zero value is the form telling you the two disagree.
6	**(s.)**	valid	= 337+2+14	valid papers — with blank and spoilt below it Identity papers_sum: valid + blank + spoilt = (n). Here 337 + 2 + 14 = 353, so the numerator is reachable from the counted papers too.
7	**(s)**	s_extracted	= 353	ballots extracted from the urn Identity match1: (c) − (s) is printed as line 1. A third route to the same number.

turnout = (w) voters ÷ (a) registered = 353 ÷ 1,226 = 28.79% · Boxes are the cells the reader actually sampled, taken from the locator's own field map in .cache/pv_template.json, not drawn by eye.
The Latin letter in each row transliterates the Arabic line marker on the paper; the monospace name is the column in data/pv_presidential_2024.csv. Every number here is handwritten, and the whole dataset is 9,448 forms like this one.
Note the asymmetry: rows 3–7 all constrain the numerator, and the form even prints two of those differences itself. Nothing constrains row 1. That is why turnout is a certified numerator over an uncertified denominator.