


Element specific constraints using OCL


Constraints written in OCL (Object Constraint Language: <https://projects.eclipse.org/projects/modeling.mdt.ocel>) may be added to every available element in the IoMT model. The screenshot below shows the element *HeartMonitoring* and one constraint attached to it, called *hasSensorAndService*.

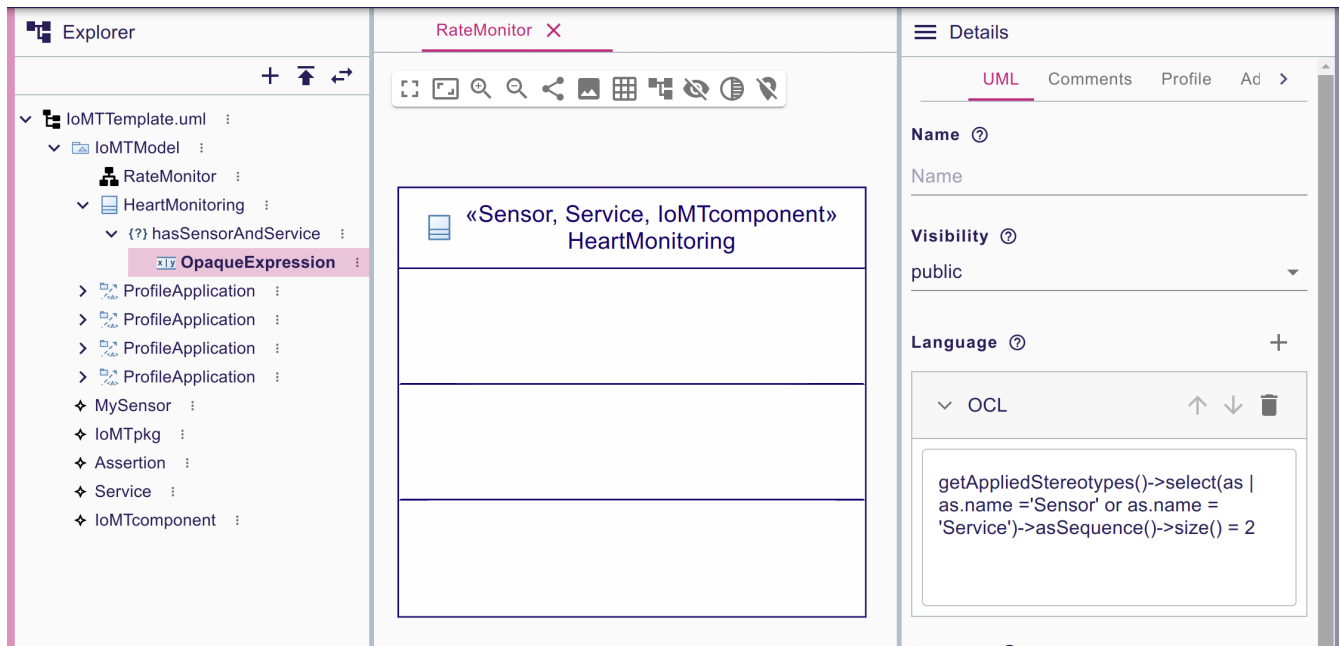

This constraint verifies if the given Class has both 'Service' and 'Sensor' stereotypes applied. The content of the constraint is chosen by the application developer.

```
getAppliedStereotypes()->select(as | as.name ='Sensor' or as.name = 'Service')->asSequence()->size() = 2
```

Constraints are created by selecting the "New Object" menu in the model element and the "Owned Rule | Constraint" option.

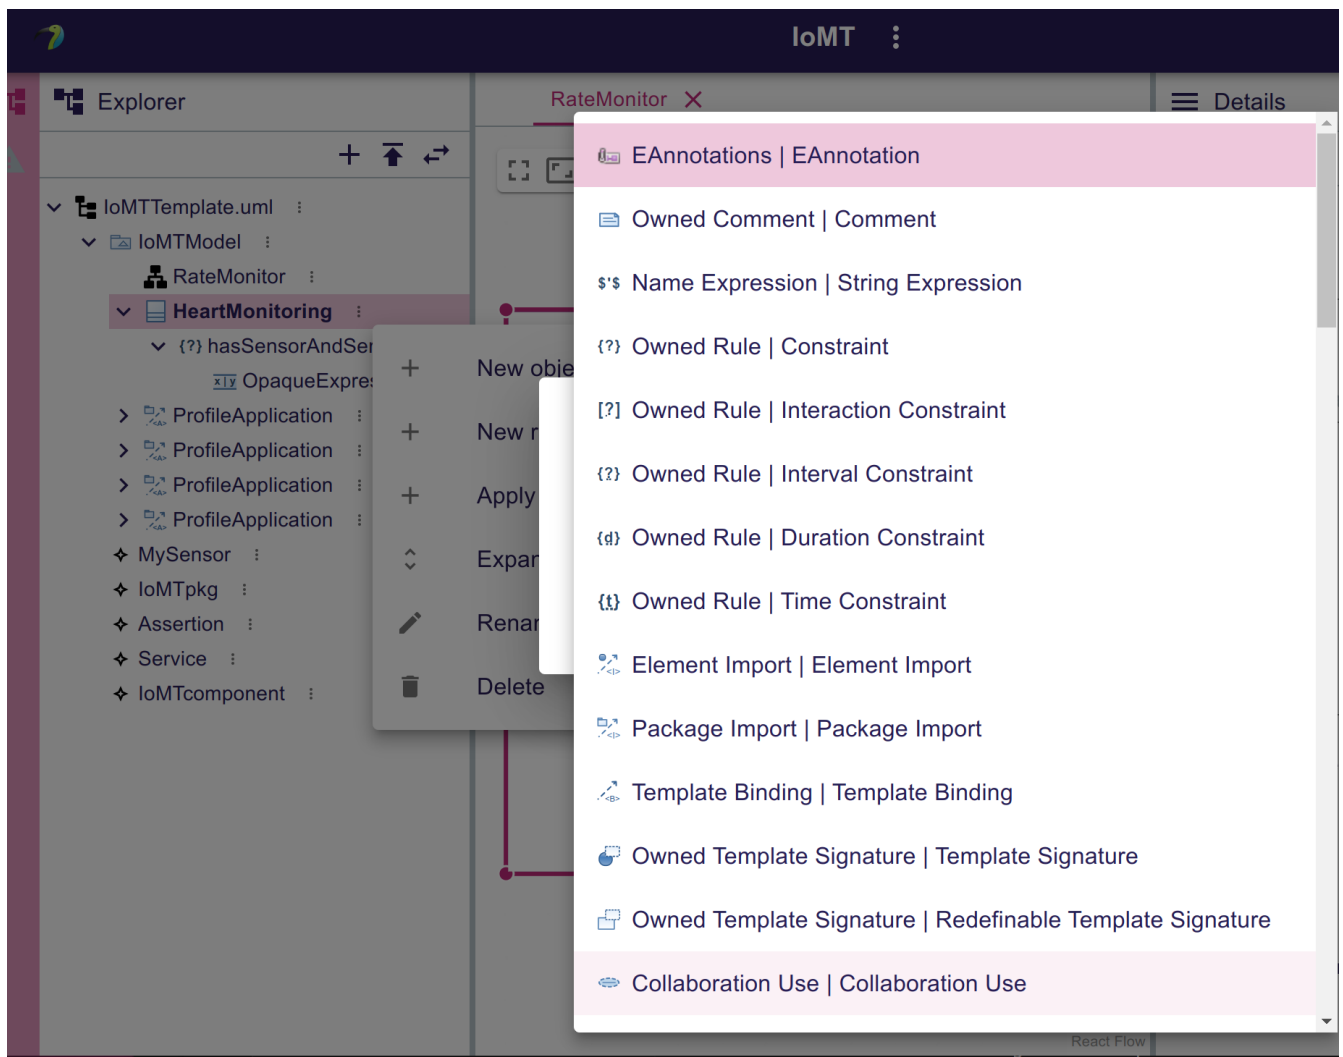

Then it is necessary to create an element "Specification | Opaque Expression". This element is responsible for storing the constraint to be written.

