We can use a Siamese encoder with shared weights and take the difference at various scales. Next, we can use a U-net like decoder to generate the segmentation mask.

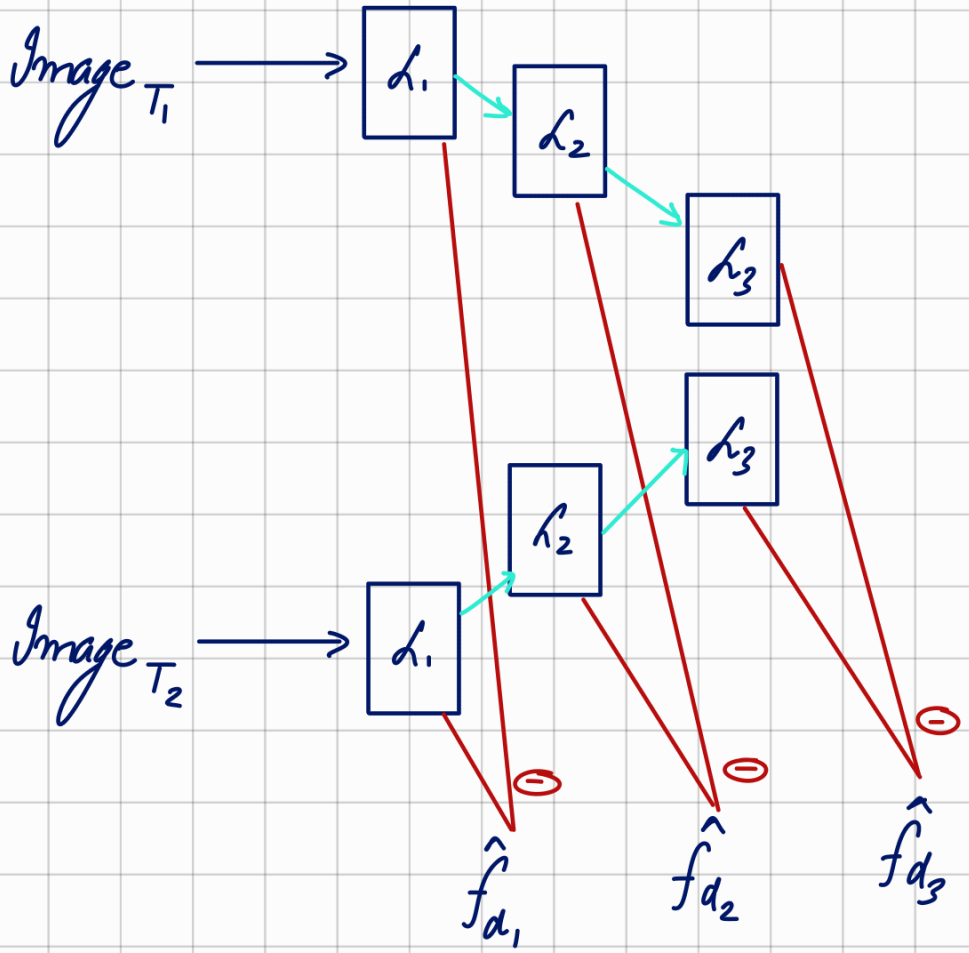

Encoder part where we compute multi-level feature differences given by $\hat{f}_{d_1}$, $\hat{f}_{d_2}$ and $\hat{f}_{d_3}$.

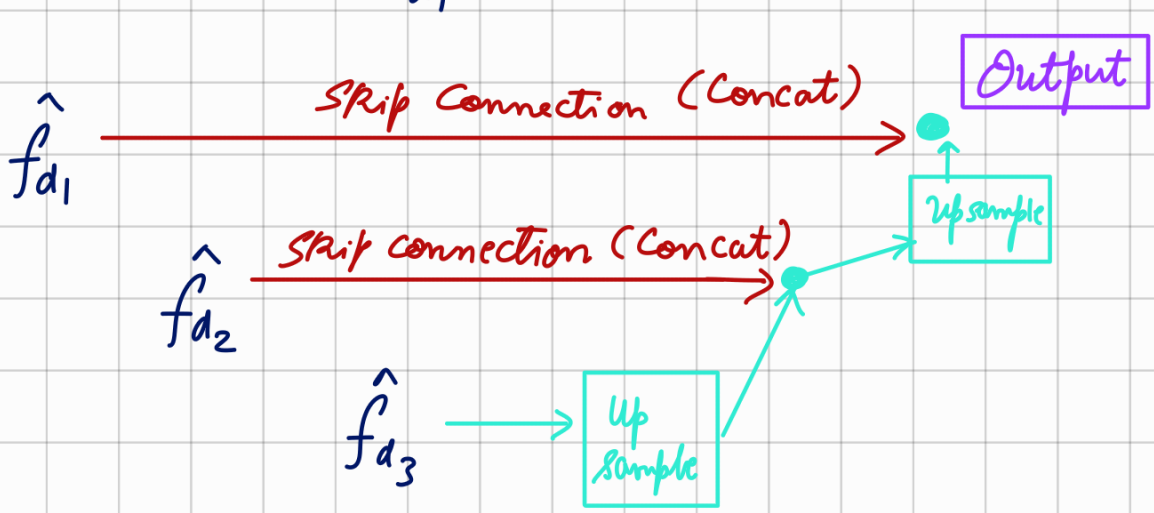

Decoder part where we upsample and Concat the next bigger level (like U-Net).