


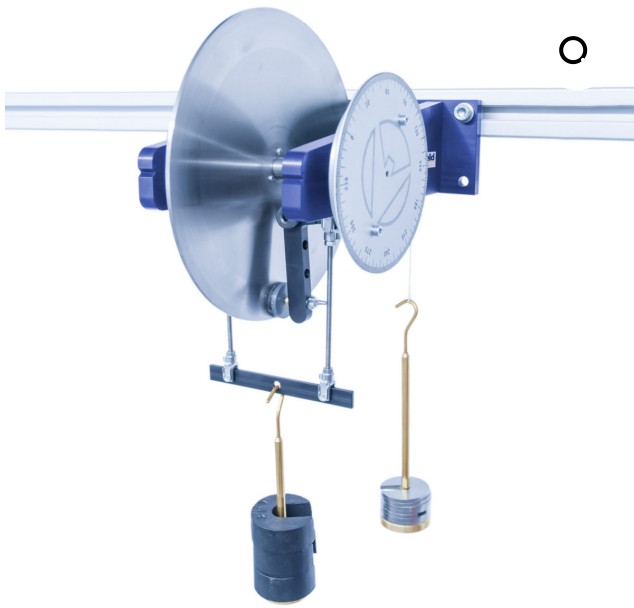

SD-1.59 Disc Brake Apparatus

Through the load hanger and calibrated weights the force is applied to the brake disc and the parameters of braking force, braking torque and normal force can be assessed.

PRODUCT CODE: SD-1.59

Categories: Educational, IFT Industrial Food Technology, SD-1.59-Disc Brake Apparatus, SV - Theory Of Machines, SV Series - Statics & Vibrations

Tags: Bell Crank Levers , Brake Pad , Braking Force , Braking Torque , Disc Brake Apparatus , Friction Coefficient , Load Hanger , SD-1.59 , SV100

DESCRIPTION

A brake disc is mounted vertically into a sturdy frame. A single shaft runs through the brake disc and the wall bracket supports. A cord pulley mounts to the shaft onto which is mounted a cord terminating in a load hanger.

Two bell crank levers are mounted either side of the brake disc. Through the load hanger and calibrated weights the force is applied to the brake disc and the parameters of braking force, braking torque and normal force can be assessed.

All load hangers, and calibrated weights are supplied with the apparatus. The rotational angle of movement of the disc wheel can be viewed using the external protractor.

Different brake pad materials can be tested as well as their radial position on the brake disc.

TECHNICAL SPECIFICATIONS

Brake pad: Ø25mm x 6mm max

Brake pad: Brake material, aluminium, brass and nylon

Stainless steel disc wheel: Ø210mm x 3mm

Radial positions for brake pad: 20mm intervals

Protractor: 360°, 1° increments

Weights set: 3 x 0.1N, 8 x 0.2N, 3 x 1N, 3 x 2N, 1 x 5N, 2 x Load hanger

FEATURES & BENEFITS

- Wall mounted apparatus
- Can be mounted to **SV100** Bench Mounted Frame
- One stainless steel disc; four brake pad materials
- Three pad radii
- 360° Protractor for angle recording
- Full set of weights and hangers provided

Experimental Content

- To determine the most effective brake pad material
- To determine the most efficient radial placing of the brake pad

Related Laws

- Braking Force
- Braking Torque
- Friction Coefficient
- Automotive
- Disc Brakes
- Levers

Ordering Specification

- 1 x SD-1.59 assembly
- 2 x Brake pad specimen
- 2 x Aluminium pad specimen
- 2 x Brass pad specimen
- 2 x Nylon pad specimen
- 1 x Hanger
- 3 x 0.1N, 8 x 0.2N, 3 x 1N, 3 x 2N, 1 x 5N weights
- Spare cord
- Instruction manual
- Packing list
- Test sheet

Essential Accessories

SV100: Bench Mounted Frame

Requirements

- Sturdy vertical support

Shipping Specifications

PACKED AND CRATED SHIPPING SPECIFICATIONS

Volume: 0.06m³

Gross weight: 15kg

Dimensions



Length: 0.45m

Width: 0.20m


Height: 0.26m

Order Codes

SD-1.59: Disc Brake Apparatus

SV100: Bench Mounted Frame

YOU MAY ALSO LIKE...



**SD-1.51 –
WHEEL AND
DIFFERENTIAL
AXLE
APPARATUS**

[Read more](#)



**SD-1.55 –
SIMPLE
FLYWHEEL**

[Read more](#)



**SD-1.54 – CAM
AND FOLLOWER
APPARATUS**

[Read more](#)

Armfield Limited. Unit 10 Headlands Business Park, Salisbury Road, Ringwood, Hampshire BH24 3PB.
England. Tel: +44(0) 1425 478781