

A study on the application of the Hill Climbing algorithm

Chirvasa Matei & Rotariu George

November 8, 2023

1 Abstract

In this article we will observe the behaviour of the Hill Climbing algorithm through the perspective of the selection neighbourhood. By considering the neighbourhood of a point to be the set of points that are at Hamming Distance 1 from the selected point we admit unexpected local maxima to the given function.

2 Introduction

We will be studying a commonly used heuristic method, namely Hill Climbing. The two improvement methods used to observe the behaviour of the algorithm are Best Improvement and First Improvement. The Best Improvement or Steepest Ascent selection method works by looking at every neighbour of the selected point and picking the one which is closest to the solution we want. On the other hand, the First Improvement selection method works by iterating through the neighbours of the selected point and picking the first point that is a better solution than the selected one.

2.1 Motivation

By observing the effect of the encoding of data on specific instances of a problem we better our understanding of the algorithm altogether. The best way to grasp the effect of the Hill Climbing algorithm, or any algorithm for that matter, is to follow the steps it takes in solving a problem and study and interpret the results it provides.


3 Method

3.1 Function

The study of the heuristic algorithm will be conducted on the following polynomial function:

$$f(x) = x^3 - 60 \cdot x^2 + 900 \cdot x + 100, x \in [0, 31]$$

We will only consider the one dimensional form of the function, plotted in the graph below.

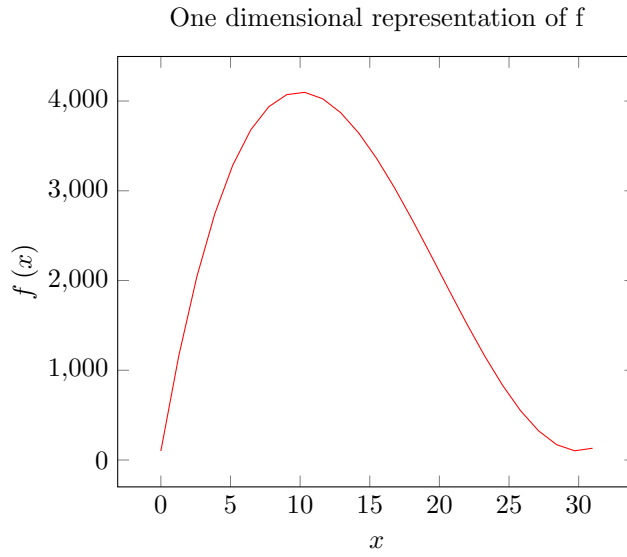

3.2 Algorithms

In this version of the Hill Climbing algorithm we will interpret any point inside the function domain

$$[0, 31]$$

to be a string of 5 bits representing the base 2 form of every natural number inside the domain. As such, we will consider the neighbourhood N of a point x_0 to be the set of bit 5 bit strings that are at Hamming Distance 1 away from x_0 . More formally,

$$N(x_0) = \left\{ x \mid x \in \{0, 1\}^5, HD(x, x_0) = 1 \right\}$$

where

$$HD : \{0, 1\}^5 \times \{0, 1\}^5 \rightarrow N$$

is the Hamming distance function. The transformation of data from real values to binary strings combined with the new definition of a neighbourhood of a point leads to a different interpretation of local maxima.

4 Experiment

For the experiment we will calculate the attraction pool of every local maxima in the search domain. The attraction pool P of a local maximum point x_m consists of the points from which if we start to Hill Climb we arrive at x_m . The Best Improvement and First Improvement selection methods should generate different attraction pools for the local maxima, however the local maxima found by the two must be the same. This is true due to the fact that both Best and First Improvement declare a point to be local maximum when it proves to be a better solution than its entire neighbourhood. Also, the set of P across all x_m local maxima of f must be a partition of the search domain. This is true due to the fact that from each point in the search domain we arrive at a local maximum after we Hill Climb, so it has to be part of at least one attraction pool and each point has its unique path it takes to arrive there, so it cannot be part of different attraction pools.

5 Results

Points of local maxima	Values of local maxima	Attraction pool
01100	3988	{00100, 01100, 11100}
00111	3803	{00110, 00111, 10110, 10111}
01010	4100	{00000, 00001, 00010, 00011, 00101, 01000, 01001, 01010, 01011, 01101, 01110, 01111, 10101, 11000, 11001, 11010, 11011, 11101, 11110, 11111}
10000	3236	{10000, 10001, 10010, 10011, 10100}

Figure 1: Attraction pools of local maxima using the Best Improvement selection method

Points of local maxima	Values of local maxima	Attraction pool
01000	3972	{00000, 10001, 10010, 10100, 11000}
01100	3988	{00100, 01000, 01100, 11100}
00111	3803	{00111, 01111, 10111}
01101	3857	{00101, 11101}
01010	4100	{00010, 01010, 01011, 01110, 11010}
11111	3475	{11111}
01001	4069	{00001, 01101, 10011, 11001}
10000	3236	{10000}
11111	4071	{00011, 01001, 11011}
01110	3684	{00110, 11110}
10101	3225	{10101}
10110	3556	{10110}

Figure 2: Attraction pools of local maxima using the First Improvement selection method

5.1 Interpretation

As can be seen, compared to the real interpretation of points and neighbourhoods, the binary interpretation of points and the Hamming neighbourhood generate different local maxima.

6 Conclusions