

EX: 1 HTML & CSS

A) Create a Web Page to Embed a Map with Hotspots, Frames & Links

AIM:

Create a web page with an interactive map, clickable hotspots, and embedded frames that display linked pages.

ALGORITHM:

1. **Setup HTML:** Create `index.html` with Leaflet.js for the map and `<iframe>` for embedded pages.
2. **Display Map:** Initialize the map with Leaflet.js and load OpenStreetMap tiles.
3. **Add Hotspots:** Place clickable markers on the map that open linked pages inside the iframe.
4. **Link Pages:** Create separate HTML pages (`page1.html`, `page2.html`) to display inside the iframe.
5. **Test:** Ensure map interactivity and that clicking hotspots loads the correct page in the iframe.

PROGRAM:

INDEX.HTML

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Interactive Moving Map with Links and Frame</title>
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <!-- Leaflet CSS -->
  <link rel="stylesheet" href="https://unpkg.com/leaflet/dist/leaflet.css" />
  <style>
```

```

body {
  font-family: Arial, sans-serif;
  margin: 0;
  padding: 0;
  text-align: center;
}
h1 {
  margin: 20px 0;
}
#map {
  height: 400px;
  width: 80%;
  margin: 0 auto;
}
iframe {
  width: 80%;
  height: 300px;
  margin: 20px auto;
  display: block;
  border: 2px solid #333;
}
</style>
</head>
<body>

```

```

<h1>🌐 Moving Interactive Map with Frames</h1>

```

```

<!-- Map -->
<div id="map"></div>

```

```

<!-- Frame -->
<iframe name="myframe" src="" title="Area Details"></iframe>

```

```

<!-- Leaflet JS -->
<script src="https://unpkg.com/leaflet/dist/leaflet.js"></script>
<script>
  // Create the map
  var map = L.map('map').setView([20.5937, 78.9629], 4); // Centered on India

  // Add OpenStreetMap tiles
  L.tileLayer('https://{s}.tile.openstreetmap.org/{z}/{x}/{y}.png', {
    attribution: '&copy; OpenStreetMap contributors'
  }).addTo(map);

```

```

// Add markers (hotspots)
var marker1 = L.marker([28.6139, 77.2090]).addTo(map); // Delhi
marker1.bindPopup('<a href="page1.html" target="myframe">Go to Area 1 (Delhi)</a>');

var marker2 = L.marker([19.0760, 72.8777]).addTo(map); // Mumbai
marker2.bindPopup('<a href="page2.html" target="myframe">Go to Area 2 (Mumbai)</a>');

var marker3 = L.marker([13.0827, 80.2707]).addTo(map); // Chennai
marker3.bindPopup('<a href="page3.html" target="myframe">Go to Area 3
(Chennai)</a>');
</script>

</body>
</html>

```

PAGE1.HTML

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Area 1</title>
  <style>
    body {
      background-color: #ffe4e1;
      font-family: Arial, sans-serif;
      text-align: center;
      padding: 20px;
    }
  </style>
</head>
<body>
  <h2><img alt="hotspot icon" data-bbox="178 708 201 725"/> Welcome to Area 1!</h2>
  <p>This is the Rectangle hotspot area.</p>
</body>
</html>

```

PAGE2.HTML

```

<!DOCTYPE html>
<html lang="en">

```


```
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Area 2</title>
  <style>
    body {
      background-color: #e0ffff;
      font-family: Arial, sans-serif;
      text-align: center;
      padding: 20px;
    }
  </style>
</head>
<body>
  <h2>🌈 Welcome to Area 2!</h2>
  <p>This is the Circle hotspot area.</p>
</body>
</html>
```

PAGE3.HTML

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Area 3</title>
  <style>
    body {
      background-color: #f0fff0;
      font-family: Arial, sans-serif;
      text-align: center;
      padding: 20px;
    }
  </style>
</head>
<body>
  <h2>🌵 Welcome to Area 3!</h2>
  <p>This is the Polygon hotspot area.</p>
</body>
</html>
```

OUTPUT:

Moving Interactive Map with Frames

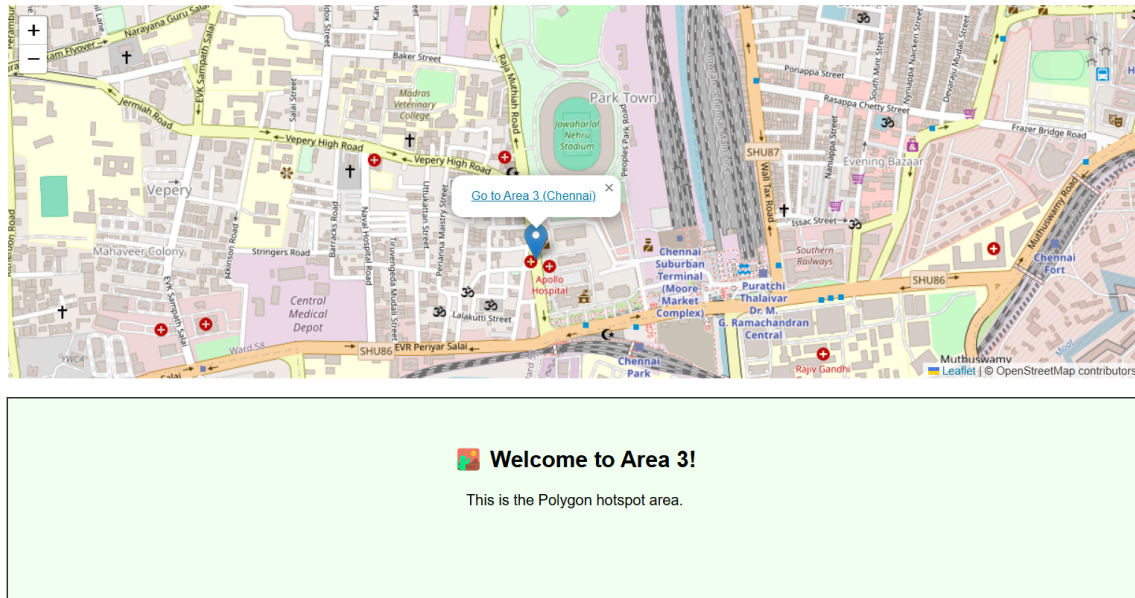

RESULT: The image map with hotspots, frames, and links is successfully created.

B) Create a Web Page Using Embedded, External & Inline CSS

AIM:

Create a web page using external, embedded, and inline CSS.

ALGORITHM:

1. **Create External CSS:** Define styles in `style.css` (e.g., body, headings, paragraphs).
2. **Create HTML File:** Structure HTML using `<html>`, `<head>`, `<body>`, and add `<title>`.
3. **Link External CSS:** Use `<link rel="stylesheet" href="style.css">` in `<head>`.
4. **Apply Embedded CSS:** Add `<style>` block in `<head>` to define additional styles.
5. **Apply Inline CSS:** Use `style` attribute directly in HTML elements.
6. **Display Content:** Add headings, paragraphs, and a styled div.
7. **Test the Page:** Open the HTML file in a browser to ensure styles apply correctly.

PROGRAM:

B.HTML

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Elegant CSS Styling Example</title>
  <link rel="stylesheet" href="styles.css"> <!-- External CSS -->
  <style>
    /* Embedded CSS */
    .embedded-style {
      color: #007bff;
      font-size: 20px;
      font-weight: bold;
      text-align: center;
      padding: 10px;
    }
  </style>
</head>
<body>
  <div class="embedded-style">
    <p>Hello, World!</p>
  </div>
</body>
</html>
```

```

        border: 2px solid #007bff;
        border-radius: 5px;
        width: 50%;
        margin: 20px auto;
        box-shadow: 0px 4px 10px rgba(0, 0, 0, 0.1);
        background: #f0f8ff;
    }
</style>
</head>
<body style="background-color: #f8f9fa; font-family: 'Poppins', sans-serif; text-align: center;">
    <h1 style="color: #ff5733; font-size: 28px;">☀️ Styled with Inline CSS ☀️</h1>
    <p class="embedded-style">✨ This text is styled using Embedded CSS ✨</p>
    <p class="external-style">🎨 This text is styled using External CSS 🎨</p>
</body>
</html>

```

STYLE.CSS


```

.external-style {
    color: #28a745;
    font-size: 22px;
    font-weight: bold;
    text-align: center;
    padding: 10px;
    border: 2px solid #28a745;
    border-radius: 5px;
    width: 60%;
    margin: 20px auto;
    box-shadow: 0px 4px 10px rgba(0, 0, 0, 0.1);
    background: #e9ffe9;
    transition: 0.3s;
}

.external-style:hover {
    background: #d4f8d4;
    transform: scale(1.05);
}

```

OUTPUT:

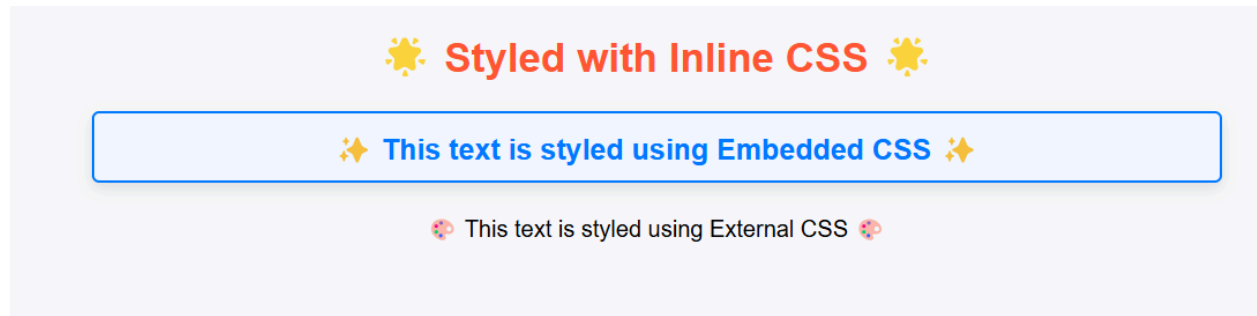

RESULT: The webpage demonstrates external, embedded, and inline CSS styles effectively.