

ACKNOWLEDGEMENT

- We wish to convey our sincere gratitude to the staff of SHREE G.K. & C.K. BOSAMIA college for giving us a chance to obtain project.
- We are very much thankful to our project guide Prof. ASTHA RAVAL. Our project cannot be completed within the time without his guidance.
- As last, our special thanks to them those who have encourage and motivate us directly or indirectly in our project.

Your faithfully,

Meet Dobariya
Divyesh Bakhilakhiya

PREFACE

- We are the students of BCA from SHREE GK & CK BOSAMIA COLLEGE ARTS & COMMERCE COLLEGE. Our project title is “HORIZON LOGISTICS”.
- This is Project Report on Horizon Logistics web application that provide shipping services that is presented to you as a subject in 5th semester in BCA.
- The successfully completion of our project was experience which we got by doing this project was essential to our future. The information in the project being submitted by us contains detailed analysis of research held by us.
- This project is developed in PHP, HTML, CSS & JS with using MySQL as a backend.

INDEX

NO.	Topic	Page no.
1.	Introduction	4
2.	Project Profile	5
3.	System Development Life Cycle	6
4.	Requirement Gathering	7
5.	Requirement Analysis	9
6.	Feasibility Study	12
7.	Flow Chart	15
8.	Bar Chart	17
9.	Time Line	18
10.	Gantt chart	18
11.	Data Flow Diagram	19
12.	Use Case Diagram	25
13.	Data Information	26
14.	Data Structure	27
15.	Screen Layout And Body	30
16.	coding	35
17.	Error And Solution	72
18.	Testing	73
19.	Implementation	74
20.	Limitation	75
21.	Conclusion	76

INTRODUCTION


- **The Horizon Logistics project Aimed to provide logistics services to the customers.**
- **The project provide you User management, Order management, Payment management & order tracking.it provide facilities such as feedbacks, order standards, special care for important orders. The system is easy to use and provide you user friendly environment.**

PROJECT PROFILE

Project Name	Horizon Logistics
Operating System	Microsoft Windows 7/8/10/11
Frontend	PHP, HTML, CSS, JS
Backend	MySQL
Submission Date	30/09/2023
Project Guide	Astha Raval
Developed By	Meet Dobariya & Divyesh Bakhlakhiya
Submitted To	SHREE G.K. & C.K. BOSAMIA College, Jetpur

SYSTEM DEVELOPMENT LIFE CYCLE

- The Software Development Life Cycle (SDLC) for a Horizon Logistics application should follow a structured approach as following to ensure that the software is developed, tested, and deployed successfully while meeting the specific needs and requirements of the Logistics web application.
- The following is Software Development Life Cycle (SDLC) diagram

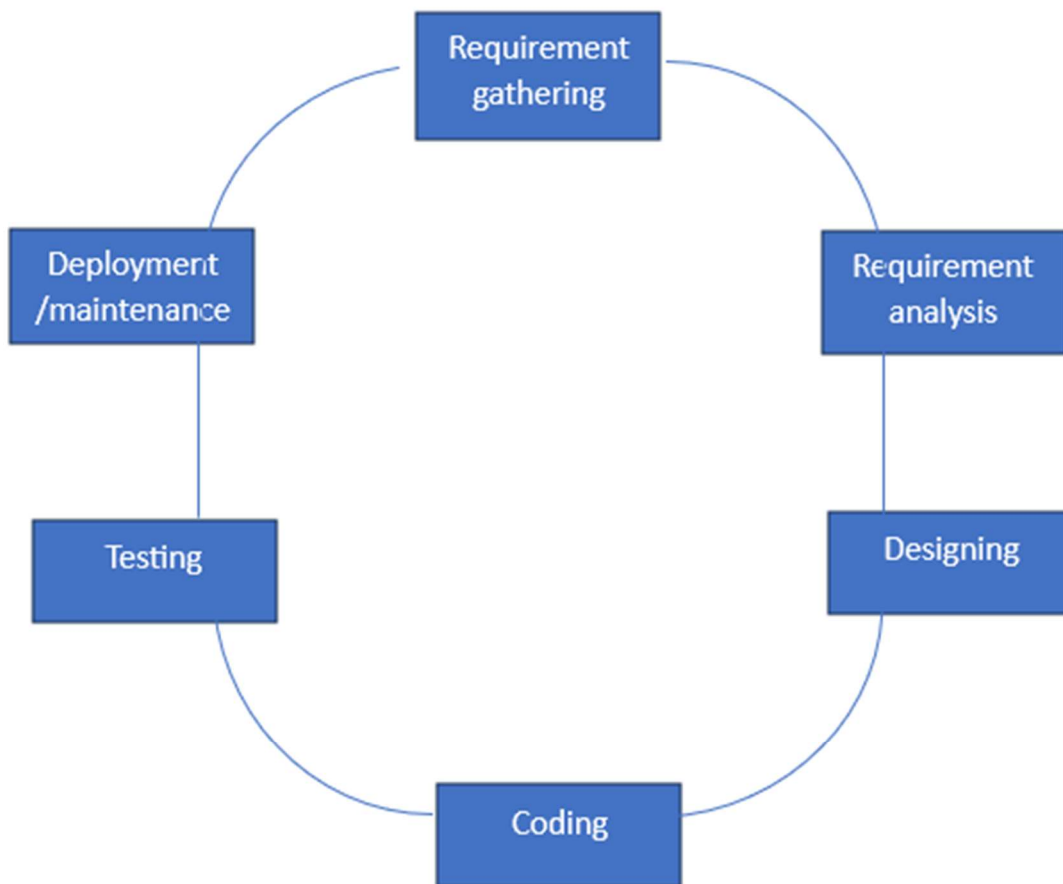

REQUIREMENT GATHERING

Horizon Logistics is web based application that provides services to transport goods.

Currently, india has limitations in shipping goods. Horizon logistics can provide services to E-commerce, personal business or personal house-holds.

The following website we checked for reference that also provide logistics services.

- 1) www.bluedart.com
- 2) www.aegisindia.com

Goals:-

Horizon logistics a web application should be user friendly and easy to understand & use. it should provide user satisfaction to use customer should easily login or registration in our websites.

Scalability And Flexibility:-

Our web application should be dynamic so it is easy to scalp up web application or change in application in future. Make a dynamic web application provides scalability.

✧ The following are the questions that we can ask.

- 1) What should be different in our web-application than other logistics application?
- 2) What is your experience from other web application and what you expect from us?
- 3) Which feature or functionalities are compulsory according to you?
Which are the limitations of current logistic web application that we can cover in our web application?

Technical Requirements:-

We should have a knowledge of frontend languages like HTML, CSS, JavaScript, and server side languages like PHP also databases like MYSQL to make a web application.

A computer system is must with following softwares:-

1. Vs Code
2. Wamp Server
3. MySql

REQUIREMENT ANALYSIS

Requirement analysis is the process of understanding, documenting and defining the needs and constraints of a system that is being developed.

It involves gathering information from well known sources, identifying the goals and objectives.

The goal of requirement analysis is to ensure that all necessary aspects of the project are identified and well understood before moving on to the next phases.

It determines the requirements are clear, complete, unduplicated, consistent, valid and resolving any conflicts. It is one of the most important phases in the life cycle of the system deployment.

✧ We have referenced information from the following websites:-

- 1) www.bluedart.com
- 2) www.aegisindia.com

1) www.bluedart.com

Bluedart is a well established logistics and courier service provider, and their website bluedart.com, reflects their commitment to efficiency and customer satisfaction.

The website has a clean and intuitive design, making it easy for users to navigate and find the information they need.


It provides real time package tracking as well as easy shipment booking, resourceful tools, mobile responsiveness etc.

2) www.aegisindia.com

Aegis logistics is a leading logistics company in India that offers a range of services, including oil, gas and chemical logistics. Their website aegisindia.com serves as their online presence and platform to showcase their services and offerings.

The website delivers relevant content about the company's history, values and achievements. It also includes informative sections about the services, safety measures and quality standard which instills confidence in potential customers.

Role of Users

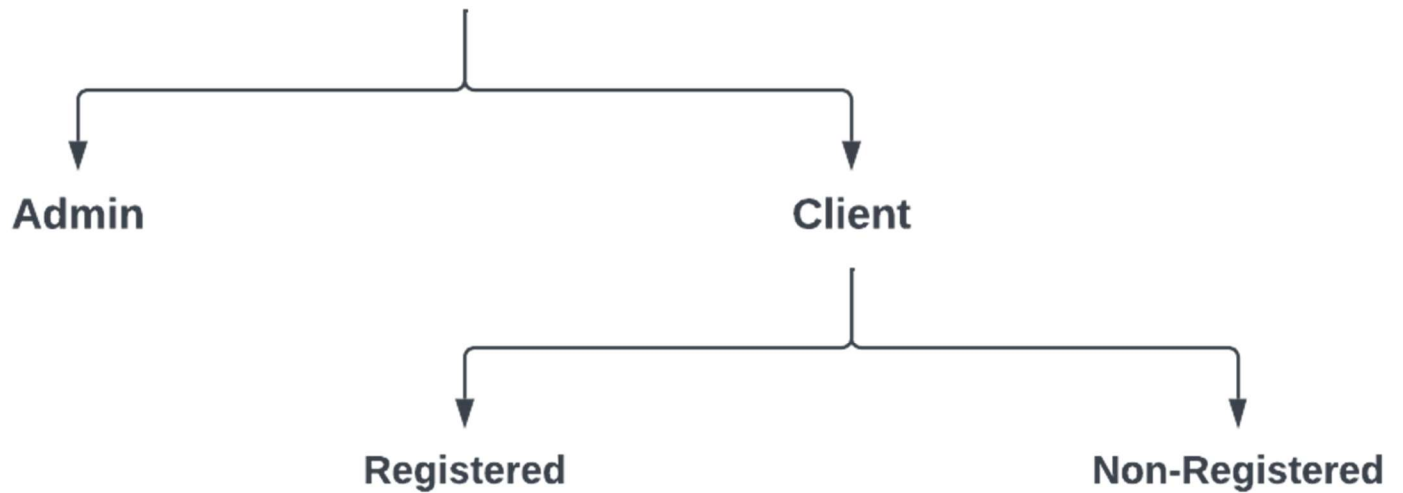

Registered:

- 1) Login
- 2) New Order
- 3) Previous Order-View Order
 - Feedback/Review
- 4) Order Tracking-Track Order
 - Delete Order
- 5) User Profile
- 6) LogOut

Non-Registered:

- 1)Sign Up
- 2)Home Page
- 3)About Us
- 4)Contact Us

Admin:

- i. Login
- ii. Manage Order-Add order
 - a. -Delete Order
 - b. Confirm order
 - c. Update order tracking
- iii. Manage Users-Add Users
 - a. -Delete Users
- iv. Read/Delete Order Feedback/Message
- v. LogOut

FEASIBILITY STUDY

feasibility study is an analysis or preliminary assesment of a projects viability, conducted to determine if it is practical and achievable.

It examines various factors, economical, operational, legal and scheduling consideration to evaluate whether the project is worth pursuing and if it can be successfully implemented.

Technical Feasibility:-

Technical feasibility refers to the assesment of whether a project can be successfully implemented using existing technology and resources.it determines the need pf a hardware and software.

- ◆ Here The Study Of Available Resources.

Software:-

- Operating System
- Wamp server
- Vs Codes
- Any Browser
- Frontend:- php
- Backend:- Mysql

Hardware:-

- Motherboard
- Monitor
- Keyboard
- Mouse
- Ram
- Hard-disk

Economical Feasibility:-

Economical feasibility also known as financial feasibility is the evaluation of whether a project is financially viable and sustainable.

✧ The Following Are Cost Table According To Technical Feasibility.

Software	Price
Wamp Server	Open Source
Vs Code Editor	Open Source
Browser	Open Source

Hardware	Price
Mother Board	8000-10000
Monitor	5000-8000
Keyboard	500-2000
Mouse	300-800
Ram	2000-5000
Hard disk	3000-9000

Operational Feasibility:-

Operational feasibility is the process to check whether project can be successfully integrated into the existing organizational structure and operations.

our project can operatable in any device and any operating system.it adapts day to day operations and workflow of logistics processes.

Legal Feasibility:-

Legal feasibility refers to the evaluation of whether a project compiles with the relevant laws, regulations and legal requirements.

Our horizon logistics considered legal aspects, such as transportation regulations, data protection and privacy, domains, international trade and customers etc..


Scheduling feasibility:-


scheduling feasibility determines of wheater a project can be completed within the required time frame.

✧ The following table shows the time frames for our projects.


Project Task	Number Of Days
<u>Requirment Gathering</u>	6
<u>Requirment analysis</u>	5
<u>Feasibility Study</u>	4
<u>Data Information</u>	2
<u>Data Structure</u>	7
<u>Data Flow Diagram</u>	5
<u>Designing</u>	5
<u>coding</u>	25
<u>Error & Solution</u>	4
<u>Testing</u>	3
<u>Implementation</u>	4
<u>Limitations</u>	2
<u>Conclusions</u>	3

FLOW CHART

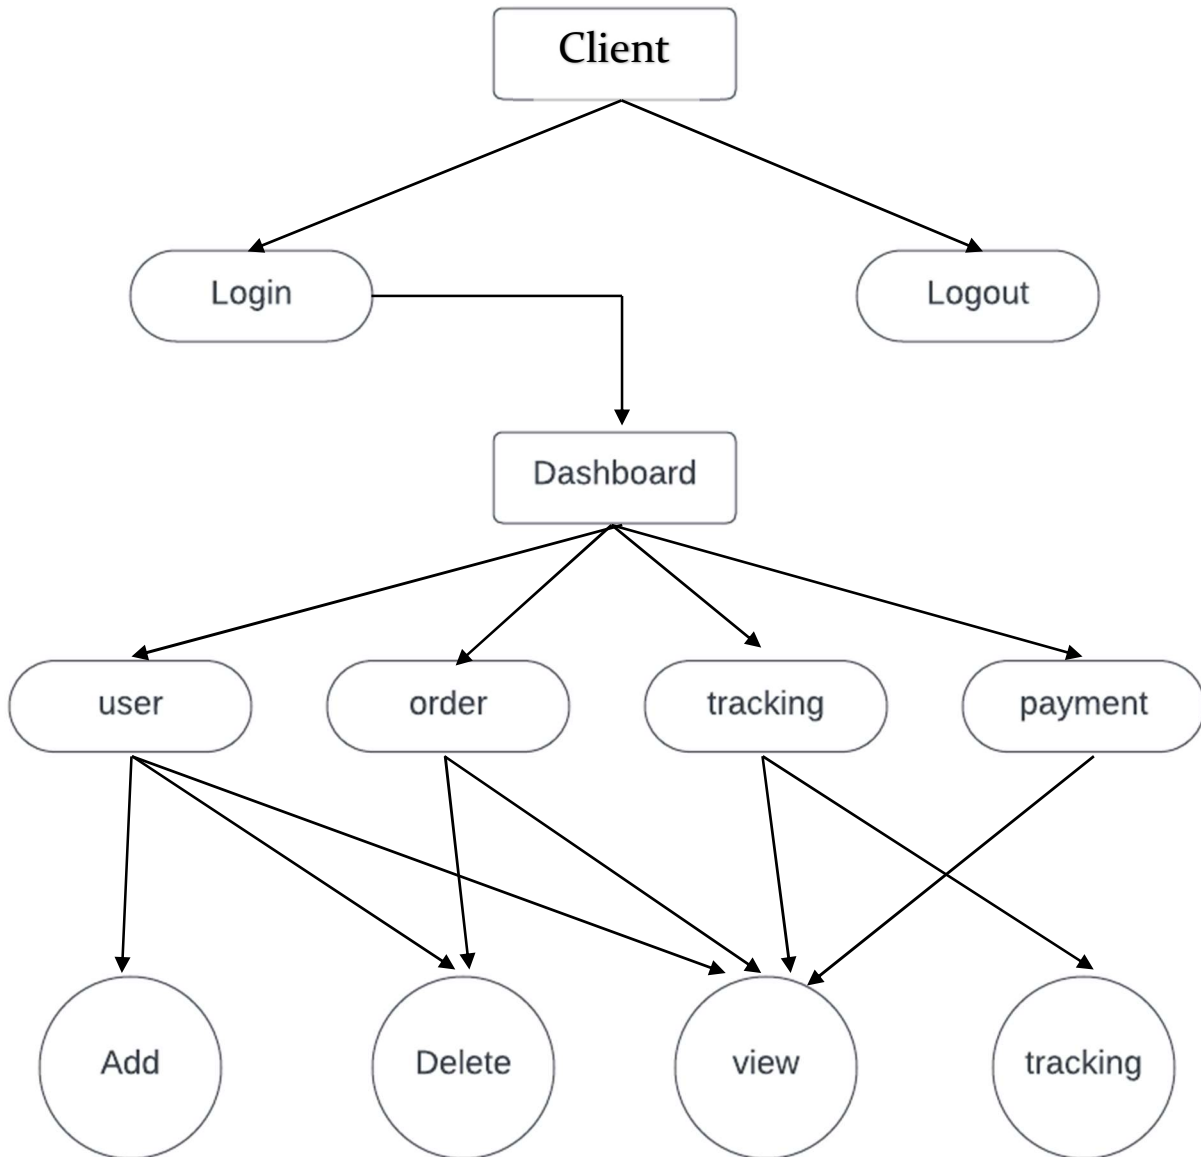


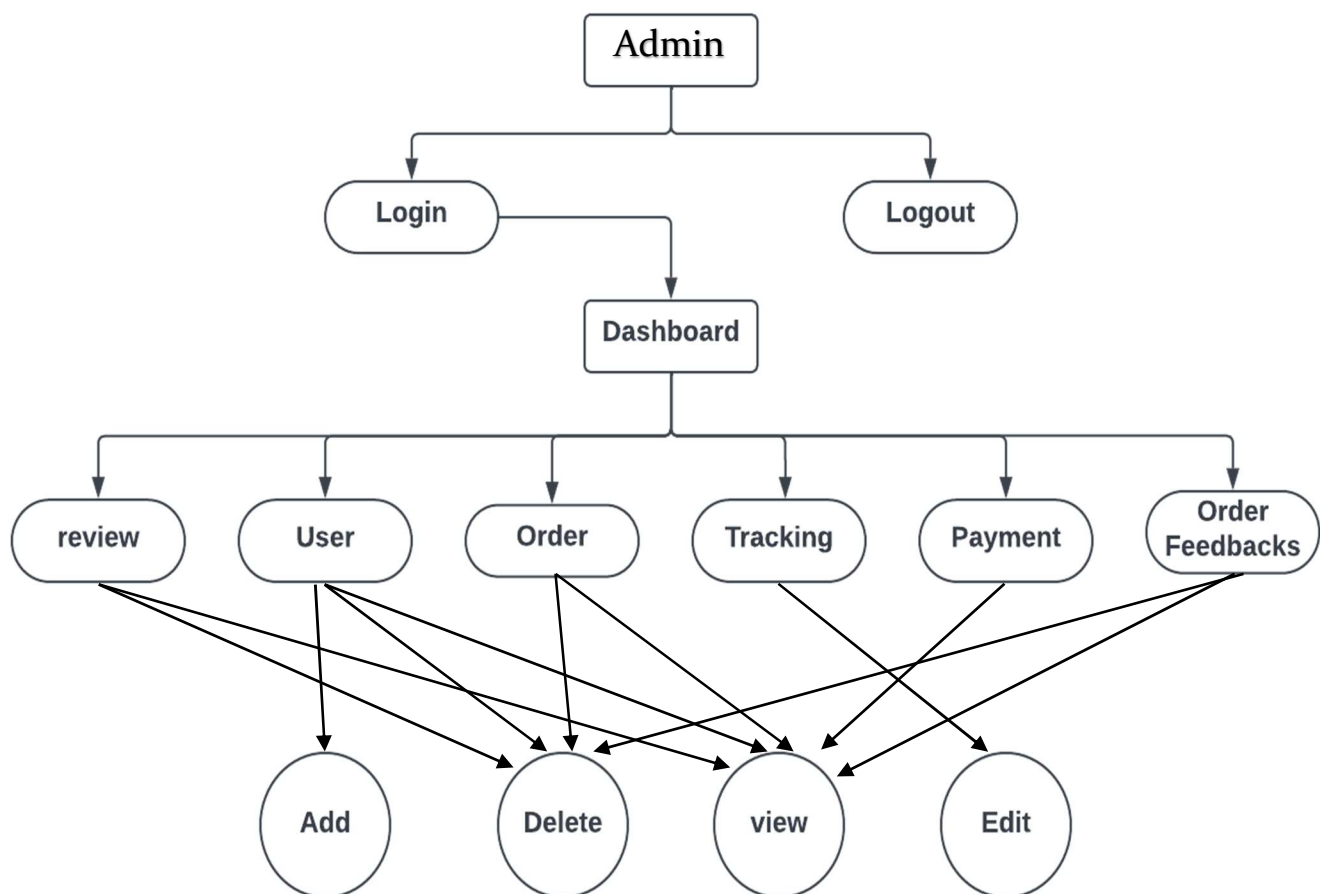


BAR CHART

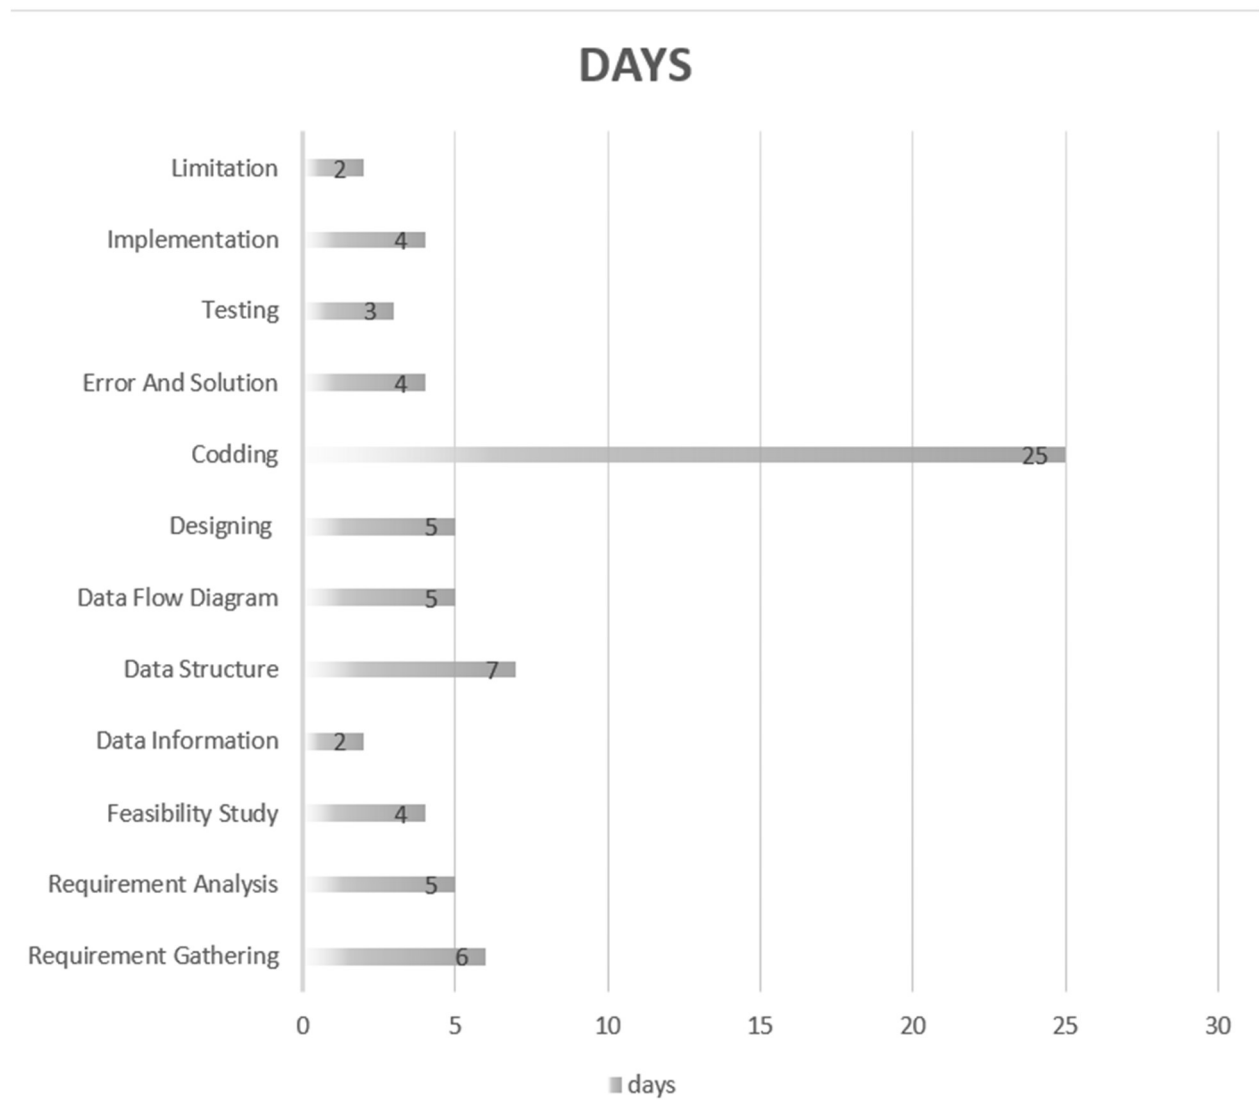

TIME LINE

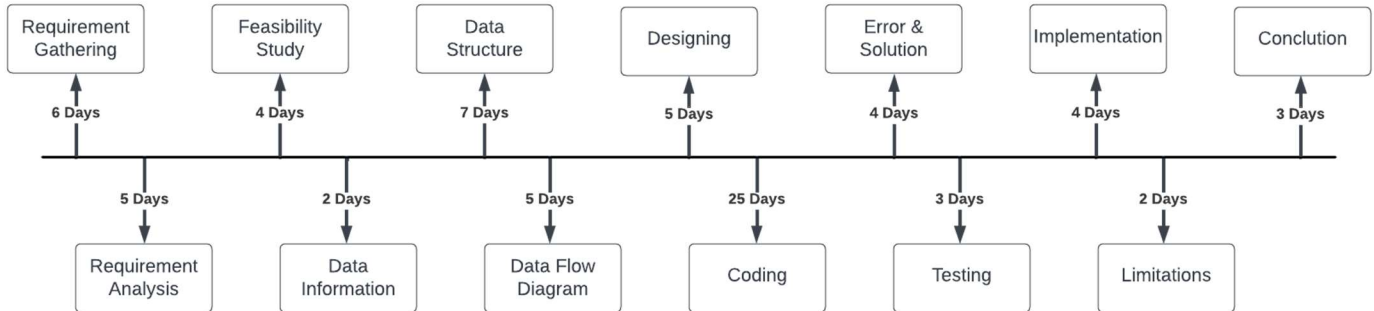

GANTT CHART

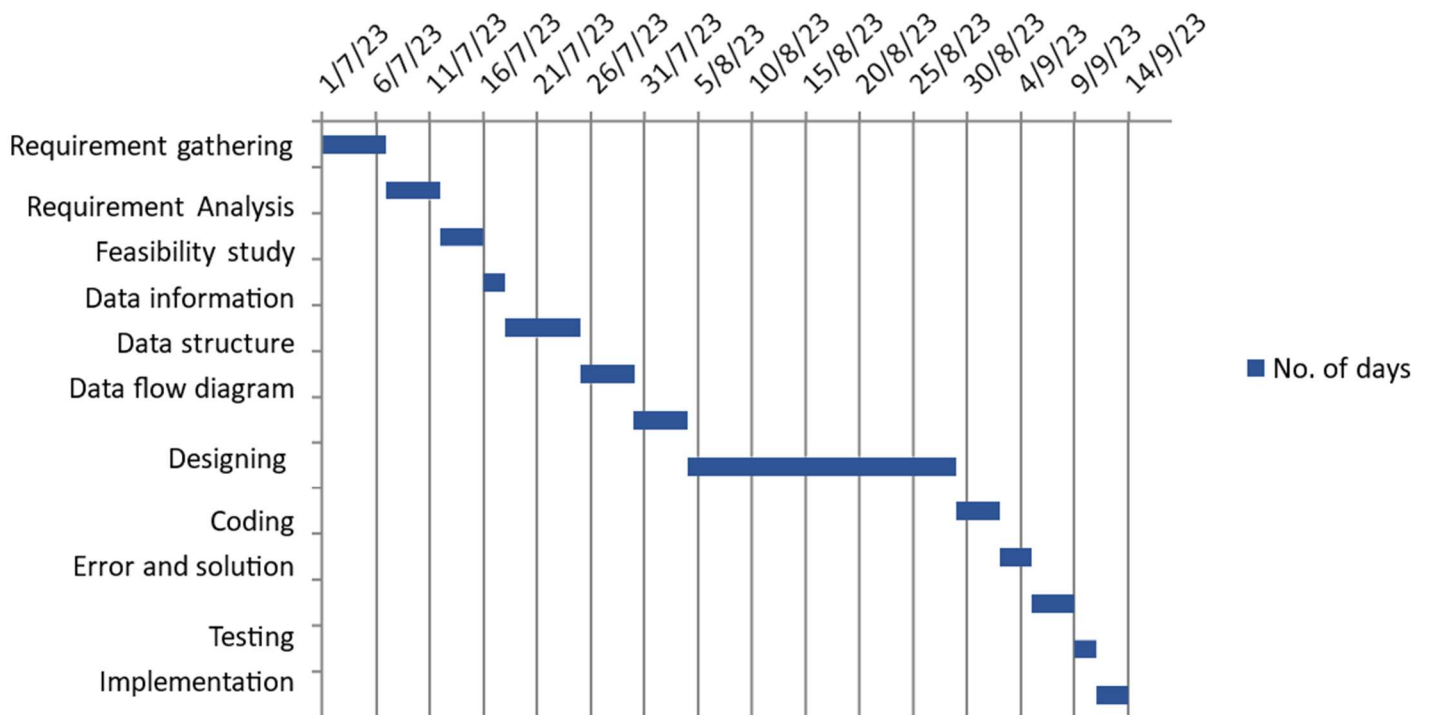

DATA FLOW DIAGRAM

Data Flow Diagrams are a visual representation of how data flows within a system. It represents processes, dataflows, databases, sources and destination.


It is used to depict the flow of information within system and external entities.

⇒ Data Flow Diagram Admin & Client Side:


○ Elements Of Data Flow Diagram:-




⇒ **Flow of data**

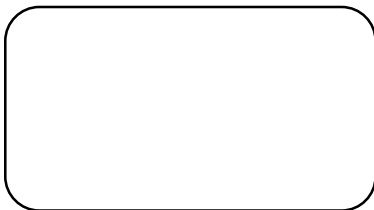

⇒ **Input & Output of data**




⇒ **Processing of Data**




⇒ **Database For Data Storage**


Level 0 Data Flow Diagram:-

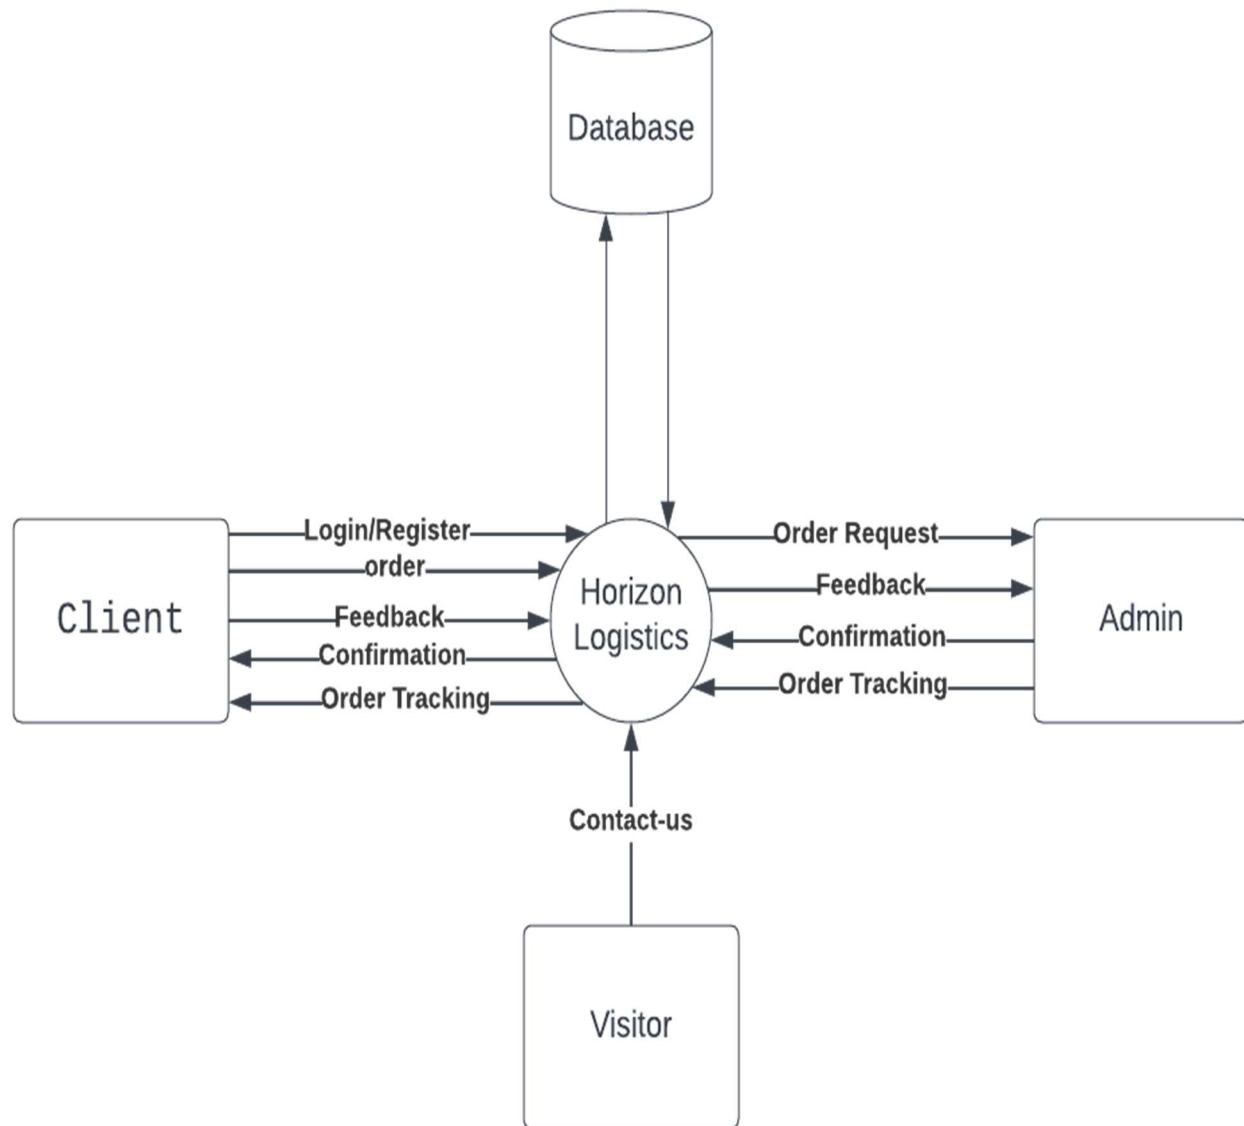


Level 1 Data Flow Diagram (Admin):-

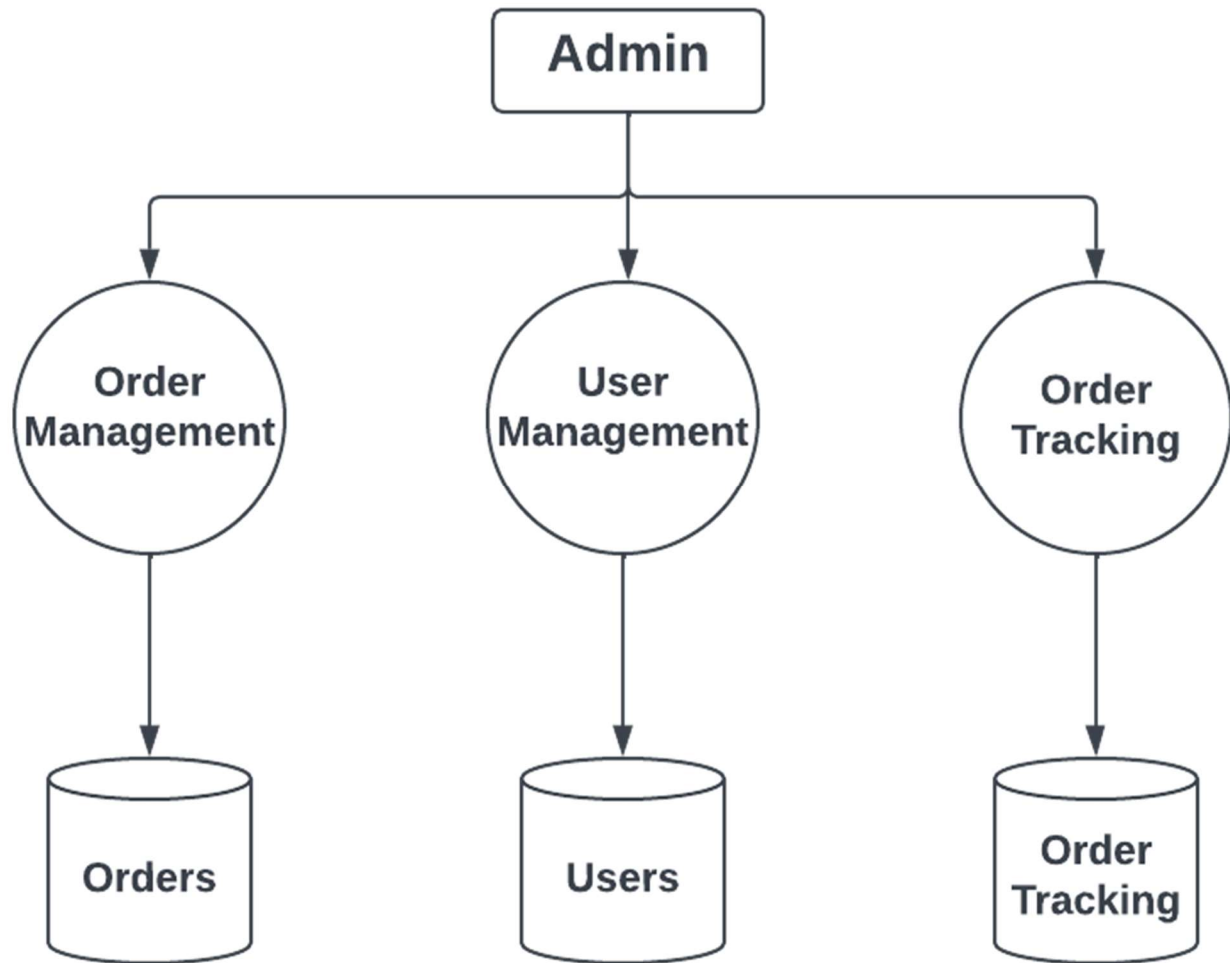


Level 1 Data Flow Diagram (Client):-

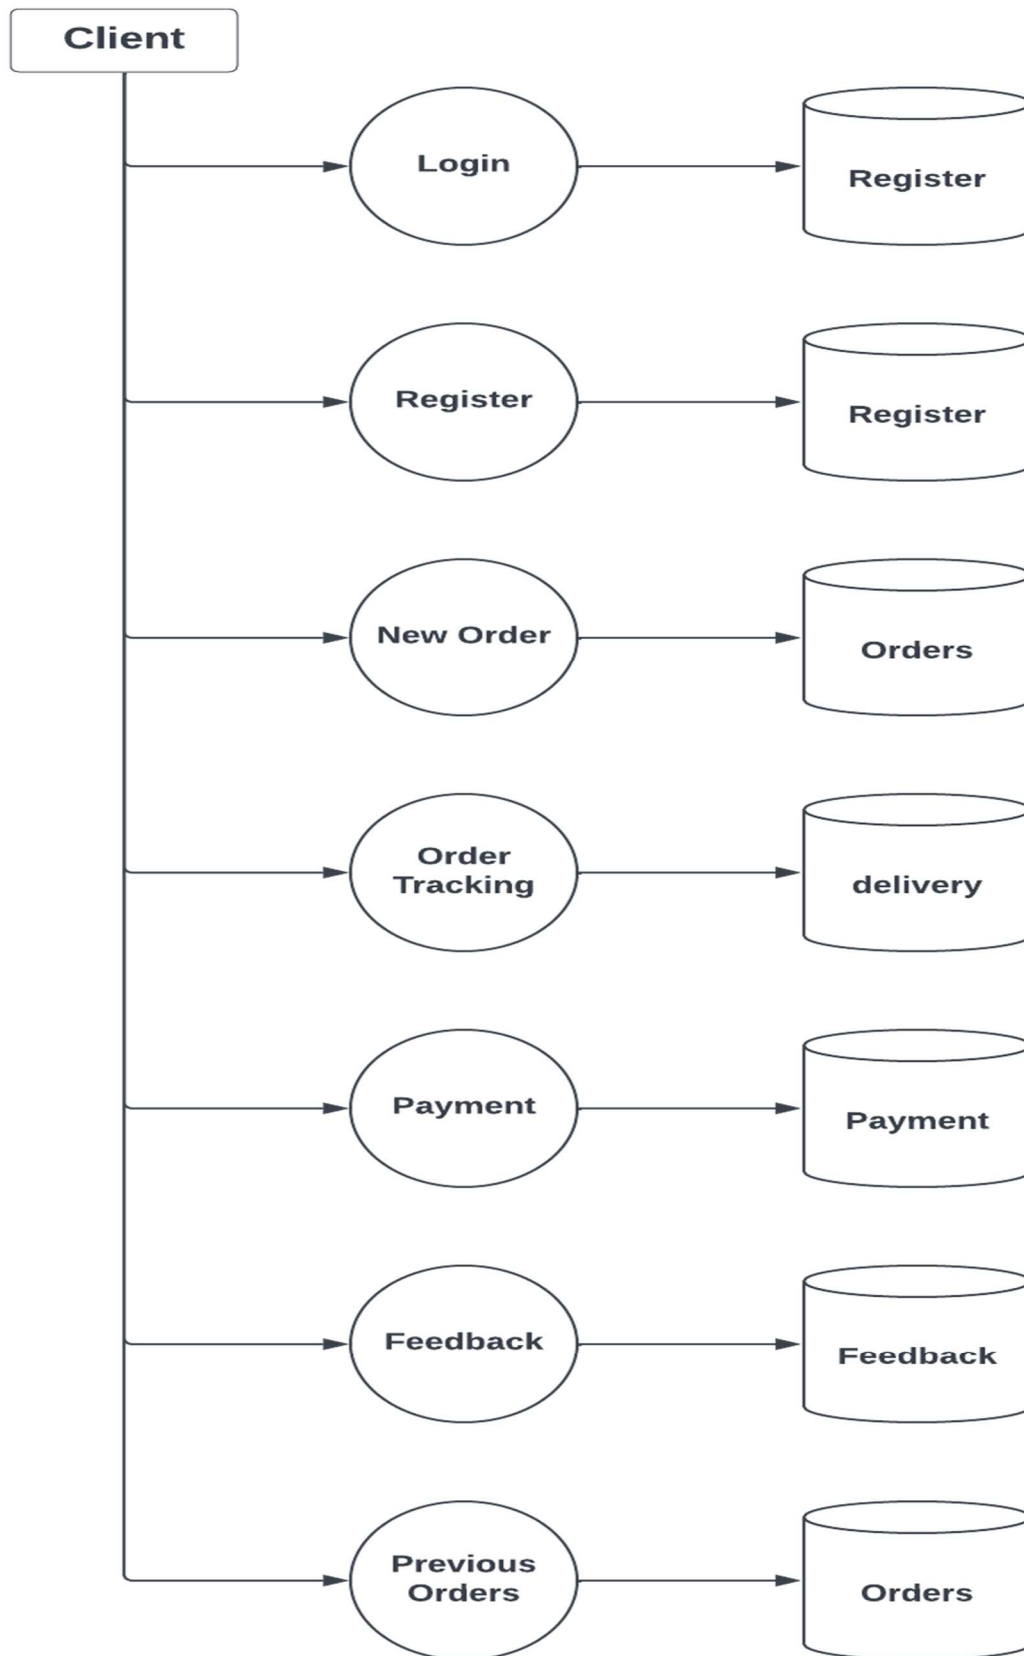



Level 2 Data Flow Diagram (Admin):-

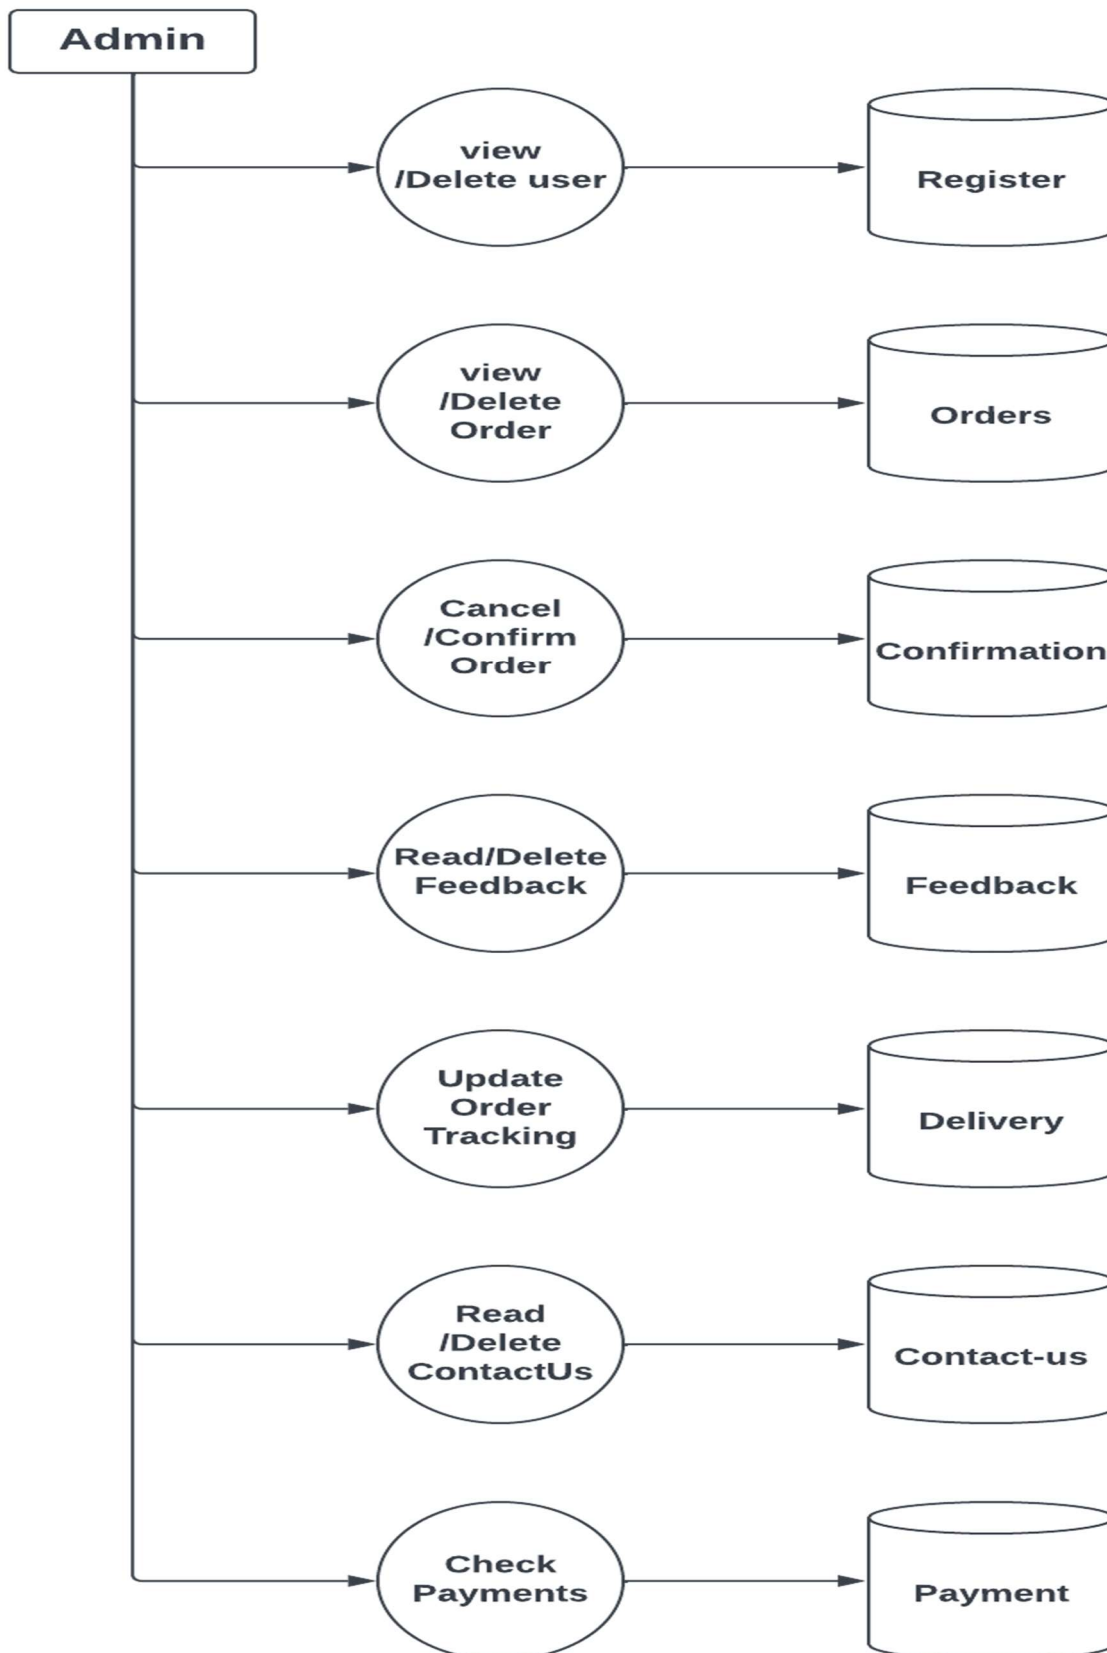

Level 2 Data Flow Diagram (Client):-

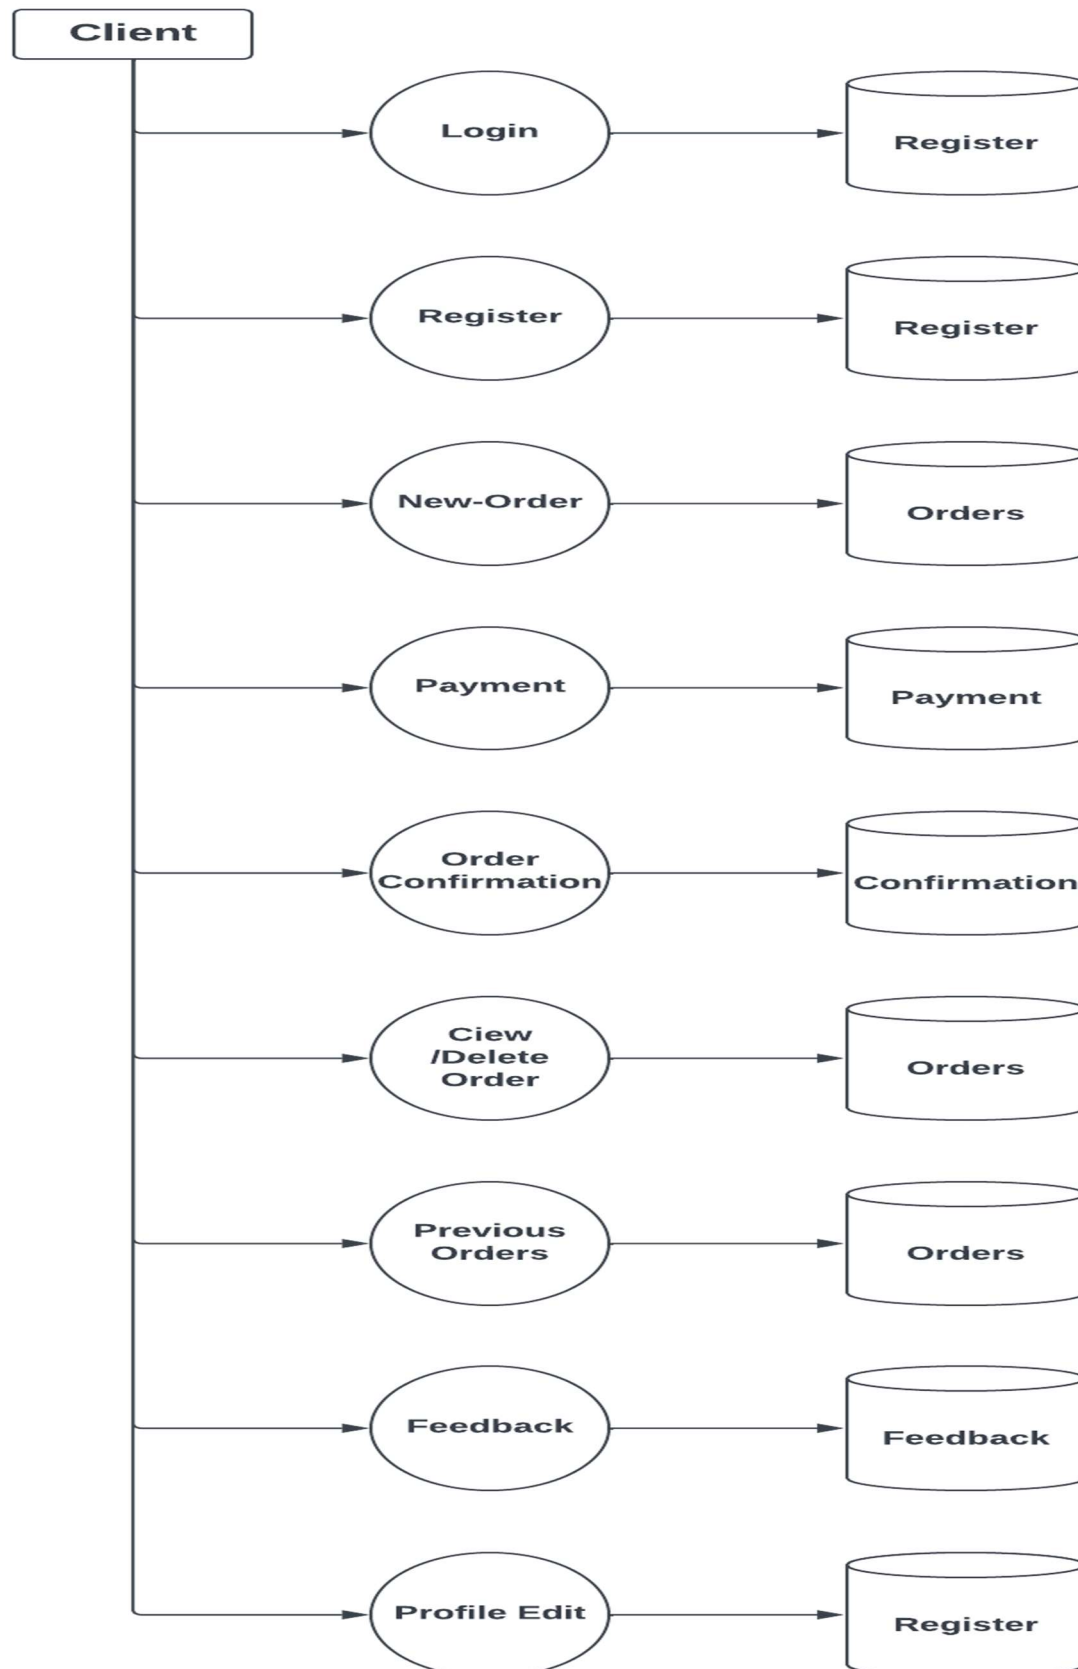

USE CASE DIAGRAM

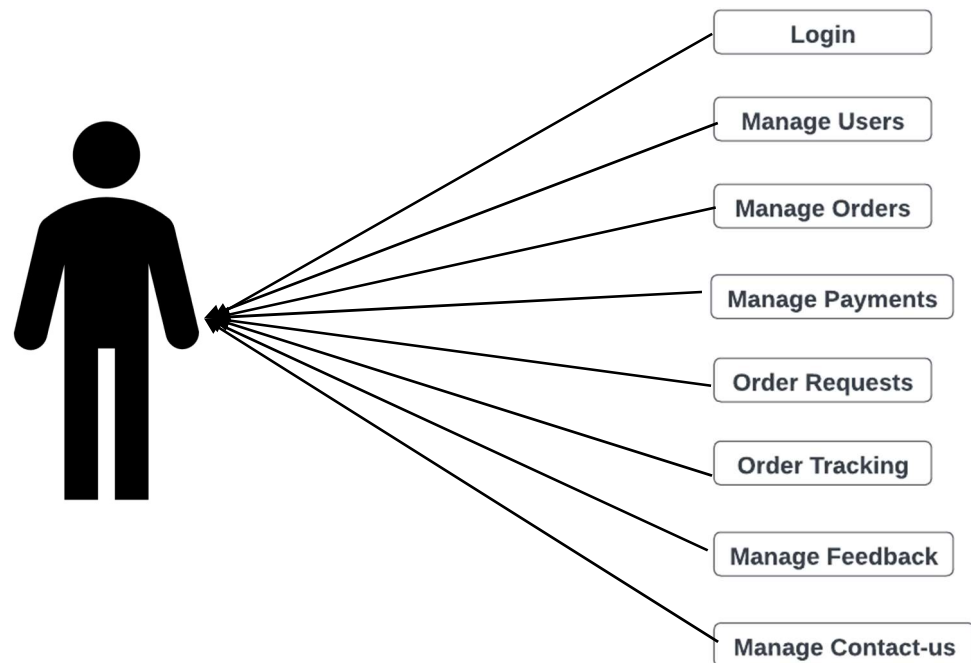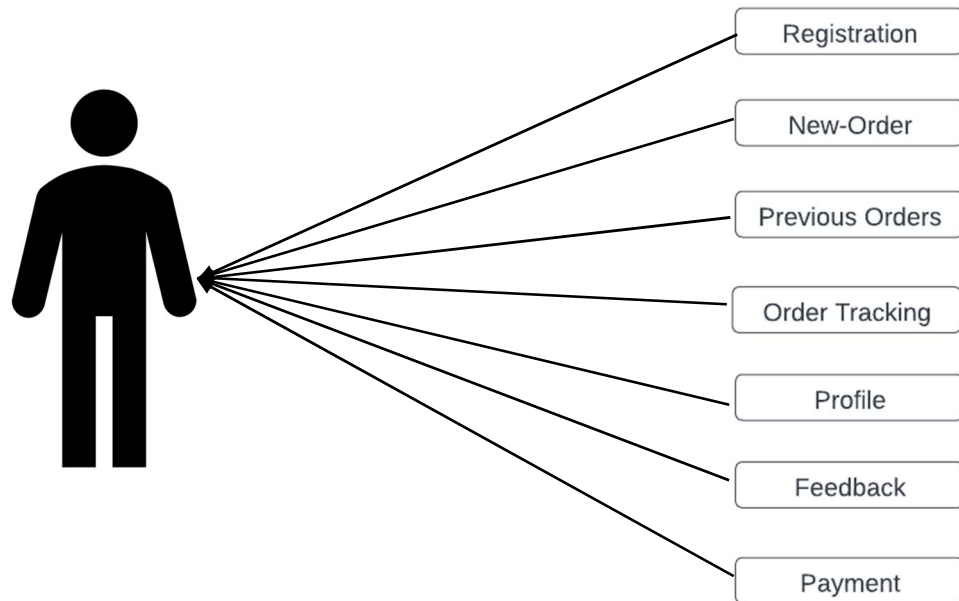

DATA INFORMATION

Data Information refers to the meaningful informations about data or data structure. raw data has by it self may not hold much significance but when processed, organized and presented in a structured manner, it becomes information that can be used for decision making and problem solving into a particular subject

✧ We define the two stage of data information and required data information are mentioned below:-

1) User Side:

- >Home: It displays the first page of website.
- >Login: User can login with username and password if registered
- >Sign Up: User details such as first name,last name,user name required.
- >User-Profile: User can see and changes its details.
- >New Order: User can make new transport order if registered.
- >View-Previous order: User can view data about previous order if user is login.
- >Preview / Feedback: User can feedback on previous order
- >Order Tracking: User can track current order status and can edit or delete it.
- >Logout: User logout his/her account.

2)Admin Side:-

- >Login: Admin can login with username and password.
- >Dashboard: Admin dashboard store the all information such as manage orders, manage users, read/delete order feedback etc.
- >Manage orders: Admin can Add/Edit/Delete orders and see all information about orders.
- >Manage users: Admin can Add/Edit/Delete users and access all the information.
- >Read/Delete feedback: Admin can read and delete order feedback.
- >Change password: Admin can change the password.
- >Logout: Admin logout his/her account.

DATA STRUCTURE

A Data structure lists the purpose of all data items and definition of all composite data items in terms of their component data item.

Designing the data structure for a logistics website is a critical aspects of its development. An effective data structure ensures efficient data management, retrieve all and processing. Below, We'll outline a simplified data structure for our logistics website.

- ◆ We have database named **logistics_db** and tables written below.

h1_admin
h1_contact-us
h1_delivery
h1_feedback
h1_orders
h1_payment
h1_register

1) h1_admin

Column	Type & Size	Constraints
admin_id	int(10)	Primary Key
username	varchar(50)	Not Null
password	varchar(50)	Not Null

2)h1_contact-us

Column	Type & Size	Constraints
id	int(10)	Primary Key
email	varchar(50)	Not Null
message	varchar(50)	Not Null

3)h1_delivery

Column	Type & Size	Constraints
id	int(10)	Primary Key
order_id	int(10)	Foreign Key
delivery_status	varchar(50)	Not Null

4)h1_feedback

Column	Type & Size	Constraints
id	int(10)	Primary Key
order_id	int(10)	Foreign Key
feedback	varchar(250)	Not Null

5)h1_orders

Column	Type & Size	Constraints
order_id	int(10)	Primary Key
user_id	int(10)	Foreign Key
orderName	varchar(50)	Not Null
ProductDescription	varchar(250)	Not Null
ProductWeight	int(50)	Not Null
deliveryDistance	int(50)	Not Null
PickUpAddress	varchar(100)	Not Null
PickUpDate	Date	Not Null
deliveryAddress	varchar(100)	Not Null
deliveryDate	Date	Not Null
ShippingMethod	varchar(50)	Not Null
itemState	int(10)	Null
otherinstructions	varchar(200)	Null



6)h1_payment

Column	Type & Size	Constraints
id	int(10)	Primary Key
order_id	int(10)	Foreign Key
cost	int(30)	Not Null
confirmation	int(10)	Not Null

7)h1_register

Column	Type & Size	Constraints
user_id	int(10)	Primary Key
fullname	varchar(50)	Not Null
username	varchar(50)	Not Null
email	varchar(50)	Not Null
phoneNumber	varchar(50)	Not Null
password	varchar(50)	Not Null
gender	varchar(20)	Not Null

SCREEN LAYOUT AND BODY

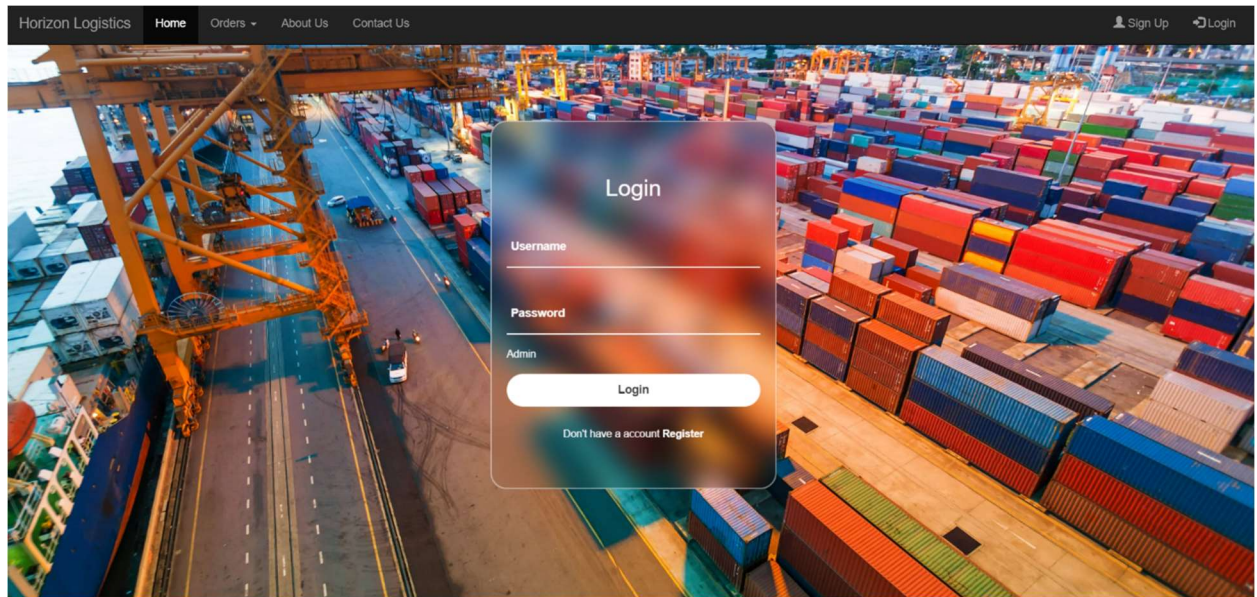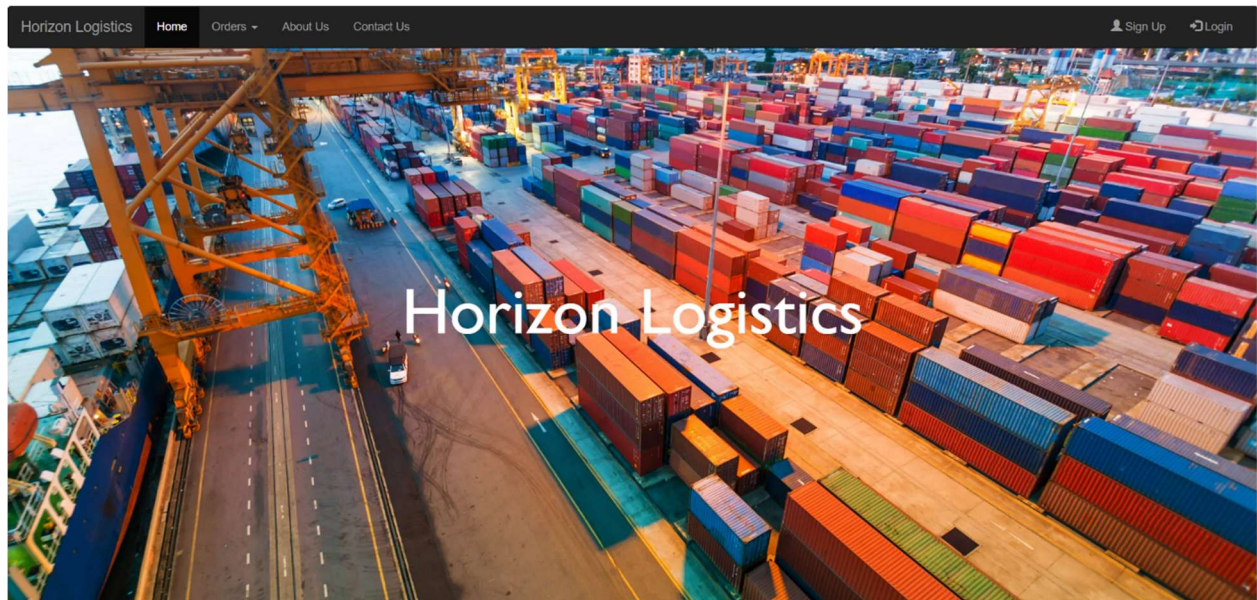

Horizon Logistics

HomeOrdersAbout UsContact Us

Sign UpLogin

Registration

FullName

Username

Email

Phone Number

Password

Confirm Password

Gender

☐ Male ☐ Female ☐ Other

Register

Order Details

Order Name:

Enter Order Name

Product Description:

Enter your message

Product Weight:

Enter Product Weight

Delivery Distance:

Enter Delivery Distance

Pickup Address:

Enter Pickup Address

Pickup Date:

dd-mm-yyyy

Delivery Address:

Enter Delivery Address

Delivery Date:

dd-mm-yyyy

Shipping Method:

Economy




☐ Fragile Items ☐ Temperature-Sensitive Goods ☐ Hazardous Materials

Other Instructions:

Enter Other Instructions

Submit


Previous Orders

Id	Order Name	Delivery Date	Shipping Method	Ammount	Feedback	Operation
1	1	2023-09-29	economy	76800	<ul style="list-style-type: none"> Average Good Excellent 	
2	second	2023-09-28	standard	76800	<ul style="list-style-type: none"> Average Good Excellent 	
3	third	2023-09-27	economy	76800	<ul style="list-style-type: none"> Average Good Excellent 	

Admin


1

Users




3

Orders




3

Collection



2

Feedbacks



Orders


View All




Order Name	Delivery Date	Shipping Method	Ammount
1	2023-09-29	economy	76800
second	2023-09-28	standard	76800
third	2023-09-27	economy	76800

Users

View All

User Id	Name	gender
1	meet dobariya	male

All Users					
Id	Fullname	Email	Phone Number	Gender	Option
1	meet dobariya	meetdobiya@gamil.com	9658452355	male	

All Orders						
Id	Order Name	Delivery Date	Shipping Method	Status	Ammount	Operation
1	1	2023-09-29	economy	Delivered	76800	
2	second	2023-09-28	standard	Delivered	76800	
3	third	2023-09-27	economy	Shipped	76800	

Admin

Orders update

Id	Order Name	Delivery Date	Shipping Method	Status	Ammount	Operation
1	1	2023-09-29	economy	Delivered	76800	<ul style="list-style-type: none"> Shipped delivered Cancel
2	second	2023-09-28	standard	Delivered	76800	<ul style="list-style-type: none"> Shipped delivered Cancel
3	third	2023-09-27	economy	Shipped	76800	<ul style="list-style-type: none"> Shipped delivered Cancel

Admin

Orders Requests

Id	Order Name	Delivery Date	Shipping Method	Status	Ammount	Operation
1	1	2023-09-29	economy	Pending	76800	✓
2	second	2023-09-28	standard	Pending	76800	✓

CODING

Index.php :-

```
<?php
session_start();
include 'include/config.php';
?>

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link rel="stylesheet" href="externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css">
  <link rel="stylesheet" href="css/style.css?v=<?= $version ?>">
  <script src="externalData/jquery/jquery.min.js"></script>
  <script src="externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
  <title>Horizon Logistics</title>
  <style>
    .title {
      position: absolute;
      top: 50%;
      left: 50%;
      transform: translate(-50%, -50%);
    }

    .title h1 {
      color: #ffffff;
      font-size: 80px;
      font-family: 'Gill Sans', 'Gill Sans MT', Calibri, 'Trebuchet MS', sans-serif;
    }
  </style>
</head>

<body>
  <div class="back1">
    <div class="title">
      <h1 class="">Horizon Logistics</h1>
    </div>
    <?php include 'include/header.php'; ?>
  </div>

</body>

</html>
```

register.php :-

```
<?php include 'include/config.php';
session_start();
error_reporting(0);
?>
<?php
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $fname = $_POST['fname'];
    $uname = $_POST['uname'];
    $email = $_POST['email'];
    $num = $_POST['phoneNumber'];
    $password = $_POST['password'];
    $confirmPassword = $_POST['confirmPassword'];
    $gender = $_POST['gender'];
    if ($password == $confirmPassword) {
        $pass_hash = md5($password);
        $result = mysqli_query($conn, "SELECT * FROM hl_register WHERE username='$uname' AND
password='$pass_hash'");
        if ($result && mysqli_num_rows($result) > 0) {
            $msg = "<div class=\"alert alert-danger alert-dismissible fade in\">
<a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
<strong>ERROR!</strong> Username and Password are Already Taken.
</div>";
        } else {
            $insert_query = mysqli_query($conn, "INSERT INTO hl_register (fullname, username, email, phoneNumber,
password, gender) VALUES ('$fname', '$uname', '$email', '$num', '$pass_hash', '$gender')");
            $res = mysqli_query($conn, "SELECT * FROM hl_register WHERE username='$uname' AND
password='$pass_hash'");
            if ($res && mysqli_num_rows($res) > 0) {
                $row = mysqli_fetch_assoc($res);
                $_SESSION['id'] = $row['user_id'];
                $_SESSION['uname'] = $row['username'];
                $_SESSION['password'] = $row['password'];
                header("location: index.php");
                exit;
            }
        }
    } else {
        $msg = "<div class=\"alert alert-danger alert-dismissible fade in\" id=\"dangerb\">
<a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
<strong>ERROR!</strong> Password Are Not Matching...
</div>";
    }
}
?>
<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```

<link rel="stylesheet" href="externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css">
<link rel="stylesheet" href="css/style.css?v=<?= $version ?>">
<link rel="stylesheet" href="css/register.css?v=<?= $version ?>">
<script src="externalData/jquery/jquery.min.js"></script>
<script src="externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
<title>login</title>
</head>

<body>
<section>
<div class="back1">
<div class="form-box">
<div class="main-user-info">
<form method="POST" action="<?php echo $_SERVER['PHP_SELF']; ?>">
<h2 class="">Registration</h2>
<div class="inputbox">
<input type="text" id="fname" name="fname" required />
<label for="fname">FullName</label>
</div>
<div class="inputbox">
<input type="text" id="uname" name="uname" required />
<label for="uname">Username</label>
</div>
<div class="inputbox">
<input type="email" id="email" name="email" required>
<label for="email">Email</label>
</div>
<div class="inputbox">
<input type="text" id="phoneNumber" name="phoneNumber" required />
<label for="phoneNumber">Phone Number</label>
</div>
<div class="inputbox">
<input type="password" id="password" name="password" required />
<label for="password">Password</label>
</div>
<div class="inputbox">
<input type="password" id="confirmPassword" name="confirmPassword" required />
<label for="confirmPassword">Confirm Password</label>
</div>
<div class="gender-details-box">
<span class="gender-title">Gender</span>
<div class="gender-category">
<input type="radio" name="gender" id="male" value="male">
<label for="male">Male</label>
<input type="radio" name="gender" id="female" value="female">
<label for="female">Female</label>
<input type="radio" name="gender" id="other" value="other">
<label for="other">Other</label>
</div>
</div>
<div class="form-submit-btn">
<input type="submit" value="Register">
</div>

```

```

        </form>
    </div>
</div>
<?php include_once 'include/header.php'; ?>
</div>
<div class="foot">
    <?= $msg ?>
</div>
</section>

</body>

```

login.php :-

```

<?php include_once 'include/config.php';
session_start();
if(isset( $_SESSION['msg'])){
    $msg = $_SESSION['msg'];
}
else{
    $msg = "";
}
?>
<?php
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $uname = $_POST['username'];
    $pwd = $_POST['password'];
    $p_hash = md5($pwd);
    $res = mysqli_query($conn,"SELECT * FROM hl_register WHERE username='$uname' AND password='$p_hash'");
    if ($res && mysqli_num_rows($res) > 0) {
        $row = mysqli_fetch_assoc($res);
        $_SESSION['id'] = $row['user_id'];
        $_SESSION['uname'] = $row['username'];
        $_SESSION['password'] = $row['password'];
        header("location: index.php");
    }
    else {
        $msg = "<div class=\"alert alert-danger alert-dismissible fade in\" id=\"dangerb\">
        <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
        <strong>ERROR!</strong> Wrong Username Or Password...
        </div>";
    }
}
?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css">

```

```

<link rel="stylesheet" href="css/style.css?v=<?= $version ?>">
<link rel="stylesheet" href="css/login.css?v=<?= $version ?>">
<script src="externalData/jquery/jquery.min.js"></script>
<script src="externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
<title>login</title>
</head>

<body>

<section>
  <div class="back1">
    <div class="form-box">
      <div class="form-value">
        <form method="POST" action="<?php echo $_SERVER['PHP_SELF']; ?>">
          <h2>Login</h2>
          <div class="inputbox">
            <input type="text" id="username" name="username" required>
            <label for="username">Username</label>
          </div>
          <div class="inputbox">
            <input type="password" id="password" name="password" required>
            <label for="password">Password</label>
          </div>
          <div class="forget">
            <a href="Admin/admin_login.php">Admin</a>
          </div>
          <div class="login-btn">
            <input type="submit" value="Login">
          </div>
          <div class="register">
            <p>Don't have a account <a href="register.php">Register</a></p>
          </div>
        </form>
      </div>
    </div>
    <div>
      <?php include 'include/header.php'; ?>
    </div>
    <div class="foot">
      <?=$msg?>
    </div>
  </section>

</body>

</html>

```

new_order.php :-

```

<?php
session_start();

```

```

error_reporting(0);
if (!isset($_SESSION['id'])) {
    $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
    header("location: login.php");
}
?>
<?php
include_once 'include/config.php';
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $odr_name = $_POST['Oname'];
    $p_d = $_POST['product_discription'];
    $weight = $_POST['weight'];
    $dist = $_POST['distance'];
    $p_addr = $_POST['p_address'];
    $p_date = $_POST['p_date'];
    $d_addr = $_POST['d_address'];
    $d_date = $_POST['d_date'];
    $s_method = $_POST['shipping_method'];
    $item_state = $_POST['item_state'];
    $i_state = 0;
    for ($i = 0; $i < sizeof($item_state); $i++) {
        $i_state = $i_state + 1;
    }
    $other_i = $_POST['other_instructions'];
    $user_id = $_SESSION['id'];

    $km_price = 40 * $dist;
    $wht = $weight / 1000;
    if ($weight > 1000) {
        $base_price = $km_price * $wht;
    }
    else{
        $base_price = $km_price;
    }

    if ($i_state == 1) {
        $a = $base_price * 0.2;
        $base_price = $base_price + $a;
    } elseif ($i_state == 2) {
        $a = $base_price * 0.4;
        $base_price = $base_price + $a;
    } elseif ($i_state == 3) {
        $a = $base_price * 0.6;
        $base_price = $base_price + $a;
    }

    $insert_query = mysqli_query($conn, "INSERT INTO hl_orders (user_id, orderName, productDiscription,
    productWeight, deliveryDistance, pickupAddress, pickupDate, deliveryAddress, deliveryDate, shippingMethod,
    itemState, otherInstructions) VALUES('$user_id', '$odr_name', '$p_d', '$weight', '$dist', '$p_addr', '$p_date',

```



```

'd_addr', 'd_date', 's_method', 'i_state', 'other_i')));
$select_result =mysql_query($conn,"SELECT * FROM hl_orders where user_id=$user_id and
orderName='$odr_name' and productDiscription='$p_d' and pickupAddress='$p_addr'");
if ($select_result && mysqli_num_rows($select_result) > 0) {
    $row = mysqli_fetch_array($select_result);
    $k= $row['order_id'];
    $f = "no feedback";
    $feedback = mysqli_query($conn,"INSERT into hl_feedback(order_id,feedback) values('$k', '$f')");
    $cost_result =mysqli_query($conn,"INSERT into hl_payment(order_id, cost, confirmation, user_id) values('$k',
'$base_price', 0,$user_id)");
    $delivery_result = mysqli_query($conn, "INSERT INTO hl_delivery(order_id, deliveryStatus, user_id)
values('$k',1,$user_id)");
}
}
?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css">
    <link rel="stylesheet" href="css/style.css?v=<?=$version ?>">
    <link rel="stylesheet" href="css/new_order.css?v=<?=$version ?>">
    <script src="externalData/jquery/jquery.min.js"></script>
    <script src="externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <title>login</title>
</head>

<body>
    <div class="form-box">
        <div class="main-user-info">
            <form method="POST" action="<?php echo $_SERVER['PHP_SELF']; ?>">
                <h2 class="">Order Details</h2>
                <div class="form-group">
                    <label for="Oname">Order Name:</label>
                    <input type="text" class="form-control" id="Oname" name="Oname" placeholder="Enter Order Name"
required>
                </div>
                <div class="form-group">
                    <label for="product_discription">Product Discription:</label>
                    <textarea class="form-control" id="product_discription" name="product_discription" rows="3"
placeholder="Enter your message" required></textarea>
                </div>
                <div class="form-group">
                    <label for="weight">Product Weight:</label>
                    <input type="text" class="form-control" id="weight" name="weight" placeholder="Enter Product Weight"
required>
                </div>
                <div class="form-group">
                    <label for="weight">Delivery Distance:</label>
                    <input type="text" class="form-control" id="distance" name="distance" placeholder="Enter Delivery

```

```

Distance" required>
    </div>
    <div class="form-group">
        <label for="p_address">Pickup Address:</label>
        <textarea class="form-control" id="p_address" name="p_address" rows="2" placeholder="Enter Pickup
Address" required></textarea>
    </div>
    <div class="form-group">
        <label for="p_date">Pickup Date:</label>
        <input type="date" class="form-control" id="p_date" name="p_date" placeholder="Enter Pickup Date"
required>
    </div>
    <div class="form-group">
        <label for="p_address">Delivery Address:</label>
        <textarea class="form-control" id="d_address" name="d_address" rows="2" placeholder="Enter Delivery
Address" required></textarea>
    </div>
    <div class="form-group">
        <label for="d_date">Delivery Date:</label>
        <input type="date" class="form-control" id="d_date" name="d_date" placeholder="Enter Delivery Date"
required>
    </div>
    <div class="form-group">
        <label for="shipping_method">Shipping Method:</label>
        <select class="form-control" id="shipping_method" name="shipping_method" required>
            <option value="economy">Economy</option>
            <option value="standard">Standard</option>
            <option value="express">Express</option>
        </select>
    </div>
    <div class="form-group">
        <label class="checkbox-inline">
            <input type="checkbox" name="item_state[]" value="f">Fragile items
        </label>
        <label class="checkbox-inline">
            <input type="checkbox" name="item_state[]" value="t">Temperature-Sensitive Goods
        </label>
        <label class="checkbox-inline">
            <input type="checkbox" name="item_state[]" value="h">Hazardous Materials
        </label>
    </div>
    <div class="form-group">
        <label for="other_instructions">Other Instructions:</label>
        <textarea class="form-control" id="other_instructions" name="other_instructions" rows="3"
placeholder="Enter Other Instructions"></textarea>
    </div>
    <input type="submit" value="Submit" class="btn btn-primary">
</form>
</div>
</div>
<div class="foot">
    <?= $msg ?>
</div>

```

```
</body>
```

```
</html>
```

orderTrack.php :-

```
<?php require_once 'include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['id'])) {
    $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
    header("location: login.php");
}

$ssid = $_SESSION['id'];

$res = mysqli_query($conn, "SELECT * FROM hl_orders where user_id=$ssid");
$cost_result = mysqli_query($conn, "SELECT * FROM hl_payment where user_id=$ssid");
$delivery_result = mysqli_query($conn, "SELECT * FROM hl_delivery where user_id=$ssid");
?>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css" />
    <link rel="stylesheet" href="css/table.css"?<?=$version ?>" />
    <script src="externalData/jquery/jquery.min.js"></script>
    <script src="externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="externalData/fontawesome-free-6.4.2-web/css/all.min.css">
    <title>Document</title>
</head>

<body>
    <div class="center">
        <main class="table">
            <section class="table__header">
                <h1>Order Tracking</h1>
            </section>
            <section class="table__body">
                <table>
                    <thead>
                        <tr>
                            <th>Id </th>
                            <th> Order Name </th>
                            <th> Delivery Date </th>
                            <th> Shipping Method </th>
```

```
<th> Status </th>  
<th> Ammount </th>  
</tr>  
</thead>  
<tbody>  
    <?php $x = 1;  
        while ($row = mysqli_fetch_array($res) and $status = mysqli_fetch_array($delivery_result) and $cost  
= mysqli_fetch_array($cost_result)) {  
            ?>  
                <tr>  
                    <td><?= $x ?></td>  
                    <td><?= $row['orderName'] ?></td>  
                    <td><?= $row['deliveryDate'] ?></td>  
                    <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<?= $row['shippingMethod'] ?></td>  
                    <td><?php if ($status['deliveryStatus'] == 1) {  
                        echo "<p class=\"status pending\">Pending</p>";  
                    } elseif ($status['deliveryStatus'] == 2) {  
                        echo "<p class=\"status process\">Processing</p>";  
                    } elseif ($status['deliveryStatus'] == 3) {  
                        echo "<p class=\"status shipped\">Shipped</p>";  
                    } elseif ($status['deliveryStatus'] == 4) {  
                        echo "<p class=\"status delivered\">Delivered</p>";  
                    } elseif ($status['deliveryStatus'] == 0) {  
                        echo "<p class=\"status cancelled\">Cancelled</p>";  
                    } ?></td>  
                    <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<?= $cost['cost'] ?></td>  
                </tr>  
            <?php $x++;  
        } ?>  
    </tbody>  
</table>  
</section>  
</main>  
</div>  
<script>  
$(document).ready(function() {  
    $('[data-toggle="tooltip"]').tooltip();  
});  
</script>  
</body>
```

Previous orders.php :-

```
<?php require_once 'include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['id'])) {
    $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
}
```

```

$_SESSION['msg'] = $msg;
header("location: login.php");
}

$cid = $_SESSION['id'];

$res = mysqli_query($conn, "SELECT * FROM hl_orders where user_id=$cid");
$cost_result = mysqli_query($conn, "SELECT * FROM hl_payment where user_id=$cid");
$delivery_result = mysqli_query($conn, "SELECT * FROM hl_delivery where user_id=$cid");

if (isset($_GET['s'])) {
    $s = $_GET['s'];
    $f1 = "Average";
    $updatefeedback = mysqli_query($conn, "update hl_feedback set feedback='$f1' where id=$s");
    header("location: previous_orders.php");
} elseif (isset($_GET['d'])) {
    $d = $_GET['d'];
    $f2 = "Good";
    $updatefeedback = mysqli_query($conn, "update hl_feedback set feedback='$f2' where id=$d");
    header("location: previous_orders.php");
} elseif (isset($_GET['c'])) {
    $c = $_GET['c'];
    $f3 = "Excellent";
    $updatefeedback = mysqli_query($conn, "update hl_feedback set feedback='$f3' where id=$c");
    header("location: previous_orders.php");
}

if(isset($_GET['oid'])){
    $oid = $_GET['oid'];
    $res = mysqli_query($conn, "DELETE FROM hl_orders Where order_id=$oid");
    $cost_result = mysqli_query($conn, "DELETE FROM hl_payment Where order_id=$oid");
    $delivery_result = mysqli_query($conn, "DELETE FROM hl_delivery Where order_id=$oid");
    header("location: previous_orders.php");
    exit;
}
?>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css" />
    <link rel="stylesheet" href="css/table.css"?<?=$version ?>" />
    <script src="externalData/jquery/jquery.min.js"></script>
    <script src="externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="externalData/fontawesome-free-6.4.2-web/css/all.min.css">
    <title>Document</title>
</head>

<body>
    <div class="content">
        <div class="center">
            <main class="table">

```



```

        <div class="modal-body">
            <p>Some text in the modal.</p>
        </div>
        <div class="modal-footer">
            <button type="button" class="btn btn-default" data-dismiss="modal">Close</button>
        </div>
    </div>

</div>
</div>

</div>
</body>

</html>

```

Profile.php :-

```

<?php include_once 'include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['id'])) {
    header("location: login.php");
} else {
    $uid = $_SESSION['id'];
}
$res = mysqli_query($conn, "SELECT * FROM hl_register where user_id=$uid");
if ($res && mysqli_num_rows($res) > 0) {
    $nums = mysqli_num_rows($res);
    $row = mysqli_fetch_array($res);
    $gen1 = "";
    $gen2 = "";
    $gen3 = "";
    if ($row['gender'] == "male") {
        $gen1 = "checked";
    } elseif ($row['gender'] == "female") {
        $gen2 = "checked";
    } elseif ($row['gender'] == "other") {
        $gen3 = "checked";
    }
}
?>

<?php
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $fname = $_POST['fname'];
    $uname = $_POST['uname'];
    $email = $_POST['email'];
    $num = $_POST['phoneNumber'];
    $password = $_POST['password'];
    $confirmPassword = $_POST['confirmPassword'];
}

```

```

$gender = $_POST['gender'];
if ($password == $confirmPassword) {
    $pass_hash = md5($password);
    $result = mysqli_query($conn, "SELECT * FROM hl_register WHERE username='$username' AND
password='$pass_hash'");

    $insert_query = mysqli_query($conn, "UPDATE hl_register set fullname='$fname', username='$username',
email='$email', phoneNumber='$num', password='$pass_hash', gender='$gender' where user_id='$uid' ");
    header("location: index.php");
    exit;
} else {
    $msg = "<div class=\"alert alert-danger alert-dismissible fade in\" id=\"dangerb\">
<a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
<strong>ERROR!</strong> Password Are Not Matching...
</div>";
}
?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css">
    <script src="externalData/jquery/jquery.min.js"></script>
    <script src="externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="css/profile.css?<?=$version ?>">
    <title>Document</title>
</head>

<body>
    <div class="center">
        <div class="bak">
            <div class="p_header">
                <h1>Profile</h1>
                <div class="btn">
                    <a href="logout.php">Logout</a>
                </div>
            </div>
            <div class="p_body">
                <form class="" method="POST" action="<?php echo $_SERVER['PHP_SELF']; ?>">
                    <div class="form-inline">
                        <h1></h1>
                        <div class="form-box">
                            <div class="form-group">
                                <label for="fname" style="color: #056363;">FullName</label>
                                <input type="text" class="form-control" id="fname" value="<?=$row['fullname'] ?>"
name="fname" required />
                            </div>
                            <div class="form-group">
                                <label for="uname" style="color: #056363;">Username</label>
                                <input type="text" class="form-control" id="uname" value="<?=$row['username'] ?>"

```



```

name="uname" required />
    </div>
    <div class="form-group">
        <label for="email" style="color: #056363;">Email</label>
        <input type="email" class="form-control" id="email" value="<?= $row['email'] ?>" name="email"
required>
        </div>
    </div>
</div>
<br />
<div class="form-group">
    <label for="phoneNumber" style="color: #056363;">Phone Number</label>
    <input type="text" class="form-control" id="phoneNumber" value="<?= $row['phoneNumber'] ?>"
name="phoneNumber" required />
    </div>
    <div class="form-group">
        <label for="password" style="color: #056363;">Password</label>
        <input type="password" class="form-control" id="password" value="" name="password" required />
    </div>
    <div class="form-group">
        <label for="confirmPassword" style="color: #056363;">Confirm Password</label>
        <input type="password" class="form-control" id="confirmPassword" value=""
name="confirmPassword" required />
    </div>
    <div class="gender-details-box">
        <span class="gender-title" style="color: #056363;"><label for="gender" style="color:
#056363;">Gender</label></span>
        <div class="gender-category">
            <input type="radio" name="gender" id="male" value="male" <?= $gen1 ?>>
            <label for="male">Male</label>
            <input type="radio" name="gender" id="female" value="female" <?= $gen2 ?>>
            <label for="female">Female</label>
            <input type="radio" name="gender" id="other" value="other" <?= $gen3 ?>>
            <label for="other">Other</label>
        </div>
    </div>
    <div class="btn">
        <input type="submit" value="Save Changes">
    </div>
</form>
</div>
</div>
<div class="foot">
    <?= $msg ?>
</div>
</body>

</html>

```

logout.php :-

```
<?php
session_start();
session_unset();
session_destroy();
header("location: index.php");
?>
```

aboutUs.php :-

```
<?php include_once 'include/config.php'; ?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css">
    <script src="externalData/jquery/jquery.min.js"></script>
    <script src="externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="css/style.css?<?= $version ?>">
    <link rel="stylesheet" href="css/aboutUs.css?<?= $version ?>">
    <title>Document</title>
</head>

<body>
    <section>
        <div class="back1">
            <?php include 'include/header.php'; ?>
            <div class="content">
                <div class="center">
                    <div class="bak">
                        <h1>Horizon Logistics</h1>
                        <h3>Horizon Logistics system provide you logistics services with user frendly interface.
                            Horizon Logistics is web based appllication that provides services to transport goods.
                            Horizon logistics a web application should be user friendly and easy to understand & use.
                            it should provide user satisfaction to use customer should easily login or registration in our websites.
                        </h3>
                        <div class="dash">
                            <h3>developed by Meet Dobariya & Divyesh Bakhklakhiya</h3>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </section>
</body>

</html>
```

contactUs.php :-

```
<?php include_once 'include/config.php';
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $fname = $_POST['fname'];
    $email = $_POST['email'];
    $msg = $_POST['message'];
    $query = mysqli_query($conn,"INSERT INTO hl_contact (fullname, email, msg) values('$fname','$email','$msg')");
    if($query == true){
        header("location: index.php");
    }
}

?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css">
    <script src="externalData/jquery/jquery.min.js"></script>
    <script src="externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="css/login.css"?<?=$version ?>">
    <link rel="stylesheet" href="css/style.css"?<?=$version ?>">
    <title>Document</title>
</head>

<body>
<section>
    <div class="back1">
        <div class="form-box">
            <div class="form-value">
                <form method="POST" action="<?php echo $_SERVER['PHP_SELF']; ?>">
                    <h2>Contact Us</h2>
                    <div class="inputbox">
                        <input type="text" id="fname" name="fname" required />
                        <label for="fname">FullName:</label>
                    </div>
                    <div class="inputbox">
                        <input type="email" id="email" name="email" required>
                        <label for="email">Email:</label>
                    </div>
                    <div class="form-group">
                        <label for="message" style="color: #fff;">Message:</label>
                        <textarea class="form-control" id="message" name="message" rows="3" placeholder="Enter your
message" required></textarea>
                    </div>
                    <div class="login-btn">
                        <input type="submit" value="Send">
                    </div>
                </form>
            </div>
        </div>
    </div>
</section>
</body>
</html>
```

```

        </form>
    </div>
</div>
<?php include 'include/header.php'; ?>
</div>
</section>
</body>

</html>

```

header.php :-

```

<?php
include 'include/config.php';
if (isset($_SESSION['uname'])) {
    $index_name = "<li><a href=\"profile.php\">Profile</a></li>";
} else {
    $index_name = null;
}
?>
<header>
<div class="">
    <nav class="navbar navbar-inverse">
        <div class="container-fluid">
            <div class="navbar-header">
                <button type="button" class="navbar-toggle" data-toggle="collapse" data-target="#myNavbar">
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                </button>
                <a class="navbar-brand" href="#">Horizon Logistics</a>
            </div>
            <div class="collapse navbar-collapse" id="myNavbar">
                <ul class="nav navbar-nav">
                    <li class="active"><a href="index.php">Home</a></li>
                    <li class="dropdown">
                        <a class="dropdown-toggle" data-toggle="dropdown" href="#">Orders <span class="caret"></span></a>
                        <ul class="dropdown-menu">
                            <li><a href="new_order.php">New Order</a></li>
                            <li><a href="previous_orders.php">Previous Orders</a></li>
                            <li><a href="orderTrack.php">Order Tracking</a></li>
                        </ul>
                    </li>
                    <li><?php $index_name ?>
                        <li><a href="aboutUs.php">About Us</a></li>
                        <li><a href="contactUs.php">Contact Us</a></li>
                    </ul>
                    <ul class="nav navbar-nav navbar-right">
                        <li><a href="register.php"><span class="glyphicon glyphicon-user"></span> Sign Up</a></li>

```

```

        <li><a href="login.php"><span class="glyphicon glyphicon-log-in"></span> Login</a></li>
    </ul>
</div>
</div>
</nav>
</header>

```

config.php :-

```

<?php
$version=22;

$servername = "localhost";
$username = "root";
$password = "";
$dbname = "logistics_db";

// Create a connection
$conn = mysqli_connect($servername, $username, $password, $dbname);

// Check connection
if (!$conn) {
    die("Connection failed: " . mysqli_connect_error());
}
?>

```

Admin_login.php :-

```

<?php include '../include/config.php';

session_start();
error_reporting(0);
if(isset( $_SESSION['msg'])){
    $msg = $_SESSION['msg'];
}
else{
    $msg = "";
}
?>

<?php
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $uname = $_POST['uname'];
    $pwd = $_POST['password'];
    $pass_hash = md5($pwd);
    $result = mysqli_query($conn,"SELECT * FROM hl_admin WHERE username='$uname' AND
password='$pass_hash'");
    if ($result && mysqli_num_rows($result) > 0) {
        $row = mysqli_fetch_assoc($result);
        $_SESSION['adminid'] = $row['id'];
        $_SESSION['adminname'] = $row['username'];
        header("location: dashboard.php");
    }
}

```

```

else {
    $msg = "<div class=\"alert alert-danger alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>ERROR!</strong> Wrong Username Or Password...
    </div>";
}
}
?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="../externalData/bootstrap-3.4.1-dist/css/bootstrap.css">
    <link rel="stylesheet" href="../css/style.css?v=<?$version ?>">
    <link rel="stylesheet" href="../css/login.css?v=<?$version ?>">
    <script src="../externalData/jquery/jquery.min.js"></script>
    <script src="../externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <title>login</title>
</head>

<body>
    <section>
        <div class="back1">
            <div class="form-box">
                <div class="form-value">
                    <form method="POST" action="<?php echo $_SERVER['PHP_SELF']; ?>">
                        <h2>Login</h2>
                        <div class="inputbox">
                            <ion-icon name="person"></ion-icon>
                            <input type="text" id="uname" name="uname" required>
                            <label for="uname">Username</label>
                        </div>
                        <div class="inputbox">
                            <ion-icon name="lock-closed"></ion-icon>
                            <input type="password" id="password" name="password" required>
                            <label for="password">Password</label>
                        </div>
                        <div class="login-btn">
                            <input type="submit" value="Login">
                        </div>
                        <div class="register">
                            <p>Don't have a account <a href="../register.php">Register</a></p>
                        </div>
                    </form>
                </div>
            </div>
            <?php include_once 'include/header.php'; ?>
        </div>
        <div class="foot">
            <?=$msg?>
        </div>
    </section>

```

```

    </section>
</body>

</html>

```

dashboard.php :-

```

<?php require_once '../include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['adminid'])) {
    $msg = "<div class='alert alert-warning alert-dismissible fade in' id='dangerb'>
    <a href='#' class='close' data-dismiss='alert' aria-label='close'>&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
    header("location: admin_login.php");
}
$user = mysqli_query($conn, "SELECT * FROM hl_register");
if ($user && mysqli_num_rows($user) > 0) {
    $user_num = mysqli_num_rows($user);
}
$cost = mysqli_query($conn, "SELECT * FROM hl_payment");
if ($cost && mysqli_num_rows($cost) > 0) {
    $cost_num = mysqli_num_rows($cost);
}
$feedback = mysqli_query($conn, "SELECT * FROM hl_feedback where feedback!='no feedback'");
if ($feedback && mysqli_num_rows($feedback) > 0) {
    $feedback_num = mysqli_num_rows($feedback);
}
$order = mysqli_query($conn, "SELECT * FROM hl_orders");
if ($order && mysqli_num_rows($order) > 0) {
    $order_num = mysqli_num_rows($order);
}
?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="stylesheet" href="../externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css" />
    <link rel="stylesheet" href="css/dashboard.css?v=<?= $version ?>" />
    <link rel="stylesheet" href="css/sidebar.css?v=<?= $version ?>" />
    <script src="../externalData/jquery/jquery.min.js"></script>
    <script src="../externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <!--<link rel="stylesheet" href="../externalData/fontawesome-free-6.4.2-web/css/fontawesome.min.css">
    <link rel="stylesheet" href="../externalData/fontawesome-free-6.4.2-web/css/regular.min.css">-->
    <link rel="stylesheet" href="../externalData/fontawesome-free-6.4.2-web/css/all.min.css">
    <title>Responsive Navbar</title>
</head>

```

```

<body>
<?php require 'include/sidebar.php'; ?>
<main class="content">
<div class="dash">
<div class="cards">
<div class="card">
<div class="box">
<h1><?= $user_num ?></h1>
<h3>Users</h3>
</div>
<div class="icon-case">
<i class="fa-regular fa-user fa-4x" style="color: #058484;"></i>
</div>
</div>
<div class="card">
<div class="box">
<h1><?= $order_num ?></h1>
<h3>Orders</h3>
</div>
<div class="icon-case">
<i class="fa-solid fa-truck-fast fa-4x" style="color: #058484;"></i>
</div>
</div>
<div class="card">
<div class="box">
<h1><?= $cost_num ?></h1>
<h3>Collection</h3>
</div>
<div class="icon-case">
<i class="fa-solid fa-indian-rupee-sign fa-4x" style="color: #058484;"></i>
</div>
</div>
<div class="card">
<div class="box">
<h1><?=$feedback_num?></h1>
<h3>Feedbacks</h3>
</div>
<div class="icon-case">
<i class="fa-regular fa-comments fa-4x" style="color: #058484;"></i>
</div>
</div>
</div>
<div class="content-2">
<div class="recent-payments">
<div class="title">
<h2>Orders</h2>
<a href="all_orders.php" class="btn">View All</a>
</div>
<div class="scroll-div">
<table>
<tbody>
<tr>

```



```

        <th>Order Name</th>
        <th>Delivery Date</th>
        <th>Shipping Method</th>
        <th>Ammount</th>
    </tr>
    <?php $x = 1;
    while ($od = mysqli_fetch_array($order) and $cos = mysqli_fetch_array($cost)) {
    ?>
        <tr>
            <td><?= $od['orderName'] ?></td>
            <td><?= $od['deliveryDate'] ?></td>
            <td><?= $od['shippingMethod'] ?></td>
            <td><?= $cos['cost'] ?></td>
        </tr>
        <?php $x++;
    } ?>
    </tbody>
</table>
</div>
</div>
<div class="new-students">
    <div class="title">
        <h2>Users</h2>
        <a href="manage_user.php" class="btn">View All</a>
    </div>
    <div class="scroll-div">
        <table>
            <tbody>
                <tr>
                    <th>User Id</th>
                    <th>Name</th>
                    <th>gender</th>
                </tr>
                <?php $x = 1;
                while ($row = mysqli_fetch_array($user)) {
                ?>
                    <tr>
                        <td><?= $x ?></td>
                        <td><?= $row['fullName'] ?></td>
                        <td><?= $row['gender'] ?></td>
                    </tr>
                    <?php $x++;
                } ?>
                </tbody>
            </table>
        </div>
    </div>
</div>
</div>
</main>
</body>

```

</html>

Manage_users.php :-

```
<?php require_once '../include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['adminid'])) {
    $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
    header("location: admin_login.php");
}
$res = mysqli_query($conn, "SELECT * FROM hl_register");
if ($res && mysqli_num_rows($res) > 0) {
    $nums = mysqli_num_rows($res);
}
?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="../externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css" />
    <link rel="stylesheet" href="css/sidebar.css"?<?=$version ?>" />
    <link rel="stylesheet" href="css/table.css"?<?=$version ?>" />
    <script src="../externalData/jquery/jquery.min.js"></script>
    <script src="../externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="../externalData/fontawesome-free-6.4.2-web/css/all.min.css">
    <title>Document</title>
</head>

<body>
    <?php include_once 'include/sidebar.php'; ?>
    <div class="content">
        <div class="center">
            <main class="table">
                <section class="table__header">
                    <h1>All Users</h1>
                </section>
                <section class="table__body">
                    <table>
                        <thead>
                            <tr>
                                <th>Id </th>
                                <th> Fullname </th>
                                <th> Email </th>
                                <th> Phone Number </th>
```

```

        <th> Gender </th>
        <th> Option </th>
    </tr>
</thead>
<tbody>
    <?php $x=1;
    while($row = mysqli_fetch_array($res)){
        ?>
        <tr>
            <td><?=$x?></td>
            <td><?=$row['fullname']?></td>
            <td><?=$row['email']?></td>
            <td><?=$row['phoneNumber']?></td>
            <td><?=$row['gender']?></td>
            <td><a href="delete.php?uid=<?=$row['user_id'];?>" data-toggle="tooltip" title="Delete"><i
class="fa-solid fa-trash" style="color:red;"></i></a></td>
        </tr>
        <?php $x++;} ?>
    </tbody>
</table>
</section>
</main>
</div>
</div>
<script>
$(document).ready(function(){
    $('[data-toggle="tooltip"]').tooltip();
});
</script>
</body>

</html>

```

payment.php :-

```

<?php require_once '../include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['adminid'])) {
    $msg = "<div class='alert alert-warning alert-dismissible fade in' id='dangerb'>
    <a href='#' class='close' data-dismiss='alert' aria-label='close'>&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
    header("location: admin_login.php");
}

$res = mysqli_query($conn, "SELECT * FROM hl_orders");
if ($res && mysqli_num_rows($res) > 0) {

```



```

                <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<?=$cost['cost']?></td>
            </tr>
        <?php $x++; } ?>
    </tbody>
</table>
</section>
</main>
</div>
</div>
</body>

</html>

```

feedback.php :-

```

<?php require_once '../include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['adminname'])) {
    $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
    header("location: admin_login.php");
}

$res = mysqli_query($conn, "SELECT * FROM hl_orders");
if ($res && mysqli_num_rows($res) > 0) {
    $nums = mysqli_num_rows($res);
}

$feedback =mysqli_query($conn,"SELECT * FROM hl_feedback");

?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="../externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css" />
    <link rel="stylesheet" href="css/sidebar.css?<?=$version ?>" />
    <link rel="stylesheet" href="css/table.css?<?=$version ?>" />
    <script src="../externalData/jquery/jquery.min.js"></script>
    <script src="../externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="../externalData/fontawesome-free-6.4.2-web/css/all.min.css">
    <title>Document</title>
</head>

<body>

```

```

<?php include_once 'include/sidebar.php'; ?>
<div class="content">
  <div class="center">
    <main class="table">
      <section class="table__header">
        <h1>Feedbacks</h1>
      </section>
      <section class="table__body">
        <table>
          <thead>
            <tr>
              <th>Id </th>
              <th>Ordername </th>
              <th>Feedback </th>
            </tr>
          </thead>
          <tbody>
            <?php $x=1;
              while($row = mysqli_fetch_array($res) and $ff = mysqli_fetch_array($feedback)){
                ?>
                <tr>
                  <td><?=$x?></td>
                  <td><?=$row['orderName']?></td>
                  <td><?=$ff['feedback']?></td>
                </tr>
                <?php $x++; } ?>
              </tbody>
            </table>
          </section>
        </main>
      </div>
    </div>
  </body>

</html>

```

review.php :-

```

<?php require_once '../include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['adminid'])) {
  $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
  <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
  <strong>WARNING!</strong> Login To Access...
  </div>";
  $_SESSION['msg'] = $msg;
  header("location: admin_login.php");
}
$res = mysqli_query($conn, "SELECT * FROM hl_contact");
?>

```

```

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet" href="../externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css" />
  <link rel="stylesheet" href="css/sidebar.css"?<?=$version ?>" />
  <link rel="stylesheet" href="css/table.css"?<?=$version ?>" />
  <script src="../externalData/jquery/jquery.min.js"></script>
  <script src="../externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
  <link rel="stylesheet" href="../externalData/fontawesome-free-6.4.2-web/css/all.min.css">
  <title>Document</title>
</head>

<body>
  <?php include_once 'include/sidebar.php'; ?>
  <div class="content">
    <div class="center">
      <main class="table">
        <section class="table__header">
          <h1>Visitor Reviews</h1>
        </section>
        <section class="table__body">
          <table>
            <thead>
              <tr>
                <th>Id </th>
                <th>fullname </th>
                <th>Email </th>
                <th>Review </th>
              </tr>
            </thead>
            <tbody>
              <?php $x=1;
              while($row = mysqli_fetch_array($res)){
                ?>
                <tr>
                  <td><?=$x?></td>
                  <td><?=$row['fullname']?></td>
                  <td><?=$row['email']?></td>
                  <td><?=$row['msg']?></td>
                </tr>
                <?php $x++; } ?>
              </tbody>
            </table>
          </section>
        </main>
      </div>
    </div>
  </body>

</html>

```

All_orders.php :-

```
<?php require_once '../include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['adminid'])) {
    $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
    header("location: admin_login.php");
}

$res = mysqli_query($conn, "SELECT * FROM hl_orders");
if ($res && mysqli_num_rows($res) > 0) {
    $nums = mysqli_num_rows($res);
}

$cost_result = mysqli_query($conn, "SELECT * FROM hl_payment");
$delivery_result = mysqli_query($conn, "SELECT * FROM hl_delivery");
if ($cost_result && mysqli_num_rows($cost_result) > 0) {
}
if ($delivery_result && mysqli_num_rows($delivery_result) > 0) {
}
?>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="../externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css" />
    <link rel="stylesheet" href="css/sidebar.css?<?=$version ?>" />
    <link rel="stylesheet" href="css/table.css?<?=$version ?>" />
    <script src="../externalData/jquery/jquery.min.js"></script>
    <script src="../externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="../externalData/fontawesome-free-6.4.2-web/css/all.min.css">
    <title>Document</title>
</head>

<body>
    <?php include_once 'include/sidebar.php'; ?>
    <div class="content">
        <div class="center">
            <main class="table">
                <section class="table__header">
                    <h1>All Orders</h1>
                </section>
                <section class="table__body">
                    <table>
```



```
<thead>  
    <tr>  
        <th> Id </th>  
        <th> Order Name </th>  
        <th> Delivery Date </th>  
        <th> Shipping Method </th>  
        <th> Status </th>  
        <th> Ammount </th>  
        <th> Operation </th>  
    </tr>  
</thead>  
<tbody>  
<?php $x=1;  
while($row = mysqli_fetch_array($res) and $status = mysqli_fetch_array($delivery_result) and $cost  
= mysqli_fetch_array($cost_result)){  
    ?>  
    <tr>  
        <td><?=$x?></td>  
        <td><?=$row['orderName']?></td>  
        <td><?=$row['deliveryDate']?></td>  
        <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~<?=$row['shippingMethod']?></td>  
        <td><?php if($status['deliveryStatus'] == 1){echo "<p class=\"status pending\">Pending</p>"; }  
elseif($status['deliveryStatus'] == 2){echo "<p class=\"status process\">Processing</p>"; }  
elseif($status['deliveryStatus'] == 3){echo "<p class=\"status shipped\">Shipped</p>"; }  
elseif($status['deliveryStatus'] == 4){echo "<p class=\"status delivered\">Delivered</p>"; }  
elseif($status['deliveryStatus'] == 0){echo "<p class=\"status cancelled\">Cancelled</p>"; }?></td>  
        <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~<?=$cost['cost']?></td>  
        <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~&nbsp;&nbsp;&nbsp;&nbsp;&~<a href="delete.php?oid=<?=$row['order_id'];?>" data-toggle="tooltip" title="Delete"><i class="fa-solid fa-trash"  
style="color:red;"></i></a></td>  
    </tr>  
    <?php $x++; } ?>  
</tbody>  
</table>  
</section>  
</main>  
</div>  
</div>  
<script>  
$(document).ready(function(){  
    $('[data-toggle="tooltip"]').tooltip();  
});  
</script>  
</body>  
  
</html>
```

confirmation.php :-

```
<?php require_once '../include/config.php';  
session_start();
```

```

error_reporting(0);
if (!isset($_SESSION['adminid'])) {
    $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
    header("location: admin_login.php");
}

$delivery_result = mysqli_query($conn, "SELECT * FROM hl_delivery where deliveryStatus=1");
if ($delivery_result && mysqli_num_rows($delivery_result) > 0) {
    $res = mysqli_query($conn, "SELECT * FROM hl_orders");
    $cost_result = mysqli_query($conn, "SELECT * FROM hl_payment");
}
if(isset($_GET['oid'])){
    $oid = $_GET['oid'];
    $delivery_result = mysqli_query($conn, "update hl_delivery set deliveryStatus='2' where id=$oid");
    $payment_result = mysqli_query($conn, "update hl_payment set confirmation='1' where id=$oid");
    header("location: confirmation.php");
}
?>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="../externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css" />
    <link rel="stylesheet" href="css/sidebar.css?<?=$version ?>" />
    <link rel="stylesheet" href="css/table.css?<?=$version ?>" />
    <script src="../externalData/jquery/jquery.min.js"></script>
    <script src="../externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="../externalData/fontawesome-free-6.4.2-web/css/all.min.css">
    <title>Document</title>
</head>

<body>
    <?php include_once 'include/sidebar.php'; ?>
    <div class="content">
        <div class="center">
            <main class="table">
                <section class="table__header">
                    <h1>Orders Requests</h1>
                </section>
                <section class="table__body">
                    <table>
                        <thead>
                            <tr>
                                <th>Id </th>
                                <th> Order Name </th>
                                <th> Delivery Date </th>
                                <th> Shipping Method </th>
                                <th> Status </th>

```

```
<th> Ammount </th>
<th> Operation </th>
</tr>
</thead>
<tbody>
<?php $x=1;
while($row = mysqli_fetch_array($res) and $status = mysqli_fetch_array($delivery_result) and $cost
= mysqli_fetch_array($cost_result)){
    ?>
    <tr>
    <td><?=$x?></td>
    <td><?=$row['orderName']?></td>
    <td><?=$row['deliveryDate']?></td>
    <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<?=$row['shippingMethod']?></td>
    <td><?php if($status['deliveryStatus'] == 1){echo "<p class=\"status pending\">Pending</p>"; }
elseif($status['deliveryStatus'] == 2){echo "<p class=\"status process\">Processing</p>"; }
elseif($status['deliveryStatus'] == 3){echo "<p class=\"status shipped\">Shipped</p>"; }
elseif($status['deliveryStatus'] == 4){echo "<p class=\"status delivered\">Delivered</p>"; }
elseif($status['deliveryStatus'] == 0){echo "<p class=\"status cancelled\">Cancelled</p>"; }?></td>
    <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<?=$cost['cost']?></td>
    <td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;<a
href="confirmation.php?oid=<?=$status['id'];?>" data-toggle="tooltip" title="Confirm"><i class="fa-solid fa-check fa-2x" style="color: #24d317;"></i></a></td>
    </tr>
    <?php $x++; } ?>
</tbody>
</table>
</section>
</main>
</div>
</div>
<script>
$(document).ready(function(){
    $('[data-toggle="tooltip"]').tooltip();
});
</script>
</body>

</html>
```

orderUpdate.php :-

```
<?php require_once '../include/config.php';
session_start();
error_reporting(0);
if (!isset($_SESSION['adminid'])) {
    $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
```

```

    header("location: admin_login.php");
}
$res = mysqli_query($conn, "SELECT * FROM hl_orders");
if ($res && mysqli_num_rows($res) > 0) {
    $nums = mysqli_num_rows($res);
}

$cost_result = mysqli_query($conn, "SELECT * FROM hl_payment");
$delivery_result = mysqli_query($conn, "SELECT * FROM hl_delivery");
if ($cost_result && mysqli_num_rows($cost_result) > 0) {
}
if ($delivery_result && mysqli_num_rows($delivery_result) > 0) {
}

if (isset($_GET['s'])) {
    $ship = $_GET['s'];
    $updateOrder = mysqli_query($conn, "update hl_delivery set deliveryStatus='3' where id=$ship");
    header("location: orderUpdate.php");
} elseif (isset($_GET['d'])) {
    $deliver = $_GET['d'];
    $updateOrder = mysqli_query($conn, "update hl_delivery set deliveryStatus='4' where id=$deliver");
    header("location: orderUpdate.php");
} elseif (isset($_GET['c'])) {
    $cancel = $_GET['c'];
    $updateOrder = mysqli_query($conn, "update hl_delivery set deliveryStatus='0' where id=$cancel");
    header("location: orderUpdate.php");
}
?>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="../externalData/bootstrap-3.4.1-dist/css/bootstrap.min.css" />
    <link rel="stylesheet" href="css/sidebar.css?<?=$version ?>" />
    <link rel="stylesheet" href="css/table.css?<?=$version ?>" />
    <script src="../externalData/jquery/jquery.min.js"></script>
    <script src="../externalData/bootstrap-3.4.1-dist/js/bootstrap.min.js"></script>
    <link rel="stylesheet" href="../externalData/fontawesome-free-6.4.2-web/css/all.min.css">
    <title>Document</title>
</head>

<body>
    <?php include_once 'include/sidebar.php'; ?>
    <div class="content">
        <div class="center">
            <main class="table">
                <section class="table__header">
                    <h1>Orders update</h1>
                </section>
                <section class="table__body">
                    <table>
                        <thead>

```



```
</html>
```

delete.php :-

```
<?php
session_start();
error_reporting(0);
if (!isset($_SESSION['adminid'])) {
    $msg = "<div class=\"alert alert-warning alert-dismissible fade in\" id=\"dangerb\">
    <a href=\"#\" class=\"close\" data-dismiss=\"alert\" aria-label=\"close\">&times;</a>
    <strong>WARNING!</strong> Login To Access...
    </div>";
    $_SESSION['msg'] = $msg;
    header("location: admin_login.php");
}
include_once '../include/config.php';
if(isset($_GET['uid'])){
    $uid = $_GET['uid'];
    $res = mysqli_query($conn, "DELETE FROM hl_register Where user_id=$uid");
    header("manage_user.php");
    exit;
}
if(isset($_GET['oid'])){
    $oid = $_GET['oid'];
    $res = mysqli_query($conn, "DELETE FROM hl_orders Where order_id=$oid");
    $cost_result = mysqli_query($conn, "DELETE FROM hl_payment Where order_id=$oid");
    $delivery_result = mysqli_query($conn, "DELETE FROM hl_delivery Where order_id=$oid");
    header("location: all_orders.php");
    exit;
}
?>
```

sidebar.php :-

```
<main class="content">
    <div class="navbar" id="myNavbar">
        <a href="#" id="sidebarToggle" class="icon" onclick=""> &#9776;</a>
        <div class="adm">
            <a href="../logout.php" data-toggle="tooltip" title="Logout">Admin</a>
        </div>
    </div>
</main>

<div class="container-fluid">
    <div class="row">
        <!-- Sidebar-->
        <div class="sidebar">
            <nav id="sidebar" class="col-md-3 col-lg-2 d-md-block sidebar">
                <div class="position-sticky">
```

```

<ul class="nav flex-column">
  <br/><br/><br/><br/>
  <li class="nav-item">
    <a class="nav-link active" href="dashboard.php"> Dashboard </a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="manage_user.php">Manage Users</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="payment.php">Payments</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="feedback.php">Order Feedbacks</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="review.php">reviews</a>
  </li>
  <li class="nav-item dropdown">
    <!-- Dropdown class added -->
    <a class="nav-link dropdown-toggle" href="#" id="productsDropdown" role="button" data-
toggle="dropdown" aria-expanded="true">
      Manage Orders
    </a>
    <div class="nav dropdown-menu">
      <a class="nav dropdown-item" href="all_orders.php">All Orders</a>
      <a class="nav dropdown-item" href="confirmation.php">Confirmation</a>
      <a class="nav dropdown-item" href="orderUpdate.php">Order Tracking</a>
    </div>
  </li>
</ul>
</div>
</nav>
</div>
</div>
</div>
</div>

<script>
$(document).ready(function() {
  $("#sidebarToggle").click(function() {
    $("#sidebar").toggleClass("active");
    $(".content").toggleClass("active");
  });
});
</Script>

```

ERROR AND SOLUTION

- Error 1):- Data Not Displayed On Admin Panel.

Solution:- Error In Mysqli_query(\$conn,"SELECT * from hl_register");

- Error 2):-Css Not changing on webpage.

Solution:-Update the version of css.

- Error 3):-Unknown database in Logistics_db in
c:\wamp64\www\HorizonLogistics

Solution:-changed named it to logistics_db in phpmyadmin.

- Error 4):-undefinrd array['id']

Solution:-Changed syntax of \$_POST['id'];

- Error 5):-Navigation bar not displayed.

Solution:- <?php include 'include/config.php' ?>
File Path Not Mentioned In Syntax.

TESTING

System testing is level of the testing that validate the complete and integrated product. It is process of checking functionality and find bugs.

There are two types of testing.

- i. Functional Testing
- ii. Non-Functional Testing

⇒ Functional Testing:-Functional testing used to determine the actual result is same as expected result.it checks the expected quality of hatstructure and design meet to actual project or not.

⇒ Non Functional Testing:-Determine capabilities of system to load performance, stress, security.it checks the functional behaviour of system.

There Are Two Types Of Testing.

- 1. White Box Testing
- 2. Black Box Testing

1. White Box Testing:-It is a internal testing that checks (code) elements such as Loops conditions paths statements.This testing is done by developer.Horizon logistics system is successfully tested according to white box testing. We tested code elements such as loops validations paths conditions statements.

2. Black Box Testing:-it is a external testing that checks the structure of the system. it is done by tester.it is not possible to do black box testing in our project becuase it is only test by tester.

IMPLEMENTATION

- To implement this project developer must have the knowldege of php html css and java script. These technologies used to program this system.
- Most of developers uses mysql because it is directly connected to php.It is one of the most populer backend database.Mysql provide data objects like tables ,views ,synonames etc.you can also build relations between objects.
- Horizon Logistics is an interactive web application that gives user friendly enviornment to the customers.This project helps us to increse our knowledge and give us many new experience.

LIMITATIONS

Following are the limitations that our project has:

- Can't track live order locations.
- Payment tracking is not possible.
- can't change admin password.
- admin can't change order and user details.

CONCLUSION

The main purpose of the project is to easily deliver goods and provide quality services to the customers.

Horizon logistics also provides beneficial facilities such as payment management, order tracking, user management and gives you quality services.