

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Theory:

Programming in Jenkins:

Continuous Integration is a software development practice where members of a team integrate their work frequently, usually each person integrates at least daily leading to multiple integrations per day. Each integration is verified by an automated build (including test) to detect integration errors as quickly as possible.” In simple way, Continuous integration (CI) is the practice of frequently building and testing each change done to your code automatically.

Jenkins is a self-contained, open-source automation server which can be used to automate all sorts of tasks related to building, testing, and delivering or deploying software.

Our first job will execute the shell commands. The freestyle project provides enough options and features to build the complex jobs that you will need in your projects.

Example 1

Example 1.1: Deploying a freestyle app in Jenkins

Creating a job:

Start building your software project


Create a job



Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Naming the job and setting it as freestyle:

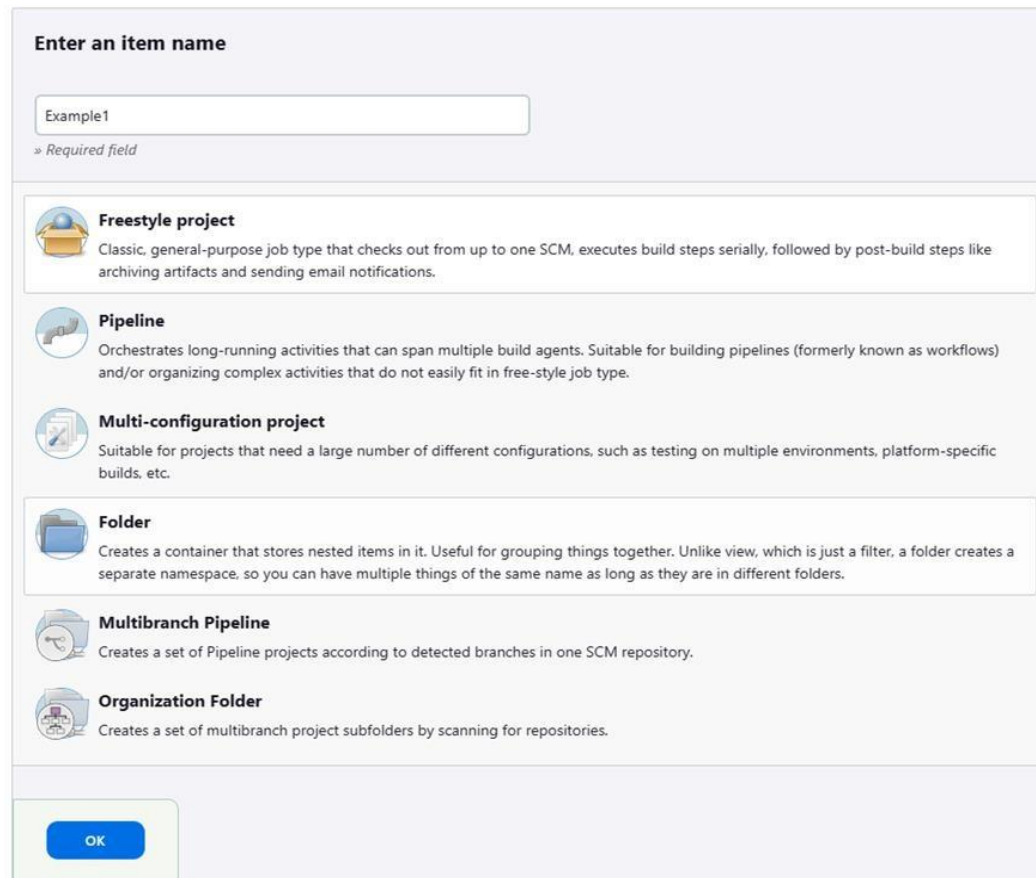


The screenshot shows the 'Enter an item name' dialog in Jenkins. At the top, there is a text input field containing 'Example1' and a label '» Required field'. Below this, there is a list of job types, each with an icon and a description:

- Freestyle project**: Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Pipeline**: Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.
- Multi-configuration project**: Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
- Folder**: Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.
- Multibranch Pipeline**: Creates a set of Pipeline projects according to detected branches in one SCM repository.
- Organization Folder**: Creates a set of multibranch project subfolders by scanning for repositories.

At the bottom left of the dialog is a blue 'OK' button.

Selecting build type as “Execute shell”:

Build Steps

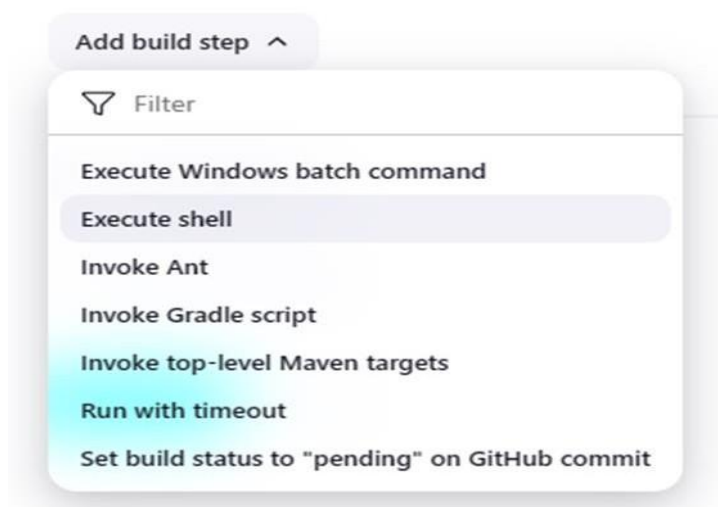

The screenshot shows the 'Add build step' dropdown menu in Jenkins. The menu is open, showing a list of build steps. The first option is 'Filter'. Below it, there is a search bar. The list of build steps includes:

- Execute Windows batch command
- Execute shell** (highlighted)
- Invoke Ant
- Invoke Gradle script
- Invoke top-level Maven targets
- Run with timeout
- Set build status to "pending" on GitHub commit

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Entering a simple command for the shell execution:

Build Steps

≡ Execute shell ?

Command

See [the list of available environment variables](#)

```
echo "Hello TSEC"
```

Advanced ▾

Applying and saving the project configuration:

✓ Saved

Save

Apply

Building the project:

▶ Build Now

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Console output (after building):



Example 1.2: Taking parameters through files

Contents of script example1.cmd:

The screenshot shows a text editor window titled 'example1.cmd'. The content of the file is:

```
@echo off
echo "Hello %1... Your address is %2"
```

The status bar at the bottom indicates 'Ln 1, Col 1' and '47 characters'.

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Executing script example1.cmd on the terminal:

```
Microsoft Windows [Version 10.0.22621.3296]
(c) Microsoft Corporation. All rights reserved.

C:\Users\AI&DS 202>Microsoft Windows [Version 10.0.22631.3155] (c) Microsoft Corporation. All rights reserved.
'Microsoft' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPM>example1.cmd
The system cannot find the path specified.

C:\Users\AI&DS 202>"Hello... Your address is "
'Hello... Your address is ' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPM>example1.cad Tanishq
The system cannot find the path specified.

C:\Users\AI&DS 202>"Hello Tanihsq... Your address is "
'Hello Tanihsq... Your address is ' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPM>example1.cmd Tanishq Girgaon "Helle Tanishq... Your address is Gi
rgaon"
The system cannot find the path specified.
```

Modifying the Jenkins project to execute the script while supplying required parameters:

Build Steps

The screenshot shows the Jenkins 'Execute Windows batch command' build step configuration. The title bar says 'Execute Windows batch command'. Below it, the 'Command' field contains the text: `C:\Admin\Academics\TSEC\Start3\SEPM\example1.cmd Siddhant Goregaon`. There is a link 'See the list of available environment variables' above the command field. Below the command field is an 'Advanced' dropdown menu. At the bottom of the configuration box is an 'Add build step' button.

Console output after building the modified project:

The screenshot shows the Jenkins console output for a build. On the left, there is a sidebar with 'Status' (checked), 'Changes', 'Console Output' (selected), 'View as plain text', 'Edit Build Information', 'Delete build *#', and 'Previous Build'. The main area shows the console output with a green checkmark icon and the title 'Console Output'. The output text is:
Started by user Siddhant Chetiar
Running as SYSTEM
Building in workspace C:\ProgramData\Jenkins\jenkins\workspace\Example1
[Example1] \$ cmd /c call C:\ADN000\TBP\Jenkins\7075095833383338.bat

C:\ProgramData\Jenkins\jenkins\workspace\Example1>C:\Admin\Academics\TSEC\Start3\SEPM\example1.cmd Siddhant Goregaon
"Hello Siddhant... Your address is Goregaon"
Finished: SUCCESS


Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Example 2

Example 2.1: Running a Java program under Jenkins


Creating a simple Java program:

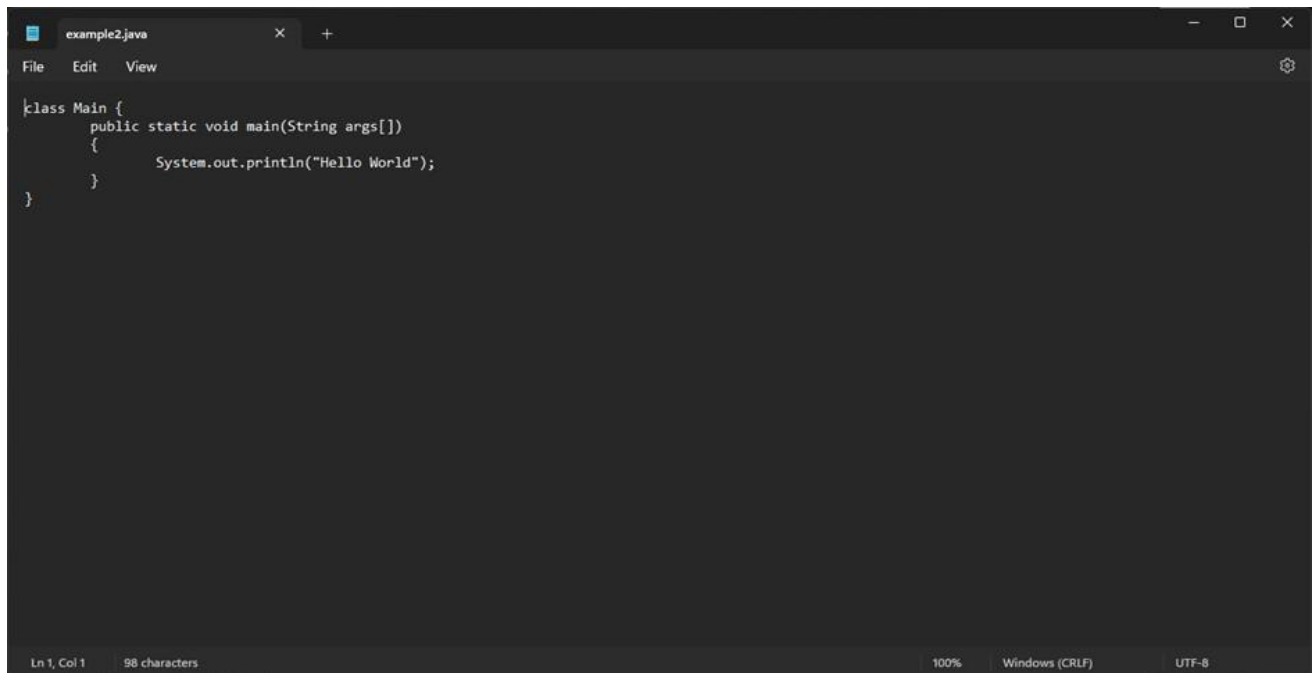A screenshot of an IDE window titled 'example2.java'. The window contains the following Java code:

```
class Main {  
    public static void main(String args[])  
    {  
        System.out.println("Hello World");  
    }  
}
```

The status bar at the bottom indicates 'Ln 1, Col 1', '98 characters', '100%', 'Windows (CRLF)', and 'UTF-8'.

Compiling and running the program on the terminal:

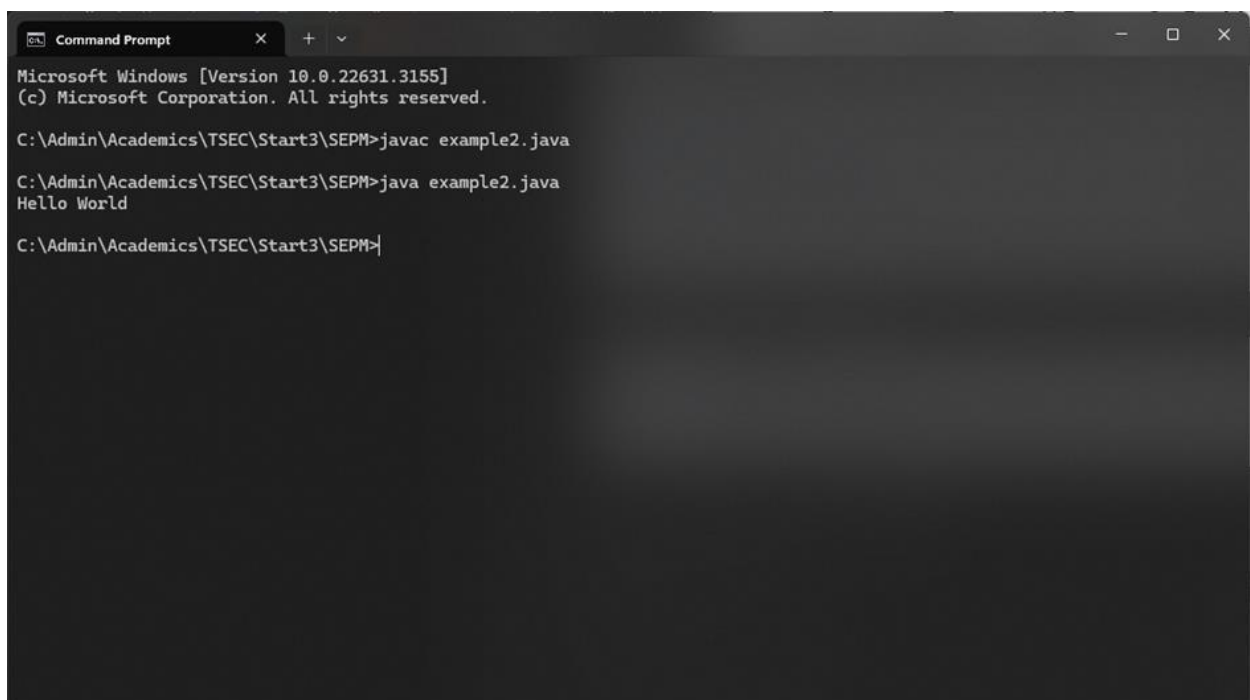
A screenshot of a Windows Command Prompt window. The text displayed is as follows:

```
Microsoft Windows [Version 10.0.22631.3155]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Admin\Academics\TSEC\Start3\SEPM>javac example2.java  
  
C:\Admin\Academics\TSEC\Start3\SEPM>java example2.java  
Hello World  
  
C:\Admin\Academics\TSEC\Start3\SEPM>|
```

Software Engineering & Project Management Lab Experiment No: - 05


Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Creating a new freestyle project:

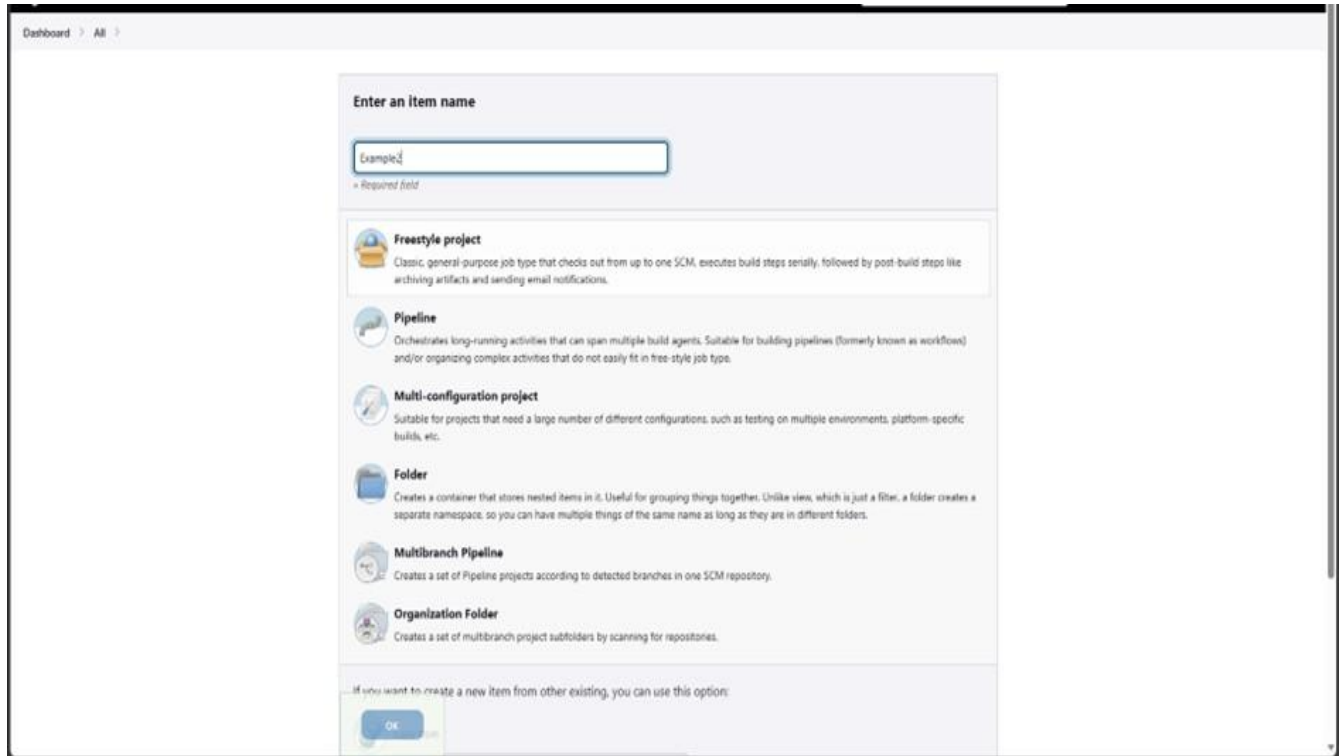

Configure new project:

Build Steps

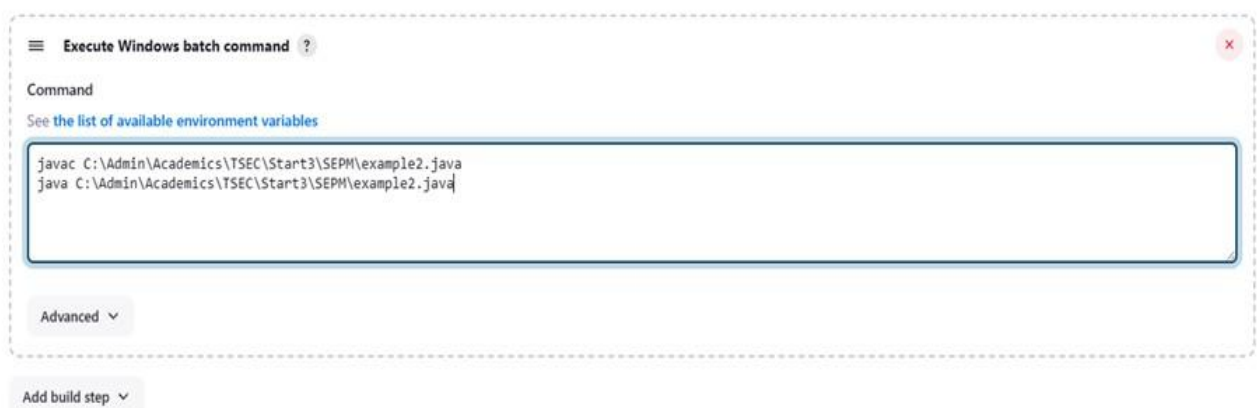

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Console output after building:

✓ Console Output

```
Started by user Siddhant Chetlur
Running as SYSTEM
[EnvInject] - Loading node environment variables.
Building in workspace C:\ProgramData\Jenkins\.jenkins\workspace\Example2
[Example2] $ cmd /c call C:\WINDOWS\TEMP\jenkins15296462484398614135.bat

C:\ProgramData\Jenkins\.jenkins\workspace\Example2>javac C:\Admin\Academics\TSEC\Start3\SEPH\example2.java

C:\ProgramData\Jenkins\.jenkins\workspace\Example2>java C:\Admin\Academics\TSEC\Start3\SEPH\example2.java
Hello World

C:\ProgramData\Jenkins\.jenkins\workspace\Example2>exit 0
Finished: SUCCESS
```

Example 3

Example 3.1: Parameterise build

Creating a new freestyle project:

Enter an item name

» Required field

**Freestyle project**
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.

**Pipeline**
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.

**Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

**Folder**
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

**Multibranch Pipeline**
Creates a set of Pipeline projects according to detected branches in one SCM repository.


**Organization Folder**
Creates a set of multibranch project subfolders by scanning for repositories.

If you want to create a new item from other existing, you can use this option:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Enabling parameterisation and adding a String parameter:

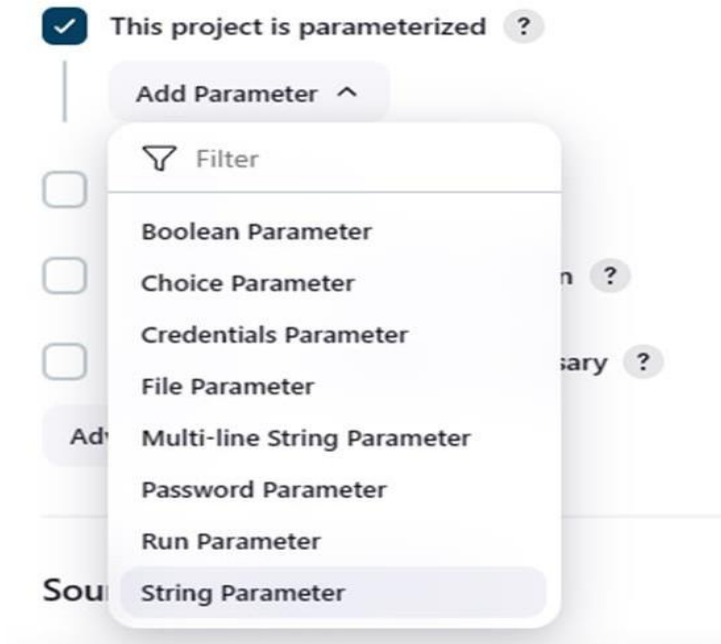


Configuring the string parameter as Fname:

A screenshot of the Jenkins 'String Parameter' configuration form. The form is titled 'String Parameter' with a help icon and a close button. It contains the following fields: 'Name' with the value 'Fname', 'Default Value' (empty), and 'Description' (empty). Below these fields, there is a 'Plain text' label and a 'Preview' link. At the bottom, there is a checkbox labeled 'Trim the string' which is currently unchecked. The entire form is enclosed in a dashed border.

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Adding a choice parameter and configuring it as City with the following choices:

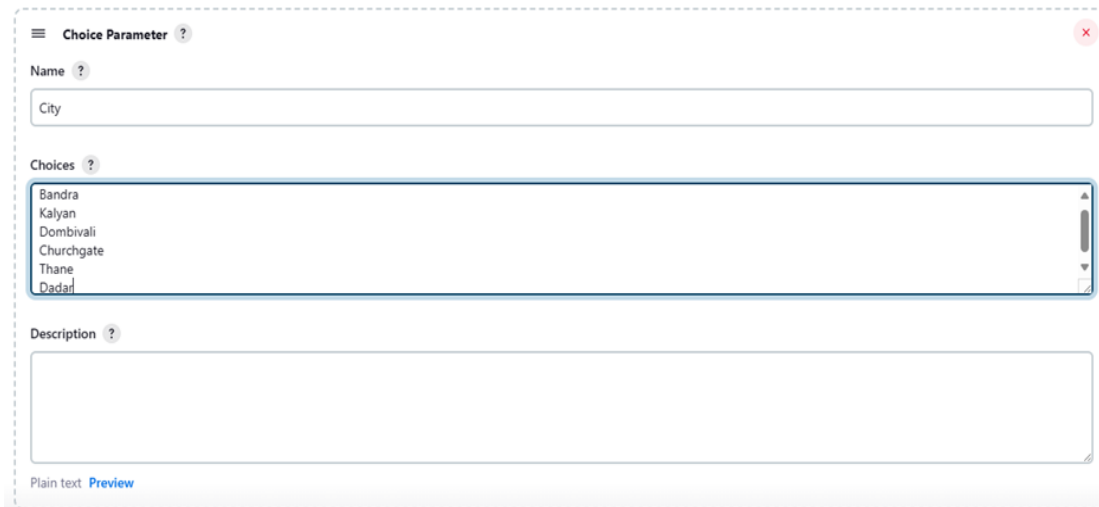

Creating a script which takes 2 arguments for name and city:

```
C:\Users\AI&DS 202>Microsoft Windows [Version 10.0.22631.3155] (c) Microsoft Corporation. All rights reserved.
'Microsoft' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPH>example3.cnd
The system cannot find the path specified.

C:\Users\AI&DS 202>Hello your name is and your city is
'Hello' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPH example3.cmd Tanishq
The system cannot find the path specified.

C:\Users\AI&DS 202>Hello your name is Tanishq and your city is
'Hello' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPH>example3.cmd Tansishq Bandra
The system cannot find the path specified.

C:\Users\AI&DS 202>Hello your name is Tanishq and your city is Bandra
'Hello' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPH
```

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Configuring build steps:

Build Steps

Execute Windows batch command ?

Command

See [the list of available environment variables](#)

```
C:\Admin\Academics\TSEC\Start3\SEPM\example3.cmd %Fname% %City%
```

Advanced ▾

Add build step ▾

Entering parameters for build:

Project Example3

This build requires parameters:

Fname

Aditya

City

Bandra

▶ Build

Cancel

Console output after building:

✓ Console Output

```
Started by user Siddhant Chetlur
Running as SYSTEM
[EnvInject] - Loading node environment variables.
Building in workspace C:\ProgramData\Jenkins\jenkins\workspace\Example3
[Example3] $ cmd /c call C:\WINDOWS\TEMP\jenkins14094536165150986151.bat


C:\ProgramData\Jenkins\jenkins\workspace\Example3>C:\Admin\Academics\TSEC\Start3\SEPM\example3.cmd Siddhant Bandra
Hello your name is Siddhant and your city is Bandra
Finished: SUCCESS
```

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server


Example 3.2: Running a Java program with parameters

Creating a Java program with an input argument:

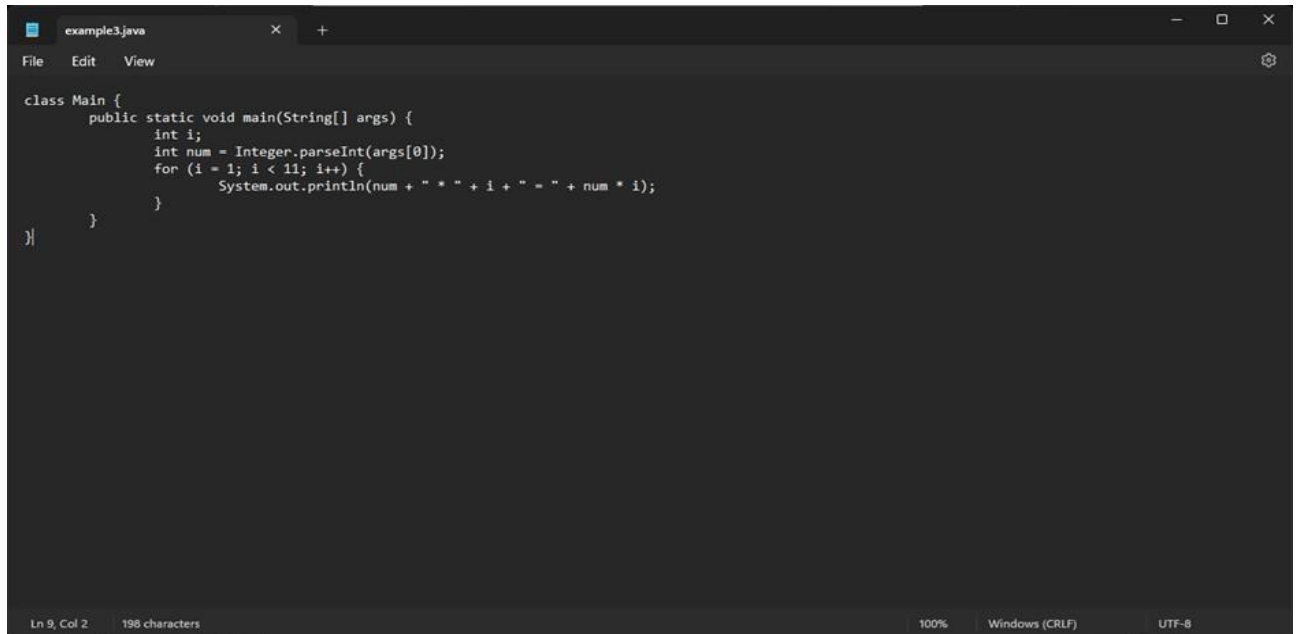

```
class Main {  
    public static void main(String[] args) {  
        int i;  
        int num = Integer.parseInt(args[0]);  
        for (i = 1; i < 11; i++) {  
            System.out.println(num + " * " + i + " = " + num * i);  
        }  
    }  
}
```

Testing the program on the terminal:

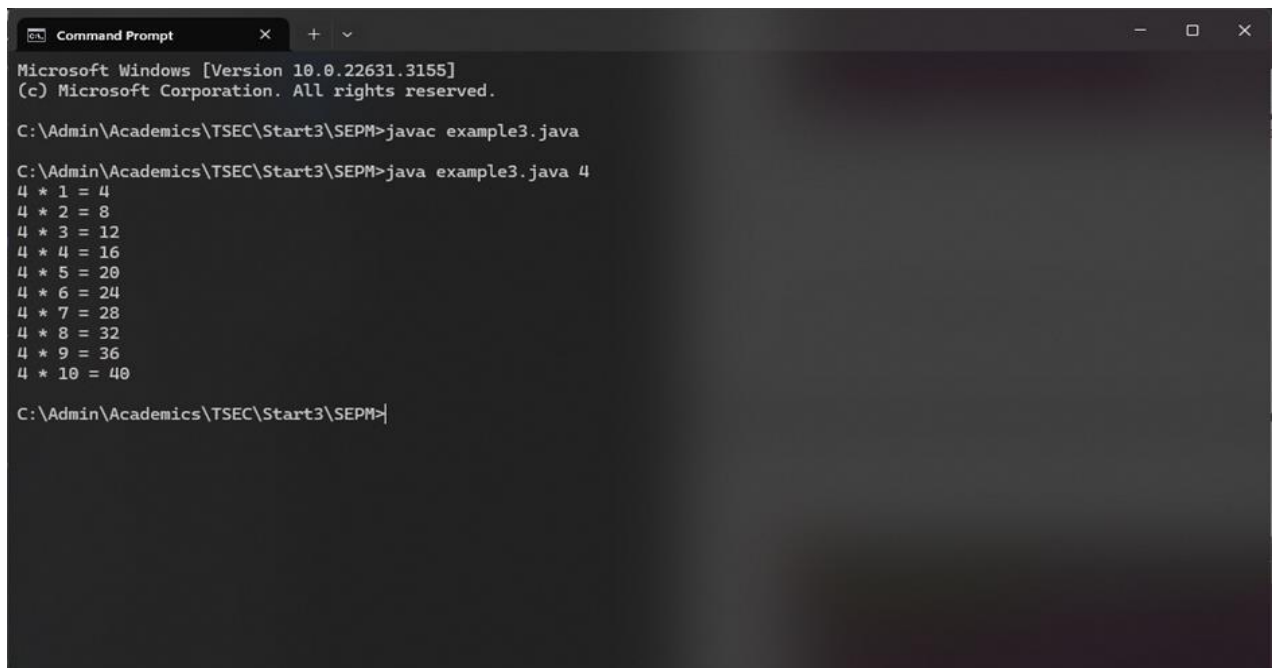

```
Microsoft Windows [Version 10.0.22631.3155]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Admin\Academics\TSEC\Start3\SEPM>javac example3.java  
  
C:\Admin\Academics\TSEC\Start3\SEPM>java example3.java 4  
4 * 1 = 4  
4 * 2 = 8  
4 * 3 = 12  
4 * 4 = 16  
4 * 5 = 20  
4 * 6 = 24  
4 * 7 = 28  
4 * 8 = 32  
4 * 9 = 36  
4 * 10 = 40  
  
C:\Admin\Academics\TSEC\Start3\SEPM>
```

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Creating a new freestyle project:

Enter an item name

Example4

» Required field

- Freestyle project**
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Pipeline**
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.
- Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
- Folder**
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.
- Multibranch Pipeline**
Creates a set of Pipeline projects according to detected branches in one SCM repository.
- Organization Folder**
Creates a set of multibranch project subfolders by scanning for repositories.

If you want to create a new item from other existing, you can use this option:

OK

Parameterise the project by adding a string parameter as follows:

☒ This project is parameterized ?

String Parameter ?

Name ?

num

Default Value ?

Description ?

Plain text: [Preview](#)

☐ Trim the string ?

Add Parameter

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Configure the build steps:

Build Steps

Execute Windows batch command ?

Command

See the list of available environment variables

```
javac C:\Admin\Academics\TSEC\Start3\SEPM\example3.java
java C:\Admin\Academics\TSEC\Start3\SEPM\example3.java %num%
```

Advanced ▾

Add build step ▾

Entering the parameter for the build:

Project Example4

This build requires parameters:

num

▶ Build

Cancel

Console output after building:

✓ Console Output

```
Started by user Siddhant Chetlur
Running as SYSTEM
[EnvInject] - Loading node environment variables.
Building in workspace C:\ProgramData\Jenkins\jenkins\workspace\Example4
[Example4] $ cmd /c call C:\WINDOWS\TEMP\jenkins15119185770823247708.bat

C:\ProgramData\Jenkins\jenkins\workspace\Example4>javac C:\Admin\Academics\TSEC\Start3\SEPM\example3.java

C:\ProgramData\Jenkins\jenkins\workspace\Example4>java C:\Admin\Academics\TSEC\Start3\SEPM\example3.java 25
25 * 1 = 25
25 * 2 = 50
25 * 3 = 75
25 * 4 = 100
25 * 5 = 125
25 * 6 = 150
25 * 7 = 175
25 * 8 = 200
25 * 9 = 225
25 * 10 = 250

C:\ProgramData\Jenkins\jenkins\workspace\Example4>exit 0
Finished: SUCCESS
```


Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Example 5

Example 5.1: Running a Python program

Creating a simple Python script:

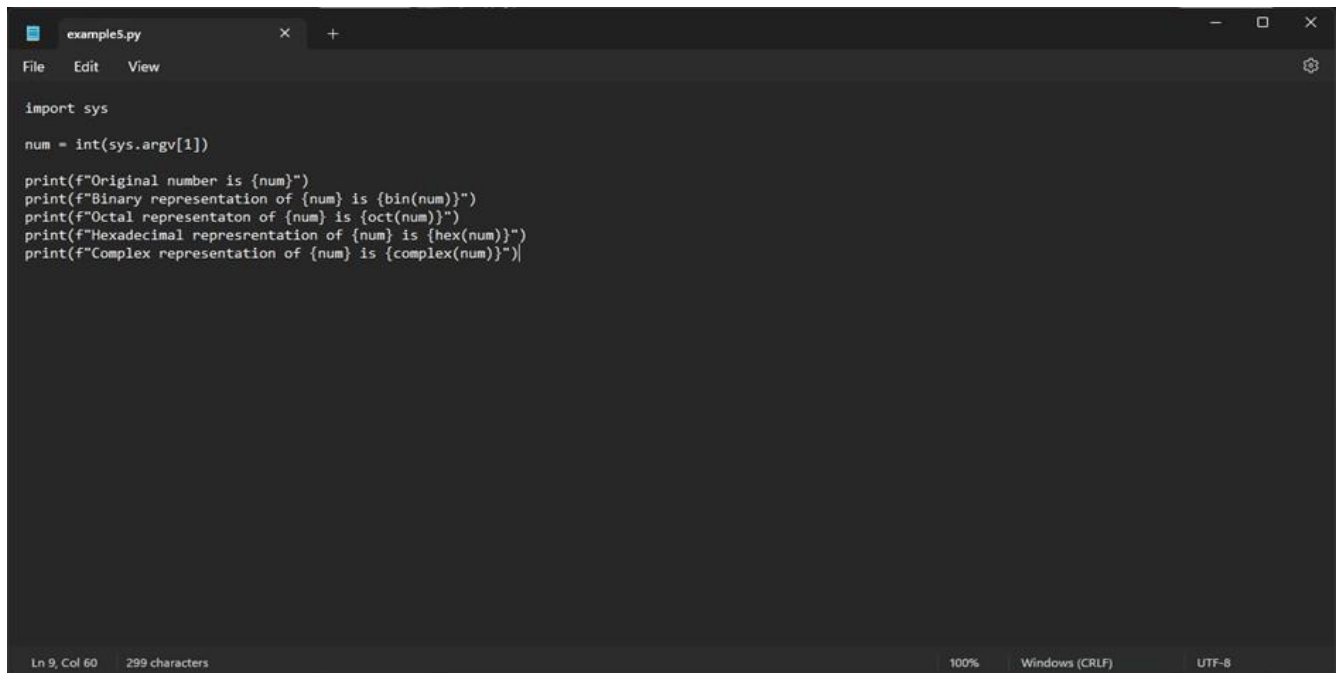


```
example5.py
File Edit View
import sys

num = int(sys.argv[1])

print(f"Original number is {num}")
print(f"Binary representation of {num} is {bin(num)}")
print(f"Octal representation of {num} is {oct(num)}")
print(f"Hexadecimal representation of {num} is {hex(num)}")
print(f"Complex representation of {num} is {complex(num)}")

Ln 9, Col 60 299 characters 100% Windows (CRLF) UTF-8
```

Running the Python script on the terminal:

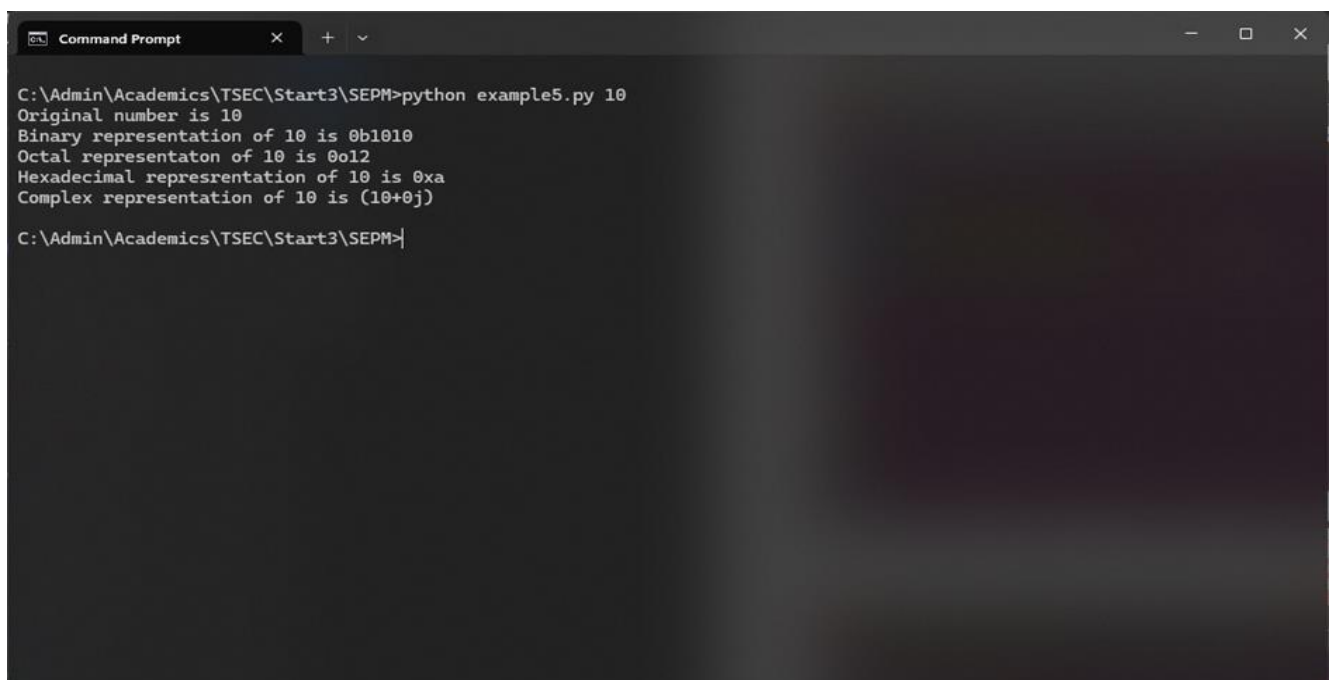

```
Command Prompt
C:\Admin\Academics\TSEC\Start3\SEPM>python example5.py 10
Original number is 10
Binary representation of 10 is 0b1010
Octal representation of 10 is 0o12
Hexadecimal representation of 10 is 0xa
Complex representation of 10 is (10+0j)
C:\Admin\Academics\TSEC\Start3\SEPM>
```

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Creating a new freestyle project:

Enter an item name

Example5

» Required field

Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.

Pipeline
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.

Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

Folder
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

Multibranch Pipeline
Creates a set of Pipeline projects according to detected branches in one SCM repository.

Organization Folder
Creates a set of multibranch project subfolders by scanning for repositories.

If you want to create a new item from other existing, you can use this option:

OK

Parameterising the project with a string parameter as follows:

☒ This project is parameterized ?

String Parameter ?

Name ?

num

Default Value ?

Description ?

Plain text [Preview](#)

☐ Trim the string ?

Add Parameter ▾

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Configuring the build steps:

Build Steps

The screenshot shows the Jenkins configuration interface for a build step titled "Execute Windows batch command". The "Command" field contains the text: `python C:\Admin\Academics\TSEC\Start3\SEPM\example5.py %num%`. Below the command field is an "Advanced" dropdown menu. At the bottom of the configuration area is an "Add build step" button.

Setting the parameter for the build:

Project Example5

This build requires parameters:

num

10

▶ Build

Cancel

Console output after building:

✓ Console Output

```
Started by user: Siddhant Chetlur
Running as SYSTEM
[EnvInject] - Loading node environment variables.
Building in workspace C:\ProgramData\Jenkins\jenkins\workspace\Example5
[Example5] $ cmd /c call C:\WINDOWS\TEMP\jenkins11157306491994470222.bat

C:\ProgramData\Jenkins\jenkins\workspace\Example5>python C:\Admin\Academics\TSEC\Start3\SEPM\example5.py 10
Original number is 10
Binary representation of 10 is 0b1010
Octal representation of 10 is 0o12
Hexadecimal representation of 10 is 0xa
Complex representation of 10 is (10+0j)

C:\ProgramData\Jenkins\jenkins\workspace\Example5>exit 0
Finished: SUCCESS
```

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Some Screenshots:

The image shows two screenshots from the Jenkins web interface. The top screenshot is the 'Configure' page for a pipeline named 'AIDS_Pipeline'. The 'Pipeline' tab is selected, showing a Groovy script for a pipeline with four stages: 'build', 'test', 'deploy', and 'postdeploy'. Each stage has a single step with an 'echo' command. The 'Use Groovy Sandbox' checkbox is checked. The bottom screenshot is the Jenkins dashboard for the 'AIDS_Pipeline'. It shows the pipeline is in a 'Success' state. A 'Stage View' table displays the duration of each stage for the latest build. A 'Builds' list shows the latest build as successful. Permalinks for the latest build are provided.

Configure Pipeline

Advanced

General

Build Triggers

Advanced Project Options

Pipeline

Pipeline

Definition

Pipeline script

```
1 pipeline {
2   agent any
3
4   stages {
5     stage('build') {
6       steps {
7         echo 'Building.. This is the build phase'
8       }
9     }
10    stage('test') {
11      steps {
12        echo 'Testing.. This is the testing phase'
13      }
14    }
15    stage('deploy') {
16      steps {
17        echo 'Deploying.... This is the deployment phase'
18      }
19    }
20    stage('postdeploy') {
21      steps {
22        echo 'Postdeployment phase....'
23      }
24    }
25  }
26 }
27
```

☒ Use Groovy Sandbox

Pipeline Syntax

Save Apply

Jenkins

Dashboard > AIDS_Pipeline

Status

Changes

Build Now

Configure

Delete Pipeline

Full Stage View

Rename

Pipeline Syntax

AIDS_Pipeline

Add description

Stage View

	Build	Test	Deploy	Postdeploy
Average stage times:	46ms	44ms	34ms	43ms
(Average full run time ~507ms)				
Feb 27 11:58	46ms	44ms	34ms	43ms

Permalinks

- Last build (#1), 2 yr 0 mo ago
- Last stable build (#1), 2 yr 0 mo ago
- Last successful build (#1), 2 yr 0 mo ago
- Last completed build (#1), 2 yr 0 mo ago

Builds

Filter

February 27, 2023


#1 1:58 PM

localhost:8080/job/AIDS_Pipeline/1/

REST API Jenkins 2.492.2

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

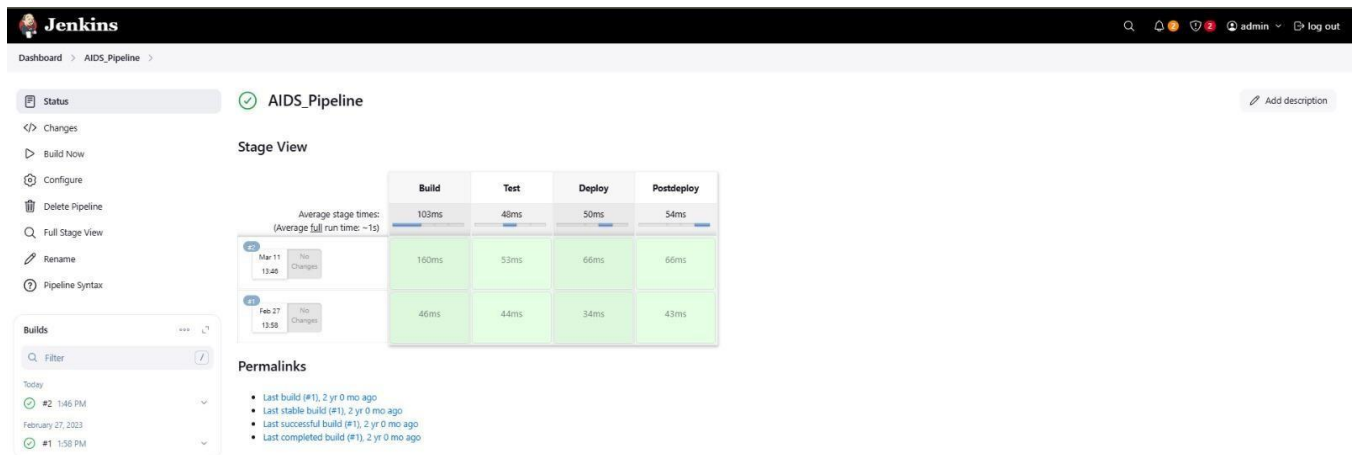


The Jenkins dashboard for the 'AIDS_Pipeline' shows the following details:

Stage View

	Build	Test	Deploy	Postdeploy
Average stage times: (Average full run time: ~7s)	103ms	48ms	50ms	54ms
Mar 11 13:46	160ms	53ms	66ms	66ms
Feb 27 13:58	46ms	44ms	34ms	43ms

Permalinks

- Last build (#1), 2 yr 0 mo ago
- Last stable build (#1), 2 yr 0 mo ago
- Last successful build (#1), 2 yr 0 mo ago
- Last completed build (#1), 2 yr 0 mo ago

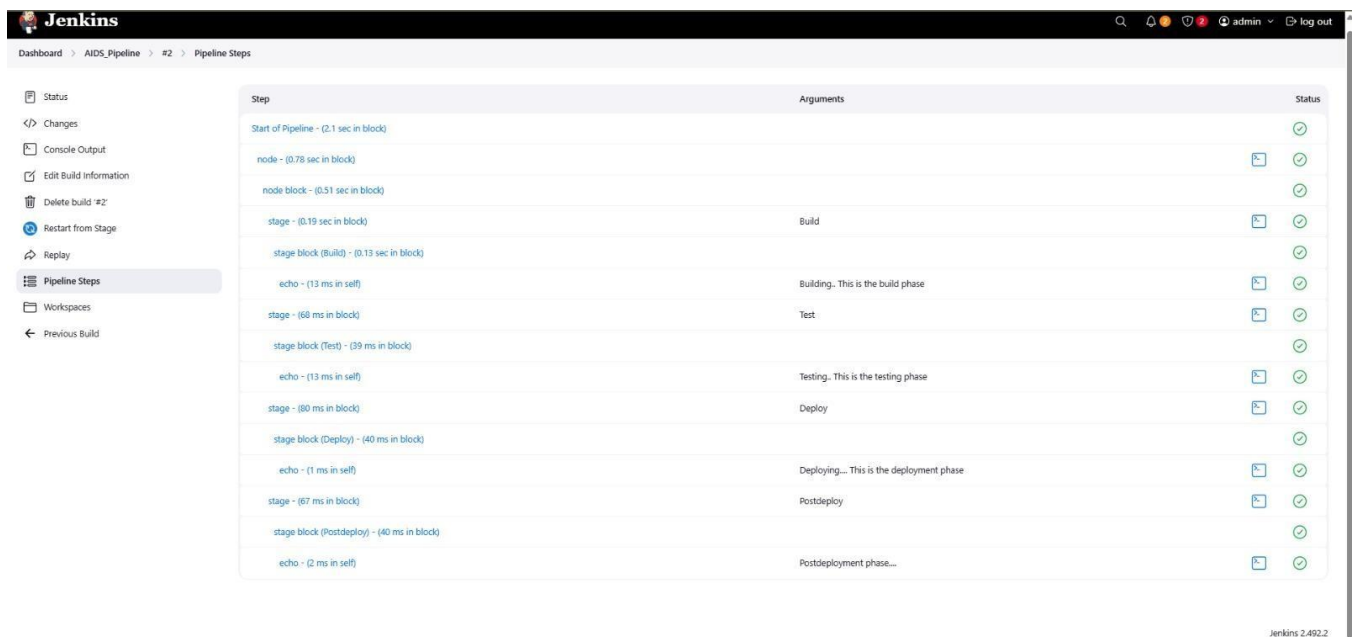

The Jenkins Pipeline Steps for 'AIDS_Pipeline' #2 show the following steps:

Step	Arguments	Status
Start of Pipeline - (2.1 sec in block)		✓
node - (0.78 sec in block)		✓
node block - (0.51 sec in block)		✓
stage - (0.19 sec in block)	Build	✓
stage block (Build) - (0.13 sec in block)		✓
echo - (13 ms in self)	Building... This is the build phase	✓
stage - (68 ms in block)	Test	✓
stage block (Test) - (39 ms in block)		✓
echo - (13 ms in self)	Testing... This is the testing phase	✓
stage - (80 ms in block)	Deploy	✓
stage block (Deploy) - (40 ms in block)		✓
echo - (1 ms in self)	Deploying... This is the deployment phase	✓
stage - (67 ms in block)	Postdeploy	✓
stage block (Postdeploy) - (40 ms in block)		✓
echo - (2 ms in self)	Postdeployment phase...	✓

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

The screenshot shows the Jenkins 'Console Output' for a pipeline build. The left sidebar contains navigation options: Status, Changes, Console Output (selected), View as plain text, Edit Build Information, Delete build #2, Restart from Stage, Replay, Pipeline Steps, Workspaces, and Previous Build. The main console area displays the following log:

```
Started by user admin
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in C:\ProgramData\Jenkins\jenkins\workspace\AIDS_Pipeline
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Build)
[Pipeline] echo
Building.. This is the build phase
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Test)
[Pipeline] echo
Testing.. This is the testing phase
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Deploy)
[Pipeline] echo
Deploying.... This is the deployment phase
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Postdeploy)
[Pipeline] echo
Postdeployment phase....
[Pipeline] }
[Pipeline] // stage
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

REST API Jenkins 2.492.2

The screenshot shows the Jenkins 'Stage View' for a pipeline. The left sidebar contains navigation options: Changes, Build Now, Configure, Delete Pipeline, Full Stage View (selected), Rename, and Pipeline Syntax. The main area displays a table of stage metrics and a list of builds.

	Build	Test	Deploy	Postdeploy
Average stage times: (Average full run time: ~1s)	91ms	50ms	51ms	58ms
#3 Mar 11 13:47 No Changes	69ms	53ms	54ms	67ms
#2 Mar 11 13:46 No Changes	160ms	53ms	66ms	66ms
#1 Feb 27 13:58 No Changes	45ms	44ms	34ms	43ms

Permalinks

- Last build (#3), 27 ms ago
- Last stable build (#2), 1 min 40 sec ago
- Last successful build (#2), 1 min 40 sec ago
- Last completed build (#2), 1 min 40 sec ago

Conclusion: Thus, we have successfully Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, created a pipeline script to Test and deploy an application over the tomcat server.