In [1]:
```python
import pandas as pd
import numpy as np
import seaborn as sns
import matplotlib.pyplot as plt
```

In [3]:
```python
df = pd.read_csv("Titanic-Dataset.csv")
```

In [4]:
```python
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
 #   Column       Non-Null Count  Dtype  
---  ------       --------------  -----  
 0   PassengerId  891 non-null    int64  
 1   Survived     891 non-null    int64  
 2   Pclass       891 non-null    int64  
 3   Name         891 non-null    object 
 4   Sex          891 non-null    object 
 5   Age          714 non-null    float64
 6   SibSp        891 non-null    int64  
 7   Parch        891 non-null    int64  
 8   Ticket       891 non-null    object 
 9   Fare         891 non-null    float64
 10  Cabin        204 non-null    object 
 11  Embarked     889 non-null    object 
dtypes: float64(2), int64(5), object(5)
memory usage: 83.7+ KB
```

In [5]:
```python
sns.countplot(x="Sex", data =df)
plt.title("Genderwise Distribution")
plt.plot()
```

Out[5]:
```
[]
```

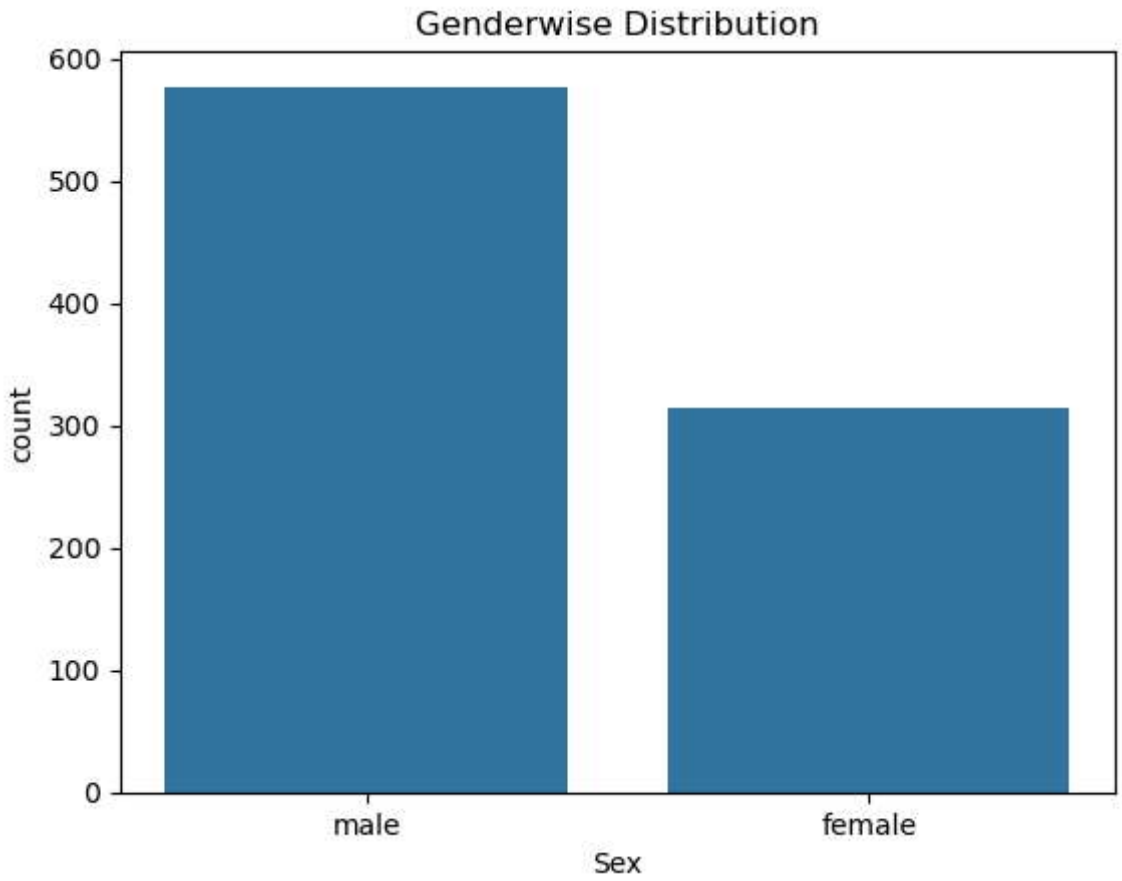

In [6]:
```
sns.countplot(x="Sex", hue="Survived", data =df)
plt.title("Genderwise Survived")
plt.plot()
```

Out[6]: []

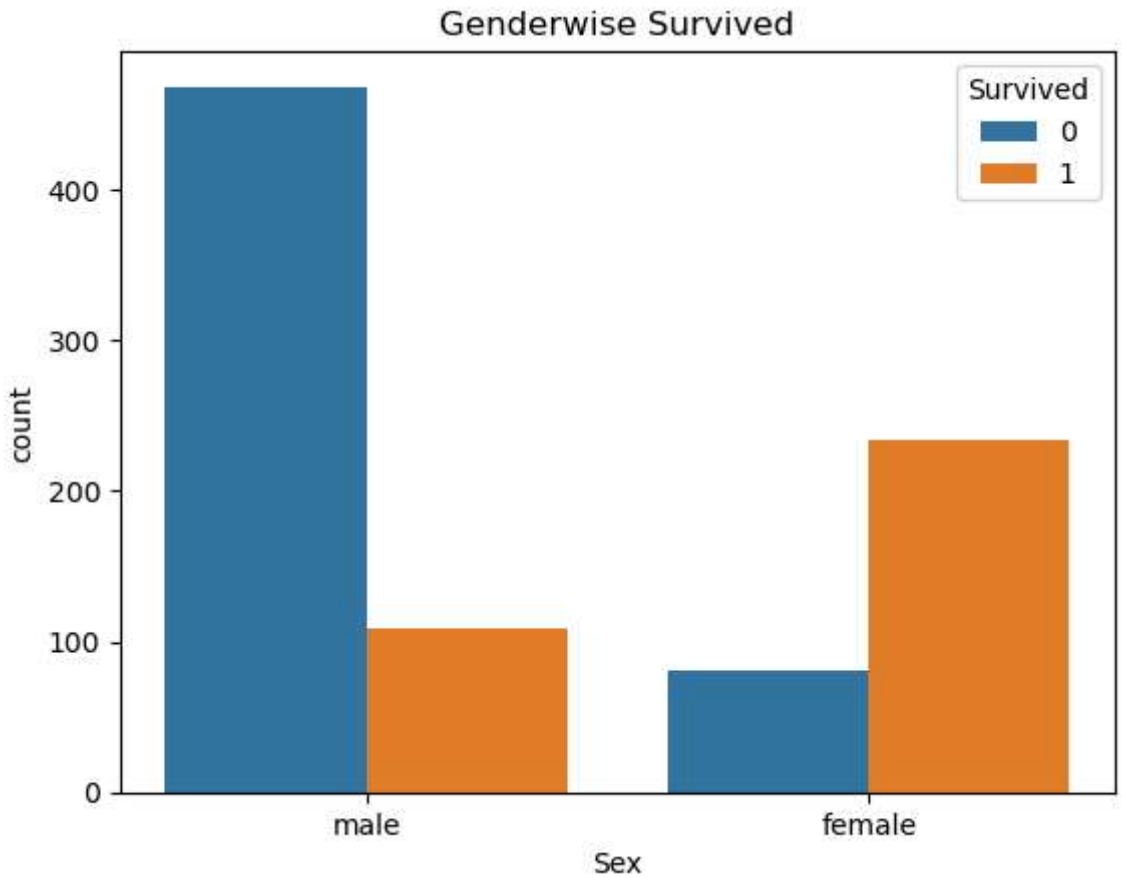

In [7]:
```
sns.countplot(x="Sex", hue="Pclass", data =df)
plt.title("Genderwise Survived")
plt.plot()
```

Out[7]: []

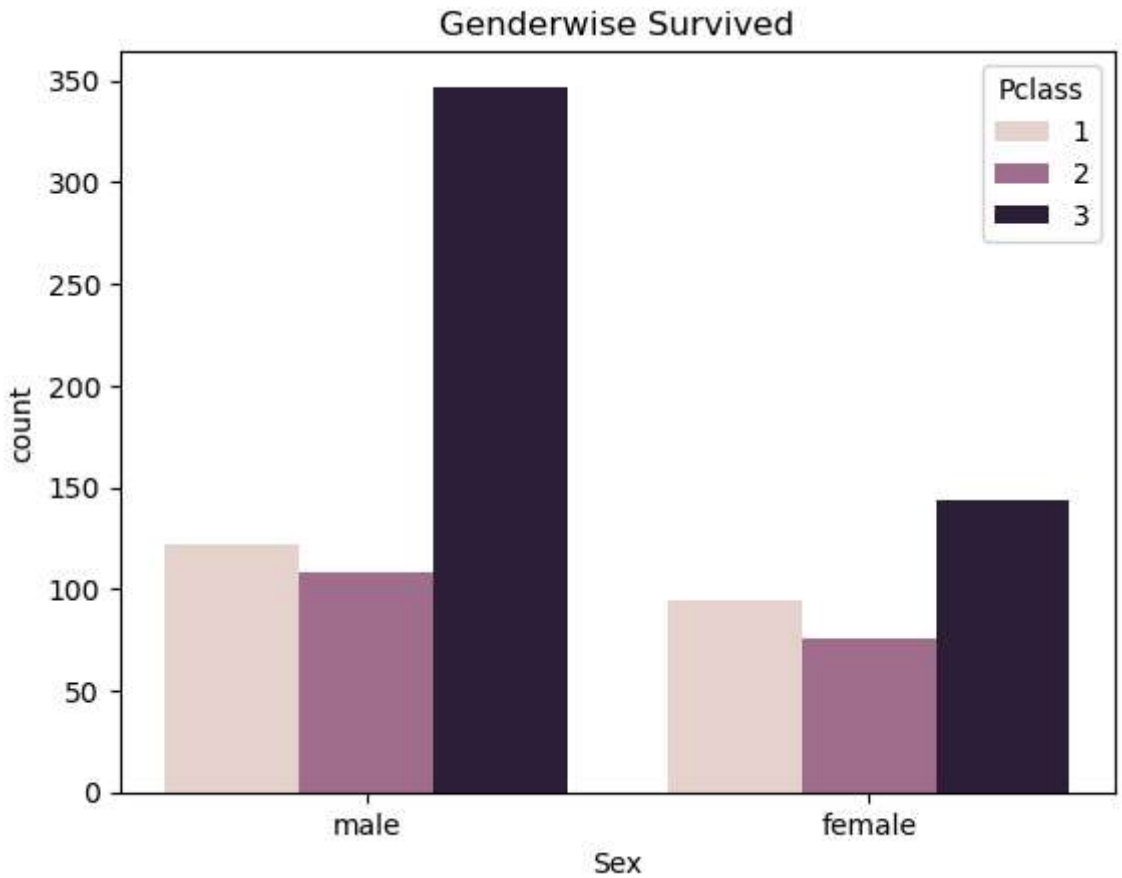

In [8]:
```
sns.histplot(df["Fare"],bins=30,kde=True)
plt.title("Fare Distribution")
plt.show()
```

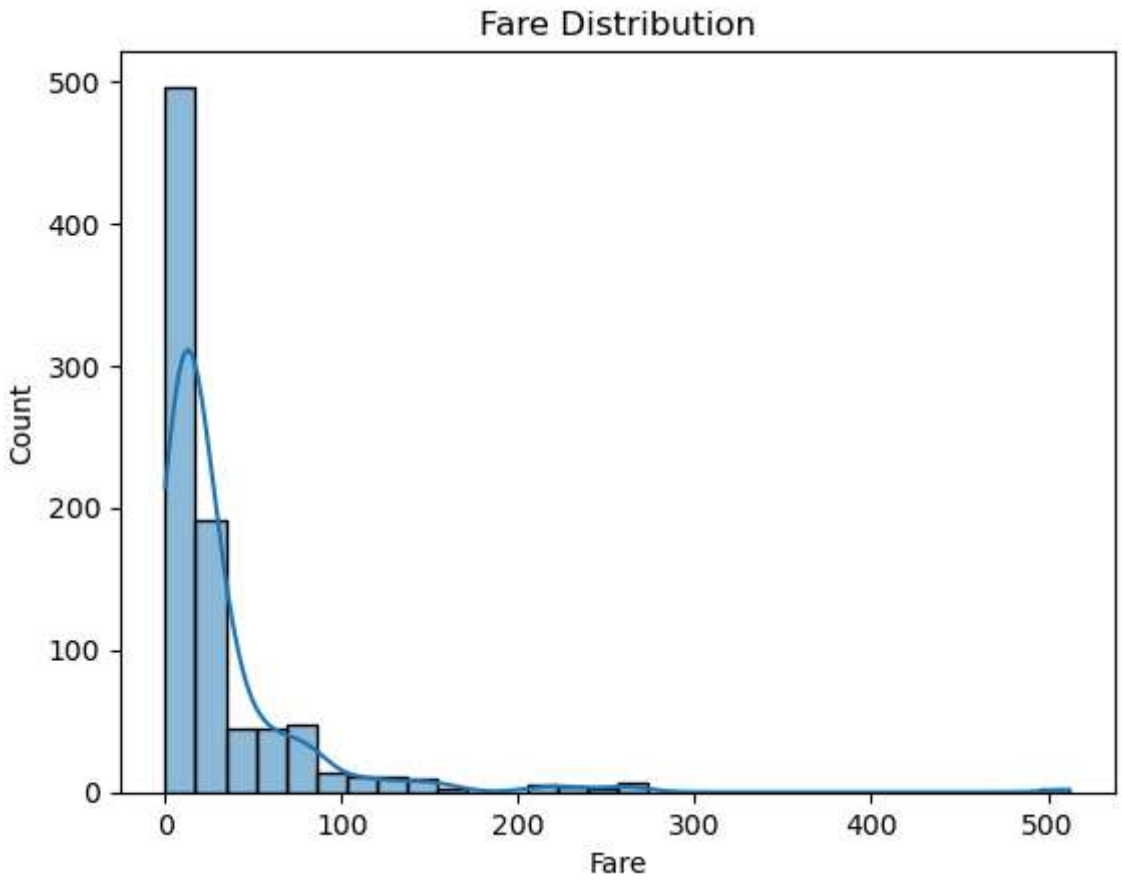

In [ ]: