

ADVANCED CYBERSECURITY PRACTICAL

Network Discovery, Traffic Analysis, Vulnerability Assessment & Hardening

Student	Prajapati Meet Ghanshyam
Program	Cyber Security Internship
Week	Week 3
Scope	Authorized VirtualBox Host-Only Lab
Date	07 October 2026

1. Executive Summary

Tasks 7–14 covered network discovery, advanced Nmap scanning, Wireshark packet analysis, Nmap/Wireshark correlation, traffic investigation, vulnerability checks, hardening and final verification.

Area	Observed result	Status
Network discovery	192.168.56.1 identified as reachable	Complete
Initial services	3306/MySQL and 7070 reachable	Investigated
Packet analysis	ARP, ICMP, LLMNR/mDNS and TCP activity observed	Complete
DNS/HTTP	No DNS or HTTP packets in selected Host-Only capture	Documented
Vulnerability checks	No confirmed Heartbleed/POODLE/CCS finding	Complete
Hardening	3306/7070 filtered; ICMP blocked	Verified

2. Lab Environment & Task 7 — Network Discovery

Lab network: 192.168.56.0/24 **Kali:** 192.168.56.101/24 on eth1 **Windows:** 192.168.56.1/24 on Ethernet 2.

The Host-Only adapter isolated the practical from the normal Wi-Fi network. Initial discovery confirmed the Windows host was reachable.

Task 7.1

```
$ sudo ip addr add 192.168.56.101/24 dev eth1  
  
(meet@undefined)-[~]  
$ ip -4 addr show eth1  
3: eth1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000  
    inet 192.168.56.101/24 scope global eth1  
        valid_lft forever preferred_lft forever
```

Kali Host-Only interface eth1 configured with 192.168.56.101/24.

Task 7.2

```
(meet@undefined)-[~]  
$ sudo nmap -sn -PR 192.168.56.1  
[sudo] password for meet:  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-06 22:28 -0400  
Nmap scan report for 192.168.56.1  
Host is up (0.00022s latency).  
MAC Address: 0A:00:27:00:00:08 (Unknown)  
Nmap done: 1 IP address (1 host up) scanned in 0.10 seconds
```

Nmap host discovery identifies the authorized Windows host at 192.168.56.1.

3. Task 7 — Initial TCP Exposure

The baseline Nmap scan identified two open TCP services. These results became the baseline for later hardening verification.

Task 7.3

```
(meet@undefined)-[~]  
$ sudo nmap 192.168.56.1  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-06 22:31 -0400  
Nmap scan report for 192.168.56.1  
Host is up (0.00049s latency).  
Not shown: 998 filtered tcp ports (no-response)  
PORT      STATE SERVICE  
3306/tcp  open  mysql  
7070/tcp  open  realserver  
MAC Address: 0A:00:27:00:00:08 (Unknown)  
  
Nmap done: 1 IP address (1 host up) scanned in 5.04 seconds
```

Initial TCP scan: 3306/tcp and 7070/tcp are open; other scanned TCP ports are filtered.

Initial finding: TCP/3306 was identified as MySQL and TCP/7070 as a realserver/SSL-enabled service in later scans. The exposure was limited to the isolated lab network.

4. Task 8 — Advanced Nmap Scanning

Service/version detection, OS detection, SYN scanning and UDP top-port scanning were performed. Exact service versions were not fully disclosed.

Task 8.1

```
(meet@undefined)-[~]
$ sudo nmap -sV 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-06 22:37 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00028s latency).
Not shown: 998 filtered tcp ports (no-response)
PORT      STATE SERVICE      VERSION
3306/tcp  open  mysql        MySQL (unauthorized)
7070/tcp  open  ssl/realserver?
MAC Address: 0A:00:27:00:00:08 (Unknown)

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 16.11 seconds
```

Nmap service/version detection: MySQL on 3306 and ssl/realserver? on 7070.

Task 8.2

```
(meet@undefined)-[~]
$ sudo nmap -O 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-06 22:44 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00001s latency).
Not shown: 998 filtered tcp ports (no-response)
PORT      STATE SERVICE
3306/tcp  open  mysql
7070/tcp  open  realserver
MAC Address: 0A:00:27:00:00:08 (Unknown)
Warning: OSScan results may be unreliable because we could not find at least 1 open and 1 closed port
Device type: general purpose
Running (JUST GUESSING): Microsoft Windows 11|10|2008 (92%), FreeBSD 6.X (88%)
OS CPE: cpe:/o:microsoft:windows_11 cpe:/o:freebsd:freebsd:6.2 cpe:/o:microsoft:windows_10 cpe:/o:microsoft:windows_server_2008::beta3 cpe:/o:microsoft:windows_server_2008
Aggressive OS guesses: Microsoft Windows 11 24H2 (92%), Microsoft Windows 11 21H2 (91%), FreeBSD 6.2-RELEASE (88%), Microsoft Windows 10 (86%), Microsoft Windows Server 2008 or 2008 Beta 3 (85%), Microsoft Windows 10 1607 (85%)
No exact OS matches for host (test conditions non-ideal).
Network Distance: 1 hop

OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 9.12 seconds
```

Nmap OS detection estimates Microsoft Windows 11/10/2008 with 92% confidence; no exact match.

5. Task 8 — SYN and UDP Results

The SYN scan reproduced the initial open TCP services. UDP results were reported as open|filtered and were not treated as confirmed open ports.

Task 8.3

```
(meet@undefined)-[~]
$ sudo nmap -sS 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-06 22:45 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00035s latency).
Not shown: 998 filtered tcp ports (no-response)
PORT      STATE SERVICE
3306/tcp  open  mysql
7070/tcp  open  realserver
MAC Address: 0A:00:27:00:00:08 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 4.91 seconds
```

TCP SYN scan confirms 3306/tcp and 7070/tcp as open.

Task 8.4

```
(meet@undefined)-[~]
$ sudo nmap -sU --top-ports 20 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-06 22:48 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00021s latency).

PORT      STATE      SERVICE
53/udp    open|filtered domain
67/udp    open|filtered dhcp
68/udp    open|filtered dhcp
69/udp    open|filtered tftp
123/udp   open|filtered ntp
135/udp   open|filtered msrpc
137/udp   open|filtered netbios-ns
138/udp   open|filtered netbios-dgm
139/udp   open|filtered netbios-ssn
161/udp   open|filtered snmp
162/udp   open|filtered snmptrap
445/udp   open|filtered microsoft-ds
500/udp   open|filtered isakmp
514/udp   open|filtered syslog
520/udp   open|filtered route
631/udp   open|filtered ipp
1434/udp  open|filtered ms-sql-m
1900/udp  open|filtered upnp
4500/udp  open|filtered nat-t-ike
49152/udp open|filtered unknown
MAC Address: 0A:00:27:00:00:08 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 1.66 seconds
```

Top-20 UDP scan showing open|filtered results; these were not treated as confirmed open.

6. Task 9 — Wireshark Protocol Analysis

Wireshark capture on eth1 was used to inspect local lab traffic. LLMNR/mDNS discovery traffic, ICMP, ARP and TCP scan packets were observed.

Task 9.1

The image shows a Wireshark capture on interface eth1. The packet list displays several LLMNR and mDNS queries. The packet details pane for packet 11 (Frame 11) shows the following structure:

- Frame 11: Packet, 93 bytes on wire (744 bits), 93 bytes captured (744 bits) on interface eth1, id 0
- Ethernet II, Src: 0a:00:27:00:00:08 (0a:00:27:00:00:08), Dst: IPv6multicast_01:00:03 (33:33:00:01:00:03)
- Internet Protocol Version 6, Src: fe80::a591:e192:90d::ff02::1:3, Dst: ff02::1:3
- User Datagram Protocol, Src Port: 53710, Dst Port: 5355
- Link-local Multicast Name Resolution (query)

The packet bytes pane shows the raw hex and ASCII data of the packet, including the Ethernet II header, IP header, and UDP header.

UDP capture showing local LLMNR/mDNS discovery traffic.


Task 9.2

icmp						
No.	Time	Source	Destination	Protocol	Length	Info
39	644.119978239	192.168.56.101	192.168.56.1	ICMP	98	Echo (ping) request id=0x5839, seq=1/256, ttl=64 (reply in 40)
40	644.126394669	192.168.56.1	192.168.56.101	ICMP	98	Echo (ping) reply id=0x5839, seq=1/256, ttl=128 (request in 39)
41	645.159895399	192.168.56.101	192.168.56.1	ICMP	98	Echo (ping) request id=0x5839, seq=2/512, ttl=64 (reply in 42)
42	645.151232799	192.168.56.1	192.168.56.101	ICMP	98	Echo (ping) reply id=0x5839, seq=2/512, ttl=128 (request in 41)
43	646.188801981	192.168.56.101	192.168.56.1	ICMP	98	Echo (ping) request id=0x5839, seq=3/768, ttl=64 (reply in 44)
44	646.181240213	192.168.56.1	192.168.56.101	ICMP	98	Echo (ping) reply id=0x5839, seq=3/768, ttl=128 (request in 43)
45	647.204024102	192.168.56.101	192.168.56.1	ICMP	98	Echo (ping) request id=0x5839, seq=4/1024, ttl=64 (reply in 46)
46	647.204342894	192.168.56.1	192.168.56.101	ICMP	98	Echo (ping) reply id=0x5839, seq=4/1024, ttl=128 (request in 45)

ICMP Echo Request/Reply traffic between Kali and Windows lab hosts.


7. Task 9 — ARP and TCP Evidence

Task 9.3

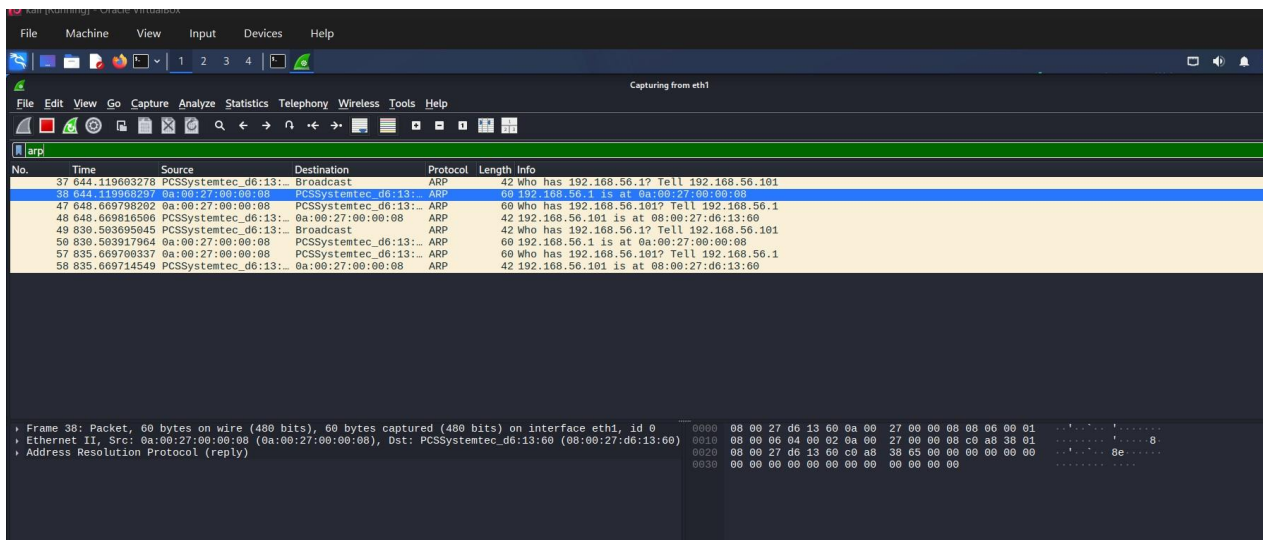


ARP request/reply traffic resolving the lab hosts' MAC addresses.

Task 9.4

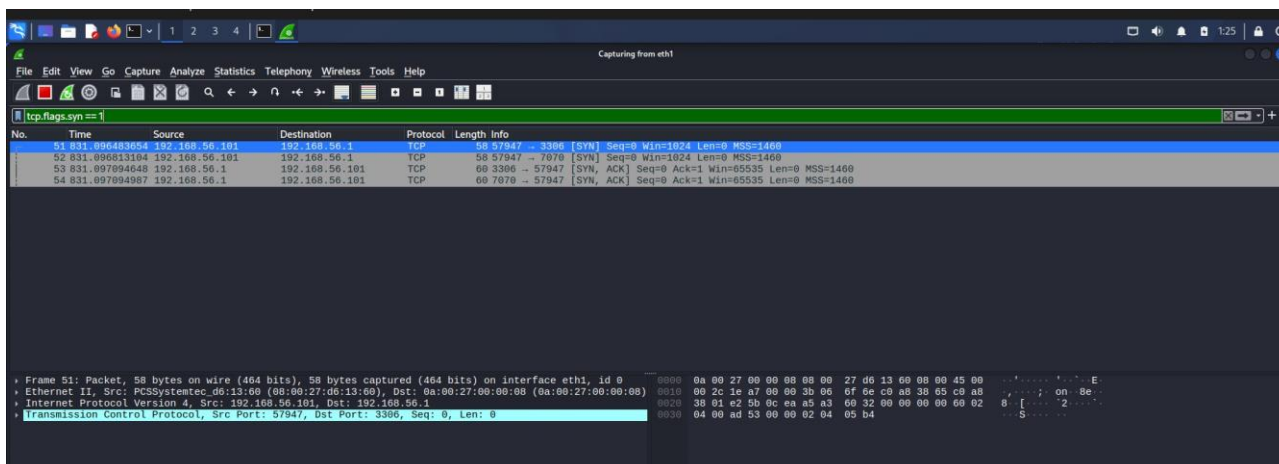

TCP SYN/SYN-ACK packets generated during the controlled scan.

Task 9.5

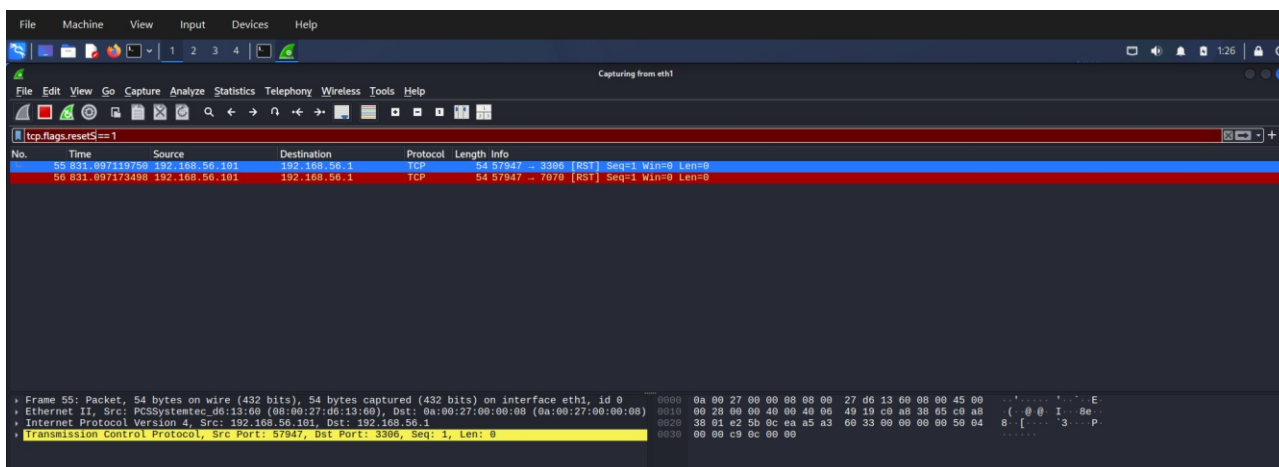


TCP RST packets used by the SYN scan to terminate half-open connections.

8. Task 10 — Nmap + Wireshark Correlation

Packets 51–56 show SYN attempts to ports 3306 and 7070, SYN/ACK responses from the Windows host, and RST packets used to terminate the half-open SYN scan connections.

Task 10

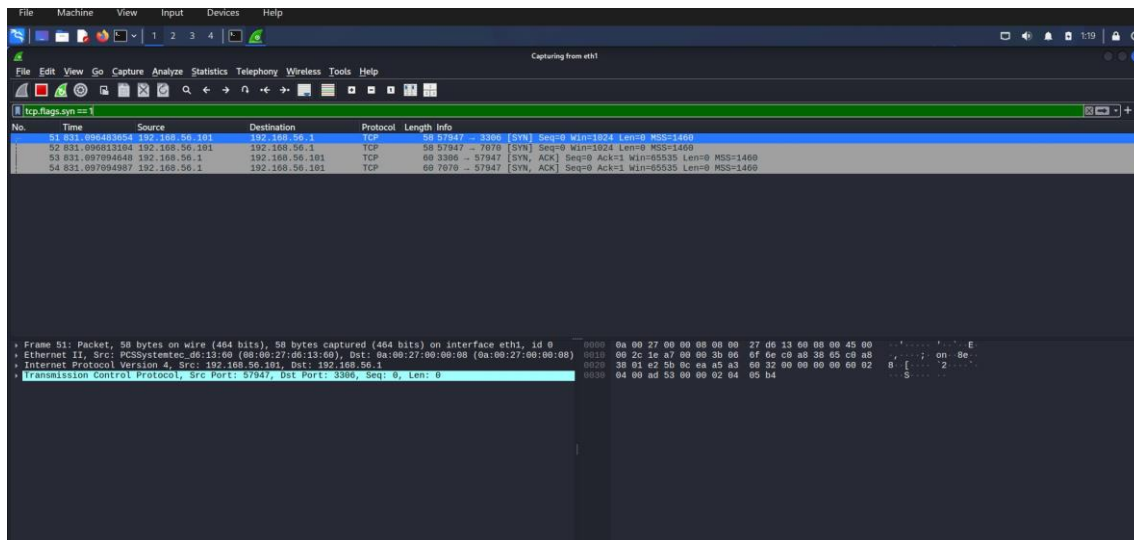

Nmap + Wireshark correlation: SYN packets to 3306/7070 and SYN-ACK responses.

9. Task 11 — Advanced Traffic Investigation

The IPv4 endpoint view identified the two primary lab endpoints. The DNS filter returned zero displayed packets. The TCP investigation confirmed the controlled SYN/SYN-ACK/RST sequence.

Task 11.1

Endpoint Settings

Ethernet IIIPv4 IIIPv6 IIICP IIUDP II

Name resolution	Address	Packets	Bytes	Tx Packets	Tx Bytes	Rx Packets	Rx Bytes	Country	City	Latitude	Longitude	AS Number AS Organization
Display raw data	192.168.56.1	2	108 bytes	0	0 bytes	2	108 bytes					
Hide aggregated	192.168.56.101	2	108 bytes	0	108 bytes	0	0 bytes					
Limit to display filter	224.0.0.252	0	0 bytes	0	0 bytes	0	0 bytes					
	224.0.0.251	0	0 bytes	0	0 bytes	0	0 bytes					

Copy

Map

Protocol

FDDI

IEEE 802.11

IEEE 802.15.4

ILNP

IPv4

IPv6

IPX

JRPA

LTP

MPTCP


NCP

openSAFETY

RSVP

IPv4 Endpoints view showing the two primary lab endpoints.

Task 11.2

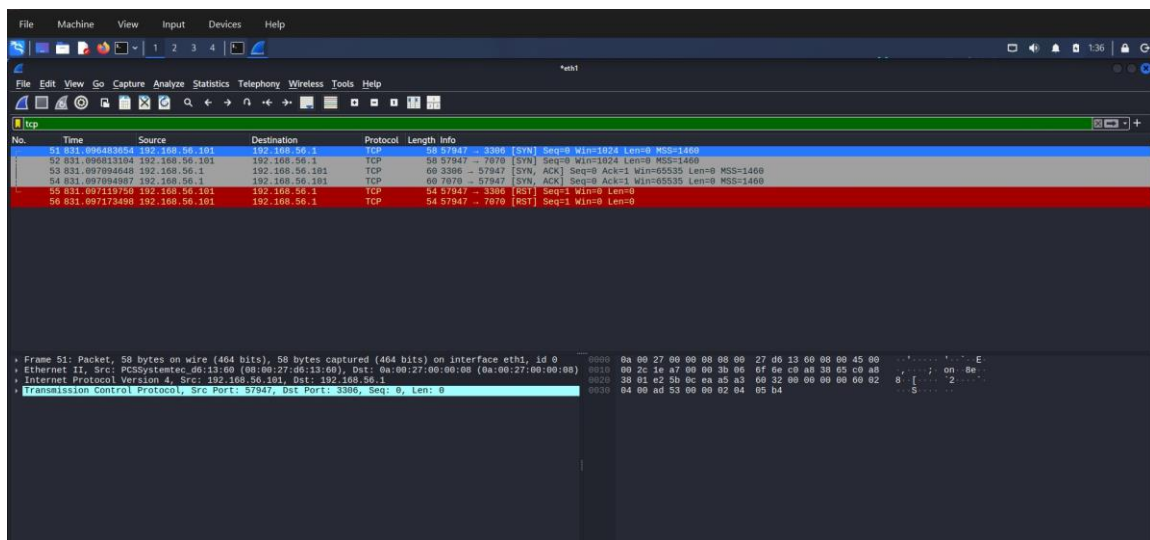


No.	Time	Source	Destination	Protocol	Length	Info
51	831.896483054	192.168.56.101	192.168.56.1	TCP	58	57847 → 3306 [SYN] Seq=0 Win=1024 Len=0 MSS=1460
52	831.896813104	192.168.56.101	192.168.56.1	TCP	58	57847 → 7070 [SYN] Seq=0 Win=1024 Len=0 MSS=1460
53	831.897094546	192.168.56.1	192.168.56.101	TCP	60	3306 → 57847 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460
54	831.897094907	192.168.56.1	192.168.56.101	TCP	60	7070 → 57847 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1460
55	831.897159169	192.168.56.101	192.168.56.1	TCP	54	57847 → 3306 [RST] Seq=1 Win=0 Len=0
56	831.897173498	192.168.56.101	192.168.56.1	TCP	54	57847 → 7070 [RST] Seq=1 Win=0 Len=0

DNS display filter returned zero displayed packets in the selected capture.

10. Task 11 — TCP & Suspicious-Activity Review


The observed SYN traffic targeted ports 3306 and 7070. Because this traffic was intentionally generated by the authorized Nmap scan, it is not classified as malicious. In a real environment, repeated unexpected SYN attempts would warrant investigation.

Task 11.3

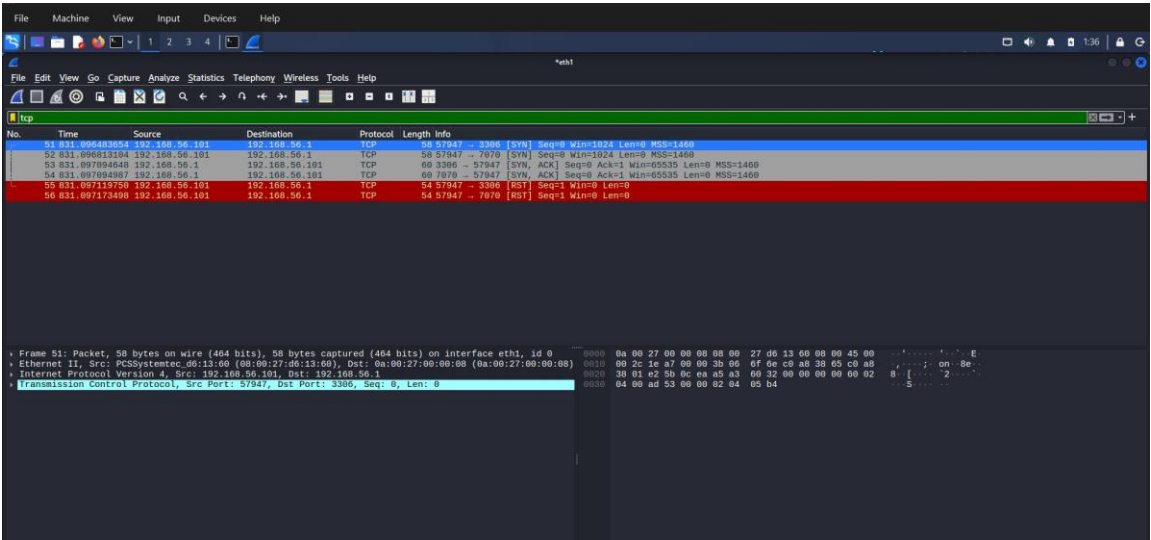

TCP investigation evidence from the controlled capture.

Task 11.4

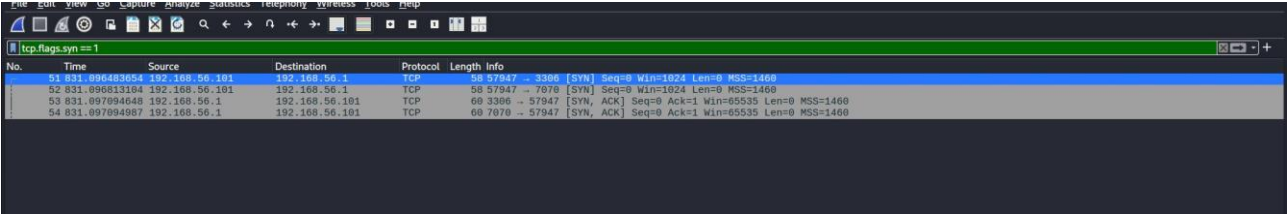

TCP SYN filter showing connection attempts to 3306 and 7070.

Investigation summary

Event	Observation	Security significance
3306 SYN/SYN-ACK	MySQL service reachable	Network attack surface
7070 SYN/SYN-ACK	TLS service reachable	Network attack surface
RST packets	Half-open scan terminated	Expected Nmap behavior
LLMNR/mdNS	Local discovery traffic	Review if unnecessary in managed networks

11. Task 12 — Vulnerability Assessment

The general Nmap vulnerability NSE scan did not report a specific CVE or confirmed critical vulnerability. Targeted checks were then performed for MySQL and TLS.

Task 12.1



General Nmap vulnerability NSE scan; no specific vulnerability was reported.

Task 12.2

```
(meet@undefined)-[~]
$ sudo nmap -p 3306 --script mysql-info 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 01:41 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00031s latency).

PORT      STATE SERVICE
3306/tcp  open  mysql
MAC Address: 0A:00:27:00:00:08 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 0.67 seconds
```

mysql-info confirms MySQL service on 3306 without disclosing an exact version.

12. Task 12 — MySQL and TLS Findings

The MySQL empty-password check did not confirm an empty-password issue; the lab host was not allowed to connect. Port 7070 presented an AnyDesk Client certificate and supported TLS 1.3 plus legacy TLS 1.2 CBC/SHA-1 suites.

Task 12.3

```
(meet@undefined)-[~]
$ sudo nmap -p 3306 --script mysql-empty-password 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 01:43 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00028s latency).

PORT      STATE SERVICE
3306/tcp  open  mysql
|_mysql-empty-password: Host '192.168.56.101' is not allowed to connect to this MySQL server
MAC Address: 0A:00:27:00:00:08 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 0.69 seconds
```

mysql-empty-password check: the Kali host was not allowed to connect to the MySQL server.

Task 12.4

```
(meet@undefined)-[~]
$ sudo nmap -p 7070 --script ssl-cert,ssl-enum-ciphers 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 01:45 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00023s latency).

PORT      STATE SERVICE
7070/tcp  open  RealServer
|_ssl-cert: Subject: commonName=AnyDesk Client
|_Issuer: commonName=AnyDesk Client
|_Public key type: rsa
|_Public key bits: 2048
|_Signature Algorithm: sha256WithRSAEncryption
|_Not valid before: 2023-11-20T12:41:43
|_Not valid after: 2073-11-13T12:41:43
|_MD5: cf67 48c2 9772 0518 fb38 c26d f8f0 a03f
|_SHA-1: 0b9b 8508 0b2c 180f 4b67 e4e4 2d55 8ba8 a026 32df
|_SHA-256: ee43 7af9 0b9d d2a1 b0b5 1bc7 1e7f 74f1 8e1 1195 b983 b10f 82c6 d751 5ac6 071e
|_ssl-enum-ciphers:
|_TLSv1.2:
|_ciphers:
|_TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 2048) - A
|_TLS_DHE_RSA_WITH_AES_128_CBC_SHA256 (dh 2048) - A
|_TLS_DHE_RSA_WITH_AES_128_GCM_SHA256 (dh 2048) - A
|_TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 2048) - A
|_TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 (dh 2048) - A
|_TLS_DHE_RSA_WITH_AES_256_GCM_SHA384 (dh 2048) - A
|_TLS_DHE_RSA_WITH_CHACHA20_POLY1305_SHA256 (dh 2048) - A
|_TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (secp256r1) - A
|_TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256 (secp256r1) - A
|_TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 (secp256r1) - A
|_TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (secp256r1) - A
|_TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA256 (secp256r1) - A
|_TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 (secp256r1) - A
|_TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 (secp256r1) - A
|_TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256 (secp256r1) - A
|_TLS_RSA_WITH_AES_128_CBC_SHA (rsa 2048) - A
|_TLS_RSA_WITH_AES_128_CBC_SHA256 (rsa 2048) - A
|_TLS_RSA_WITH_AES_128_GCM_SHA256 (rsa 2048) - A
|_TLS_RSA_WITH_AES_256_CBC_SHA (rsa 2048) - A
|_TLS_RSA_WITH_AES_256_CBC_SHA256 (rsa 2048) - A
|_TLS_RSA_WITH_AES_256_GCM_SHA384 (rsa 2048) - A
|_compressors:
|_None
|_cipher preference: client
|_TLSv1.3:
|_ciphers:
|_TLS_AKE_WITH_AES_128_GCM_SHA256 (ecdhe,x25519) - A
|_TLS_AKE_WITH_AES_256_GCM_SHA384 (ecdhe,x25519) - A
|_TLS_AKE_WITH_CHACHA20_POLY1305_SHA256 (ecdhe,x25519) - A
|_cipher preference: client
|_least strength: A
```

TLS certificate and cipher enumeration for 7070; legacy CBC/SHA-1 suites are supported.

Task 12.5

```

Nmap done: 1 IP address (1 host up) scanned in 1.05 seconds

(meet@undefined)-[~]
$ sudo nmap -p 7070 --script ssl-heartbleed,ssl-poodle,ssl-ccs-injection 1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 01:49 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00025s latency).

PORT      STATE SERVICE
7070/tcp  open  realserver
MAC Address: 0A:00:27:00:00:08 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 0.78 seconds

```

Targeted Heartbleed, POODLE and CCS Injection checks returned no specific finding.

13. Task 12 — Targeted TLS Checks & Task 13 — Hardening

Heartbleed, POODLE and CCS Injection checks returned no specific finding. A Windows Firewall rule was then created to block inbound TCP/3306 from the lab network.

Task 13.1

```

Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\WINDOWS\system32> Get-NetFirewallRule -DisplayName "Lab Block MySQL 3306" | Get-NetFirewallPortFilter
Get-NetFirewallRule : No MSFT_NetFirewallRule objects found with property 'DisplayName' equal to 'Lab Block MySQL
3306'. Verify the value of the property and retry.
At line:1 char:1
+ Get-NetFirewallRule -DisplayName "Lab Block MySQL 3306" | Get-NetFire ...
+ ~~~~~
+ CategoryInfo          : ObjectNotFound: (Lab Block MySQL 3306:String) [Get-NetFirewallRule], CimJobException
+ FullyQualifiedErrorId : CmdletizationQuery_NotFound_DisplayName,Get-NetFirewallRule

PS C:\WINDOWS\system32> netsh advfirewall firewall add rule name="lab3306" dir=in action=block protocol=TCP localport=3
306 remoteip=192.168.56.0/24
Ok.

PS C:\WINDOWS\system32>

```

Windows Firewall rule creation for lab TCP/3306 returned Ok.

Task 13.2

```

(meet@undefined)-[~]
$ sudo nmap -Pn -p 3306 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 02:15 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00049s latency).

PORT      STATE SERVICE
3306/tcp  filtered mysql
MAC Address: 0A:00:27:00:00:08 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 0.85 seconds

```

Post-hardening Nmap: 3306/tcp is filtered.

14. Task 13–14 — Final Hardening & Assessment

After hardening, TCP/3306 and TCP/7070 were filtered and ICMP Echo requests were blocked. The final targeted Nmap scan confirmed both services remained filtered.

Task 13.3

```
(meet@undefined)-[~]
$ sudo nmap -Pn -p 7070 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 02:17 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00042s latency).

PORT      STATE      SERVICE
7070/tcp   filtered   realserver
MAC Address: 0A:00:27:00:00:08 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 0.87 seconds
```

Post-hardening Nmap: 7070/tcp is filtered.

Task 13.4

```
(meet@undefined)-[~]
$ ping -c 4 192.168.56.1
PING 192.168.56.1 (192.168.56.1) 56(84) bytes of data.

— 192.168.56.1 ping statistics —
4 packets transmitted, 0 received, 100% packet loss, time 3071ms
```

Post-hardening ping: 4 transmitted, 0 received, 100% packet loss.

Task 14

```
(meet@undefined)-[~]
$ sudo nmap -Pn -p 3306,7070 192.168.56.1
[sudo] password for meet:
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 02:37 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00069s latency).

PORT      STATE      SERVICE
3306/tcp   filtered   mysql
7070/tcp   filtered   realserver
MAC Address: 0A:00:27:00:00:08 (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 2.12 seconds
```

Final Nmap verification: both 3306/tcp and 7070/tcp are filtered.

Final Findings & Recommendations

Finding	Risk	Recommendation
MySQL exposed before hardening	Medium	Restrict access to required source networks and retain firewall
7070/TLS service exposed before harden	ngMedium	Restrict access to trusted systems.
Legacy CBC/SHA-1 TLS suites	Medium	Prefer TLS 1.3/modern AEAD suites where compatibility permits.
LLMNR/mDNS observed	Low–Medium	Review whether local discovery is required.

ICMP exposed initially	Low	Restrict ICMP to required management/monitoring sources.
------------------------	-----	--

Conclusion: Week 3 Tasks 7–14 were completed in the authorized lab. The final scan provides direct before/after evidence that the hardening controls reduced network reachability.