


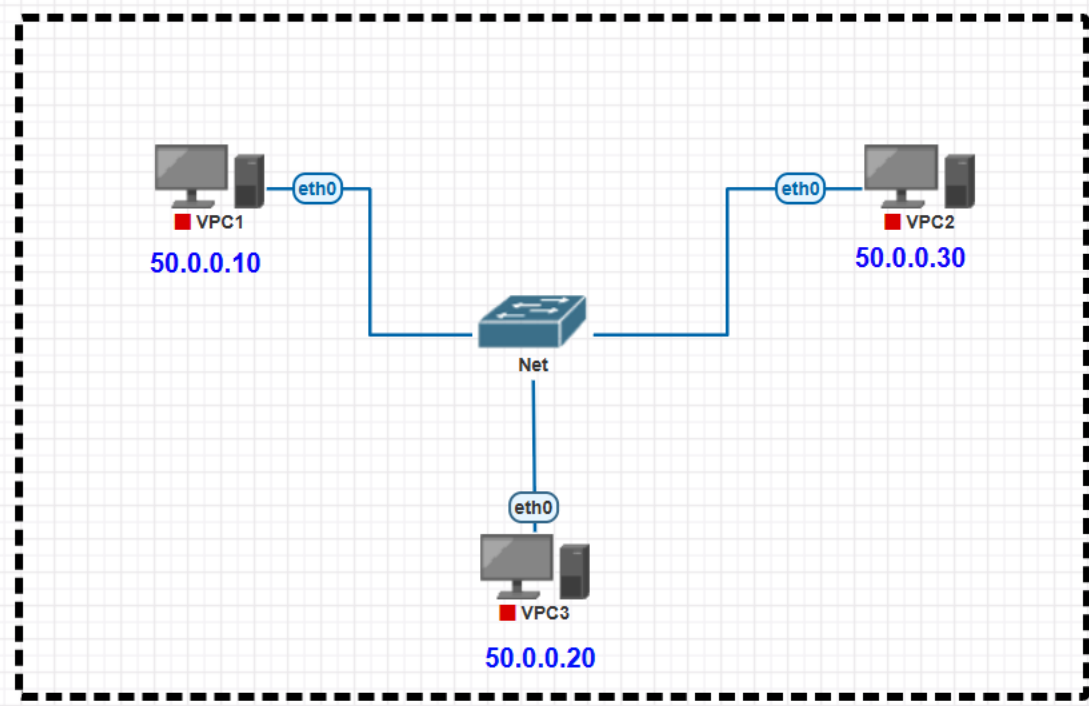

Switch

Physical 01 : 00 : 00 START

```
VPC1>
```

☰

🔍

📁

+

labs.surrennetwork.com/store/public/admin/labs/terminal?terminals=eyJ0YWJzljpbeyJuYW1lIjo...

📄 ⭐ 🔴 🟢 🟡 ⚪

🔗 Webmail - Main 🗕 Networking Acade... 📄 Online typing WPM... 🌐 NCCR Biometric Att... 🖨️ HP Product Warrant... 🏢 Fujitsu Technical Su... 🌐 D-LINK 🖨️ HP » Device Status

VPC1 x VPC2 x VPC3 x

VPC2> ip 50.0.0.30 255.0.0.0 To assign the IP address to the Ethernet Port 0 command

Checking for duplicate address...

VPC2 : 50.0.0.30 255.0.0.0

VPC2> show ip

NAME : VPC2[1]
IP/MASK : 50.0.0.30/8
GATEWAY : 255.0.0.0
DNS :
MAC : 00:50:79:66:68:e0
LPORT : 20000
RHOST:PORT : 127.0.0.1:30000
MTU : 1500

VPC2> ping 50.0.0.10 To check the reliability of VPC2 to VPC1

84 bytes from 50.0.0.10 icmp_seq=1 ttl=64 time=0.293 ms
84 bytes from 50.0.0.10 icmp_seq=2 ttl=64 time=0.342 ms
84 bytes from 50.0.0.10 icmp_seq=3 ttl=64 time=0.291 ms
84 bytes from 50.0.0.10 icmp_seq=4 ttl=64 time=0.462 ms
84 bytes from 50.0.0.10 icmp_seq=5 ttl=64 time=0.189 ms

VPC2> ping 50.0.0.20 To check the reliability of VPC2 to VPC3

84 bytes from 50.0.0.20 icmp_seq=1 ttl=64 time=0.143 ms
84 bytes from 50.0.0.20 icmp_seq=2 ttl=64 time=0.354 ms
84 bytes from 50.0.0.20 icmp_seq=3 ttl=64 time=0.273 ms
84 bytes from 50.0.0.20 icmp_seq=4 ttl=64 time=0.232 ms
84 bytes from 50.0.0.20 icmp_seq=5 ttl=64 time=0.229 ms

VPC2> █

27°C Mostly cloudy

🔍 Search

📄 📅 🗂️ 🖨️ 📧 📶 📶 📶 📶 📶

07:48 am 03-09-2026

```
VPC3 : 50.0.0.20 255.0.0.0
```

```
NAME      : VPC3[1]
IP/MASK   : 50.0.0.20/8
GATEWAY   : 255.0.0.0
DNS       :
MAC       : 00:50:79:66:68:0f
LPORT     : 20000
RHOST:PORT : 127.0.0.1:30000
MTU       : 1500
```

```
84 bytes from 50.0.0.10 icmp_seq=1 ttl=64 time=0.282 ms
84 bytes from 50.0.0.10 icmp_seq=2 ttl=64 time=0.227 ms
84 bytes from 50.0.0.10 icmp_seq=3 ttl=64 time=0.257 ms
84 bytes from 50.0.0.10 icmp_seq=4 ttl=64 time=0.379 ms
84 bytes from 50.0.0.10 icmp_seq=5 ttl=64 time=0.236 ms
```

```
84 bytes from 50.0.0.30 icmp_seq=1 ttl=64 time=0.254 ms
84 bytes from 50.0.0.30 icmp_seq=2 ttl=64 time=0.210 ms
84 bytes from 50.0.0.30 icmp_seq=3 ttl=64 time=0.216 ms
84 bytes from 50.0.0.30 icmp_seq=4 ttl=64 time=0.278 ms
84 bytes from 50.0.0.30 icmp_seq=5 ttl=64 time=0.286 ms
```

```
VPC3>
```

Senario 1

Assign ip address for three virtual pc

PC-1

VPC 1 > ip 50.0.0.10 255.0.0.0

To check ip in vpc

VPC 1 > show ip

PC-2

VPC 2 > ip 50.0.0.20 255.0.0.0

PC-3

VPC 3 > ip 50.0.0.30 255.0.0.0

Check network rechability between three device using ping cmd

VPC1> ping 50.0.0.20

```
84 bytes from 50.0.0.20 icmp_seq=1 ttl=64 time=0.389 ms
84 bytes from 50.0.0.20 icmp_seq=2 ttl=64 time=0.397 ms
84 bytes from 50.0.0.20 icmp_seq=3 ttl=64 time=0.378 ms
84 bytes from 50.0.0.20 icmp_seq=4 ttl=64 time=0.326 ms
84 bytes from 50.0.0.20 icmp_seq=5 ttl=64 time=0.282 ms
```

VPC1> ping 50.0.0.30

```
84 bytes from 50.0.0.30 icmp_seq=1 ttl=64 time=0.223 ms
84 bytes from 50.0.0.30 icmp_seq=2 ttl=64 time=0.236 ms
84 bytes from 50.0.0.30 icmp_seq=3 ttl=64 time=0.245 ms
84 bytes from 50.0.0.30 icmp_seq=4 ttl=64 time=0.288 ms
84 bytes from 50.0.0.30 icmp_seq=5 ttl=64 time=0.263 ms
```