

Projet2

1- Alerte d'envoi d'email

- Pour installer le paquet d'envoi de mail (sudo yum install postfix mailx -y)

```
Mis à niveau:
crypto-policies-20250905-2.gitc7eb7b2.el10.noarch  crypto-policies-scripts-20250905-2.gitc7eb7b2.el10.noarch  openssl-devel-1:3.5.1-4.el10_1.x86_64
openssl-libs-1:3.5.1-4.el10_1.x86_64
Installé:
openssl-1:3.5.1-4.el10_1.x86_64  openssl-fips-provider-1:3.5.1-4.el10_1.x86_64  postfix-2:3.8.5-8.el10.x86_64  postfix-lmdb-2:3.8.5-8.el10.x86_64
s-nail-14.9.24-12.el10.x86_64
Terminé !
```

2- Configure postfix pour envoyer les emails (SMTP Gmail, Outlook, etc)

Sudo nano /etc/postfix/main.cf

```
smtp_tls_security_level = may

default_database_type = lmdb
shlib_directory = /usr/lib64/postfix
meta_directory = /etc/postfix

relayhost = [smtp.gmail.com]:587
smtp_use_tls = yes
smtp_sasl_auth_enable = yes
smtp_sasl_security_options = noanonymous
smtp_sasl_password_maps = hash:/etc/postfix/sasl_passwd
#smtp_tls_CAfile = /etc/ssl/cert/ca-bundle.crt
```

3- Ajoute un login au gmail/Outlook

Il faut d'abord créer un mot de passe pour appli généré par google

<https://myaccount.google.com/apppasswords>

← Mots de passe des applications

Les mots de passe d'application vous permettent de vous connecter à votre compte Google sur des applis et des services plus anciens, non compatibles avec les normes de sécurité les plus récentes.

Les mots de passe d'application sont moins sécurisés que les applis et services à jour qui utilisent les normes de sécurité les plus récentes. Avant de créer un mot de passe d'application, vous devez vérifier si votre appli en a besoin pour établir la connexion.

[En savoir plus](#)

Vous n'avez aucun mot de passe d'application.

Pour créer un mot de passe spécifique à une appli, indiquez son nom ci-dessous.

Nom de l'appli

Nagios

Créer

Mot de passe d'application généré

Mot de passe d'application pour votre appareil

bwlb jlfc bcno fexg

Comment l'utiliser ?

Accédez aux paramètres de votre compte Google dans l'application ou l'appareil que vous essayez de configurer. Remplacez le mot de passe par celui de 16 caractères indiqué ci-dessus.

Tout comme votre mot de passe classique, ce mot de passe spécifique à une application permet d'accorder un accès complet à votre compte Google. Étant donné que vous n'avez pas besoin de le mémoriser, ne le notez nulle part ni ne le partagez avec personne.

Terminé

Sudo nano /etc/postfix/sasl_passwd

```
GNU nano 8.1 /etc/postfix/sasl_passwd
[smtp.gmail.com]:587 meganelezegning683@gmail.com:bwlbjlfcbcnofexg
```

```
GNU nano 8.1 /etc/postfix/sasl_passwd
[smtp.gmail.com]:465 meganelezegning683@gmail.com:bwlbjlfcbcnofexg
```

4- Protéger le fichier

Sudo chmod 600 /etc/postfix/sasl_passwd

sudo postmap /etc/postfix/sasl_passwd

```
[megane@localhost ~]$ sudo postmap /etc/postfix/sasl_passwd
[megane@localhost ~]$
```

Restart et enable le postfix

```
[megane@localhost ~]$ sudo systemctl restart postfix
[megane@localhost ~]$ sudo systemctl enable postfix
[megane@localhost ~]$
```

- Desactive ipv6

```
[megane@localhost ~]$ sudo sysctl -w net.ipv6.conf.all.disable_ipv6=1
[sudo] Mot de passe de megane :
net.ipv6.conf.all.disable_ipv6 = 1
[megane@localhost ~]$ sudo sysctl -w net.ipv6.conf.default.disable_ipv6=1
net.ipv6.conf.default.disable_ipv6 = 1
[megane@localhost ~]$
```

- Jechange inet_interfaces et protocols

```
[megane@localhost ~]$ sudo nano /etc/postfix/main.cf
```

```
#inet_interfaces = localhost
inet_interfaces = all
# Enable IPv4, and IPv6 if supported
#inet_protocols = all
inet_protocols = ipv4
# The next interface is the interface used for the
```

On restart postfix

Et on envoi le message

```
[megane@localhost ~]$ echo "test" | mail -s "test nagios" meganelezegning683@gmail.com
[megane@localhost ~]$
```

- J'installe les dependance pour pouvoir recoir le message sur ma boite Gmail

```
[megane@localhost ~]$ sudo dnf install postfix s-nail cyrus-sasl-plain -y
```

- L'ancienne config

```
smtp_tls_security_level = may

default_database_type = lmdb
shlib_directory = /usr/lib64/postfix
meta_directory = /etc/postfix

relayhost = [smtp.gmail.com]:587
smtp_use_tls = yes
smtp_sasl_auth_enable = yes
smtp_sasl_security_options = noanonymous
smtp_sasl_password_maps = hash:/etc/postfix/sasl_passwd
smtp_tls_CAfile = /etc/ssl/cert/ca-bundle.crt
```

- Modifier le fichier tout a la fin

```
[megane@localhost ~]$ sudo nano /etc/postfix/main.cf
```

```
#smtp_tls_security_level = may

default_database_type = lmbd
shlib_directory = /usr/lib64/postfix
meta_directory = /etc/postfix

relayhost = [smtp.gmail.com]:465
smtp_tls_wrappermode = yes
smtp_use_tls = yes
smtp_tls_security_level = encrypt
smtp_tls_CAfile = /etc/pki/tls/certs/ca-bundle.crt

smtp_sasl_auth_enable = yes
smtp_sasl_password_maps = static:meganelezegning683@gmail.com:bwlbjlfcl
smtp_sasl_tls_security_options = noanonymous

inet_protocols = ipv4
#smtp_tls_CAfile = /etc/ssl/cert/ca-bundle.crt
```

- Créer un fichier d'authentification

```
GNU nano 8.1 /etc/postfix/sasl_passwd
[smtp.gmail.com]:587 meganelezegning683@gmail.com:bwlbjlfclbcno fexg_
```

- On le sécurise et on restart

```
[megane@localhost ~]$ sudo chmod 600 /etc/postfix/sasl_passwd
[megane@localhost ~]$ sudo postmap /etc/postfix/sasl_passwd
[megane@localhost ~]$ sudo systemctl restart postfix
[megane@localhost ~]$
```

- On renvoie le message et on attend 10 à 20 secondes

```
[megane@localhost ~]$ echo "test depuis nagios" | mail -s "test nagios" meganelezegning683@gmail.com
[megane@localhost ~]$
```

```
[megane@localhost ~]$ sudo firewall-cmd --permanent --add-service=smtp
success
[megane@localhost ~]$ sudo firewall-cmd --permanent --add-port=587/tcp
Warning: ALREADY_ENABLED: 587:tcp
success
[megane@localhost ~]$ sudo firewall-cmd --reload
success
[megane@localhost ~]$
```

- Modifie le fichier contact.cfg (usr/local/nagios/etc/objects)

```

define contact {
    contact_name    mlz        ;Short name of user
    use             generic-contact ;Inherit default values from generic-contact template (defined above)
    alias          Megane Lezegning        ;Full name of user
    pager          0045xxxxxxxx
    email          meganelezegning683@gmail.com
    host_notification_period    24x7
    host_notification_options   d,u,r
    host_notification_commands  notify-host-by-email
    service_notification_commands  notify-service-by-email
    service_notification_options w,u,c,r_
}

```

- Modifier le fichier Localhost

SSH et HTTP

```

define service {
    use             local-service        ; Name of service template to use
    host_name       localhost
    service_description    Swap Usage
    check_command    check_local_swap!20%!10%
}

# Define a service to check SSH on the local machine.
# Disable notifications for this service by default, as not all users may have SSH enabled.

define service {
    use             local-service        ; Name of service template to use
    host_name       localhost
    service_description    SSH
    check_command    check_ssh!-w 3 -c 5
    notifications_enabled  1
}

```

MySQL et Espace Disque

```

define service {
    use             local-service        ; Name of service template to use
    host_name       localhost
    service_description    HTTP
    check_command    check_http!-s -w 3 -c 5
    notifications_enabled  1
}

# Define a service to check Espace Disque
define service {
    use             local-service
    host_name       localhost
    service_description    Espace Disque
    check_command    check_local_disk!10G!5G/
}

# define a service to check MySQL
define service {
    use             local-service
    host_name       localhost
    service_description    MySQL
    check_command    check_mysql!-w 3 -c 5
}

```

DNS on le rajoute dans la config Commands.cfg

```
define command {
    command_name    check-dns
    command_line     $USER1$/check_dns -H google.com -w $ARG1$ -c $ARG2$
}
```

- Vérifie les permission

```
[megane@localhost objects]$ sudo chown nagios:nagcmd /usr/local/nagios/var/rw
[megane@localhost objects]$ sudo chown nagios:nagcmd /usr/local/nagios/var/rw
sudo chmod u+rwx /usr/local/nagios/var/rw
[megane@localhost objects]$ sudo chmod u+rwx /usr/local/nagios/var/rw
[megane@localhost objects]$ sudo chmod g+rwx /usr/local/nagios/var/rw
[megane@localhost objects]$ sudo chmod g+s /usr/local/nagios/var/rw
[megane@localhost objects]$
```


- On ouvre le port 465 sur le stormshield



- Test manuel

```
[megane@localhost ~]$ sudo systemctl restart postfix
[sudo] Mot de passe de megane :
[megane@localhost ~]$ echo "Test Nagios" | mail -s "Alerte Test" meganelezegning683@gmail.com
[megane@localhost ~]$
```

- Modifie le fichier generic (sudo nano /etc/postfix/generic

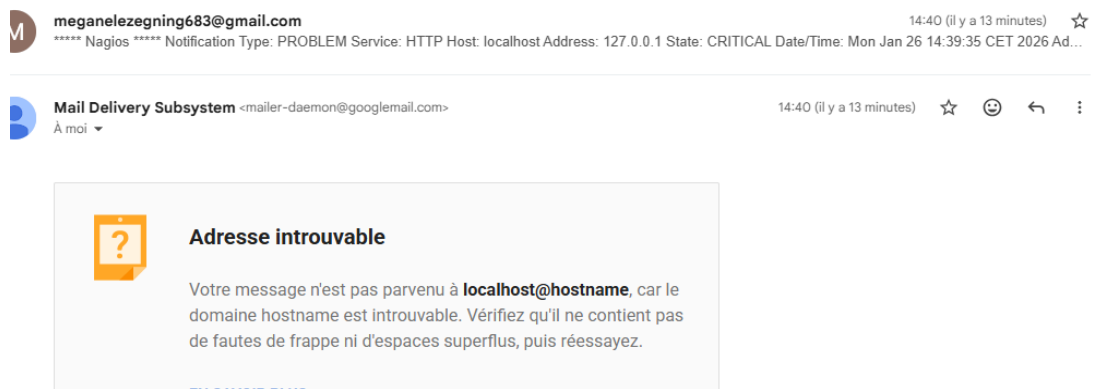

```
#smtp_tls_security_level = may

default_database_type = lmbd
shlib_directory = /usr/lib64/postfix
meta_directory = /etc/postfix

relayhost = [smtp.gmail.com]:465
smtp_tls_wrappermode = yes
smtp_use_tls = yes
smtp_tls_security_level = encrypt
smtp_tls_CAfile = /etc/pki/tls/certs/ca-bundle.crt

smtp_sasl_auth_enable = yes
smtp_sasl_password_maps = static:meganelezegning683@gmail.com:bulbjlfcbcnofexg
smtp_sasl_tls_security_options = noanonymous

inet_protocols = ipv4
#smtp_tls_CAfile = /etc/ssl/cert/ca-bundle.crt
smtp_generic_maps = static:meganelezegning683@gmail.com
```

```
#
megane@localhost meganelezegning683@gmail.com
megane@localhost.localdomain meganelezegning683@gmail.com
```

- Applique le changement

```
[megane@localhost ~]$ sudo postmap /etc/postfix/generic
[sudo] Mot de passe de megane :
[megane@localhost ~]$
```

- Applique et redémarre

```
[megane@localhost objects]$ sudo postmap /etc/postfix/generic
[sudo] Mot de passe de megane :
[megane@localhost objects]$ sudo systemctl restart postfix
[megane@localhost objects]$
```

- Résultat

**** PROBLEM Service Alert: localhost/SSH is UNKNOWN ****

Boîte de réception x



meganelezeegning683@gmail.com

10:03 (il y a 0 minute)

À moi ▾

***** Nagios *****

Notification Type: PROBLEM

Service: SSH
Host: localhost
Address: 127.0.0.1
State: UNKNOWN

Date/Time: Tue Jan 27 09:43:04 CET 2026

Additional Info:

Utilisation:

**** PROBLEM Service Alert: localhost/MYSQL is CRITICAL ****

Boîte de réception x



meganelezeegning683@gmail.com

10:03

À moi ▾

***** Nagios *****

Notification Type: PROBLEM

Service: MYSQL
Host: localhost
Address: 127.0.0.1
State: CRITICAL

Date/Time: Tue Jan 27 08:45:17 CET 2026

Additional Info:

connect to address 127.0.0.1 and port 3306: Connexion refusée

**** PROBLEM Service Alert: Serveur Web/Disque Dur is CRITICAL **** |

Boîte de réception x



meganelezegning683@gmail.c... Demain 22:16 (il y a 0 minute)



À moi ▾

***** Nagios *****

Notification Type: PROBLEM

Service: Disque Dur

Host: Serveur Web

Address: 10.0.11.22

State: CRITICAL

Date/Time: Tue Apr 28 22:14:12 CEST 2026

Additional Info:

**** PROBLEM Service Alert: Serveur Web/SSH is UNKNOWN ****

Boîte de réception x



meganelezegning683@gmail.c... Demain 21:59 (il y a 0 minute)



À moi ▾

***** Nagios *****

Notification Type: PROBLEM

Service: SSH

Host: Serveur Web

Address: 10.0.11.22

State: UNKNOWN

Date/Time: Tue Apr 28 21:57:26 CEST 2026

Additional Info:

Supervision Nagios

créer le fichier de l'équipement

Configuration checks cpu, Disque,Ram

```
[root@localhost objects]# cd /usr/local/nagios/etc/objects/flausio/
[root@localhost flausio]# touch supervision_projet.cfg
[root@localhost flausio]#
```

```
GNU nano 0.1                                srv-web.cfg                                Modifié

define host {

    use                linux-server          ; Name of host template to use
                                           ; This host definition will inherit all variables that are defined
                                           ; in (or inherited by) the linux-server host template definition.

    host_name          SRV_WEB_01
    alias              Serveur Web
    address             19.0.11.22
    check_command       check-host-alive
    max_check_attempts  5
    check_period        24x7
    notification_interval 30
    notification_period 24x7
}

#####
#
# HOST GROUP DEFINITION
#
#####
# Define an optional hostgroup for Linux machines

define hostgroup {

    hostgroup_name      linux-servers        ; The name of the hostgroup
    alias              Linux Servers         ; Long name of the group
    members             localhost,SRV_WEB_01 ; Comma separated list of hosts that belong to this group
}

#####
#
# SERVICE DEFINITIONS
#
#####
# Define a service to "ping" the local machine
```

```
define service {

    use                local-service          ; Name of service template to use
    host_name          SRV_WEB_01
    service_description SSH
    check_command       check_ssh!-w 3 -c 5
    notifications_enabled 1
}

# Define a service to check HTTP on the local machine.
# Disable notifications for this service by default, as not all users may have HTTP enabled.
define service {

    use                local-service          ; Name of service template to use
    host_name          SRV_WEB_01
    service_description HTTP
    check_command       check_http!-s -w 3 -c 5
    notifications_enabled 1
}

# Define a service to check Espace Disque
define service {

    use                local-service          ; Name of service template to use
    host_name          SRV_WEB_01
    service_description Espace Disque
    check_command       check_local_disk!10G!5G/
}

# define a service to check MYSQL
define service {

    use                local-service          ; Name of service template to use
    host_name          SRV_WEB_01
    service_description MYSQL
    check_command       check_tcp!3306!-w 3 -c 5
}

# Define a service to check DNS
```

Alde Écrire Chercher Couper Exécuter Emplacement Annuler Marquer -> Crochet Précédent
Quitter Lire fichier Remplacer Coller Justifier Aller ligne Refaire Copier Retrouver Suivant

```

[root@localhost flausiol]# /usr/local/nagios/bin/nagios -v /usr/local/nagios/etc/nagios.cfg

Nagios Core 4.5.10
Copyright (c) 2009-present Nagios Core Development Team and Community Contributors
Copyright (c) 1999-2009 Ethan Galstad
Last Modified: 2025-10-28
License: GPL

Website: https://www.nagios.org
Reading configuration data...
  Read main config file okay...
  Read object config files okay...

Running pre-flight check on configuration data...

Checking objects...
  Checked 19 services.
  Checked 4 hosts.
  Checked 2 host groups.
  Checked 0 service groups.
  Checked 2 contacts.
  Checked 1 contact groups.
  Checked 26 commands.
  Checked 5 time periods.
  Checked 0 host escalations.
  Checked 0 service escalations.
Checking for circular paths...
  Checked 4 hosts.
  Checked 0 service dependencies.
  Checked 0 host dependencies.
  Checked 5 timeperiods.
Checking global event handlers...
Checking obsessive compulsive processor commands...
Checking misc settings...

Total Warnings: 0
Total Errors: 0

Things look okay - No serious problems were detected during the pre-flight check
[root@localhost flausiol]# systemctl restart nagios
[root@localhost flausiol]#

```

Nagios

- General
- Home
- Documentation
- Current Status
- Tactical Overview
- Map
- Hosts
- Services
- Host Groups
 - Summary
 - Grid
- Service Groups
 - Summary
 - Grid
- Problems
 - Services (Unhandled)
 - Hosts (Unhandled)
 - Network Outages
- Quick Search:
- Reports
 - Availability
 - Trends
 - Alerts
 - History

Host Information

Last Updated: Thu Apr 2 16:49:23 CEST 2026

Updated every 90 seconds

Nagios® Core™ 4.5.10 - www.nagios.org

Logged in as nagiosadmin

View Status Detail For This Host

View Alert History For This Host

View Trends For This Host

View Alert Histogram For This Host

View Availability Report For This Host

View Notifications For This Host

Host

Serveur Web

(SRV_WEB_01)

Member of

linux-servers

10.0.11.22

Host State Information

Host Status: UP (for 0d 1h 49m 12s)

Status Information: PING OK - Paquets perdus = 0%, RTA = 2.16 ms

Performance Data: rta=2165000ms;3000.000000;5000.000000;0.000000
p1=0%;80;100;0
1/5 (HARD state)

Last Check Time: 04-02-2026 16:45:11

Check Type: ACTIVE

Check Latency / Duration: 0,000 / 4,000 seconds

Next Scheduled Active Check: 04-02-2026 16:50:11

Last State Change: 04-02-2026 15:00:11

Last Notification: 04-02-2026 15:00:15 (notification 0)

Is This Host Flapping? NO (0,00% state change)

In Scheduled Downtime? NO

Last Update: 04-02-2026 16:49:15 (0d 0h 0m 8s ago)

Active Checks: ENABLED

Passive Checks: ENABLED

Obsessing: ENABLED

Notifications: ENABLED

Event Handler: ENABLED

Flap Detection: ENABLED

Host Commands

Locate host on map

Disable active checks of this host

Re-schedule the next check of this host

Submit passive check result for this host

Stop accepting passive checks for this host

Stop obsessing over this host

Disable notifications for this host

Send custom host notification

Schedule downtime for this host

Schedule downtime for all services on this host

Disable notifications for all services on this host

Enable notifications for all services on this host

Schedule a check of all services on this host

Disable checks of all services on this host

Enable checks of all services on this host

Disable event handler for this host

Disable flap detection for this host

Clear flapping state for this host

Page Tour

TEST

```

[megane@localhost objects]$ sudo /usr/local/nagios/libexec/check_ping -H 10.0.11.22 -w 100,20% -c 500,60%
PING OK - Paquets perdus = 0%, RTA = 2.17 ms|rta=2.169000ms;100.000000;500.000000;0.000000 p1=0%;20;60;0
[megane@localhost objects]$

```