

Major Project

Topic : Create a Chatbot using Amazon Lex Tool

Intent of the chatbot: Book Hotel

- 1)** All the information must be conveyed to the user after booking the room and must be informed to the user the price of the hotel room and the day of stay.
- 2)** Using this chatbot user must be aware of the types of Available rooms(Classic, Duplex, etc)-Choose your own Category as well.
- 3)** All events must be in flow for the fulfillment of the intent.

Submitted by

Mekala Yashvanth

yashyern1224@gmail.com

Procedure :

1. Search Amazon Lex in the AWS search Box >>> Create Bot

The screenshot displays the AWS Amazon Lex console interface. The top navigation bar includes the AWS logo, a search bar, and user information (United States (N. Virginia), Mekala Yashvanth). The left sidebar shows the 'Amazon Lex' menu with options like 'Bots', 'Bot templates', 'Networks of bots', 'Test workbench', and 'Related resources'. The main content area is titled 'Bots (1)' and features a 'Create bot' button. A notification banner at the top right announces 'Amazon Lex Generative AI features powered by Amazon Bedrock', listing features like Descriptive Bot Builder, Assisted Slot Resolution, Sample Utterance Generation, AMAZON.QnAIntent, and Generative AI Bots. Below the notification, the 'Configure bot settings' page is shown, with 'Step 1: Configure bot settings' selected. The 'Creation method' section offers three options: 'Create a blank bot' (selected), 'Start with an example', and 'Start with transcripts'. The 'Bot configuration' section shows the 'Bot name' field with the value 'BookHotel'. The 'IAM permissions' section indicates that IAM roles are used to access other services, and the 'Runtime role' section shows the role 'AWSServiceRoleForLexV2Bots_WYUOMBCN6R' created by Amazon Lex.

Amazon Lex

Bots

Bot templates [New](#)

Networks of bots [New](#)

▼ **Test workbench** [New](#)

Test sets

Test results

► **Related resources**

Return to the V1 console

Announcing Amazon Lex Generative AI features powered by Amazon Bedrock.

Try the new build time and run time features to make your bot more intelligent by enabling these features on the Gen AI Configurations page in your bot.

- Descriptive Bot Builder - Provide a description in natural language to have Lex generate a bot for you using large language models.
- Assisted Slot Resolution - Leverage the intelligence of large language models to resolve slot values in a user utterance when natural language understanding fails.
- Sample Utterance Generation - Have Lex generate training utterances for your bot using generative AI.
- AMAZON.QnAIntent: A Bedrock-powered built-in intent that uses Generative AI to fulfill FAQ requests by querying authorized knowledge content.
- Generative AI Bots - Leverage large language models and your existing Bedrock knowledge bases to fulfill user requests without the need to build bots.

Bots (1) [Info](#)

[Action](#) [Create bot](#)

Configure bot settings [Info](#)

Step 1
Configure bot settings

Step 2
Add languages

Creation method

Traditional **Generative AI**

☒ **Create a blank bot**
Create a basic bot with no preconfigured languages, intents, and slot types.

☐ **Start with an example**
An example bot has preconfigured languages, intents, and slot types. You can change these settings.

☐ **Start with transcripts**
Automatically generate intents from conversation transcripts that you upload. Only English (US) language is available when starting with a transcript.

Bot configuration

Bot name

Maximum 100 characters. Valid characters: A-Z, a-z, 0-9, -, _

IAM permissions [Info](#)

IAM roles are used to access other services on your behalf.

Runtime role

Choose a role that defines permissions for your bot. To create a custom role, use the IAM console.

☒ **Create a role with basic Amazon Lex permissions.**

☐ Use an existing role.

Creating a role takes a few minutes. Don't delete the role or edit the trust or permissions policies in this role until we've finished creating it.

New role

Amazon Lex creates a runtime role with permission to upload to Amazon CloudWatch Logs.

Bot error logging [Info](#)

Debug unexpected issues on Lex bots.

Error logs

☒ Enabled

☐ Disabled

[Learn more about error logs](#)

[Go to error logs](#)

Children's Online Privacy Protection Act (COPPA) [Info](#)

Is use of your bot subject to the [Children's Online Privacy Protection Act \(COPPA\)](#)?

☐ Yes

☒ No

Children's Online Privacy Protection Act (COPPA) [Info](#)

Is use of your bot subject to the [Children's Online Privacy Protection Act \(COPPA\)](#)?

☐ Yes

☒ No

Idle session timeout

You can configure how long a session is maintained when the user does not provide any input and the session is idle. Amazon Lex retains context information until a session ends.

Session timeout

minute(s) ▼

By default, session duration is 5 minutes, but you can specify any duration between 1 and 1440 minutes (24 hours).

► Advanced settings - optional [Info](#)

Cancel

Next

Add language to bot [Info](#)

▼ Language: English (US)

Select language

English (US) ▼

Description - *optional*

Maximum 2000 characters.

Voice interaction

The text-to-speech voice that your bot uses to interact with users.

Danielle ▼

Voice sample

Hello, my name is Danielle. Let me know how I can assist you.

Play

Description - *optional*

Maximum 2000 characters.

Voice interaction

The text-to-speech voice that your bot uses to interact with users.

Danielle ▼

Voice sample

Hello, my name is Danielle. Let me know how I can assist you.

Play

Intent classification confidence score threshold

0.40

Min: 0.00, max: 1.00.

Cancel

Add another language

Done

Amazon Lex

Bots

Bot templates [New](#)

Networks of bots [New](#)

▼ Test workbench [New](#)

Test sets

Test results

► Related resources

Return to the V1 console

Bots (1) [Info](#)

Action ▼

Create bot

Search bots

< 1 > ⚙

	Name ▲	Description ▼	Status ▼	Latest Version ▼	Last updated ▼
☐	BookHotel	-	Available	1	3 hours ago

Import/export history (0) [Info](#)

Delete selected

Search import/export history

< 1 > ⚙

	Type ▼	Bot ▼	Status ▼	Errors ▼	Last updated ▲	File	Version
--	--------	-------	----------	----------	----------------	------	---------

No import/export records found

2. Go to Bot >>>> Intents >>>> Add Intent

The screenshot shows the Amazon Lex console interface. On the left, there's a sidebar with a search bar and a list of intents: 'BookHotel' (highlighted in orange) and 'FallbackIntent'. The main area is titled 'Intent: BookHotel' with an 'Info' link. Below the title, there's a description: 'An intent represents an action that fulfills a user's request. Intents can have arguments called slots that represent variable information.' There are two tabs: 'Conversation flow' and 'Intent details' (selected). Under 'Intent details', the 'Intent name' field is set to 'BookHotel'. A note below the field states: 'Maximum 100 characters. Valid characters: A-Z, a-z, 0-9, -, _, ...'. At the top right, there are buttons for 'Draft version', 'English (US)', 'Successfully built', 'Build', and 'Test'.

➔ Go to Slots >>>> Add slot

The first screenshot shows the configuration for a slot named 'Location'. The title bar says 'Prompt for slot: Location' with a message 'Which city you would like to stay in ?' and a 'Slot type' of 'AMAZON.City'. A checkbox 'Required for this intent' is checked, with a note: 'The bot will prompt for this slot during the conversation if a value is not provided by the user.' The 'Name' field is 'Location' and the 'Slot type' dropdown is 'AMAZON.City'. The 'Prompts' field contains 'Which city you would like to stay in ?'. There's a note: 'You can use the advanced options setting to configure rich messages such as a custom payload, card groups, and SSML.' and an 'Advanced options' button.

The second screenshot shows the configuration for a slot named 'CheckInDate'. The title bar says 'Prompt for slot: CheckInDate' with a message 'what is your check-in-date ??' and a 'Slot type' of 'AMAZON.Date'. A checkbox 'Required for this intent' is checked, with a note: 'The bot will prompt for this slot during the conversation if a value is not provided by the user.' The 'Name' field is 'CheckInDate' and the 'Slot type' dropdown is 'AMAZON.Date'. The 'Prompts' field contains 'what is your check-in-date ??'. There's a note: 'You can use the advanced options setting to configure rich messages such as a custom payload, card groups, and SSML.' and an 'Advanced options' button.

▼ Prompt for slot: Nights

Message: How may days you want to stay ?

⚡ Slot type

AMAZON.AlphaNumeric

×

☒ Required for this intent

The bot will prompt for this slot during the conversation if a value is not provided by the user.

Name

Nights

Slot type

AMAZON.AlphaNumeric ▼

Prompts

How may days you want to stay ?

You can use the advanced options setting to configure rich messages such a custom payload, card groups, and SSML.

Advanced options

- ➔ Customizing “RoomType” slot as there is no default slot in lex
- Go Back to Bot homepage >>>> slot type
 - Add Slot Type >>>> Add a blank slot type

Draft version ▼

English (US) ▼

Successfully built

Add blank slot type

×

Create a custom slot type for your bot.

Slot type name

RoomType

Maximum 100 characters. Valid characters: A-Z, a-z, 0-9, -, _

Cancel

Add

▶ Slot type details

Slot value resolution

Amazon Lex resolves the slot values in an utterance to only the values you provide, or it expands the resolution to related or similar values.

☐ Expand values (default)
Values used as training data.

☒ Restrict to slot values
Use only values provided.

Slot type values

Modify the list of values used to train the machine learning model to recognize values for a slot.

Standard	Tab or ; or enter return for new value	×
Deluxe	Tab or ; or enter return for new value	×
Queen	Tab or ; or enter return for new value	×
Suit	Tab or ; or enter return for new value	×

➔ Go back to Intents >>> slots >>>> Add slot

▼

Prompt for slot: RoomType

Message: Which type of Room would you prefer ??

Slot type

RoomType

×

☒ Required for this intent

The bot will prompt for this slot during the conversation if a value is not provided by the user.

Name

RoomType

Slot type

RoomType

▼

Prompts

Which type of Room would you prefer ??

You can use the advanced options setting to configure rich messages such as a custom payload, card groups, and SSML.

Advanced options

Slot: RoomType Info

×

Slot prompts Info

Prompts to elicit the slot.

▶ Bot elicits information

Message: Which type of Room would you prefer ??

▼ Bot elicits information

Message: Which type of Room would you prefer ??

☐ Play the messages in order [Info](#)
Messages will be used in the predefined order as slot prompts by your bot.

▼ Message group [Info](#)

You can define a text message group to respond using plain text.

Message

Which type of Room would you prefer ??

► Variations - optional

More prompt options

Add custom payloads, SSML, and card groups.

Slot prompts

Prompts to elicit the slot.

☐ Preview

Add ▼

▼ Message group [Info](#)

You can define a text message group to respond using plain text.

Message

Which type of Room would you prefer ??

Slot prompts

Prompts to elicit the slot.

☐ Preview

Add ▲

Add text message group

Add card group

Add custom payload

Add SSML language

▼ Message group [Info](#)

You can define a text message group to respond using plain text.

Message

Which type of Room would you prefer ??

Card 1

+ Add card

You can use response card with Facebook Messenger, Slack, Twilio, or your own client applications.

Image URL

Must be an Amazon S3 object URL.

Title

Maximum 250 characters. Valid characters: A-Z, a-z, 0-9, @, #, \$

Subtitle

Maximum 250 characters. Valid characters: A-Z, a-z, 0-9, @, #, \$

▼ Buttons - optional

Add button

➔ Update Prompts and Update slot After Adding the below buttons

Standard (10k/night) Button title can have up to 50 characters.	Standard Button value can have up to 50 characters.
Button 2 title Deluxe (12k/night) Button title can have up to 50 characters.	Button 2 value Deluxe Button value can have up to 50 characters.
Button 3 title Queen (15k/night) Button title can have up to 50 characters.	Button 3 value Queen Button value can have up to 50 characters.
Button 4 title Suit (20k/night)	Button 4 value Suit

➔ Add one more slot for Guest name

▼ Prompt for slot: GuestName

Message: May I have your name for Reservation ?

Slot type
AMAZON.FirstName

✕

☒ Required for this intent

The bot will prompt for this slot during the conversation if a value is not provided by the user.

Name

GuestName

Slot type

AMAZON.FirstName

▼

Prompts

May I have your name for Reservation ?

You can use the advanced options setting to configure rich messages such as a custom payload, card groups, and SSML.

Advanced options

➔ Add Sample Utterances

Sample utterances (2) Info

What's this?

⚡ Generate utterances

Representative phrases that you expect a user to speak or type to invoke this intent. Amazon Lex extrapolates based on the sample utterances to interpret any user input that may vary from the samples. The priority order of the sample utterances is not used to determine intent classification output.

🔍 Filter

Sort by added (ascending) ▼

Preview

Plain text

Amazon Lex ✕

Draft version ▼

English (US) ▼

Successfully built

Build

Test

< Back to intents list (2)

🔍 Search

Sort by last updated ▼

BookHotel

FallbackIntent

Book hotel

Add utterance

Maximum 500 characters.

Draft version ▾English (US) ▾Successfully builtBuildTest

i want to book hotel in pune on 22-05-2025 for 3 days

Add utterance

Use available slot

Location

CheckInDate

Nights

RoomType

er's initial request. You can also configure next step in the conversation and branch based

request

Draft version ▾English (US) ▾Successfully builtBuildTest

i want to book hotel in pune on 22-05-2025 for 3 days

Add utterance

Use available slot

Location

CheckInDate

Nights

RoomType

er's initial request. You can also configure next step in the conversation and branch based

request

Draft version ▾English (US) ▾Successfully builtBuildTest

i want to book hotel in {Location} on 22-05-2025 for 3 days

Add utterance

Use available slot

Location

CheckInDate

Nights

RoomType

GuestName

er's initial request. You can also configure next step in the conversation and branch based

request

Draft version ▾English (US) ▾Successfully builtBuildTest

i want to book hotel in {Location} on {CheckInDate} for 3 daysAdd utterance

Location

CheckInDate

Nights

RoomType

Sample utterances (2) Info

What's this?Generate utterances

Representative phrases that you expect a user to speak or type to invoke this intent. Amazon Lex extrapolates based on the sample utterances to interpret any user input that may vary from the samples. The priority order of the sample utterances is not used to determine intent classification output.

Filter

Sort by added (ascending) ▾

PreviewPlain text

Book Hotel

i want to book hotel in {Location} on {CheckInDate} for {Nights} days

➔ Tick the Code Hooks box , to use Lambda Function

Draft version ▾English (US) ▾Successfully builtBuildTest

▼ Code hooks - optional Info

☒ Use a Lambda function for initialization and validation

Allow dialog code hook invocation. Turn this off to prevent invocation of the code hook throughout this intent.

3. Creating a Table in DynamoDB to store data

➔ Search DynamoDB in AWS search box >>>> Create Table

The screenshot shows the 'Create table' page in the AWS DynamoDB console. The 'Table details' section is active, showing the 'Table name' as 'HotelBookings'. A description states: 'DynamoDB is a schemaless database that requires only a table name and a primary key when you create the table.' Below the table name, it says 'This will be used to identify your table.' and 'Between 3 and 255 characters, containing only letters, numbers, underscores (_), hyphens (-), and periods (.)'.

This screenshot shows the 'Partition key' section of the 'Create table' page. The 'Partition key' is 'BookingId' and the data type is 'String'. A description states: 'The partition key is part of the table's primary key. It is a hash value that is used to retrieve items from your table and allocate data across hosts for scalability and availability.' Below the partition key, it says '1 to 255 characters and case sensitive.'

This screenshot shows the 'Tags' section of the 'Create table' page. It states 'No tags are associated with the resource.' and has an 'Add new tag' button. At the bottom right, the 'Create table' button is highlighted with a yellow box and a yellow arrow points to it.

The screenshot shows the 'Tables (1)' page in the AWS DynamoDB console. The table 'HotelBookings' is listed with the following details:

Name	Status	Partition key	Sort key	Indexes	Replication Regions	Deletion protection
HotelBookings	Active	BookingId (S)	-	0	0	Off

4. Creating Lambda Function

➔ Go to AWS search box and search Lambda >>>> Create Function



The screenshot shows the 'Create function' page in the AWS console. The breadcrumb navigation at the top reads 'Lambda > Functions > Create function'. The main heading is 'Create function' with an 'Info' link. Below it, a text prompt says 'Choose one of the following options to create your function.' There are three radio button options: 'Author from scratch' (selected), 'Use a blueprint', and 'Container image'. The 'Author from scratch' option has a subtext 'Start with a simple Hello World example.' Below these options is the 'Basic information' section. It has a subheading 'Function name' and a text prompt 'Enter a name that describes the purpose of your function.' A text input field contains the value 'bookhotel'. Below the input field, a note states: 'Function name must be 1 to 64 characters, must be unique to the Region, and can't include spaces. Valid characters are a-z, A-Z, 0-9, hyphens (-), and underscores (_).'

The screenshot shows the 'Runtime' tab of the 'Create function' page. The breadcrumb navigation is 'Lambda > Functions > Create function'. The subheading is 'Runtime' with an 'Info' link. The text prompt says 'Choose the language to use to write your function. Note that the console code editor supports only Node.js, Python, and Ruby.' A dropdown menu is open, showing a search bar and a list of languages. The list includes 'Other supported', 'Java 11', 'Java 17', 'Java 8 on Amazon Linux 2', 'Node.js 18.x', 'Node.js 20.x', 'Python 3.10', 'Python 3.11', 'Python 3.12', 'Python 3.9' (which is highlighted with a checkmark), and 'Ruby 3.2'. To the right of the dropdown, there is a circular refresh icon and some partially visible text about logs.


The screenshot shows the 'Permissions' tab of the 'Create function' page. The breadcrumb navigation is 'Lambda > Functions > Create function'. The subheading is 'Permissions' with an 'Info' link. The text prompt says 'By default, Lambda will create an execution role with permissions to upload logs to Amazon CloudWatch Logs. You can customize this default role later when adding triggers.' There are two expandable sections: 'Change default execution role' and 'Additional configurations'. The 'Additional configurations' section has a text prompt 'Use additional configurations to set up code signing, function URL, tags, and Amazon VPC access for your function.' At the bottom right, there are two buttons: 'Cancel' and 'Create function'. A large yellow arrow points down towards the 'Create function' button, which is also highlighted with a yellow rectangle.

➔ Integration of Lex with Lambda



- Go to Aliases in the Bot >>>>TestBotAlias
- Go to Languages >>>> click on English(US)

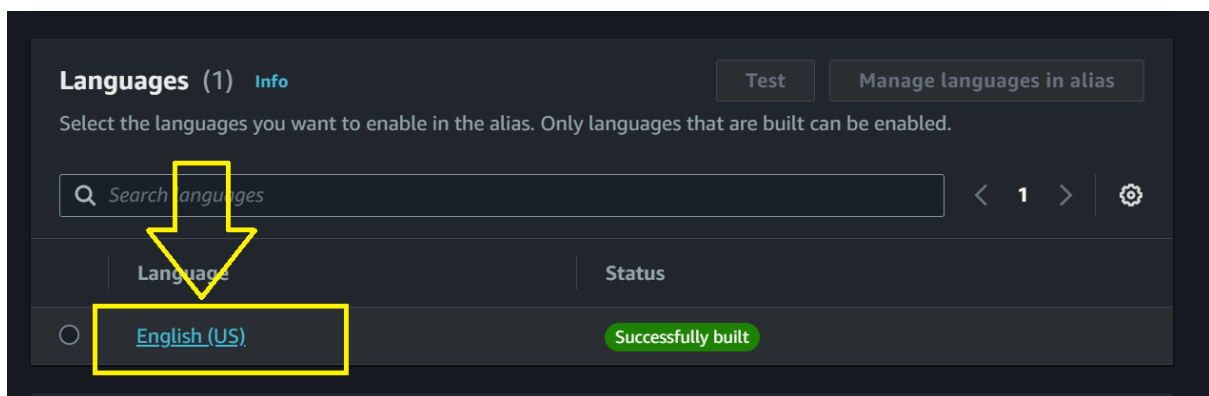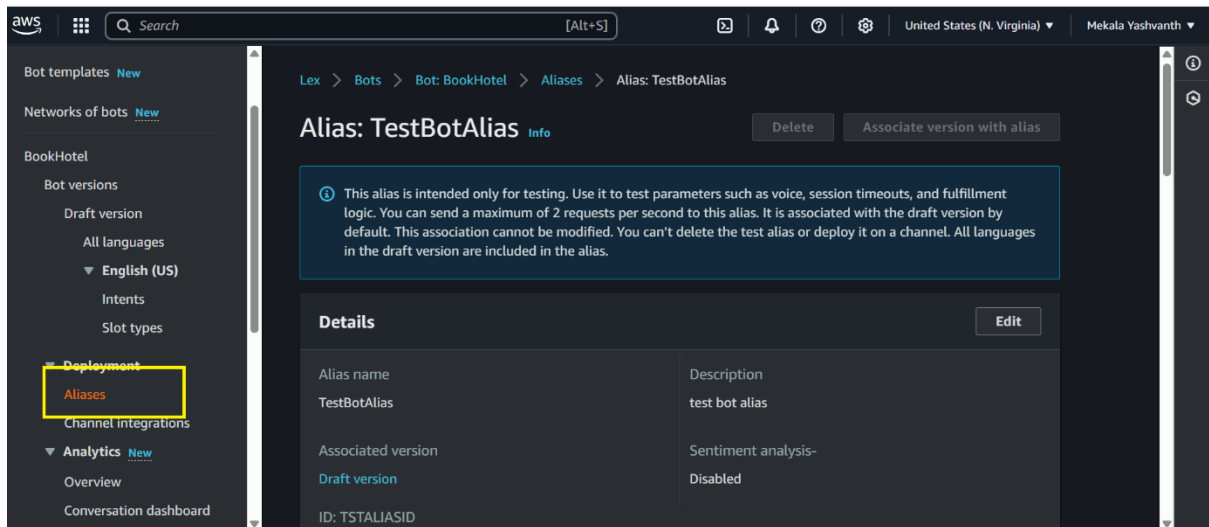


Choose Lambda function and save

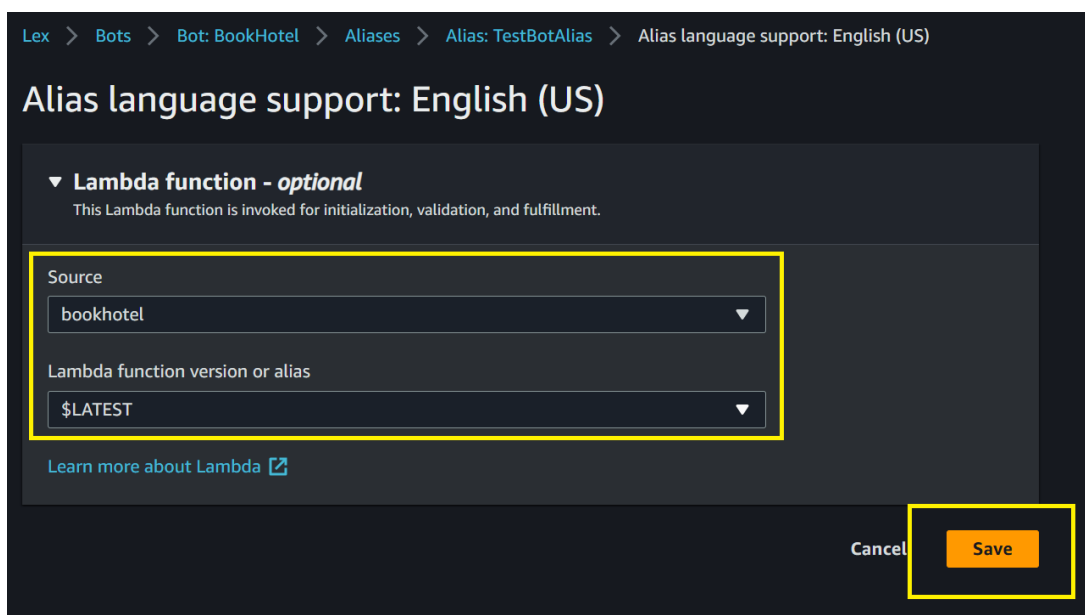

➔ Deployment of Lambda Function

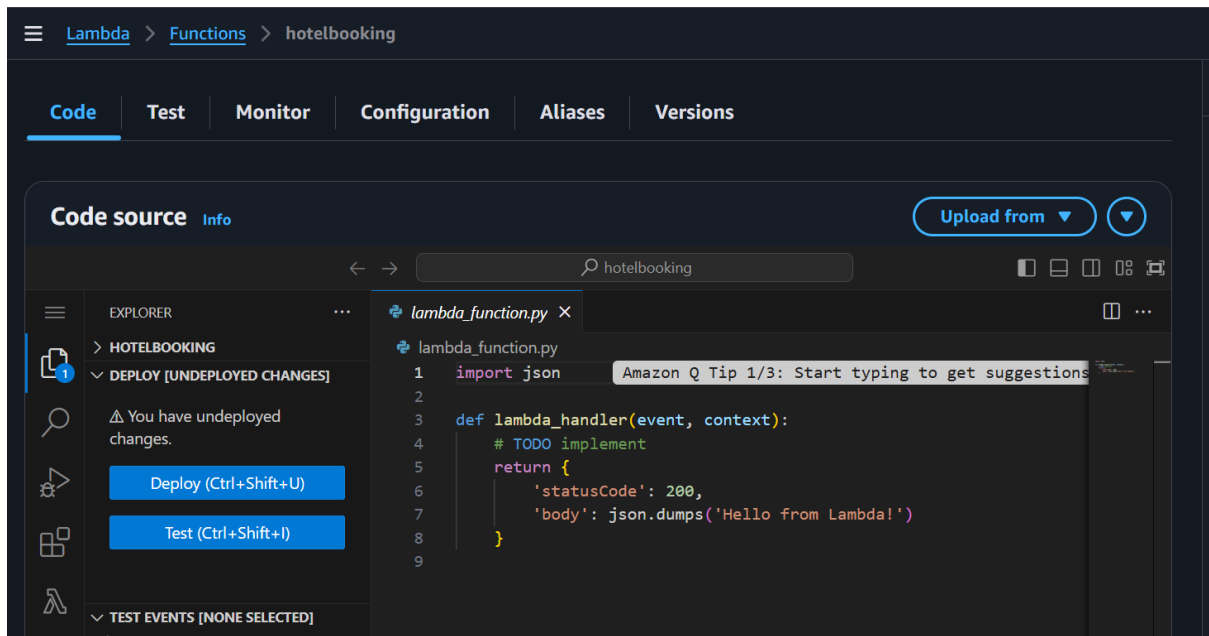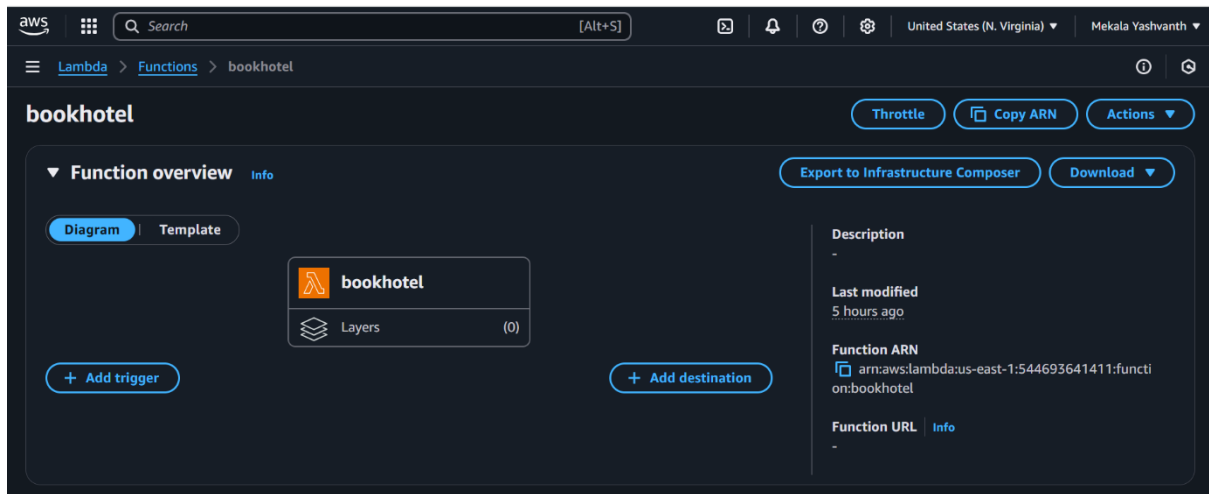

➔ Write the python code for fulfilment of the Bot and then Deploy

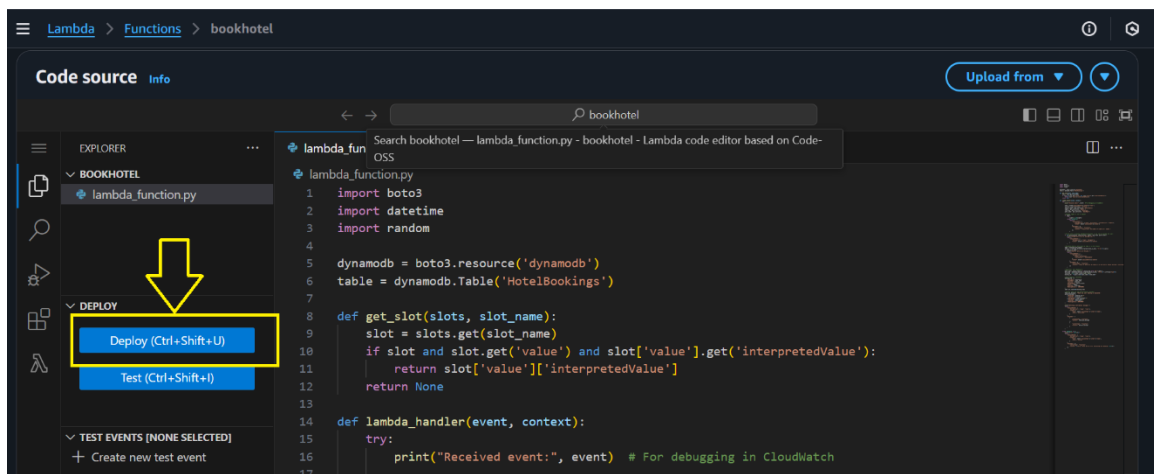

< Python Code for Lambda Function >

```
import boto3
import datetime
import random

dynamodb = boto3.resource('dynamodb')
table = dynamodb.Table('HotelBookings')

def get_slot(slots, slot_name):
    slot = slots.get(slot_name)
    if slot and slot.get('value') and
slot['value'].get('interpretedValue'):
        return slot['value']['interpretedValue']
    return None

def lambda_handler(event, context):
    try:
        print("Received event:", event) # For debugging in
CloudWatch

        slots = event['sessionState']['intent']['slots']
        location = get_slot(slots, 'Location')
        check_in_date = get_slot(slots, 'CheckInDate')
```

```

nights = get_slot(slots, 'Nights')
room_type = get_slot(slots, 'RoomType')
guest_name = get_slot(slots, 'GuestName')

# Convert nights to int if present
if nights:
    try:
        nights = int(nights)
    except ValueError:
        return {
            "sessionState": {
                "dialogAction": {"type": "ElicitSlot",
"slotToElicit": "Nights"},
                "intent": event['sessionState']['intent']
            },
            "messages": [{
                "contentType": "PlainText",
                "content": "Please enter the number of nights as a
number."
            }]
        }

# If any slot is missing, delegate dialog back to Lex (let
Lex prompt the user)

```

```

    if not all([location, check_in_date, nights, room_type,
guest_name]):

        print("Delegating to Lex for missing slot.")
        return {
            "sessionState": {
                "dialogAction": {"type": "Delegate"},
                "intent": event['sessionState']['intent']
            }
        }

# Validate check-in date (must be today or in the future)
today = datetime.date.today()

check_in = datetime.datetime.strptime(check_in_date,
"%Y-%m-%d").date()

if check_in < today:

    print("Check-in date is in the past.")
    return {
        "sessionState": {
            "dialogAction": {
                "type": "ElicitSlot",
                "slotToElicit": "CheckInDate"
            },
            "intent": event['sessionState']['intent']
        },
    },

```

```
        "messages": [{
            "contentType": "PlainText",
            "content": "Check-in date must be today or in the
future. Please provide a valid date."
        }]
    }
```

```
# Generate a short Booking ID
guest_code = (guest_name[:3] if guest_name else
"GST").upper()
date_code = datetime.datetime.strptime(check_in_date,
"%Y-%m-%d").strftime("%y%m%d")
rand_code = str(random.randint(1000, 9999))
booking_id = f'{guest_code}{date_code}-{rand_code}'
```

```
# Store booking in DynamoDB
booking_item = {
    'BookingId': booking_id,
    'GuestName': guest_name,
    'Location': location,
    'CheckInDate': check_in_date,
    'Nights': nights,
    'RoomType': room_type,
    'BookingStatus': 'CONFIRMED'
}
```

```

table.put_item(Item=booking_item)

# Prepare thank you and booking details messages
thank_you_message = "Thank you, your Booking is
Completed."

details_message = (
    f"BookingId: {booking_id}\n"
    f"Location: {location}\n"
    f"CheckInDate: {check_in_date}\n"
    f"GuestName: {guest_name}\n"
    f"RoomType: {room_type}\n"
    f"BookingStatus: CONFIRMED"
)

print("Returning confirmation messages.")
return {
    "sessionState": {
        "dialogAction": {"type": "Close"},
        "intent": {
            "name": event['sessionState']['intent']['name'],
            "state": "Fulfilled"
        }
    },
    "messages": [

```

```

        {
            "contentType": "PlainText",
            "content": thank_you_message
        },
        {
            "contentType": "PlainText",
            "content": details_message
        }
    ] }

```



except Exception as e:

```

    print(f"Error: {str(e)}")
    return {
        "sessionState": {
            "dialogAction": {"type": "Close"},
            "intent": {
                "name": event['sessionState']['intent']['name'],
                "state": "Failed"
            }
        },
        "messages": [{
            "contentType": "PlainText",
            "content": f"Sorry, there was an error processing your
booking: {str(e)}"
        }] }


```

➔ Configuration of lambda for accessing DynamoDB

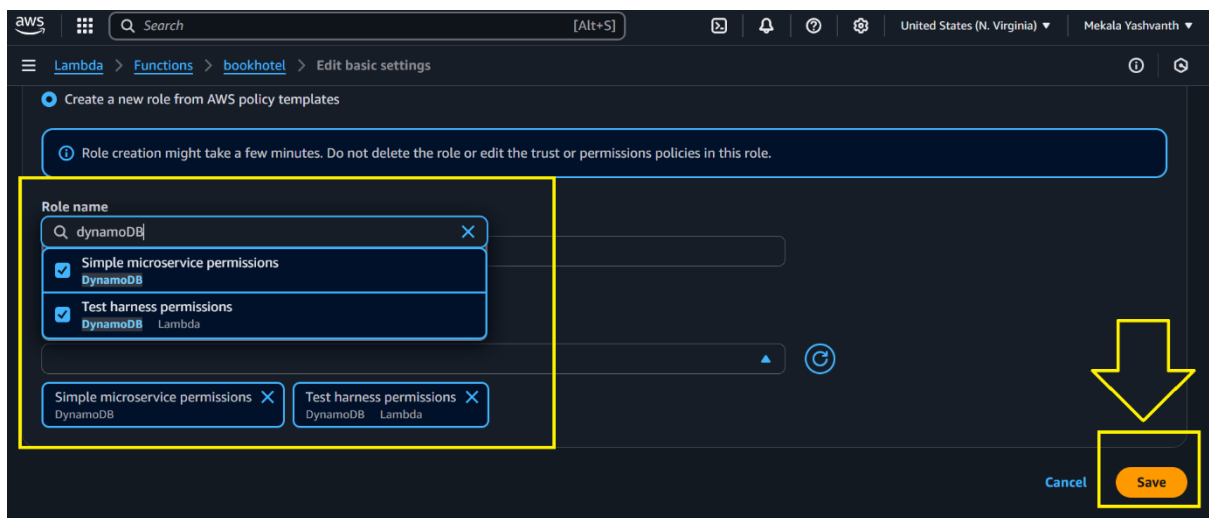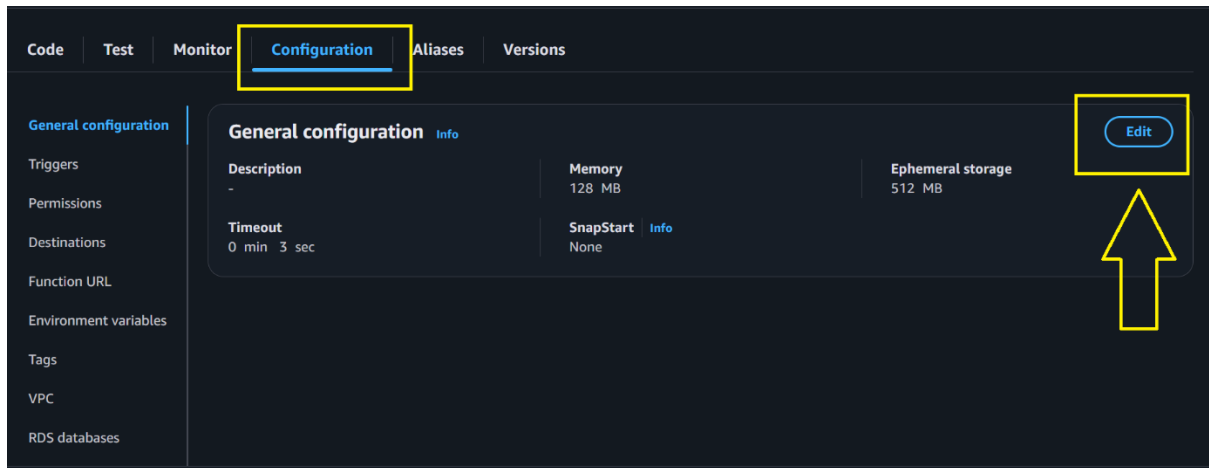


➔ After Deployment of code Go back to the Intent





➔ Click on 'Build'

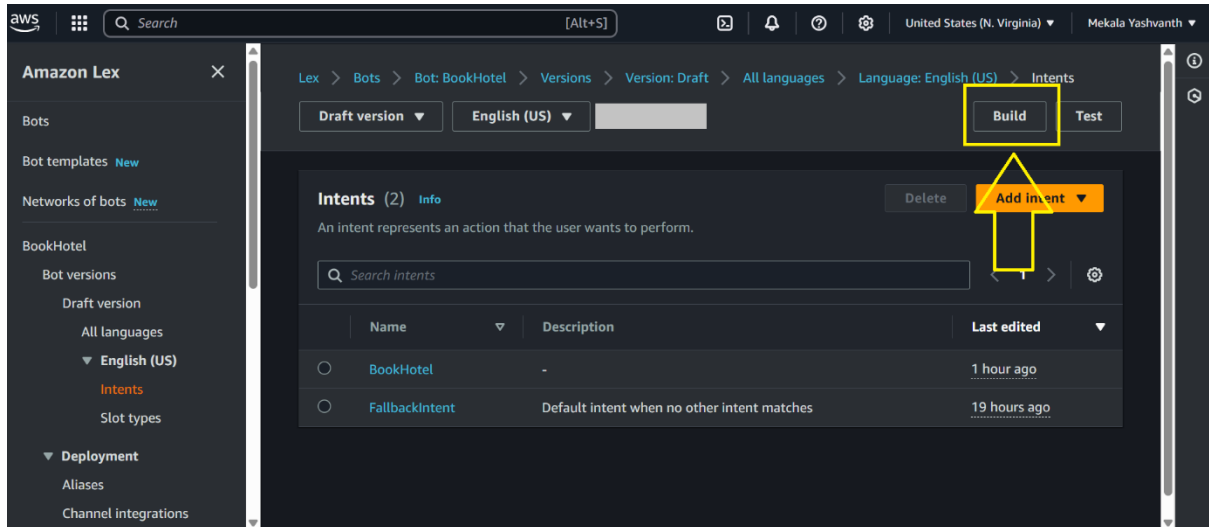


➔ After the Bot is Successfully Built Go and test the Bot

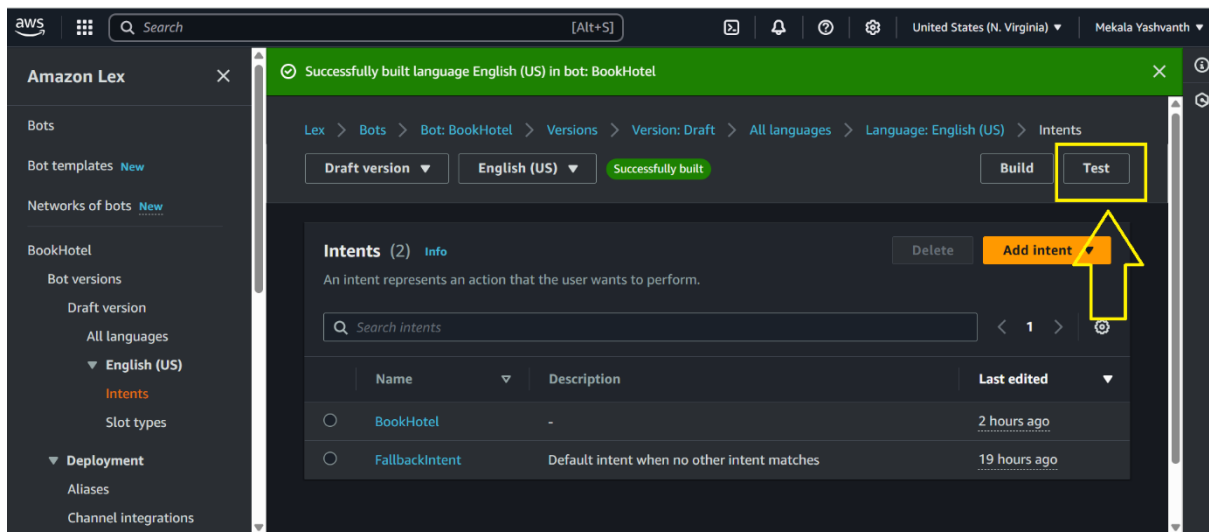

5. Testing of Bot

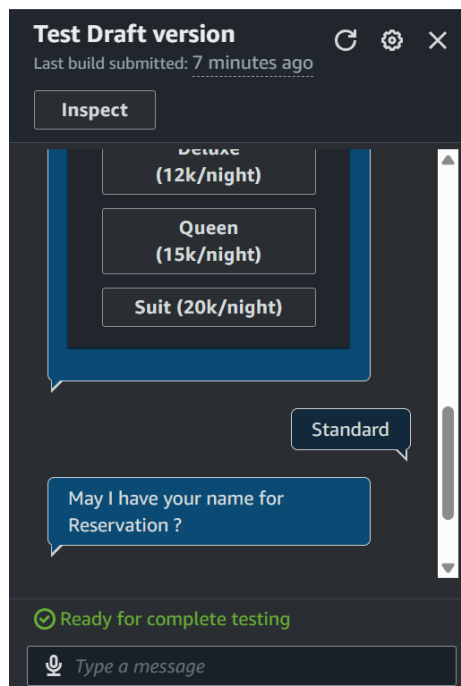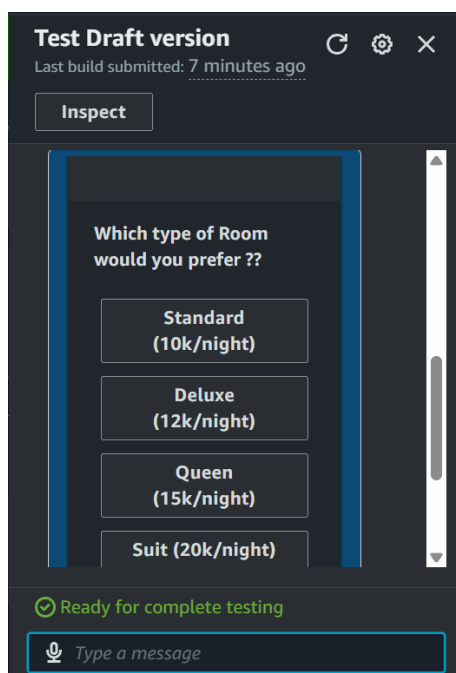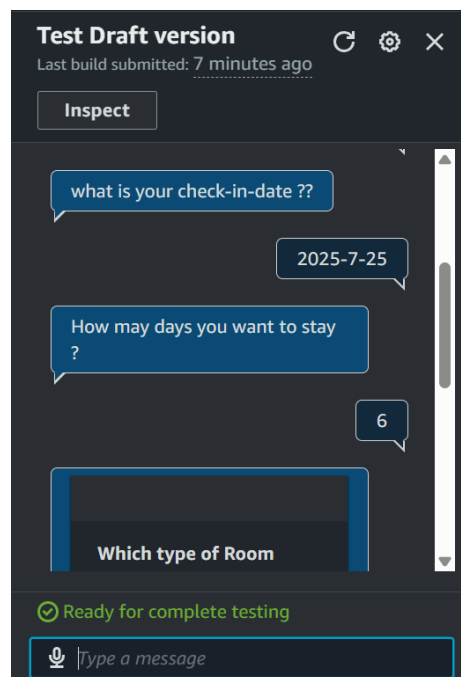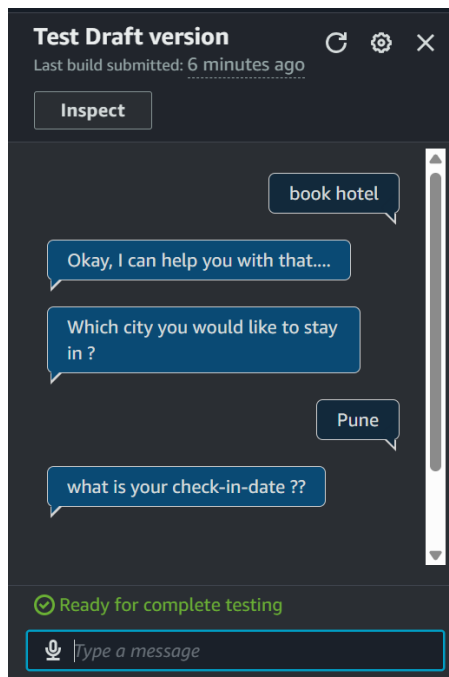

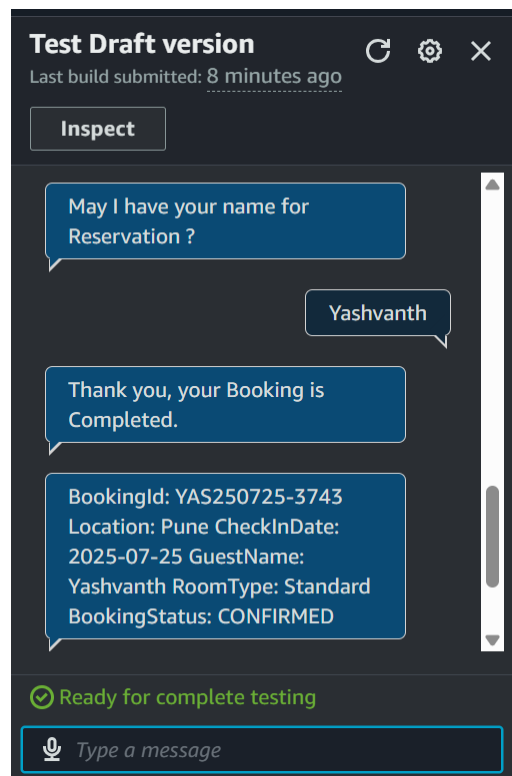

Bot testing is successful.

➔ HotelBookings Table in DynamoDB after the interaction with the Bot i.e Booking History.

aws Search [Alt+S] United States (N. Virginia) Mekala Yashvanth

DynamoDB > Explore items >

Table: HotelBookings - Items returned (13) Actions Create item

Scan started on July 04, 2025, 19:34:20

	BookingId (String)	BookingStatus	CheckInDate	GuestNa...	Location	Nights	RoomType
☐	ARA250712-1859	CONFIRMED	2025-07-12	Aravind	chennai	6	Deluxe
☐	OMP250724-5485	CONFIRMED	2025-07-24	Omprakash	pune	2	Suit
☐	Sruthi-2025-10-22-ch...	CONFIRMED	2025-10-22	Sruthi	chennai	3	Deluxe
☐	GAN250809-6518	CONFIRMED	2025-08-09	Ganesh	hyderabad	5	Deluxe
☐	yash-2025-12-22-pune	CONFIRMED	2025-12-22	yash	pune	6	Queen
☐	NET251201-5856	CONFIRMED	2025-12-01	Netaji	delhi	2	Suit
☐	YAS250725-3743	CONFIRMED	2025-07-25	Yashvanth	Pune	6	Standard
☐	PRA250808-7340	CONFIRMED	2025-08-08	Prasad	chennai	3	Standard

6. External Integration of Bot

< Integration of the Bot with WhatsApp >

Go to “Twilio.com” and create an account.

➔ Go to Phone Numbers >>>> Manage >>>> Active numbers

The top screenshot shows the Twilio 'Active Numbers' page. The left sidebar has 'Phone Numbers' selected, with 'Active numbers' highlighted under 'Manage'. The main content area says 'You don't have any Twilio phone numbers.' and provides links to 'Buy a new Twilio Number' or 'Port a Number'. Below this is a section for 'Sending OTP or 2FA?' with a 'Learn more about Verify' link.

The bottom screenshot shows the 'Buy a Number' page. The left sidebar has 'Buy a number' highlighted under 'Manage'. The main content area has search filters for 'Country' (us (+1) United States - US) and 'Capabilities' (SMS selected). Search criteria include 'Number' and 'First part of number'. A table of available numbers is shown below:

Number	Type	Capabilities				Address Requirement	Monthly fee	Buy
		Voice	SMS	MMS	Fax			
+1 775 637 3028 ▲ Gabbs, NV US	Local	☎	💬	💬	📠	None	\$1.15	Buy

Twilio Home

Account Dashboard

Develop Monitor

Phone Numbers

Manage

Active numbers

Released numbers

Buy a number

Verified Caller IDs

Twiml apps

Port & Host

Global Routing

Routing [Regional](#)

Voice and Messaging will be routed to the United States (US1) Region. You can re-route in the number configuration after purchase.

Emergency Calling Enablement

To avoid a \$75.00 fee per each Emergency Call, this number requires the addition of an emergency address after purchase. You can add an address in the Phone Number's page.

☒ I agree to comply with the [Emergency calling terms and conditions](#).

Cancel Buy +1 775 637 3028

Can't find a number?

Twilio Home

Yash Trial: \$15.50 Upgrade

Jump to...

Admin

Active Numbers

Buy a number

Inventory Filters

Number

Configuration Filters

Voice URL

Filter Reset filters

Number	Friendly Name	Capabilities				Active Configuration
		Voice	SMS	MMS	Fax	
+1 775 637 3028	(775) 637-3028					Voice Webhook to POST: https://demo.twilio.com/welcome/voice/ Messaging Webhook to POST: https://demo.twilio.com/welcome/sms/reply

← Previous Next →

➔ Now got to Amazon Lex and Create new Bot Version

Amazon Lex

Bots

Bot templates [New](#)

Networks of bots [New](#)

BookHotel

Bot versions

Draft version

All languages

English (US)

Intents

Slot types

Deployment

Aliases

Channel integrations


Lex > Bots > Bot: BookHotel > Versions

Versions (1) [Info](#)



Actions [Create version](#)



Search versions

Version	Description	Created
☐ Draft version	-	13 hours ago

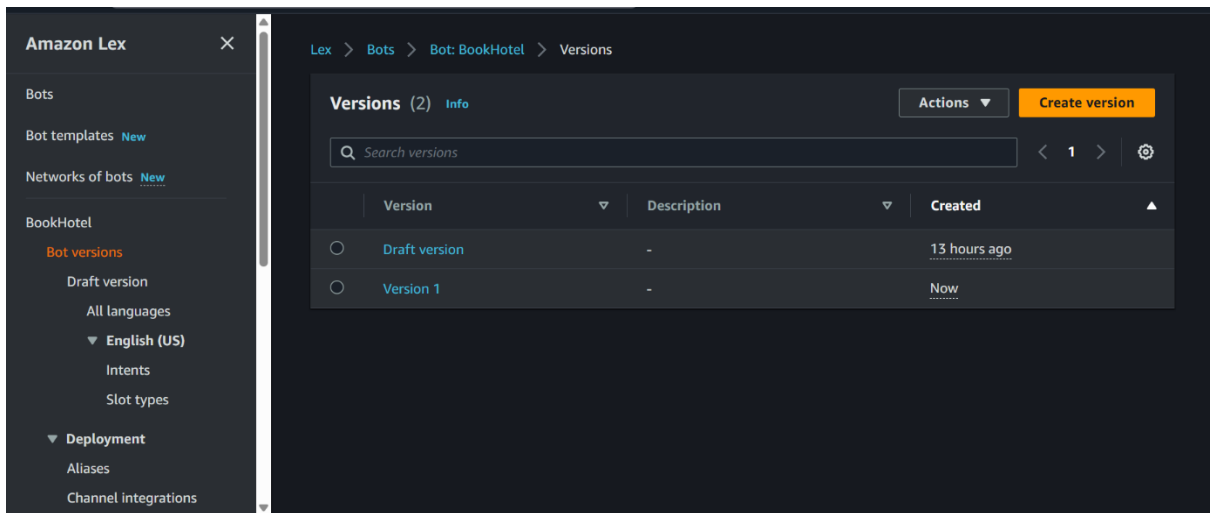


→ Go to Aliases and create new Alias


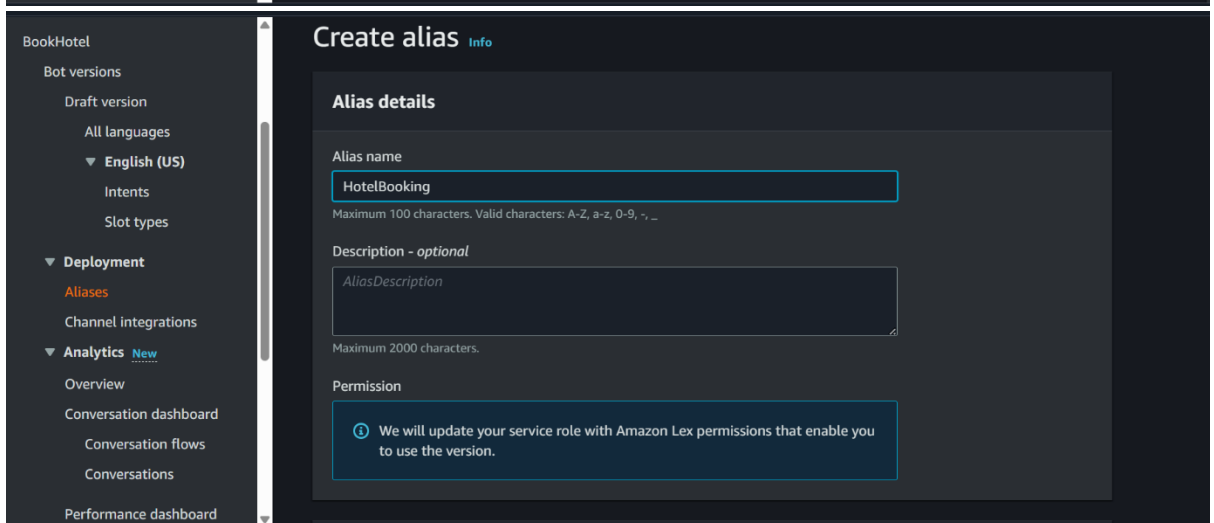
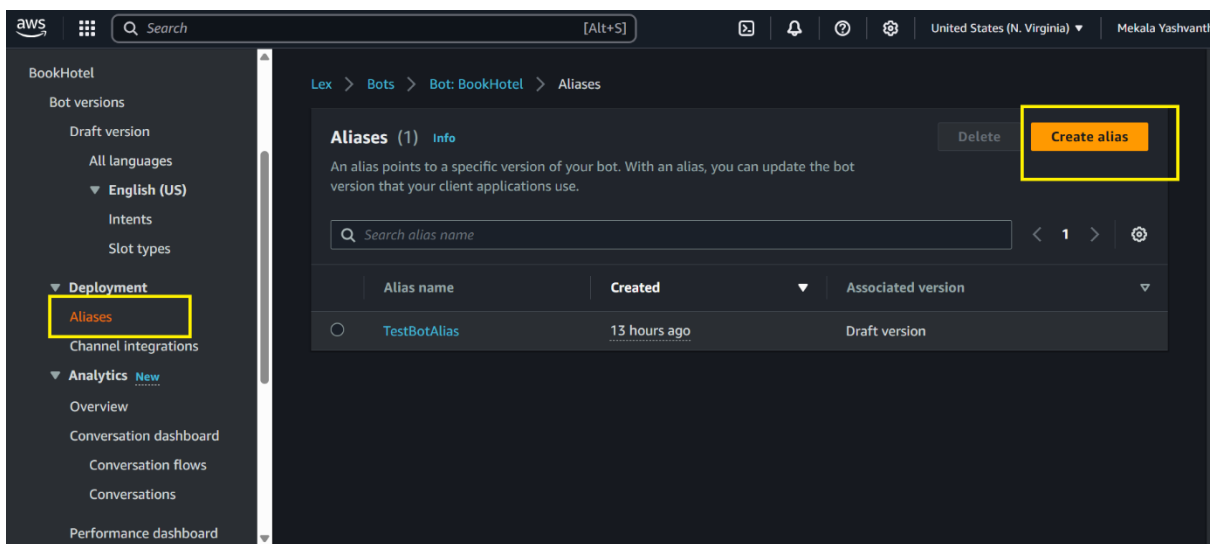


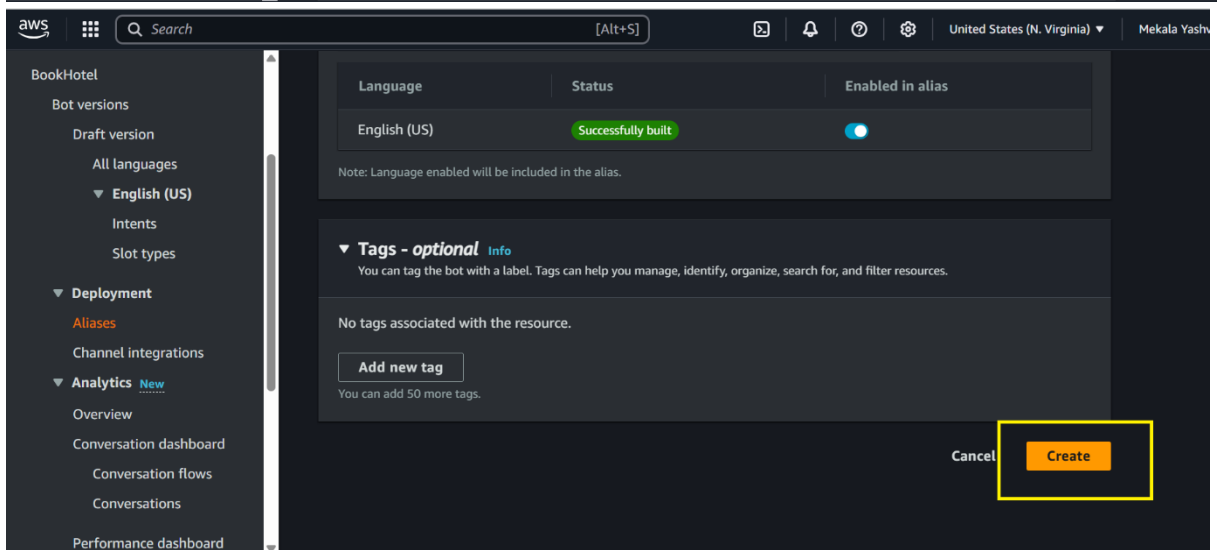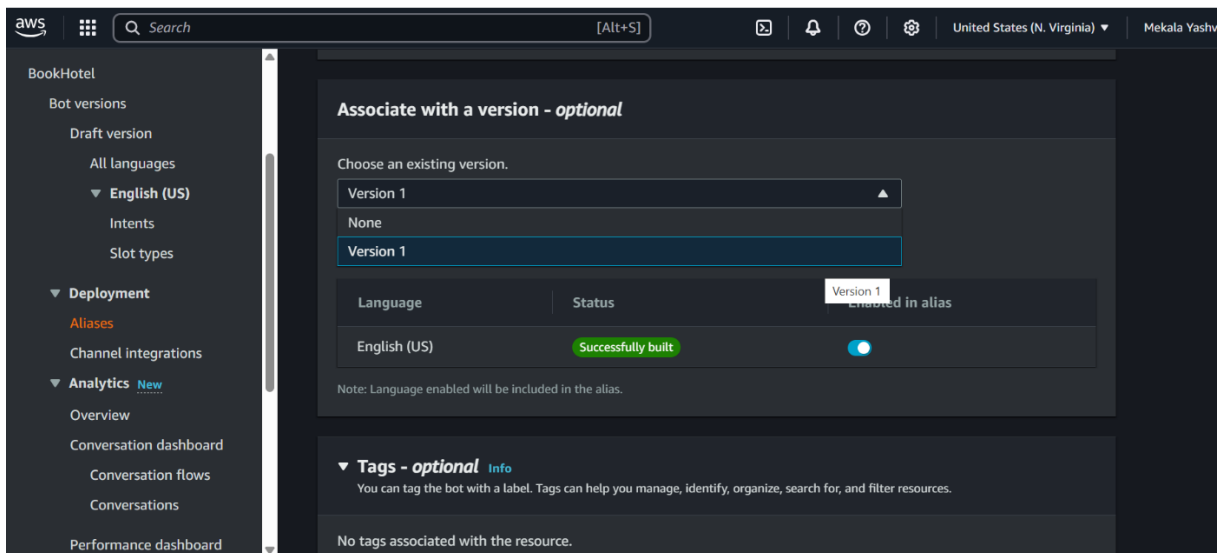

➔ Integrate Newly created Alias with our Existing Lambda Function

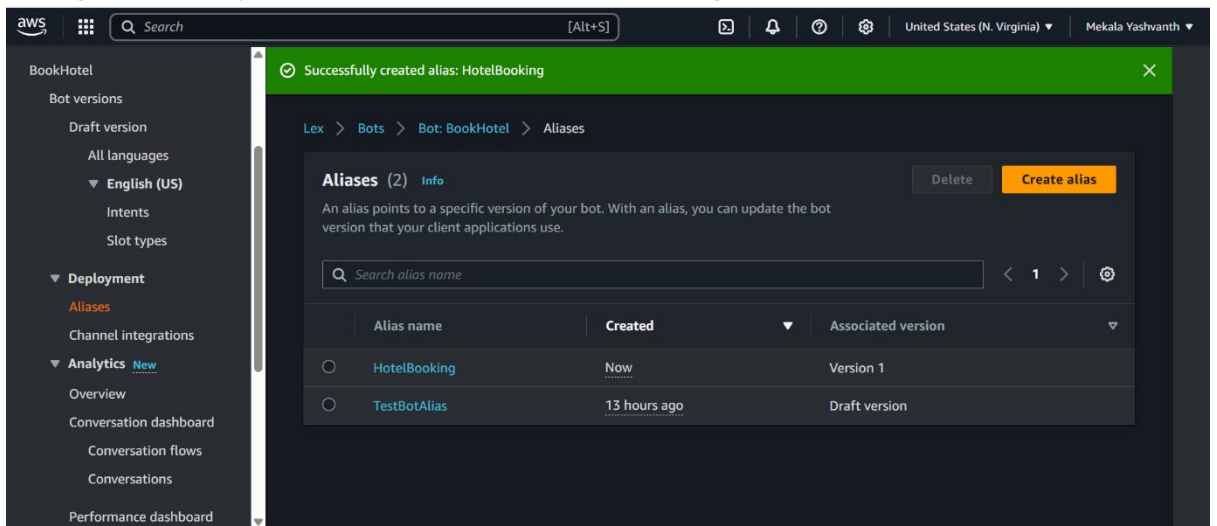

➔ Go to Channel Integrations >>>> Add Channel

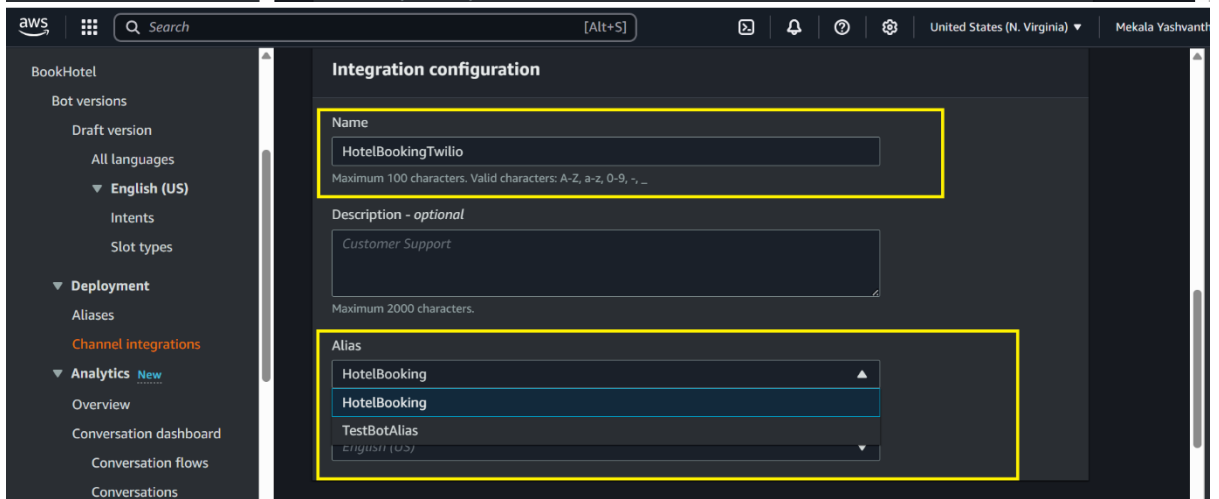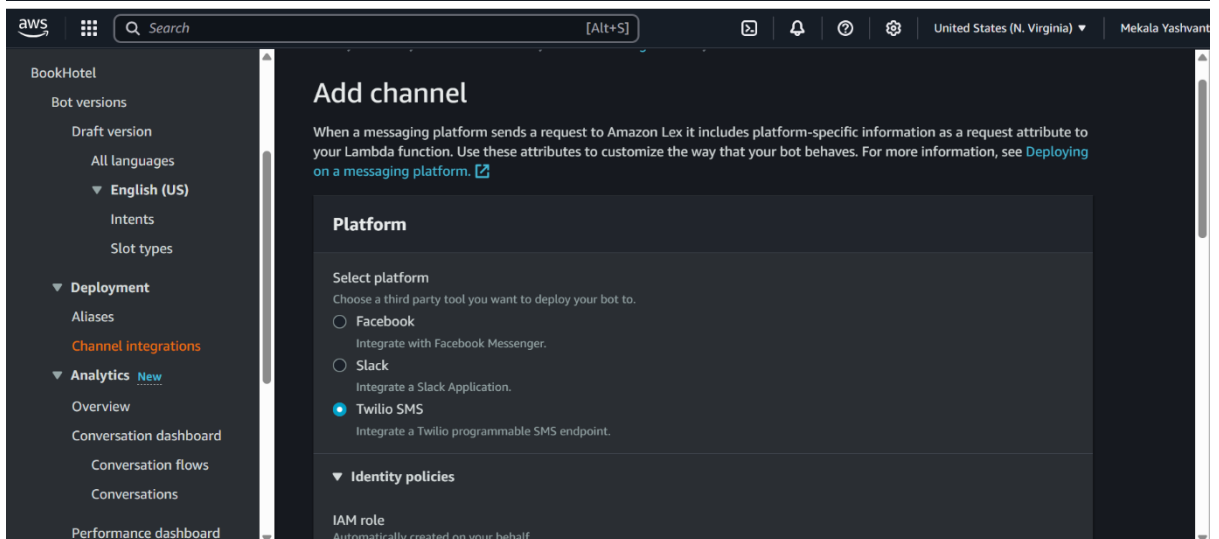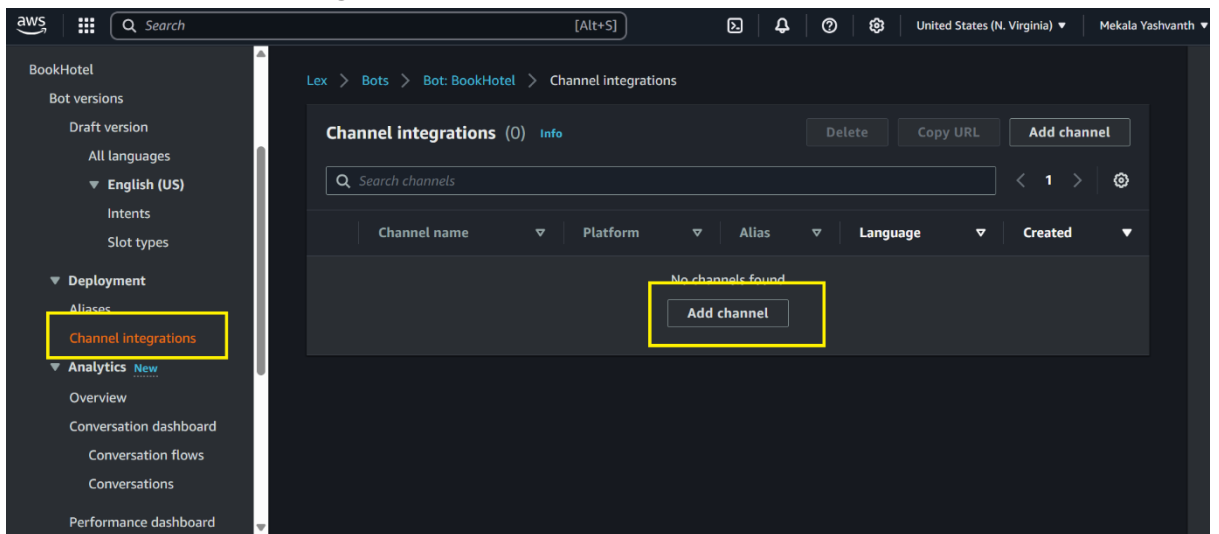

→ Copy and Paste the Acc SID and Auth Token of Twilio Account

Maximum 2000 characters.

Alias
HotelBooking

Language
English (US)

Additional configuration

Account SID
ACe7d1a49c...

Authentication token
9c60222bf2e...

Cancel Add

Successfully created channel HotelBookingTwilio View details

Lex > Bots > Bot: BookHotel > Channel integrations

Channel integrations (1) Info Delete Copy URL Add channel

Search channels < 1 > ⚙

Channel name	Platform	Alias	Language	Created
HotelBookingTwilio	TwilioSms	HotelBooking	English (US)	Now

→ Copy the Call Back URL in HotelBookingTwilio

Description - Language English (US)

Use this generated callback URL to connect your channel to the alias listed. Learn more

Callback URL

Endpoint
https://channels.lex.us-east-1.amazonaws.com/...

Copy

➔ Go to Twilio >>>>Messaging>>>Tryitout>>>Send a WhatsApp Message>>>SandBox Settings and Paste the Call Back URL.

Twilio Home Yash Trial: \$15.50 Upgrade Jump to... Admin

Try WhatsApp

Twilio Sandbox for WhatsApp lets you test your app in a developer environment without WhatsApp approval for your account.

Sandbox Sandbox settings

Sandbox Configuration

To send and receive messages from the Sandbox to your Application, configure your endpoint URLs. [Learn more](#)

When a message comes in Method POST

Status callback URL Method GET

Save

-----Bot Interaction in WhatsApp-----

