

```
#include <stdlib.h>
#include <string.h>
#include <ctype.h>
```

```
#define MAXPAROLA 30
#define MAXRIGA 80
```

```
int main(int argc, char *argv[])
{
    int freq[MAXPAROLA]; /* vettore di contatori
delle frequenze delle lunghezze delle parole */
    char riga[MAXRIGA];
    int i, inizio, lunghezza;
    FILE *f;
```

```
for(i=0; i<MAXPAROLA; i++)
    freq[i]=0;
```

```
if(argc != 2)
```

```
{
    fprintf(stderr, "ERRORE, serve un parametro con il nome del file\n");
    exit(1);
}
```

```
f = fopen(argv[1], "r");
if(f==NULL)
```

```
{
    fprintf(stderr, "ERRORE, impossibile aprire il file %s\n", argv[1]);
    exit(1);
}
```

```
while( fgets( riga, MAXRIGA, f ) != NULL )
```



High Level Programming

Associative containers

Stefano Quer

Dipartimento di Automatica e Informatica

Politecnico di Torino

License Information

This work is licensed under the license



Attribution-NonCommercial-NoDerivatives 4.0 International

This license requires that reusers give credit to the creator. It allows reusers to copy and distribute the material in any medium or format in unadapted form and for noncommercial purposes only.

① **BY:** Credit must be given to you, the creator.

② **NC:** Only noncommercial use of your work is permitted.

Noncommercial means not primarily intended for or directed towards commercial advantage or monetary compensation.

③ **ND:** No derivatives or adaptations of your work are permitted.

To view a copy of the license, visit:

<https://creativecommons.org/licenses/by-nc-nd/4.0/?ref=chooser-v1>

Introduction

- ❖ Associative containers support lookup and retrieval by a key
- ❖ The two primary associative containers are
 - Maps, whose elements are pairs **key-value**
 - The key is used to access the value
 - Sets, whose elements are just **keys**
 - The set support efficient query as to whether a key is present
- ❖ Each associative container
 - Is either a **map** or a **set**
 - Requires **unique** keys or allows **multiple** keys
 - Stores elements in **order** or **not**

Associative containers

❖ The word

- **Multi** indicates multiple keys
- **Unordered** indicates the use of a hash function

Type	Meaning
map	Associative array; hold pairs key-value.
set	Container in which the key is the value.
multimap	A map in which a key can appear multiple times.
multiset	A set in which a key can appear multiple times.
unordered_map	A map organized using a hash function.
unordered_set	A set organized using a hash function.
unordered_multimap	Multi map organized using a hash function.
unordered_multiset	Multi set organized using a hash function.

Main operations

❖ The main operations on associative containers are

➤ Insertion, extraction, and access

For a full list of operations (versions), please see the documentation

Operation	Meaning
<small>c is an instance of the container</small> c.insert(v)	Insert element v in the associative container c.
c.emplace(argv)	Construct an element from argv and insert it in c. For map and set, argv is created and inserted only if the key is not already in the container.
c.erase(k)	Removes every element with key k from c.
c.erase(b,e)	Removes every element in the range denoted by the iterator b and e.
c[k]	Returns the element with key k. If k is not in c, adds a new value (value-initialized) with the key k.
c.at(k)	Check access to the element with key k. Throws an out_of_range exception if k is not in c.

Extra operations


- ❖ Extra (more complex) operations on associative containers
 - Search a key or a key range

Operation	Meaning
<code>c.find(k)</code>	Returns an iterator to the first element with key <code>k</code> .
<code>c.count(k)</code>	Returns the number of elements with key <code>k</code> .
<code>c.lower_bound(k)</code>	Returns an iterator to the first element with key not less than <code>k</code> in <code>c</code> .
<code>c.upper_bound(k)</code>	Returns an iterator to the first element with key greater than <code>k</code> in <code>c</code> .
<code>c.equal_range(k)</code>	Returns a pair of iterators denoting the element with key <code>k</code> . If <code>k</code> is not present both members are <code>c.end()</code> .


Maps

❖ Maps are associative containers consisting of pairs key-value

➤ In maps, the keys are sorted

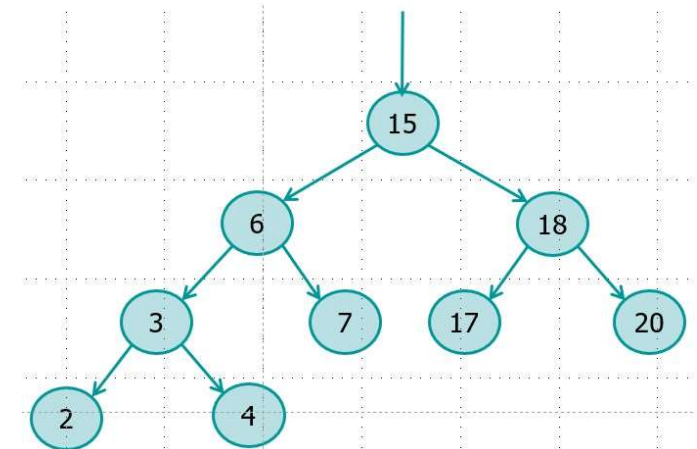

➤ In unordered maps, there is no order among keys

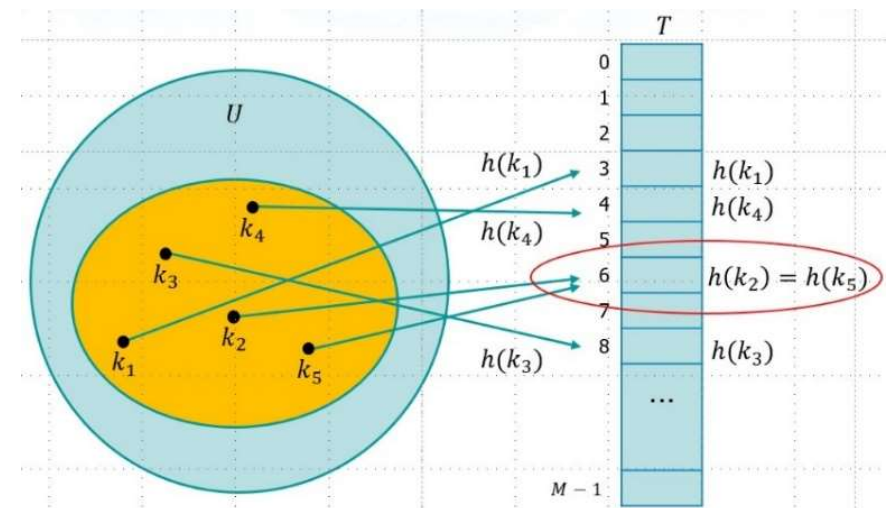


Maps

❖ Complexity for random access, search, insertion, and removal is

➤ $O(\log N)$ for maps


- Internally are a tree (usually AVL- or R/B-Tree)

N is the number of element stored in the container

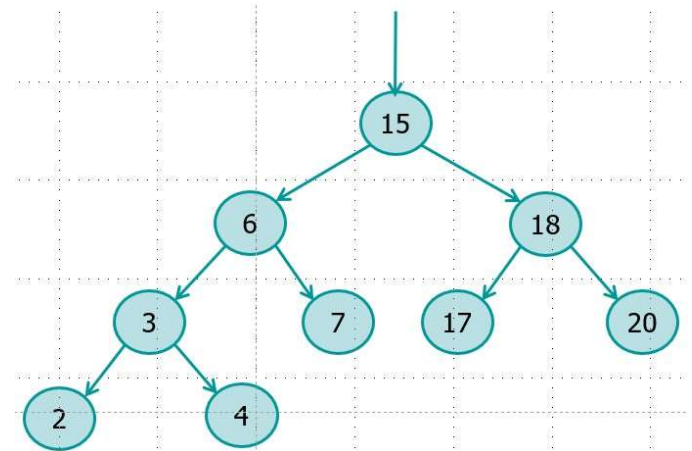

➤ $O(1)$ for unordered maps

- Internally are a hash-table using a hash-function (h)

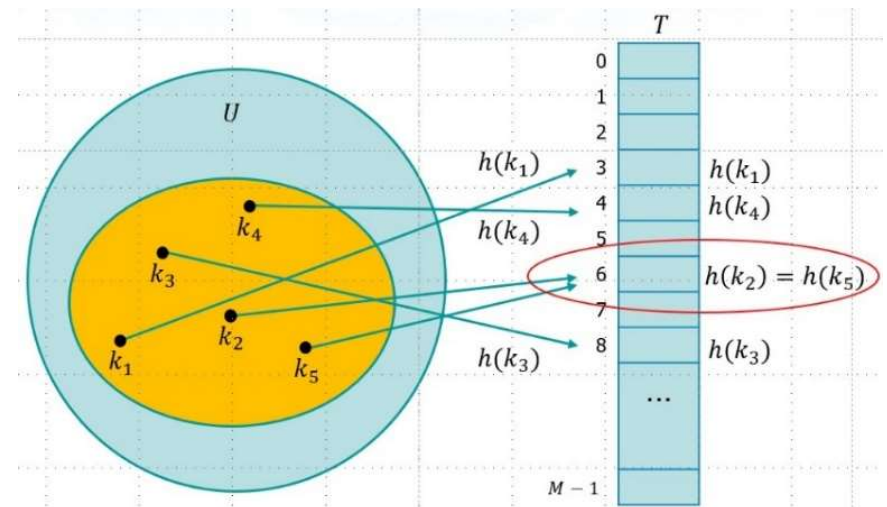

Maps

❖ Main characteristics

- Defined in the header **map** or **unordered_map**
- Maps and unordered maps have a very similar user interface
 - In a **map** there is no way to access keys or values in order
- Keys are required to be **unique**
- To check if a key exists, we may use the function **count**

Examples

Definitions

```
#include <map>

map<string,int> mymap;           // Empty map

// Map with three elements
map<string, string> authors = {
    { "Joyce ", "James " },
    { "Austen ", "Jane " },
    { "Dickens ", "Charles " } };
```

Examples

Insertions

```
map<string,size_t> word_count;  
  
word_count.insert({ "this",1});  
word_count.insert(make_pair{ "this",1});  
word_count.insert(pair<string,size_t> ( "this",1));  
word_count.insert(map<string,size_t>::value_type( "this",1));
```

Empty map

Equivalent insertion

See documentation for:
key_type, mapped_type,
value_type

❖ Elements of a map are objects of **pair** type

- A pair holds two data members
- Unlike other library types, these two data members are public
 - They are named **first** and **second**, respectively

The pair type

❖ Pairs have their own set of operations

Operation	Meaning
<code>pair<T1,T2> p;</code>	Defines a new pair p. The members of the pair are initialized following type T1 and T2.
<code>pair<T1,T2> p(v1,v2);</code>	Defines a new pair p. The members of the pair are initialized with v1 and v2.
<code>make_pair(v1,v2)</code>	Returns a pair initialized with v1 and v2.
<code>p.first</code>	Returns the (public) member of p named first (i.e., v1).
<code>p.second</code>	Returns the (public) member of p, named second (i.e., v2).
<code>p1==p2</code> <code>p1!=p2</code>	Two pairs are equal if their first and second member are respectively equal.

Examples

Compute the absolute frequency of input words

```
#include <map>
```

```
map<string, size_t> word_count;  
string word;
```

```
while (cin >> word)  
    ++word_count[word];
```

```
for (const auto &w : word_count) {  
    cout << w.first << "occurs " << w.second <<  
        "time(s)." << endl;  
}
```

Empty map

Insertion through subscripting

Access to the pair

Examples

Compute the absolute frequency of input words

```
#include <map>

map<string, size_t> word_count;
string word;

while (cin >> word)
    ++word_count[word];
```

Insertion through subscripting

```
while (cin >> word) {
    auto ret = word_count.insert ({word,1});
    if (!ret.second)
        ++ret.first->second;
}
```

Equivalent insertion:
more verbose

Word is in.
Increase the counter

Insert returns a pair.

The first member is an iterator to the element, the second is a bool.
If the key is not present, then the element is inserted and the bool is true.
If the key is already in the container, insert does nothing and the bool is false.

Examples

Iterating through a map

```
#include <map>

map<string, size_t> word_count;

...

auto it = word_count.begin();
while (it != word_count.end()) {
    cout << it->first << occurs << it->second << times << endl;
    it++;
}
```

Map iterator

In an unordered map, keys are in random order

Examples

Given a map {author,title}
Print all books by a specific author

```
#include <map>

map<string, string> books =
    {{ "A1 ", "B1 "}, {"A2 ", "B2 "}, {"A3 ", "B3 "}, ... };

string my_author("Tolkien");

auto entries = books.count (my_author);
auto iter = books.find (my_author);

while (entries) {
    cout << iter->second << endl;
    ++iter;
    --entries;
}
```

Number of books
with that author

Variable iter is an
iterator to all
books with the
same author

Examples

Operations with an unordered_map

```
#include <unordered_map>

std::unordered_map<std::string, double> um
{{"maier", 1.3}, {"huber", 2.7}, {"schmidt", 5.0}};


cout << um["huber"];           // Displays 2.7
cout << um.at("schmidt");      // Displays 5.0

auto search = um.find("schmidt");
if (search != um.end()) {
    // Returns an iterator pointing to a pair!
    string s = search->first;    // This is "schmidt"
    float val = search->second;  // This is 5.0
}

int n1 = um.count("schmidt");   // == 1
int n2 = um.count("blafasel");  // == 0
```

Sets

❖ A set is simply a collection of keys

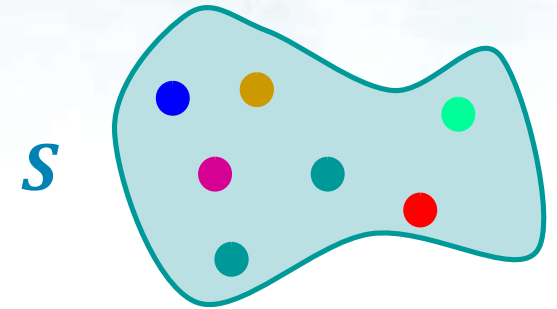

❖ They are useful when we want to know whether a value is present

- Sets are usually implemented using **trees** and traversed using iterators
- Unordered sets are often implemented using **hash tables**

Examples

Definitions and basic operations

```
#include <set>

set<int> is = {0,1,2,3,4,5,6,7,8,9};

auto it1 = is.find(1);    // Returns an iterator
                        // to element with key=1

auto it2 = is.find(11);   // Returns an iterator to is.end()

auto n1 = is.count(1);    // Returns 1

auto n2 = is.count(11);   // Returns 0
```

Examples

Definitions

```
#include <set>

set<int> myset;

vector<int> iv = {2,4,6,8,2,4,6,8,2,4,6,8};

myset.insert(iv.begin(), iv.end());
// myset includes 4 elements {2,4,6,8}

myset.insert({1,3,5,7,1,3,5,7});
// myset now includes 8 elements {1,2,3,4,5,6,7}
```

Empty set

Do not forget that
keys are unique

Iterators on sets

```
set<int> is = {0,1,2,3,4,5,6,7,8,9};
set<int>::iterator it = is.begin();
while (it != is.end()) {
    cout << *it << endl;
    it++;
}
```

Displays 0,1,2,...,9 in order.
In unordered_set the order
is undefined.

Examples

Map

Set

Compute the absolute frequency of input words

Excluding a few words

```
#include <map>
#include <set>
```

```
map<string, size_t> word_count;
set<string> exclude = { "The", "But", "And", "Or", "An", "A",
                        "the", "but", "and", "or", "an", "a" };
string word;
```

```
while (cin >> word)
    if (exclude.find(word) == exclude.end())
        ++word_count[word];
```

```
for (const auto &w : word_count) {
    cout << w.first << "occurs " << w.second <<
        "time(s)." << endl;
}
```

List initialization

Or
exclude.count(word) == 0

Exercise: Word Frequency Counter

- ❖ Write a C++ program that reads a paragraph of text (a line of text) from the user
 - Tokenize the input paragraph into words
 - Ignore punctuation, consider only alphabetic characters, and transform characters in lowercase
 - Create a map in which
 - Words (in the text) are keys
 - Values are frequencies (of that word in the text)
 - Display the list of unique words and their frequencies alphabetically
 - Find and display the total number of unique words in the paragraph

Exercise: Word Frequency Counter

- Prompt the user to enter a word and then search the map to display the frequency of that word
- Create a set containing the unique words from the paragraph
- Display the unique words in the set sorted alphabetically

Example

Input

This is a simple example. This is a paragraph. It has some words.

Output

Unique words and their frequencies:

a: 2

example: 1

has: 1

is: 2

...

Total number of unique words: 10

Enter a word: is

is appears 2 times

Input

Unique words sorted alphabetically:

a

example

has

...

Solution

Main: Part 1

```
#include <iostream>
#include <string>
...

using ...

int main() {
    string paragraph;
    string word;
    set<string> words;
    map<string, int> freq_map;

    // Read a paragraph
    cout << "Enter a paragraph of text: ";
    getline (cin, paragraph);
```

Read an entire input line

Solution

Istringstream, ostringstream, stringstream are like fstream but for in-memory string IO

Main: Part 2

```
std::stringstream ss(paragraph);
```

Reading from a string stream instead than from IO (overloading)

```
while (ss >> word) {  
    // Remove punctuation and convert to lowercase  
    std::string clean_word;  
    for (char c : word) {  
        if (std::isalpha(c)) {  
            clean_word += std::tolower(c);  
        }  
    }  
    words.insert(clean_word);  
    freq_map[clean_word]++;  
}
```

Remove punctuation and convert to lowercase

Insert word in set (unique words)

Count word frequency

Solution

Display unique words
and their frequencies

Main: Part 3

```
std::cout << "\nUnique words and their frequencies:\n";  
for (const auto &pair : freq_map) {  
    std::cout << pair.first << ": " << pair.second << std::endl;  
}
```

Display total number of unique words

```
std::cout << "\nTotal number of unique words: «  
    << words.size() << std::endl;
```

Search a word and
display its frequency

```
cout << "\nEnter a word: ";  
cin >> word;  
cout << word << "appears " <<  
    freq_map[word] << " times.\n";
```

```
std::cout << "\nUnique words sorted alphabetically:\n";  
for (const std::string &word : words)  
    std::cout << word << std::endl;
```

```
return 0;
```

```
}
```

Display unique
words sorted
alphabetically