
Sprint 2 Testing

For unit testing, we have used python unit test

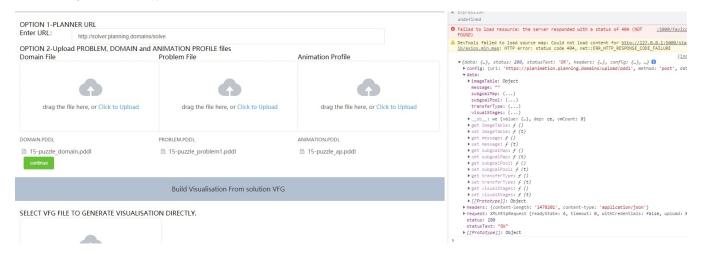

```
▼ subgoalPool: Object
▶ m keys: Array(16)
▼ m_values: Array(16)
  ▶ 0: (2) ['t5', 'node2-3', __ob__: we]
  ▶1: (2) ['t6', 'node3-3', __ob__: we]
  ▶ 2: (2) ['t9', 'node2-2', ob : we]
  ▶ 3: (2) ['t10', 'node3-2', _ob_: we]
  ▶ 4: (2) ['t11', 'node4-2', __ob__: we]
  ▶ 5: (2) ['t14', 'node3-1', __ob__: we]
  ▶ 6: (2) ['t2', 'node3-4', __ob__: we]
  ▶ 7: ['node1-4', __ob__: we]
  ▶8: (2) ['t4', 'node1-3', __ob__: we]
  ▶ 9: (2) ['t13', 'node2-1', __ob__: we]
  ▶ 10: (2) ['t8', 'node1-2', __ob__: we]
  ▶ 11: (2) ['t1', 'node2-4', __ob__: we]
  ▶ 12: (2) ['t15', 'node4-1', __ob__: we]
  ▶13: (2) ['t7', 'node4-3', __ob__: we]
  ▶ 14: (2) ['t3', 'node4-4', __ob__: we]
  ▶ 15: (2) ['t12', 'node1-1', __ob__: we]
    length: 16
```

USER ACCEPTANCE TEST: the team has performed the unit testing before sprint 2 as a team are not aware whether what browser or windows client uses so we performed testing on

operating system:

windows

mac os

browser:

mozilla

google chrome

TEST RESULTS

TEST CASE ID	TEST RESULT	Member
TC009	Passed	priyanka
TC010	Passed	priyanka
TC011	Passed	priyanka
TC012	Passed	priyanka
TC013	Passed	priyanka