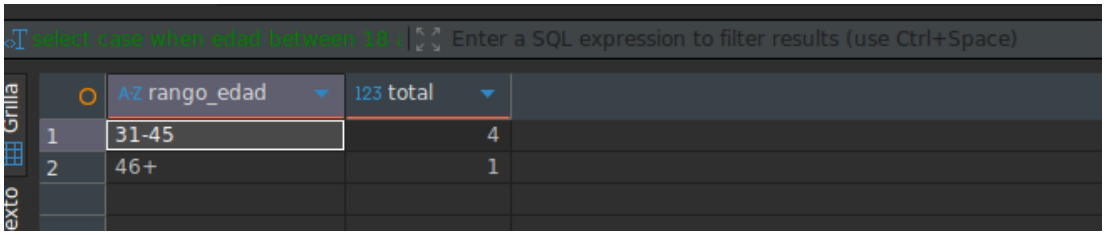
# Actividad 04 — Anonimización y análisis de reidentificación

**Alumno:** José Meldrick Rafael Vega Vega

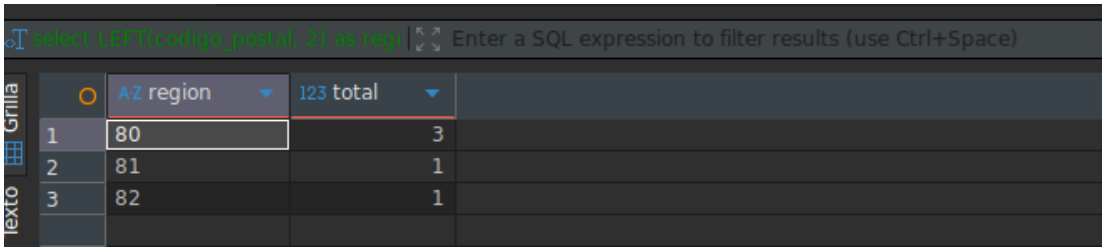
PostgreSQL 16.15 · DBeaver 26.2.3 · Ejecutado: 2026-10-23

**Propósito:** Aplicar generalización, agregación y supresión de grupos pequeños (k = 5) para generar información estadística.



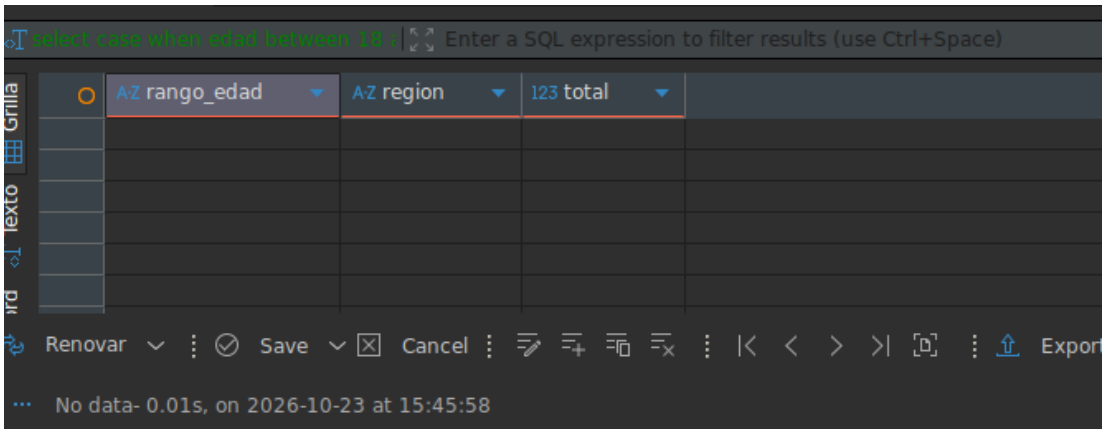

1. Generalización de la edad por rangos.

**Consulta ejecutada:** `SELECT CASE WHEN edad BETWEEN 18 AND 30 THEN '18-30' WHEN edad BETWEEN 31 AND 45 THEN '31-45' ELSE '46+' END AS rango_edad, COUNT(*) AS total FROM clientes GROUP BY 1 ORDER BY 1;`



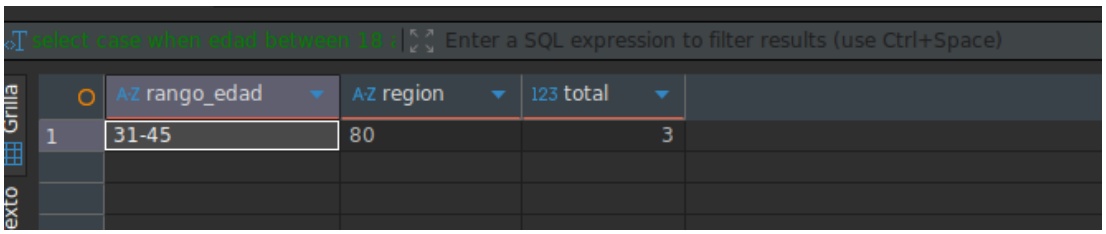

2. Generalización de la región a partir de los dos primeros dígitos del código postal.

**Consulta ejecutada:** `SELECT LEFT(codigo_postal, 2) AS region, COUNT(*) AS total FROM clientes GROUP BY 1 ORDER BY 1;`




3. Supresión con k = 5: ningún grupo alcanza el umbral y no se publica información.

**Consulta ejecutada:** `SELECT CASE WHEN edad BETWEEN 18 AND 30 THEN '18-30' WHEN edad BETWEEN 31 AND 45 THEN '31-45' ELSE '46+' END AS rango_edad, LEFT(codigo_postal, 2) AS region, COUNT(*) AS total FROM clientes GROUP BY 1, 2 HAVING COUNT(*) >= 5 ORDER BY 1, 2;`




4. Comparación con k = 2: el único grupo que se publicaría queda suprimido con k = 5.

**Consulta ejecutada:** `SELECT CASE WHEN edad BETWEEN 18 AND 30 THEN '18-30' WHEN edad BETWEEN 31 AND 45 THEN '31-45' ELSE '46+' END AS rango_edad, LEFT(codigo_postal, 2) AS region, COUNT(*) AS total FROM clientes GROUP BY 1, 2 HAVING COUNT(*) >= 2 ORDER BY 1, 2;`