


MellowYak Phase 7

Runtime Profiles, Snapshot Memory, and Universal Probes

Deterministic synthetic delivery catalog · English base + Hebrew RTL · 2026-08-24


No private source, user path, credential, prompt, provider data, or live evidence is included.

1. Runtime Wizard — project type

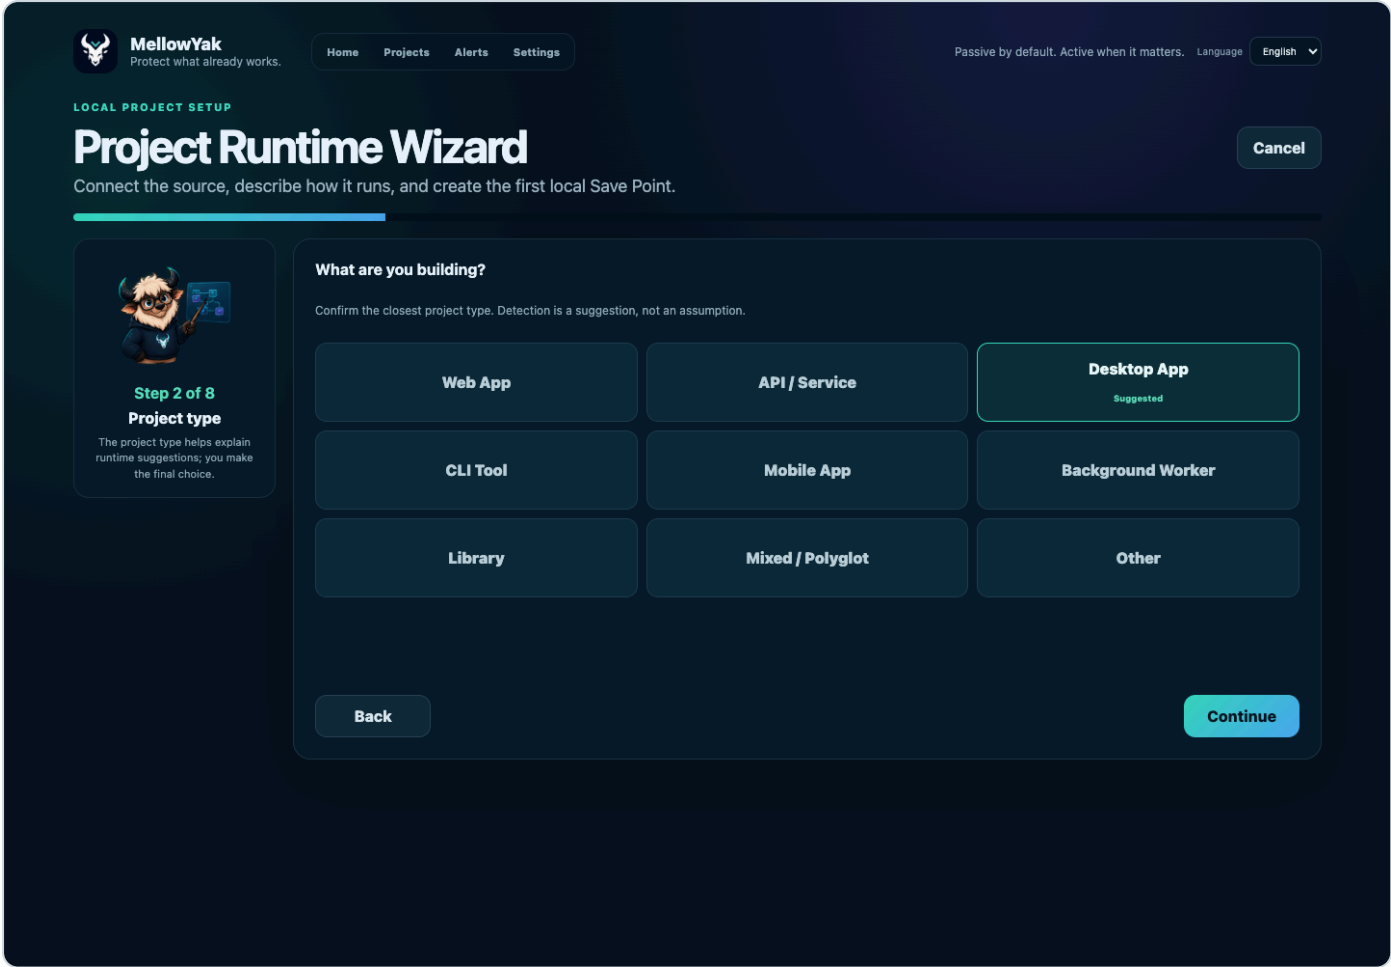

Purpose	Review the confirmed project-type choice before runtime setup.
Displayed state	A local non-Git source folder was detected and Web App is suggested.
Source of data	Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.
Available actions	Choose any project type, continue, go back, or cancel.
What is known	Canonical local folder metadata, detected languages, frameworks, and source-local policy.
What is not known	The primary runtime and executable are not selected yet.
Expected next step	Confirm the project type and continue to runtime detection.

2. Runtime Wizard — detected runtimes

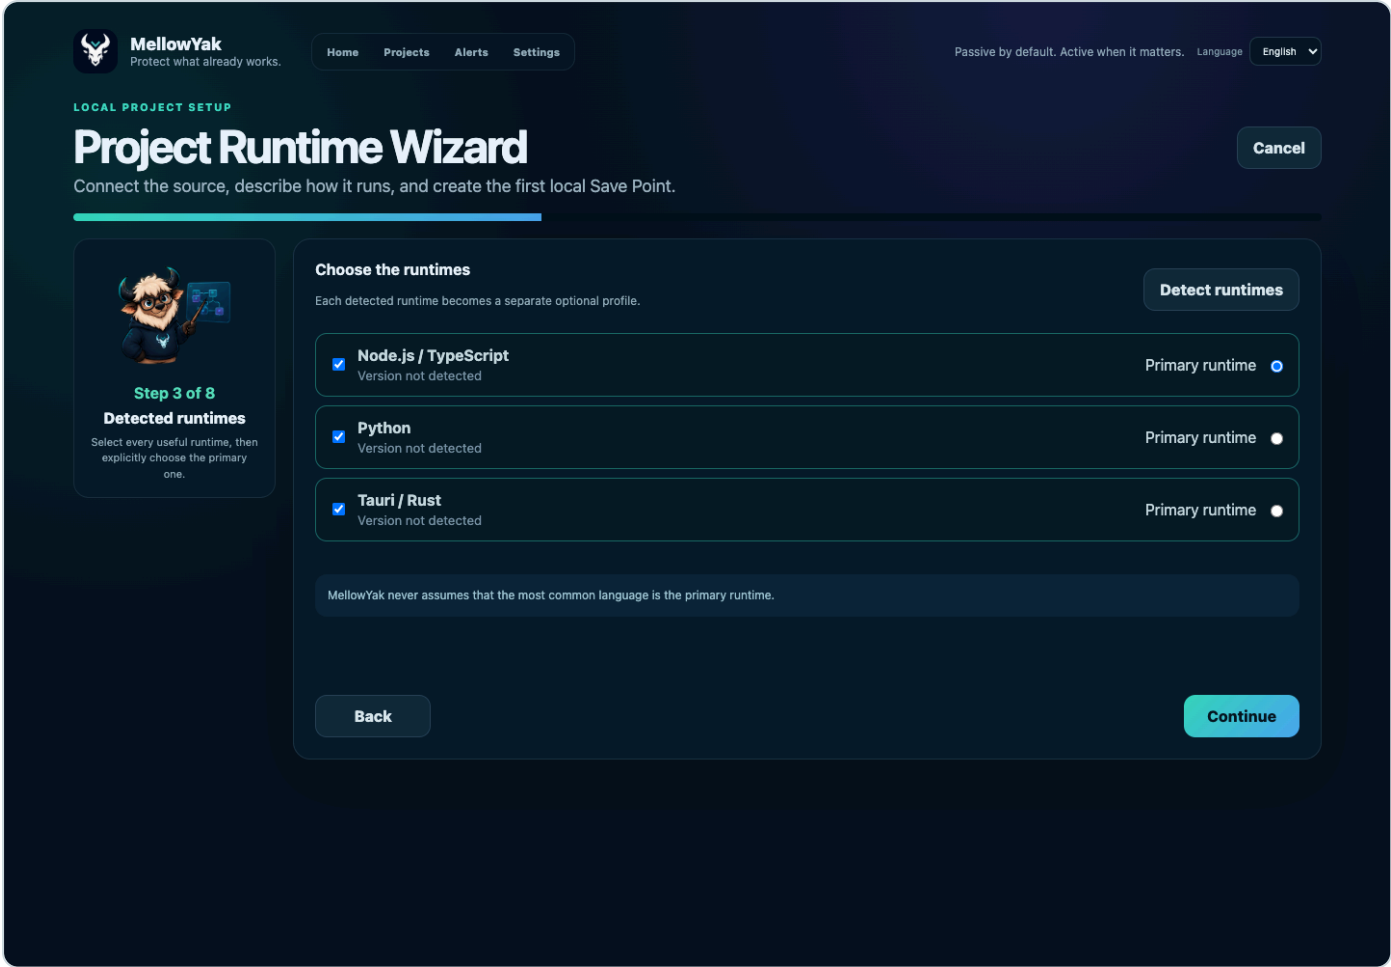

Purpose	Review every detected runtime independently and choose primary/secondary roles.
Displayed state	Node.js, Python, and Tauri/Rust are suggested from public fixture metadata.
Source of data	Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.
Available actions	Select runtimes, choose exactly one primary runtime, re-run detection, continue, or go back.
What is known	Runtime candidates and available version hints.
What is not known	No start command has been approved yet.
Expected next step	Confirm the selected runtimes and describe how each one runs.

3. Runtime Wizard — profile configuration

MellowYak

Protect what already works.

Home

Projects

Alerts

Settings

Passive by default. Active when it matters.

LanguageEnglish

LOCAL PROJECT SETUP

Project Runtime Wizard

Connect the source, describe how it runs, and create the first local Save Point.

Cancel

Step 4 of 8

How it runs

Commands are stored as an executable and argument array, never as a shell string.

Describe how each runtime runs

Use one argument per line. Managed execution remains explicit and local.

▼ Node.js / TypeScript

Profile name

Node.js / TypeScript

Execution mode

Managed

Executable

Arguments

One argument per line

Relative working directory

Expected ports

Optional loopback health URL

Optional test executable

Optional stop behavior

Runtime version

Dependency manifests

Safe environment-variable names

Shell-free execution

Execution uses no shell. The default network policy allows loopback only and blocks external egress.

► Python

► Tauri / Rust

Back

Continue

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Configure one approved runtime profile without a shell command string.

The primary profile is expanded; secondary profiles remain available but collapsed for legibility.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Set mode, executable, argv, working folder, ports, health URL, tests, and safe environment names.

Executable and argv are persisted separately with loopback-only policy.

Availability is not claimed until profile validation succeeds.


Review test suggesting/privacy settings.

4. Runtime Wizard — initial Save Point

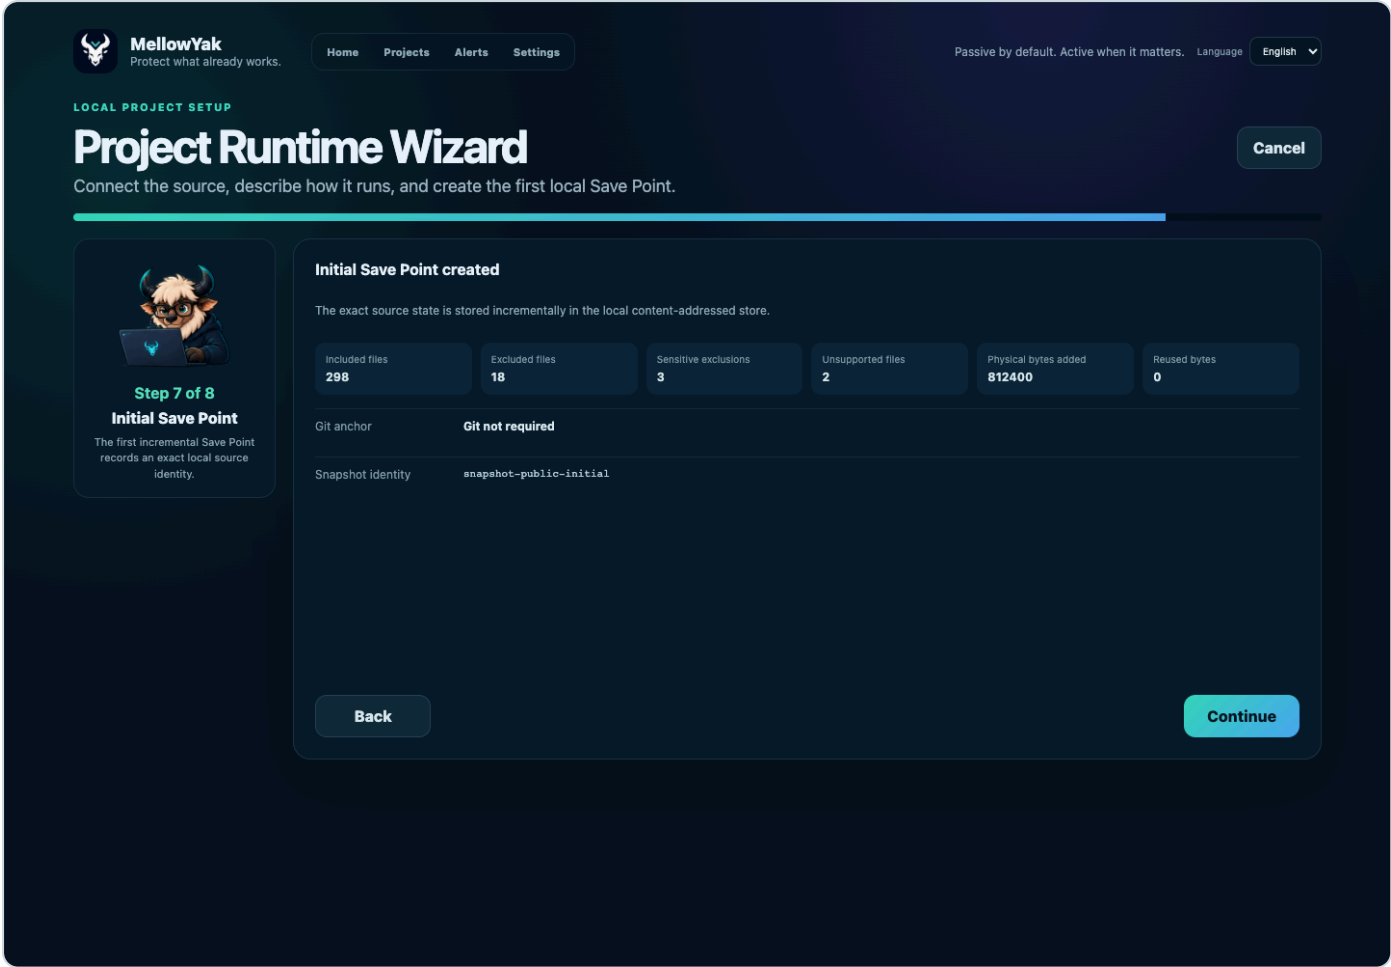

Purpose	Confirm the first content-addressed local source snapshot.
Displayed state	The initial snapshot reports included, excluded, sensitive, unsupported, physical, and reused bytes.
Source of data	Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.
Available actions	Continue to the readiness summary or go back.
What is known	Exact snapshot identity and bounded capture counts.
What is not known	Unsupported files remain outside verified coverage.
Expected next step	Review readiness and every remaining limitation.

5. Ready with limits — actionable details

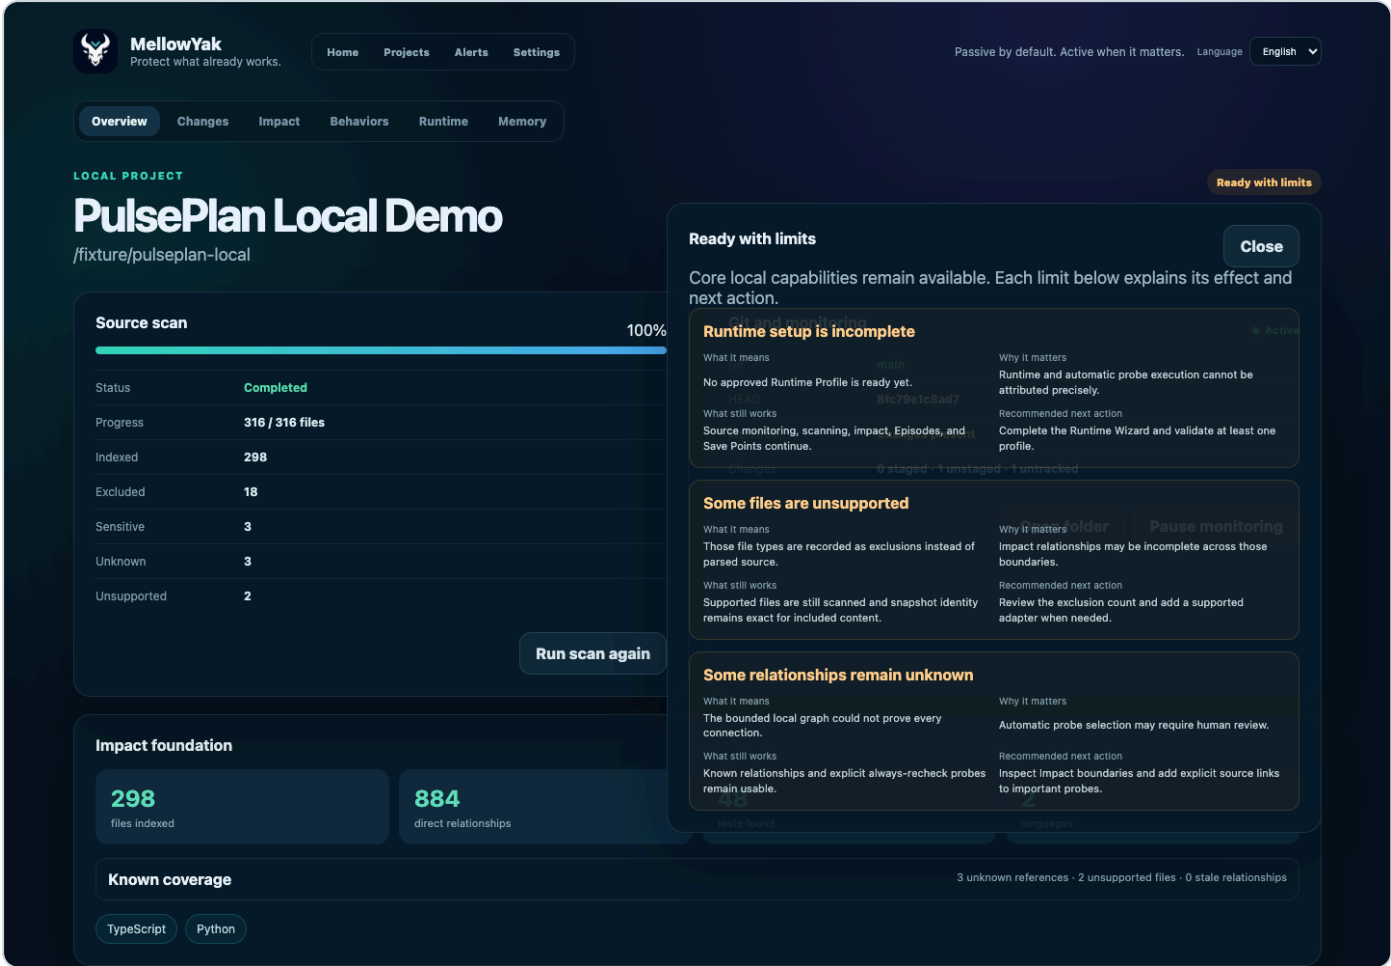

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Replace a vague readiness badge with an actionable explanation.

Runtime setup, unsupported files, and unknown relationships are explained.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Close the explanation or follow the recommended setup actions.

Source scanning and local monitoring remain operational.

Automatic runtime checks and unsupported relationships are not fully covered.

Complete runtime setup and review unsupported or unknown boundaries.

6. Runtime Profiles

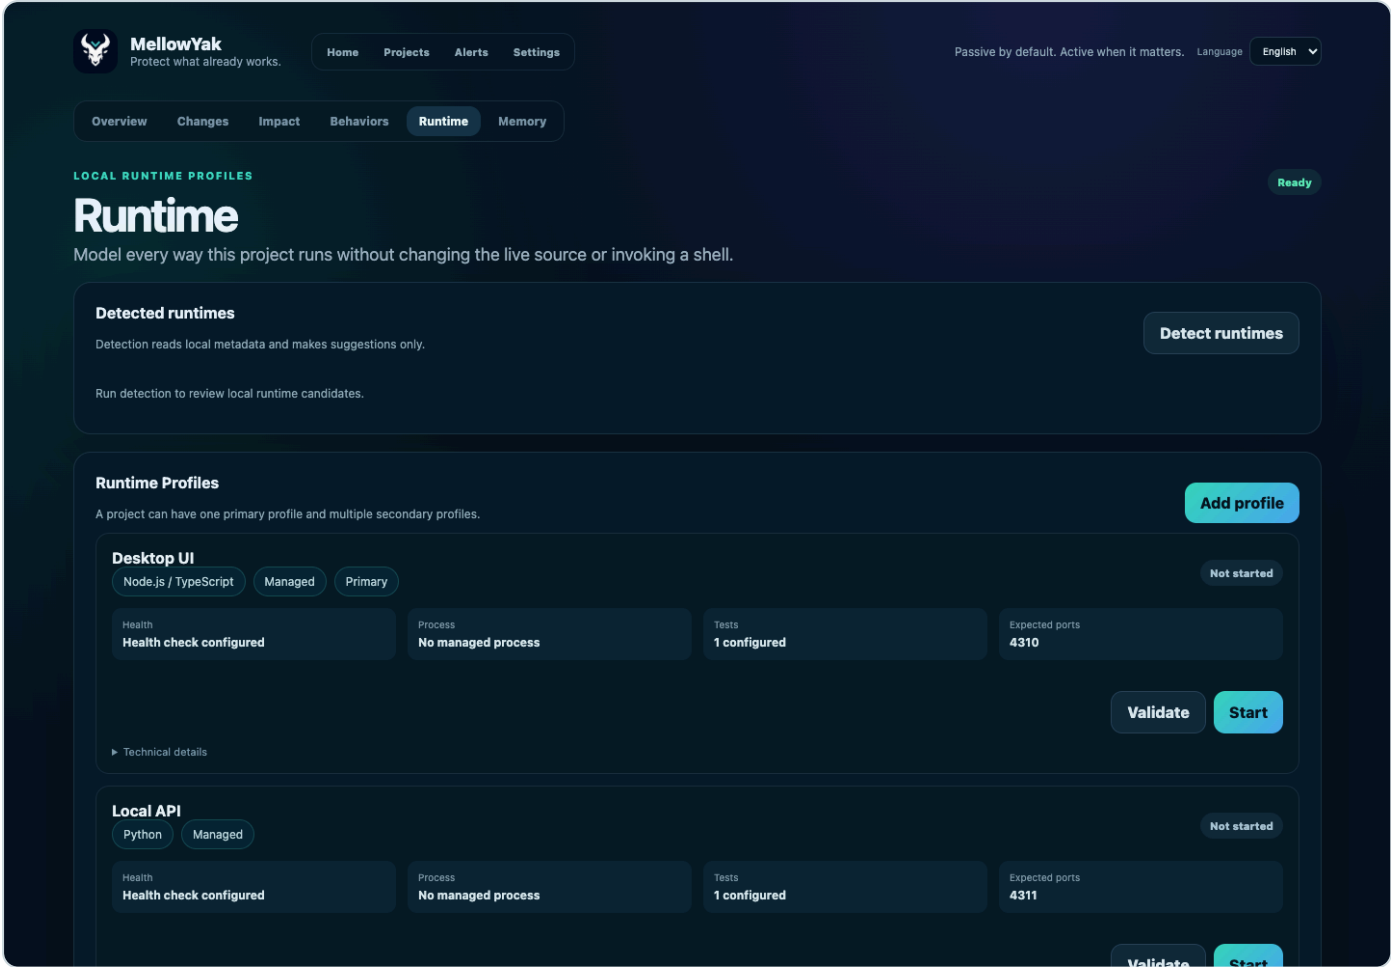

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Inspect primary and secondary local runtime profiles.

Node.js and Python profiles are configured but no managed process is currently running.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Detect, validate, start, stop, inspect evidence, add a profile, or add a probe.

Approved executable/argv, ports, tests, health policy, and profile versions.

Current process health is unknown until a runtime starts.


Validate and start the intended primary runtime.

7. Runtime Profile — running

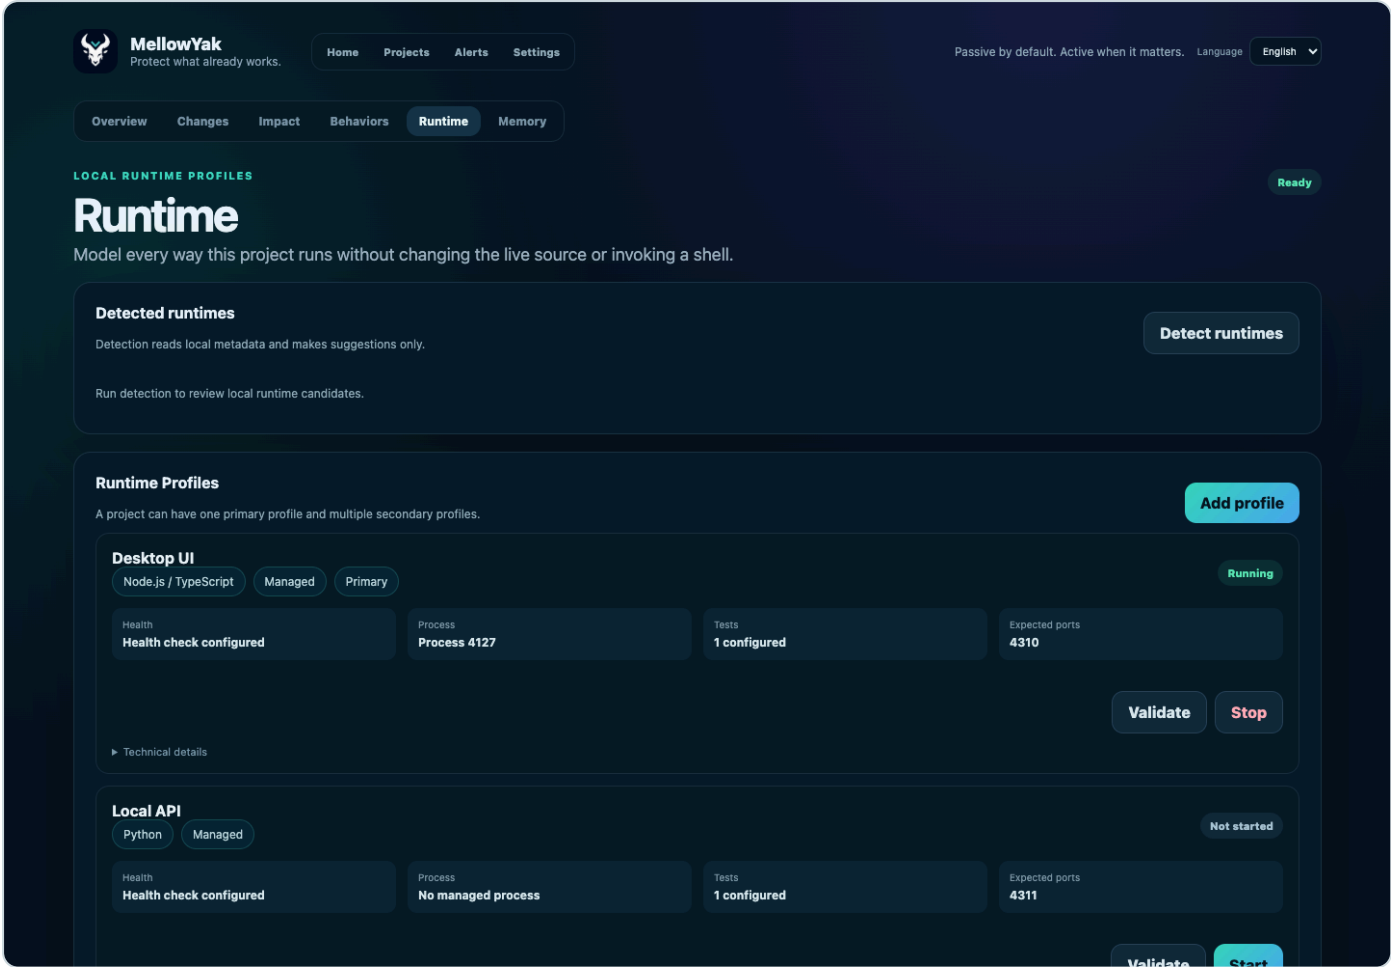

Purpose	Show bounded runtime process and health observation.
Displayed state	The primary Node.js profile is running on its expected loopback port.
Source of data	Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.
Available actions	Stop, validate, inspect technical details, or run an approved probe.
What is known	Process ID, local port, health state, uptime, and profile version.
What is not known	MellowYak does not inspect unrelated process memory or environment values.
Expected next step	Run the relevant approved probe or continue passive monitoring.

8. Memory — Episodes and Save Points

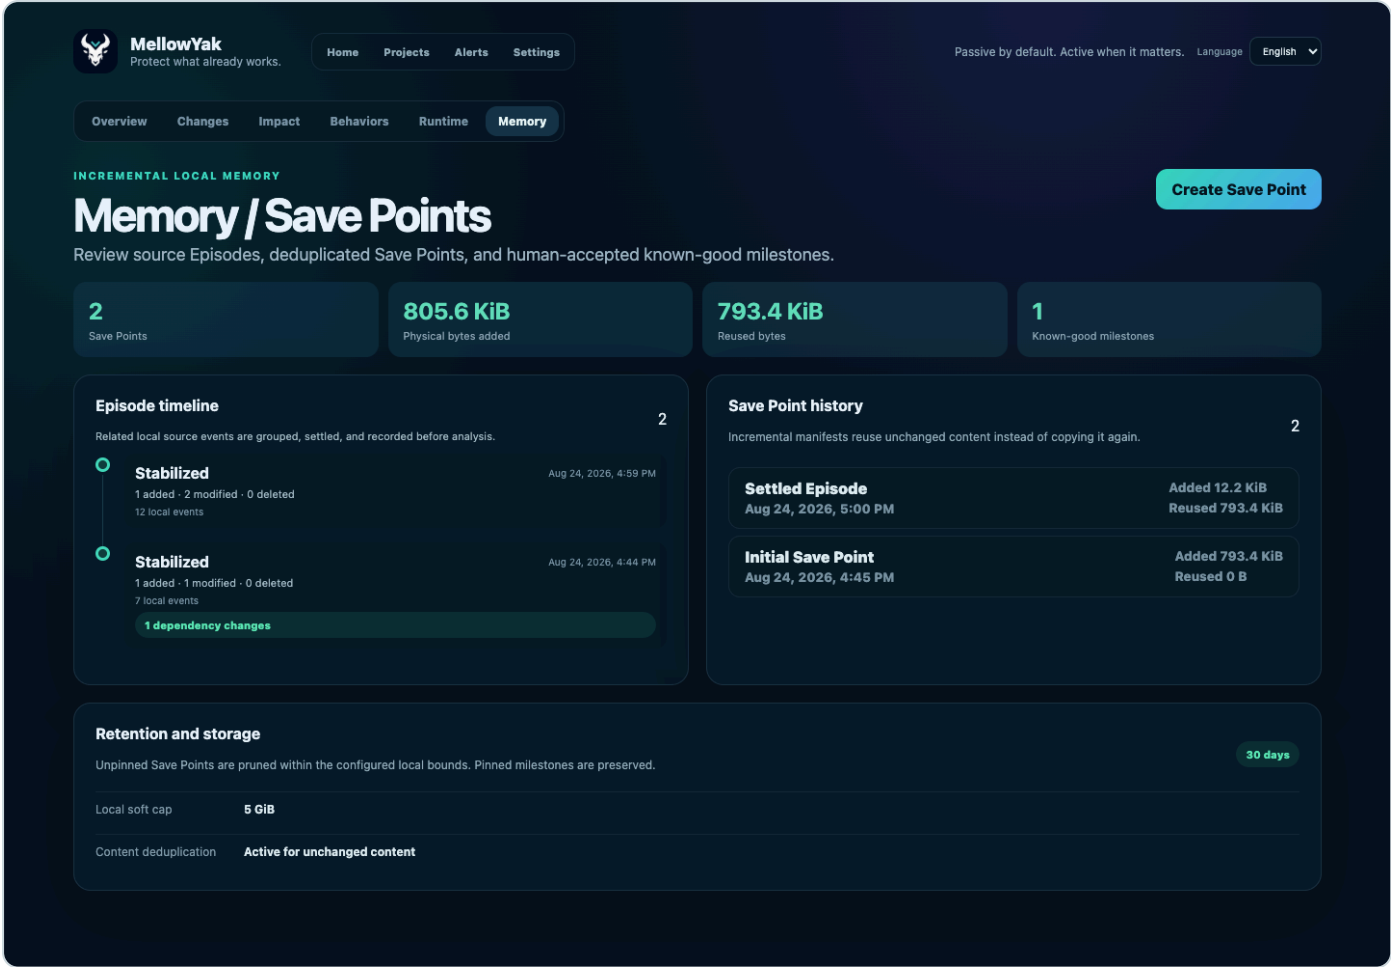

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Review grouped change Episodes and deduplicated local Save Point history.

Two stabilized Episodes produced two Save Points with reused-byte evidence.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.

Create a Save Point, select history, inspect retention, or open snapshot details.

Episode counts, changed-path summaries, physical bytes, reused bytes, and pinned milestones.

A Save Point alone does not prove a behavior still works.

Select a Save Point to inspect or bind it to a passing probe as known good.

9. Snapshot detail

Stabilized

1 added · 2 modified · 0 deleted

12 local events

Aug 24, 2026, 4:59 PM

Stabilized

1 added · 1 modified · 0 deleted

7 local events

Aug 24, 2026, 4:44 PM

1 dependency changes

Settled Episode

Aug 24, 2026, 5:00 PM

Added 12.2 KiB

Reused 793.4 KiB

Initial Save Point

Aug 24, 2026, 4:45 PM

Added 793.4 KiB

Reused 0 B

Save Point detail

snapshot-public-current

Integrity verified

Included files

301

Excluded files

18

Sensitive exclusions

3

Unsupported files

2

Logical size

805.6 KiB

Git anchor

Git not required

The live project stays untouched

Materialization creates a separate local copy and never overwrites the connected source.

Load manifest

Pin

Materialize local copy

This works — save it

▼ Manifest entries (3)

src/checkout/summary.ts

src/api/checkout.py

tests/checkout/summary.test.ts

► Technical details

Retention and storage

Unpinned Save Points are pruned within the configured local bounds. Pinned milestones are preserved.

30 days

Local soft cap

5 GiB

Content deduplication

Active for unchanged content

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Inspect exact snapshot identity, integrity, exclusions, and materialization safety.

The current incremental snapshot is verified and its bounded manifest entries are visible.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Load manifest, pin, materialize, or begin a known-good milestone.

Manifest digest, source identity, included entries, sizes, and Git-optional anchor.

Behavioral correctness is not inferred from files alone.

Materialize for inspection or validate a behavior before marking known good.

10. This works — save it

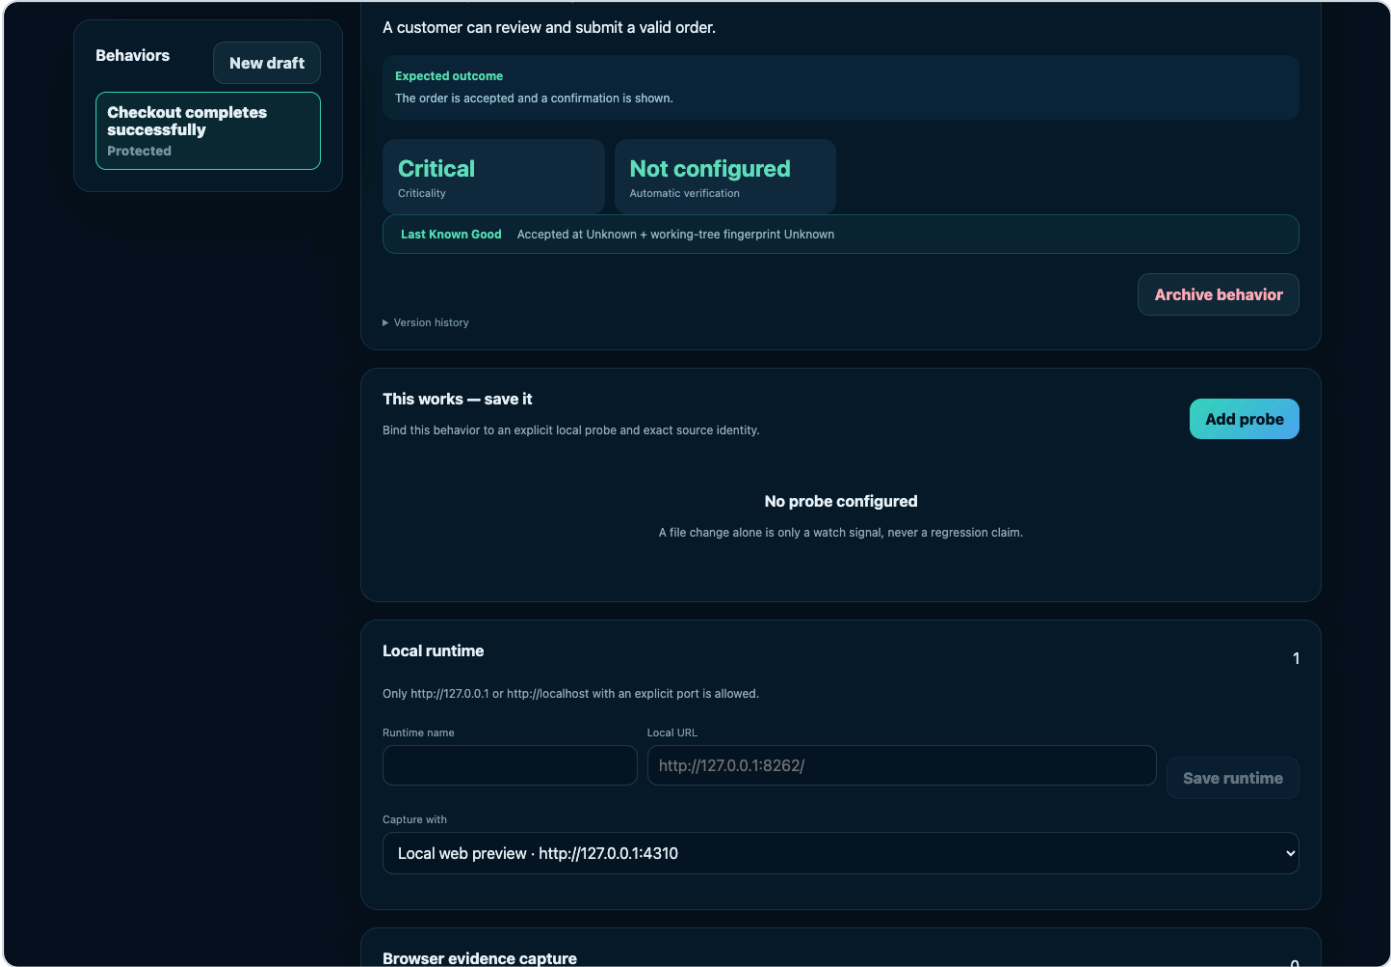

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Start the friendly known-good workflow from a protected behavior.

Checkout has an explicit expected outcome but no Phase 7 probe has been configured.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.

Add a Browser, API, CLI, Process, Test, or Manual probe.

Behavior version, expected outcome, criticality, and prior accepted baseline.

No comparable current automated result exists yet.

Choose a probe type and record its exact expected result.

11. Probe type selection

Behaviors

New draft

Checkout completes successfully

Protected

A customer can review and submit a valid order.

Expected outcome

The order is accepted and a confirmation is shown.

Critical

Criticality

Not configured

Automatic verification

Last Known Good

Accepted at Unknown + working-tree fingerprint Unknown

Version history

Archive behavior

This works — save it

Bind this behavior to an explicit local probe and exact source identity.

Cancel

Probe name

Probe type

API

Loopback endpoint URL

Expected result

Timeout in seconds

30

Bounded local execution

Commands use an executable and argument array without a shell. API and browser targets must be loopback-local.

Save approved probe

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Choose one universal Probe contract for the behavior.

The probe builder exposes the approved type selector and bounded execution policy.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.

Choose Browser, API, CLI, Process, Test, or Manual; cancel or save after required fields are complete.

All probe types bind to source identity and use bounded local evidence.

No type or expected result is accepted until the user saves it.

Select the probe matching the behavior and fill its expected result.

12. HTTP/API Probe

Behaviors

New draft

Checkout completes successfully
Protected

A customer can review and submit a valid order.

Expected outcome

The order is accepted and a confirmation is shown.

Critical

Criticality

Not configured

Automatic verification

Last Known Good

Accepted at Unknown + working-tree fingerprint Unknown

► Version history

Archive behavior

This works — save it

Cancel

Bind this behavior to an explicit local probe and exact source identity.

Probe name

Checkout API remains healthy

Probe type

API

Loopback endpoint URL

http://127.0.0.1:4310/health

Expected result

200

Timeout in seconds

30

Bounded local execution

Commands use an executable and argument array without a shell. API and browser targets must be loopback-local.

Save approved probe

Purpose
Displayed state
Source of data
Available actions
What is known
What is not known
Expected next step

Configure a loopback-only API health assertion.
A GET request targets a synthetic loopback health endpoint and expects status 200.
Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.
Edit target, expected status, timeout, runtime binding, save, or cancel.
External egress is disabled and bodies are not retained by default.
The endpoint has not run in this configuration yet.
Save the approved probe and execute it against the exact Save Point.

13. CLI Probe

Behaviors

New draft

Checkout completes successfully
Protected

Critical
Criticality

Not configured
Automatic verification

Last Known Good Accepted at Unknown + working-tree fingerprint Unknown

Version history

Archive behavior

This works — save it

Cancel

Bind this behavior to an explicit local probe and exact source identity.

Probe name

Focused checkout test

Probe type

CLI

Executable

node

Arguments

node_modules/vitest/vitest.mjs
run
tests/checkout/summary.test.ts

Expected result

0

Timeout in seconds

30

Bounded local execution

Commands use an executable and argument array without a shell. API and browser targets must be loopback-local.

Save approved probe

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Configure a bounded local CLI check without invoking a shell.

Executable and argv are separate and the expected exit code is zero.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Edit executable, one argument per line, timeout, expected exit code, save, or cancel.

No shell syntax is evaluated and the working scope is local.

The executable has not been validated on this fixture screen.

Save, validate availability, then run the probe.

14. Known-Good Milestone

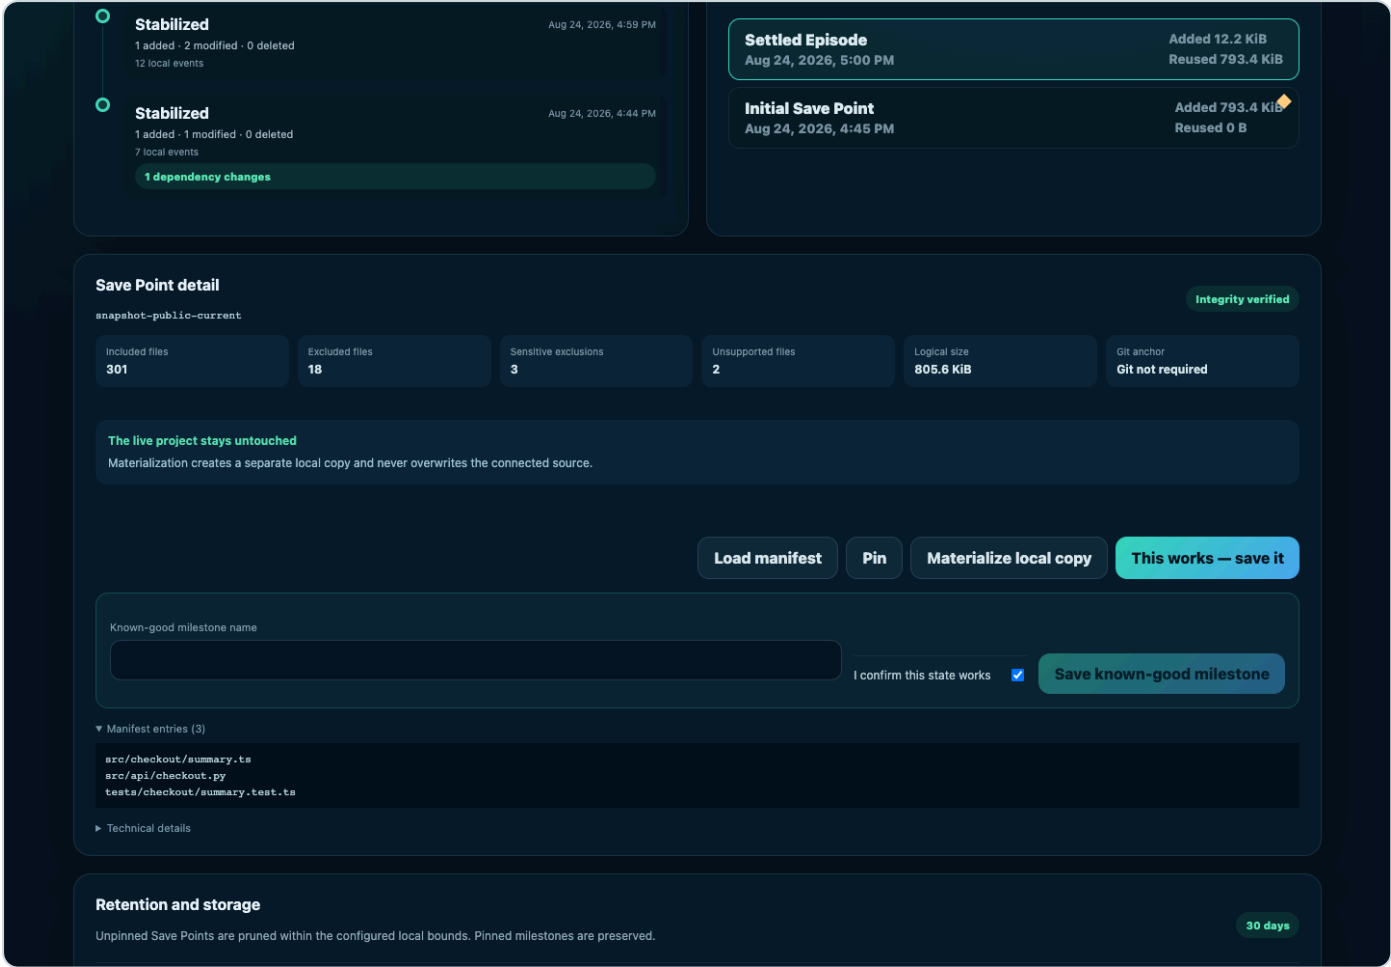

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Bind a friendly milestone name to an exact Save Point and explicit attestation.

A current snapshot is selected and the known-good milestone form is open.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Name and save the milestone, or keep inspecting snapshot evidence.

Exact snapshot, pinned prior milestone count, runtime fingerprints, and attestation mode.

Human attestation does not become automated probe evidence.

Save only after the behavior is observed working or its approved probe passes.

15. WATCH — file change only

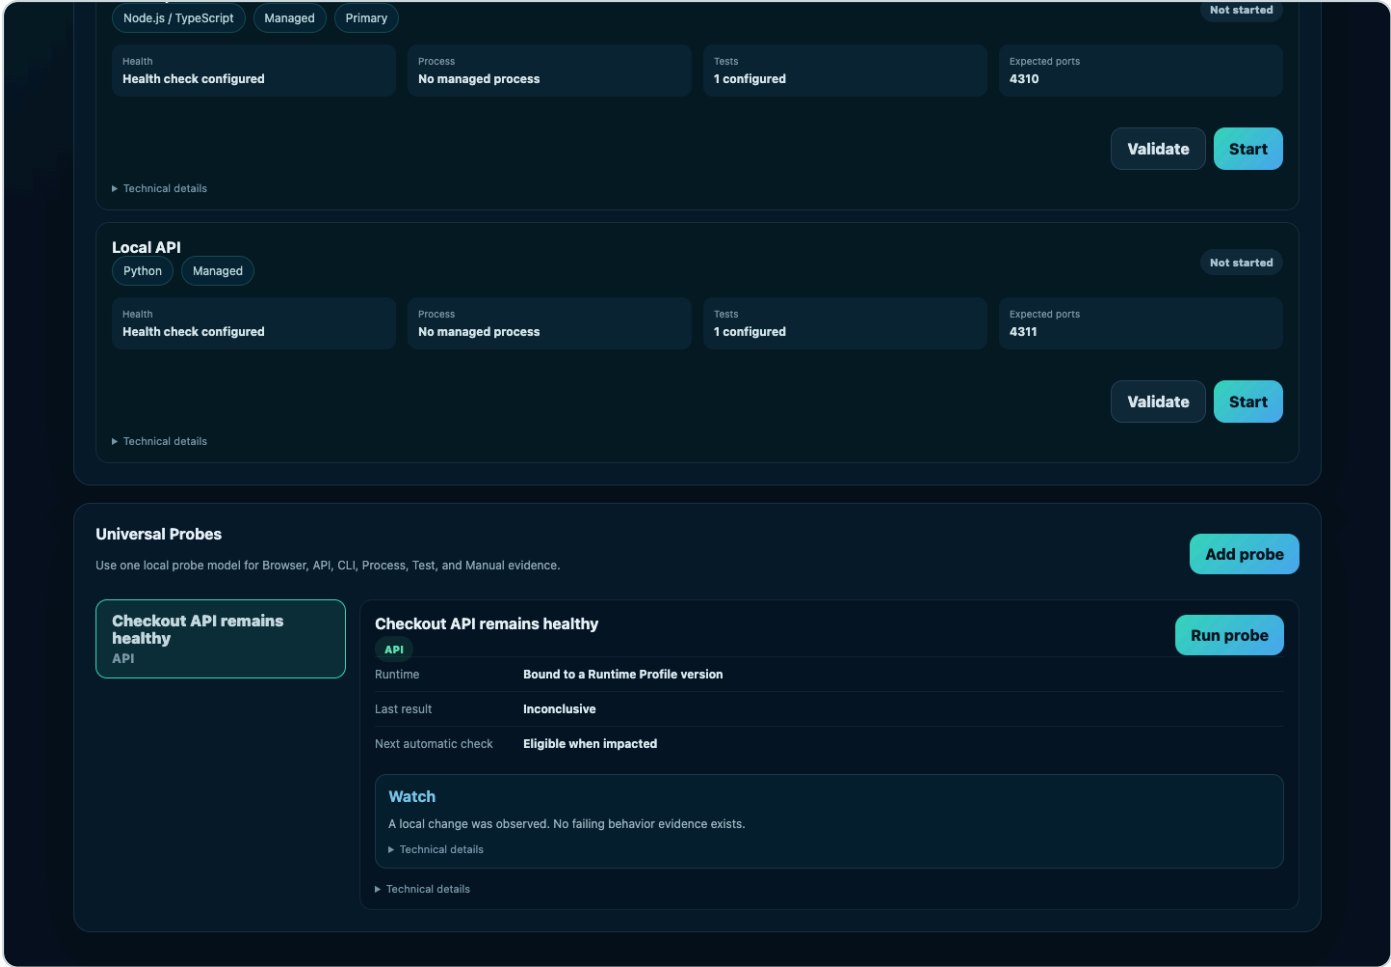

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Show that a source change alone is not called a regression.

The local API probe has no observed behavior failure; the deterministic signal remains WATCH.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Run the probe, inspect technical details, or continue monitoring.

Three files changed in one Episode and no comparable failure was observed.

Whether the affected behavior still works has not been proven.

Run the relevant comparable probe before making a regression claim.

16. Confirmed regression — friendly view

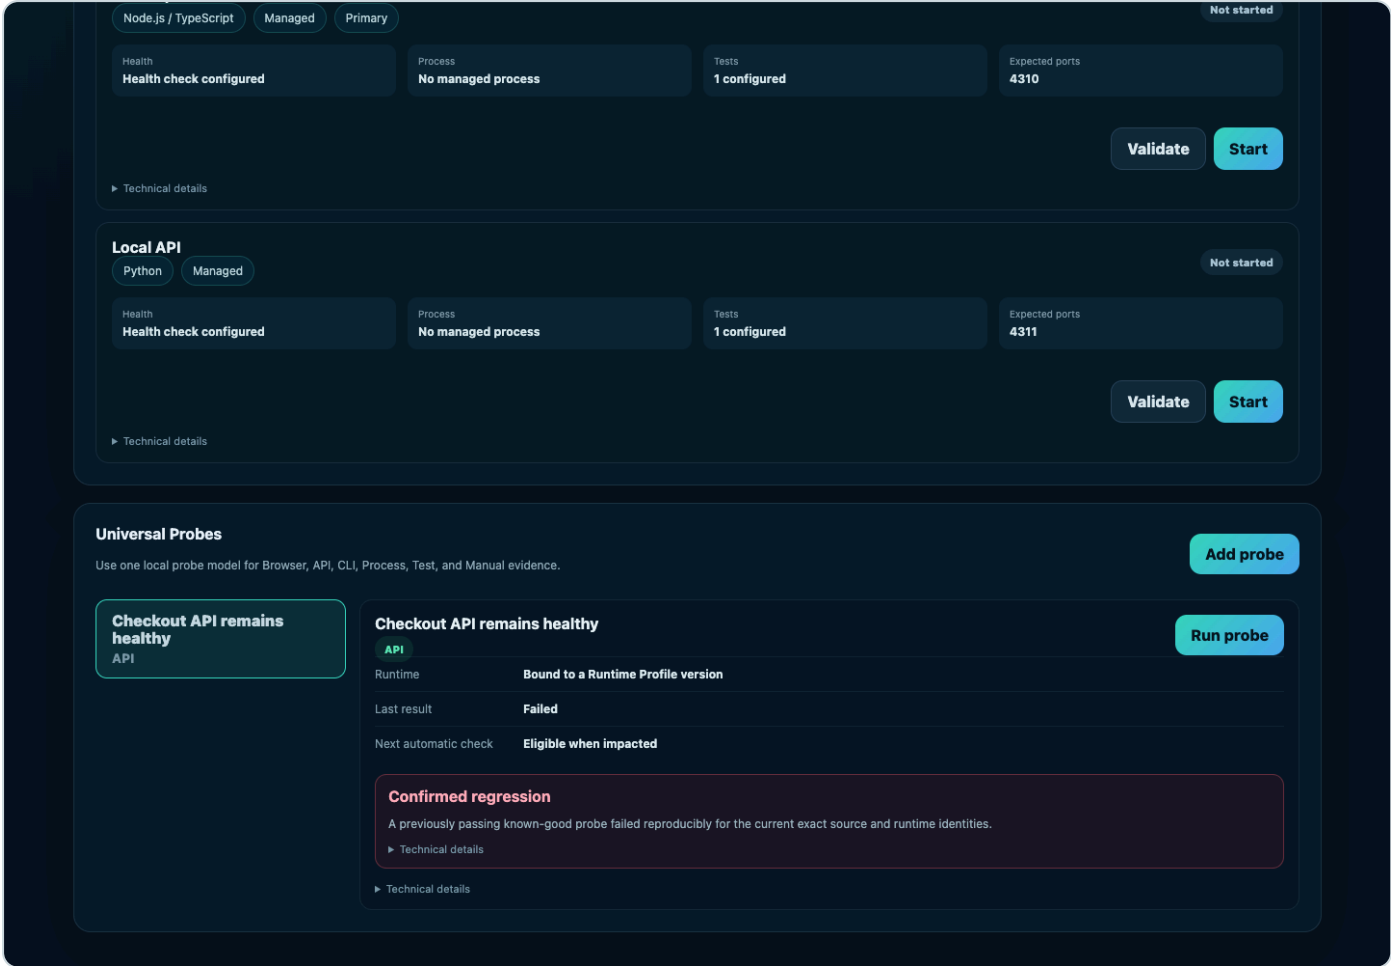

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Explain a reproducible prior-pass to current-fail transition in novice language.

A probe that passed at an accepted milestone failed twice at the current comparable source identity.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Inspect technical details, rerun the probe, or open change context.

Prior accepted pass, current comparable fail, and retry reproduction.

Root cause is not claimed.

Inspect technical evidence and create an isolated Repair Workspace if needed.

17. Confirmed regression — technical evidence

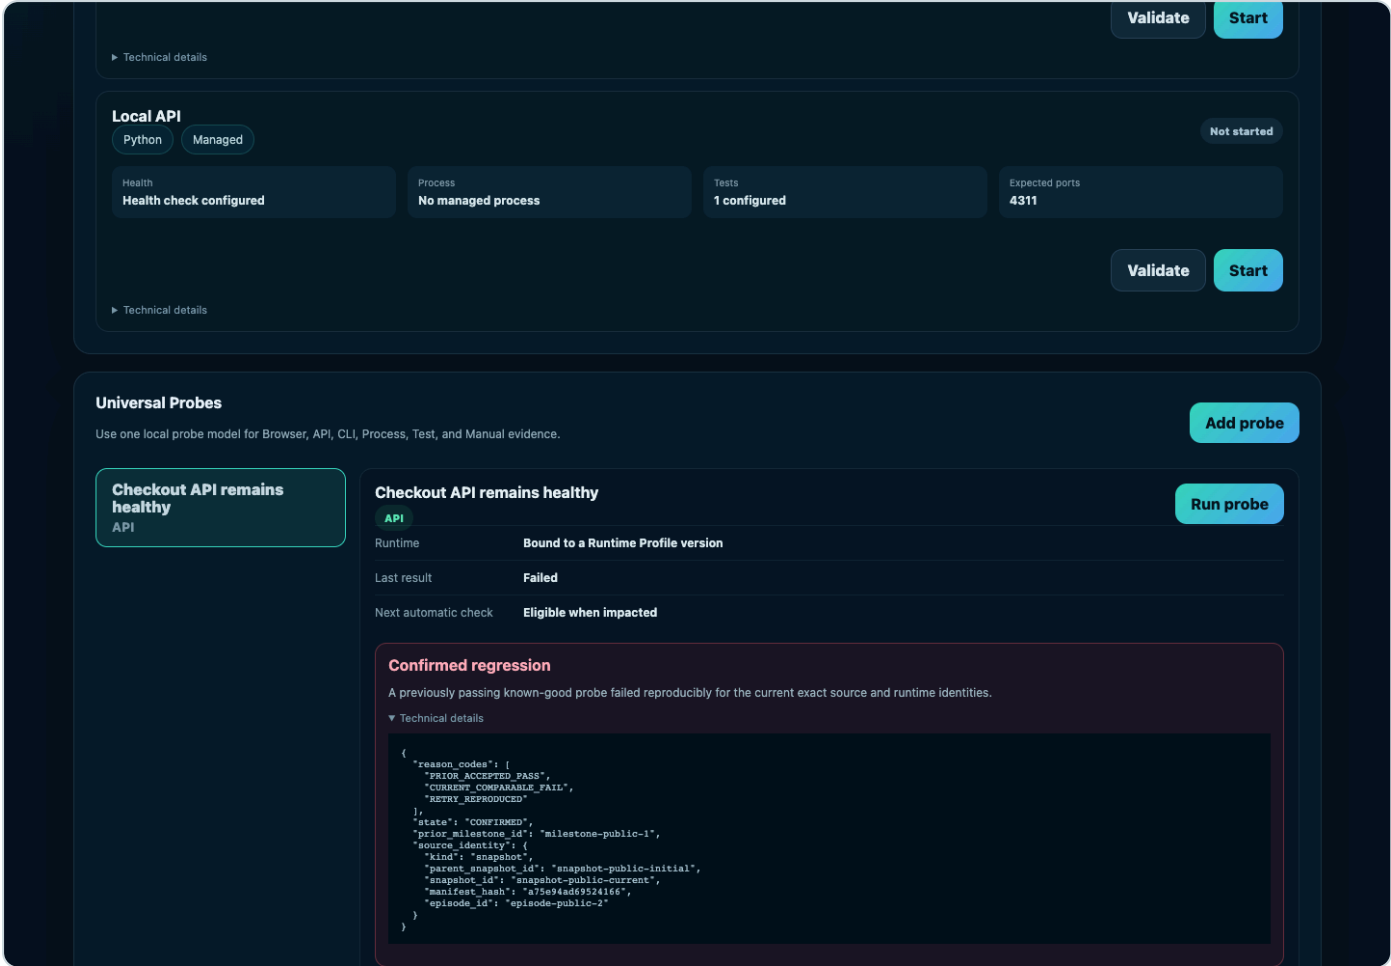

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Expose deterministic reason codes and exact source identity.

The technical disclosure shows prior milestone, current snapshot identity, and reproducibility reasons.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Review structured evidence or collapse the technical disclosure.

Exact reason codes, prior accepted baseline, attempts, expected result, and observed result.

No automatic root-cause or repair claim is made.

Use the evidence to scope a local isolated Repair Workspace.

18. Repair Workspace

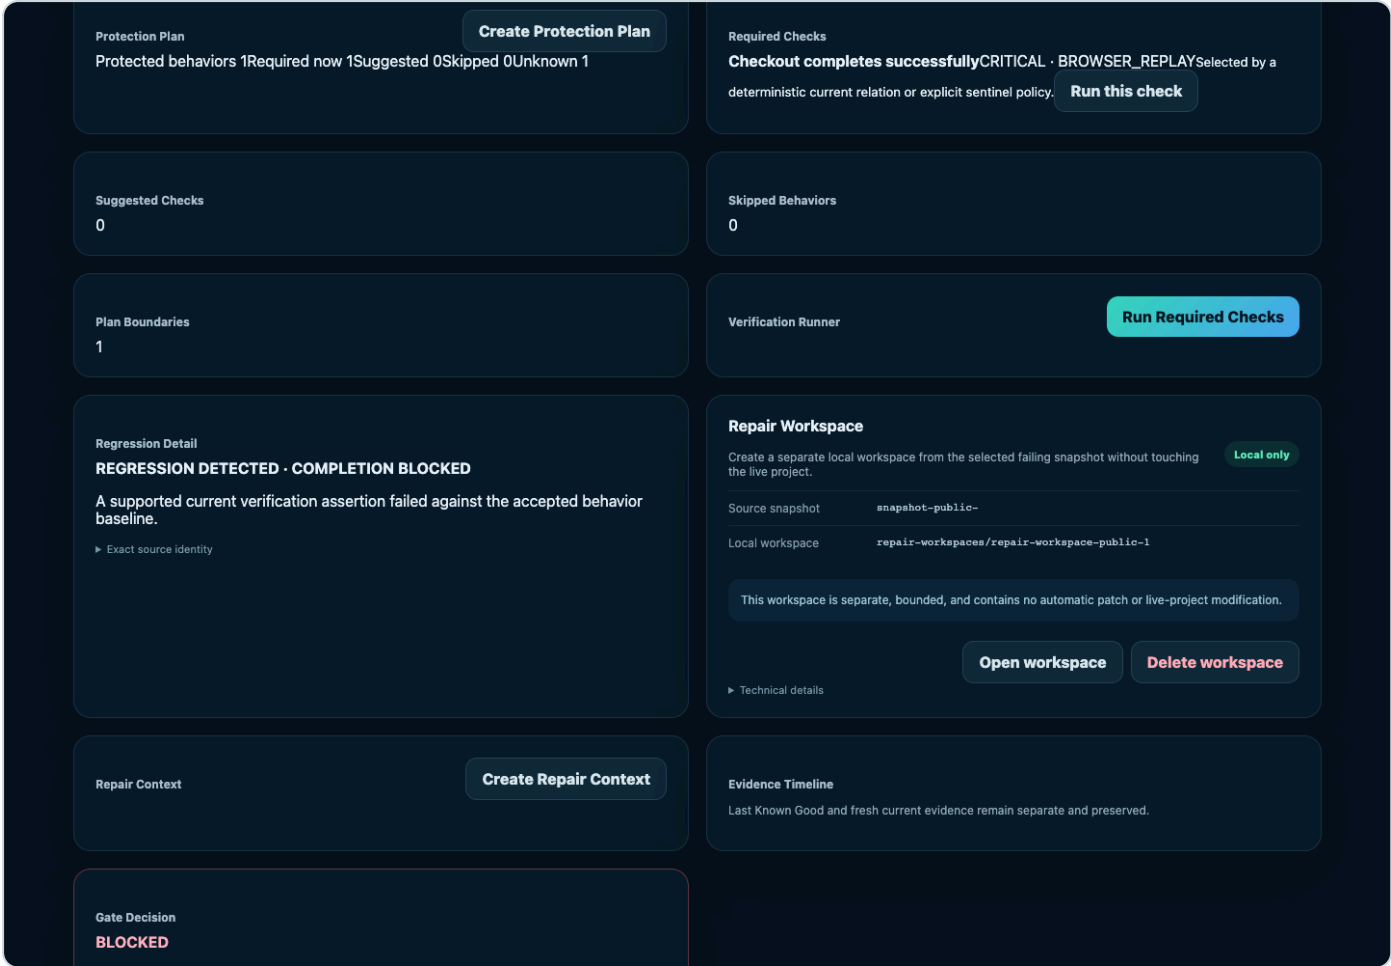

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Create an isolated local materialization for manual repair work.

The workspace is ready outside the live project with current source, evidence, and validation plan references.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Open or delete the Repair Workspace and inspect its technical manifest.

Snapshot digest, bounded workspace location, included item classes, and live-project safety.

MellowYak has not generated or applied a patch.

Open the isolated workspace manually and follow the required rechecks.

19. Non-Git project

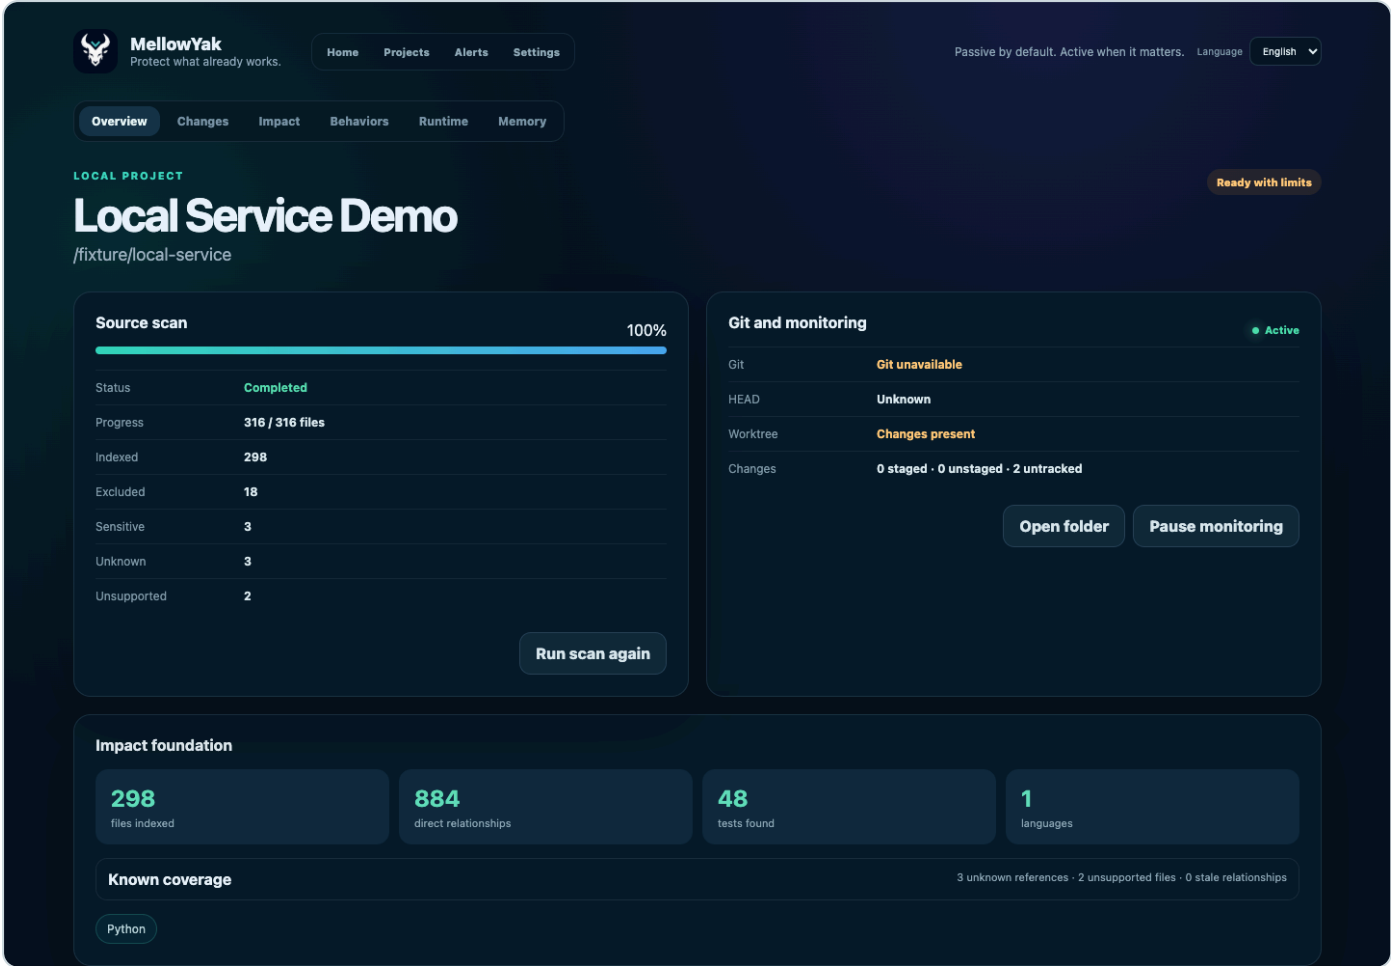

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Show full local operation without requiring a Git repository.

Source scan and monitoring are ready with snapshot-backed identity.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Open Runtime, Memory, Changes, Impact, Behaviors, scan, or source folder.

Local source metadata, snapshot identity support, scan coverage, and monitoring status.

Git branch and commit anchors do not exist for this project.


Use Save Points and Episodes as the source-history vocabulary.

20. Polyglot project

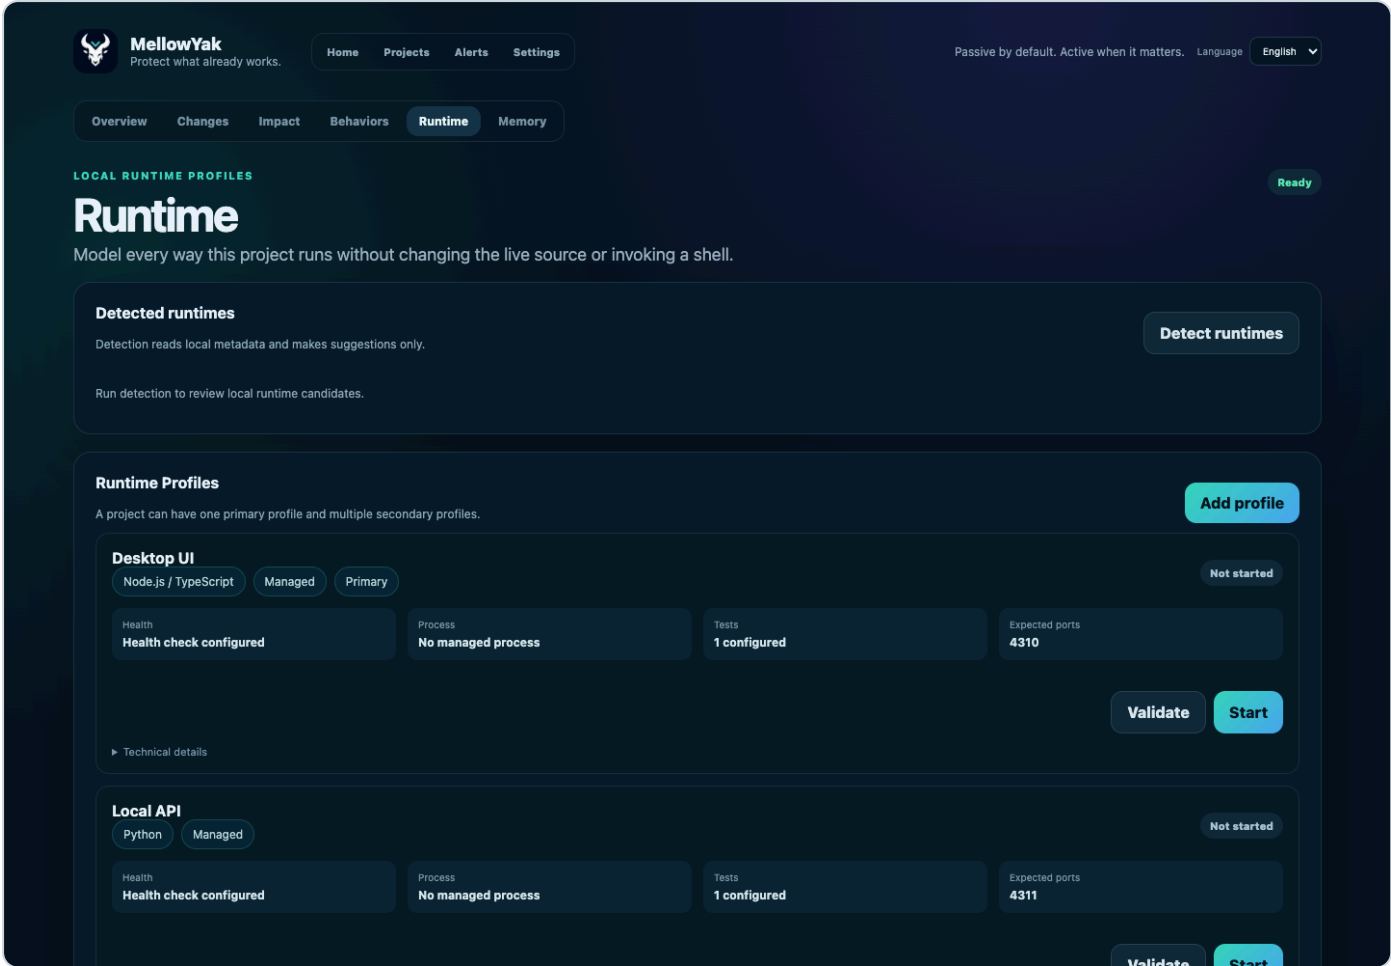

Purpose	Show multiple runtime profiles with an explicit primary and secondary selection.
Displayed state	Node.js is primary and Python is secondary; both retain independent versions and tests.
Source of data	Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.
Available actions	Detect, validate, start either approved profile, inspect limitations, or configure probes.
What is known	Per-runtime executable, health, tests, ports, and primary role.
What is not known	Neither runtime process is currently running.
Expected next step	Start only the profile needed for the next relevant probe.

21. Runtime Wizard — Hebrew RTL

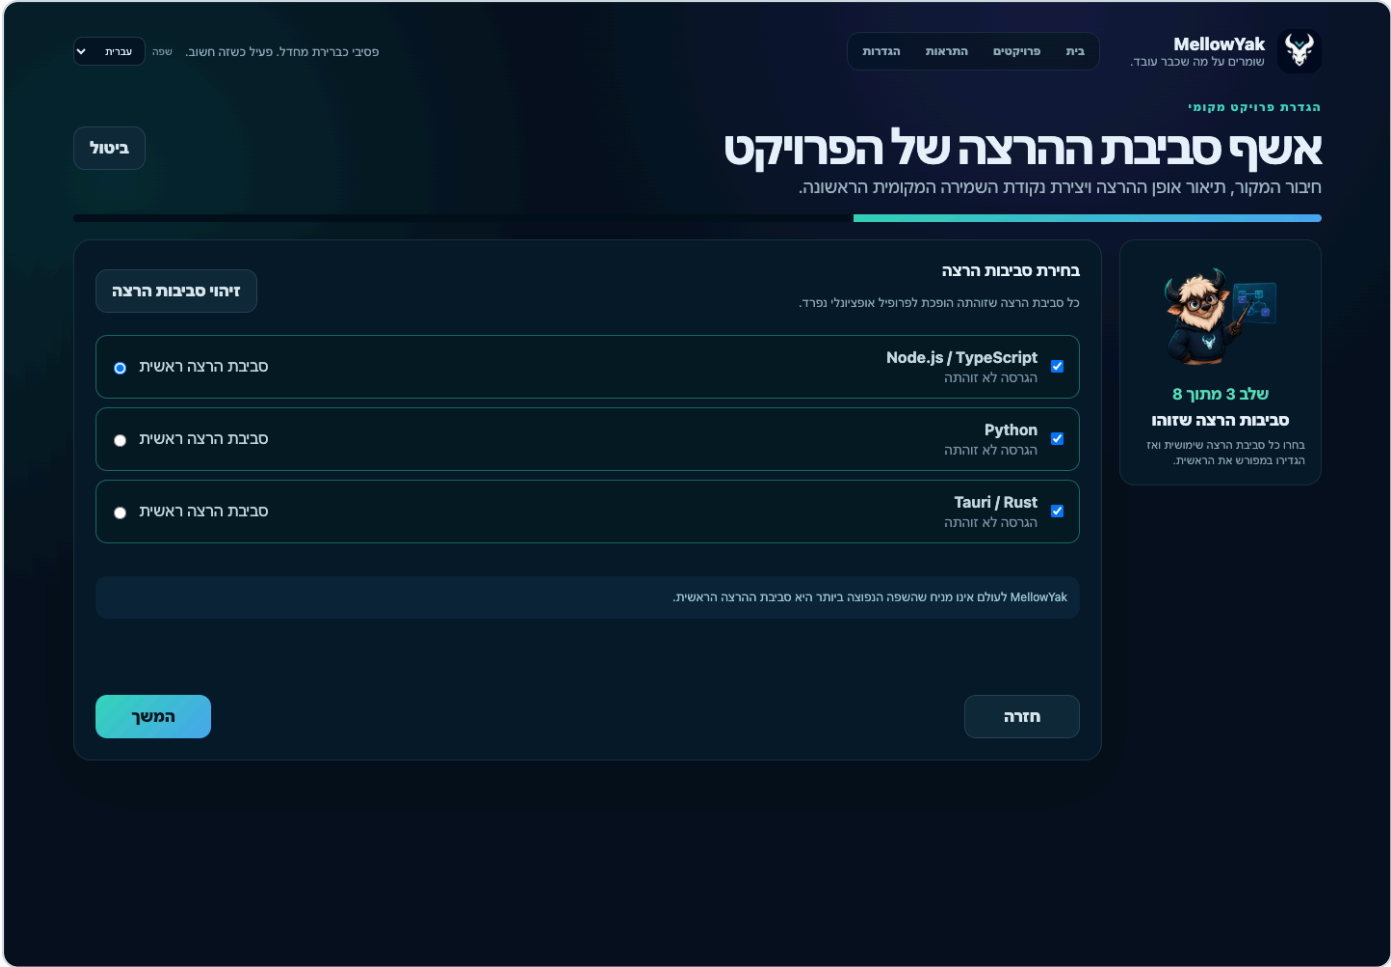

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Verify the runtime-selection step in complete Hebrew RTL layout.

Detected runtimes, checkboxes, version hints, and primary selection are mirrored correctly.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Select runtimes, choose the primary profile, detect again, continue, or go back.

The same synthetic runtime metadata used by the English screen.

Execution remains unapproved until the later configuration step.

Continue in Hebrew to configure executable and argv separately.

22. Known-Good Milestone — Hebrew RTL

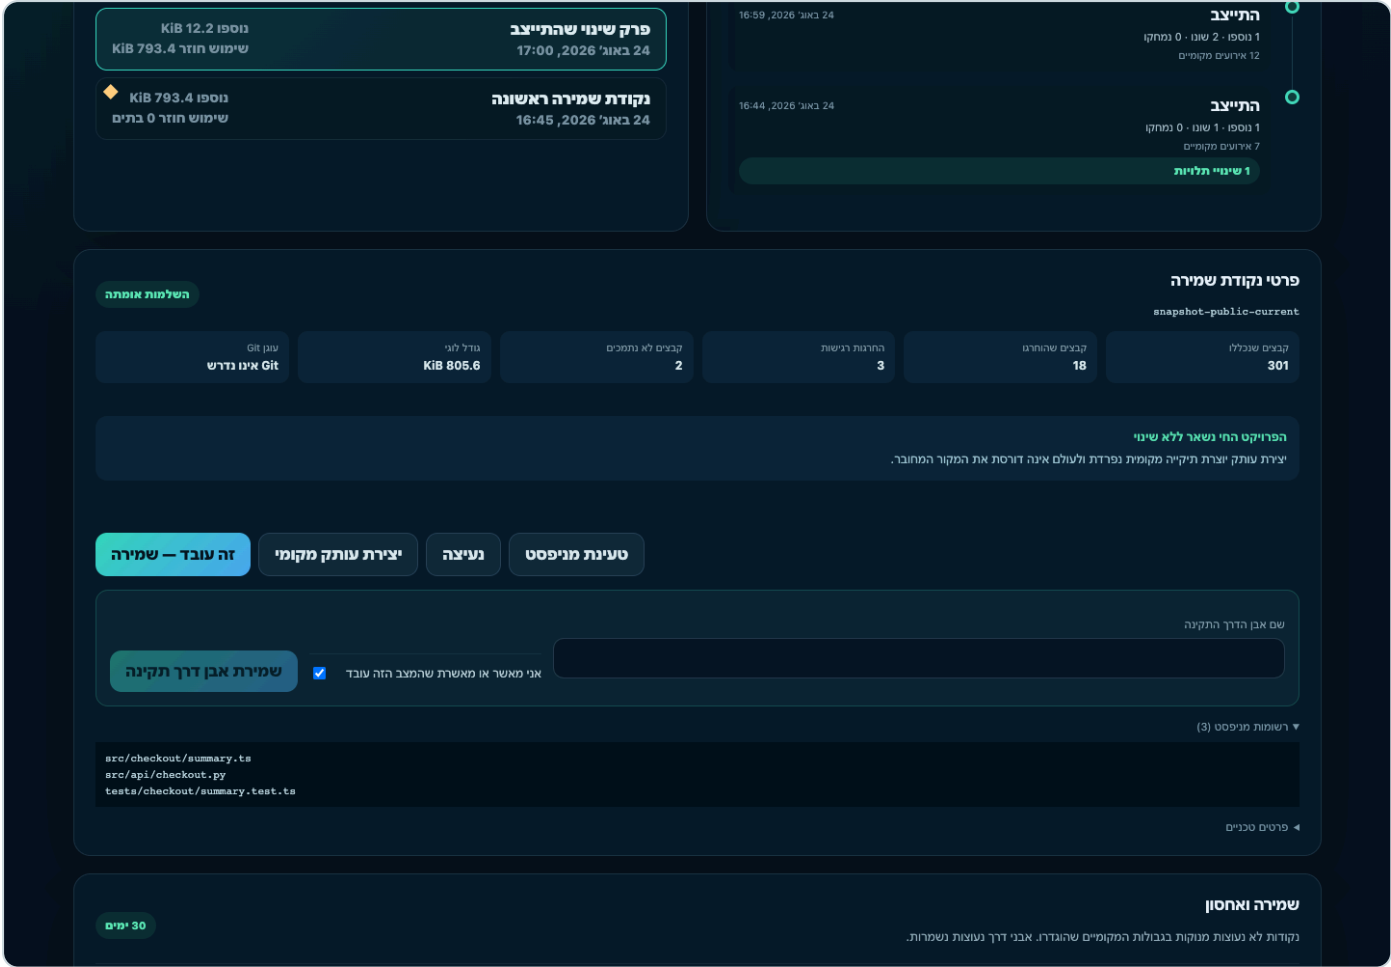

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Verify the known-good workflow, data direction, and controls in Hebrew.

The selected Save Point and milestone form are fully translated and right-to-left.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.


Name and save an attested milestone or inspect snapshot evidence.

Exact local snapshot and existing pinned milestone count.

Attestation remains manual until a supported probe passes.

Save the milestone only after explicit verification.

23. Confirmed regression — Hebrew RTL

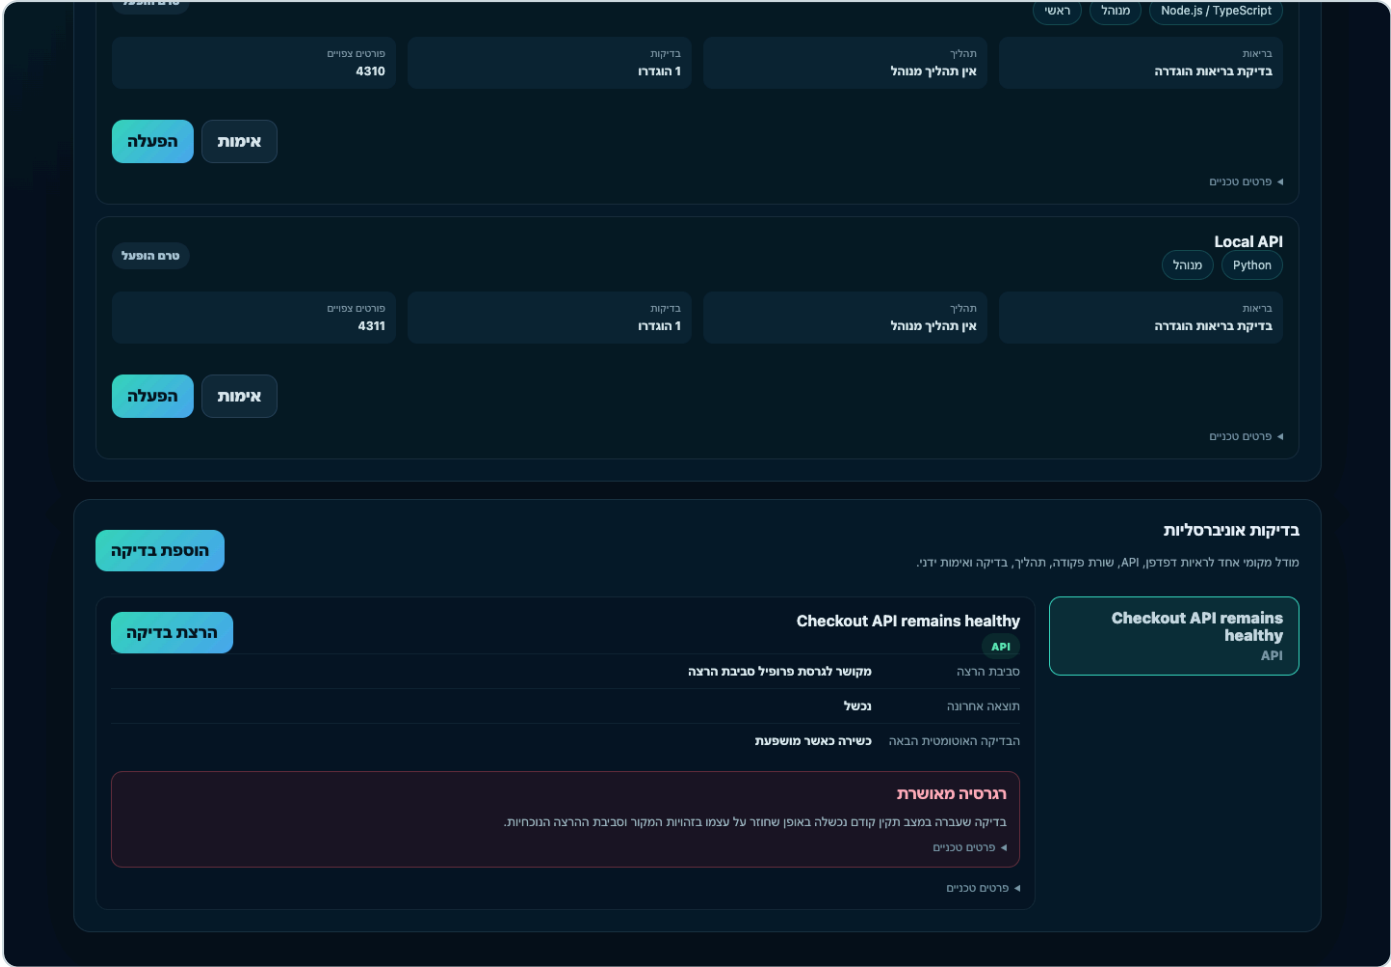

- Purpose
- Displayed state
- Source of data
- Available actions
- What is known
- What is not known
- Expected next step

Verify friendly confirmed-regression copy in Hebrew while technical identifiers remain LTR.

The reproducible prior-pass to current-fail transition is translated and mirrored.

Deterministic synthetic Phase 7 fixture data intercepted on the authenticated loopback API boundary.

Run again or expand technical details.

Accepted prior pass, comparable current failures, and retry evidence.

Root cause and automatic repair remain out of scope.

Review evidence and create a separate Repair Workspace when needed.