
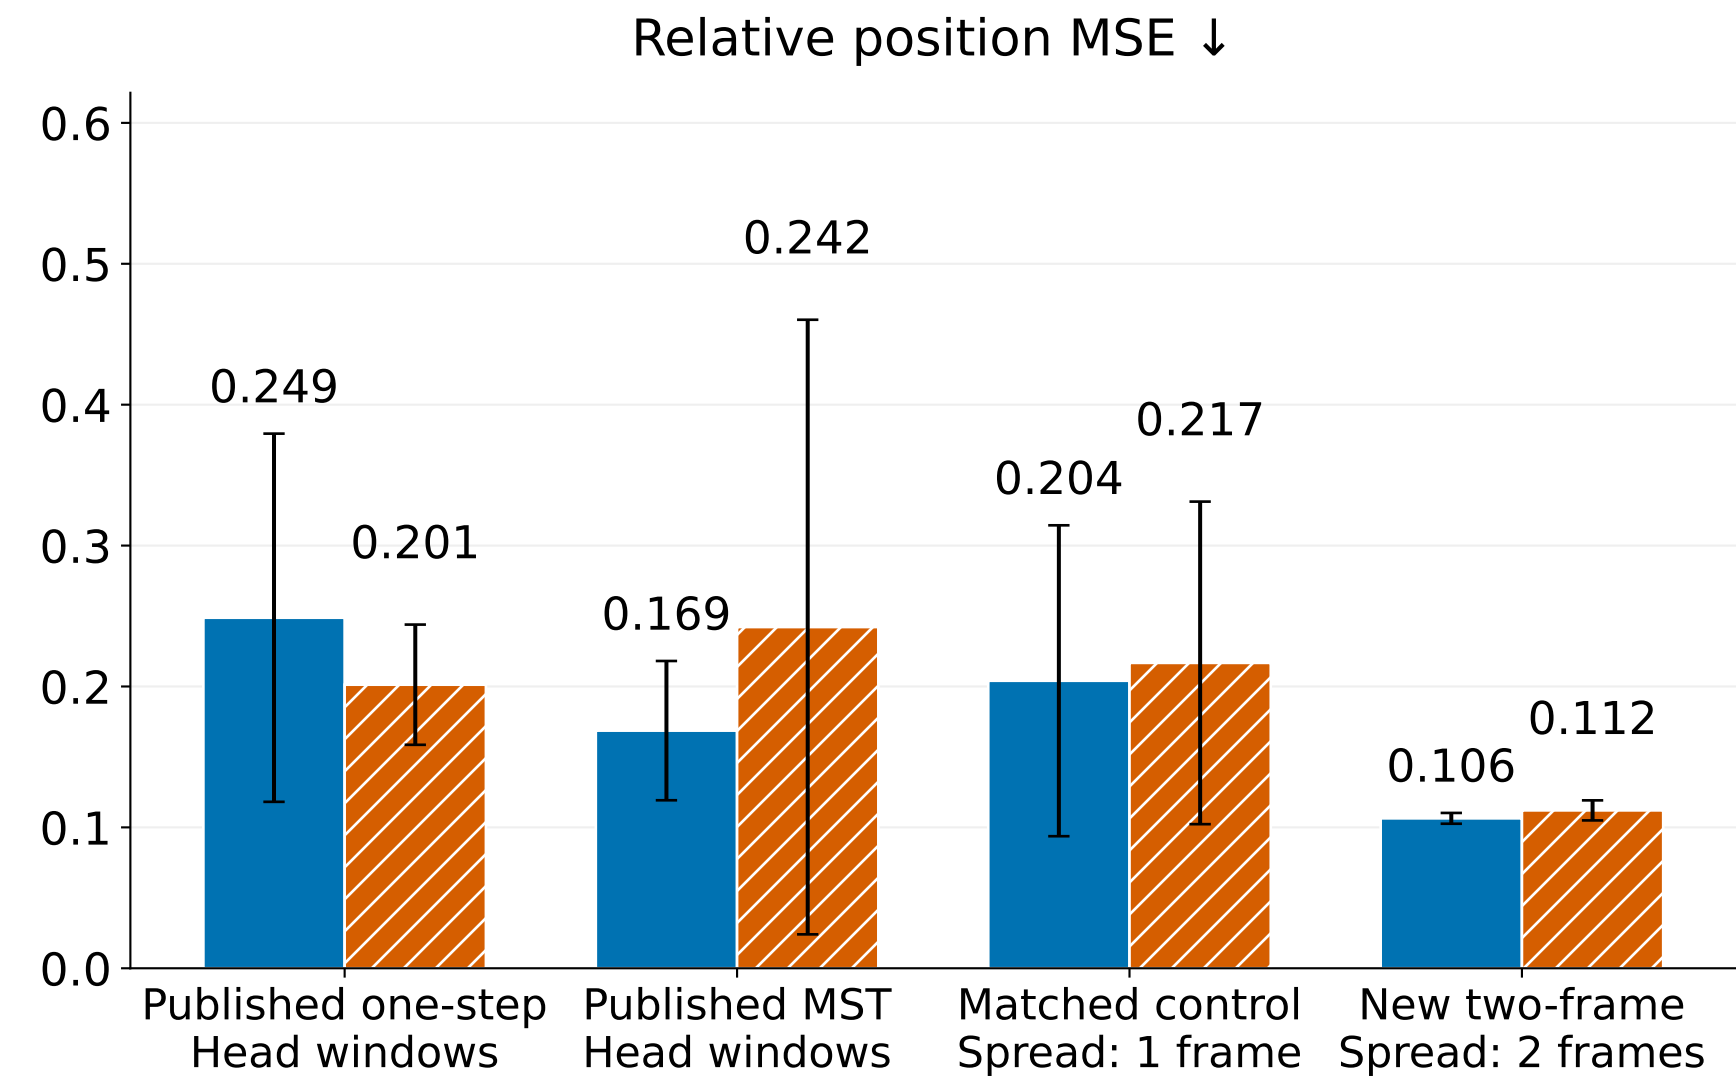


Noisy LJ: predict two frames per step with the original seed

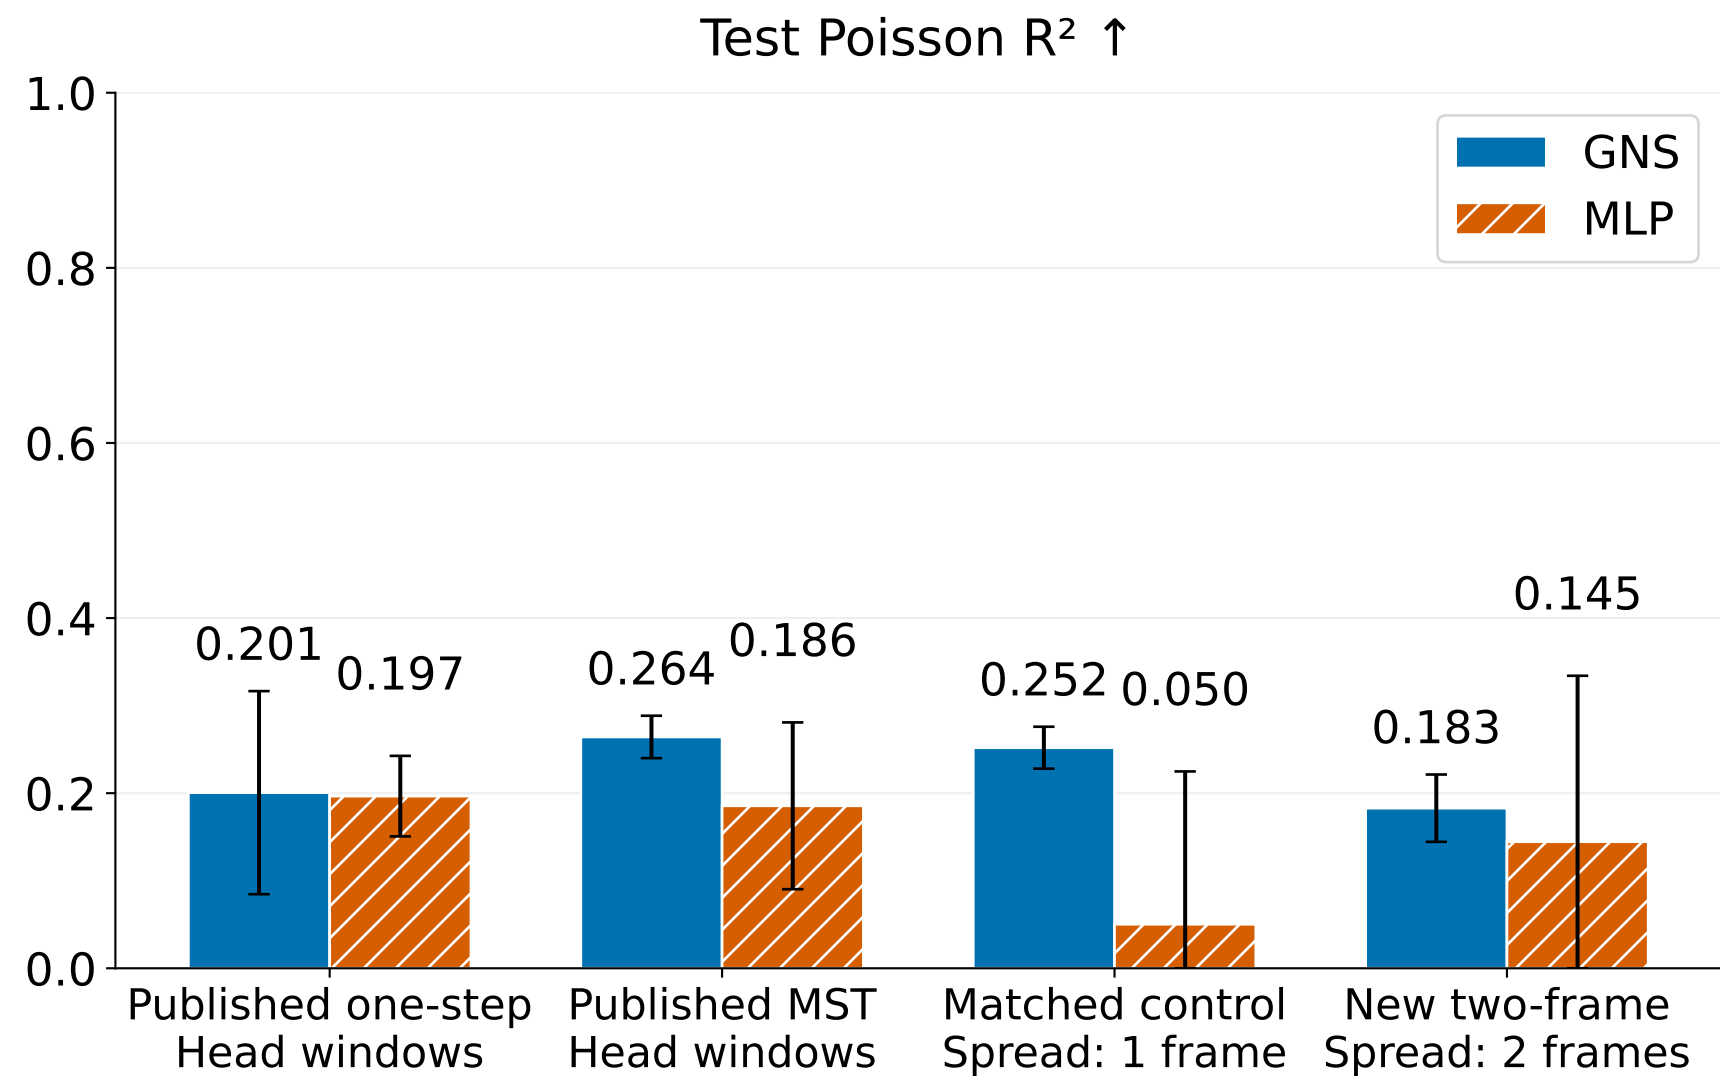

All inputs: frames 0–3 · Forecast and Poisson measurement: 3→103 · Same 50 train / 50 validation / 70 test networks
Mean $\pm$ sample SD over 3 seeds. Matched spread pair uses early stopping; published one-step used fixed 40 epochs.
Two-frame runs interpolate intermediate predictions. Negative R^2 is drawn at 0; labels retain actual values.