

How good is your model?

SUPERVISED LEARNING WITH SCIKIT-LEARN



Andreas Müller

Core developer, scikit-learn

Classification metrics

- Measuring model performance with accuracy:
 - Fraction of correctly classified samples
 - Not always a useful metric

Class imbalance example: Emails

- Spam classification
 - 99% of emails are real; 1% of emails are spam
- Could build a classifier that predicts ALL emails as real
 - 99% accurate!
 - But horrible at actually classifying spam
 - Fails at its original purpose
- Need more nuanced metrics

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

Diagnosing classification predictions

- Confusion matrix

	Predicted: Spam Email	Predicted: Real Email
Actual: Spam Email	True Positive	False Negative
Actual: Real Email	False Positive	True Negative

- Accuracy:

$$\frac{tp + tn}{tp + tn + fp + fn}$$

Metrics from the confusion matrix

- Precision $\frac{tp}{tp + fp}$
- Recall $\frac{tp}{tp + fn}$
- F1score: $2 \cdot \frac{\text{precision} \cdot \text{recall}}{\text{precision} + \text{recall}}$
- High precision: Not many real emails predicted as spam
- High recall: Predicted most spam emails correctly

Confusion matrix in scikit-learn

```
from sklearn.metrics import classification_report
from sklearn.metrics import confusion_matrix

knn = KNeighborsClassifier(n_neighbors=8)

X_train, X_test, y_train, y_test = train_test_split(X, y,
                                                    test_size=0.4, random_state=42)

knn.fit(X_train, y_train)

y_pred = knn.predict(X_test)
```

Confusion matrix in scikit-learn

```
print(confusion_matrix(y_test, y_pred))
```

```
[[52  7]
 [ 3 112]]
```

```
print(classification_report(y_test, y_pred))
```

	precision	recall	f1-score	support
0	0.95	0.88	0.91	59
1	0.94	0.97	0.96	115
avg / total	0.94	0.94	0.94	174

Let's practice!

SUPERVISED LEARNING WITH SCIKIT-LEARN

Logistic regression and the ROC curve

SUPERVISED LEARNING WITH SCIKIT-LEARN



Hugo Bowne-Anderson
Data Scientist, DataCamp

Logistic regression for binary classification

- Logistic regression outputs probabilities
- If the probability 'p' is greater than 0.5:
 - The data is labeled '1'
- If the probability 'p' is less than 0.5:
- The data is labeled '0'

Linear decision boundary



Logistic regression in scikit-learn

```
from sklearn.linear_model import LogisticRegression
from sklearn.model_selection import train_test_split

logreg = LogisticRegression()


X_train, X_test, y_train, y_test = train_test_split(X, y,
                                                    test_size=0.4, random_state=42)

logreg.fit(X_train, y_train)
y_pred = logreg.predict(X_test)
```



Probability thresholds

- By default, logistic regression threshold = 0.5
- Not specific to logistic regression
 - k-NN classifiers also have thresholds
- What happens if we vary the threshold?


The ROC curve

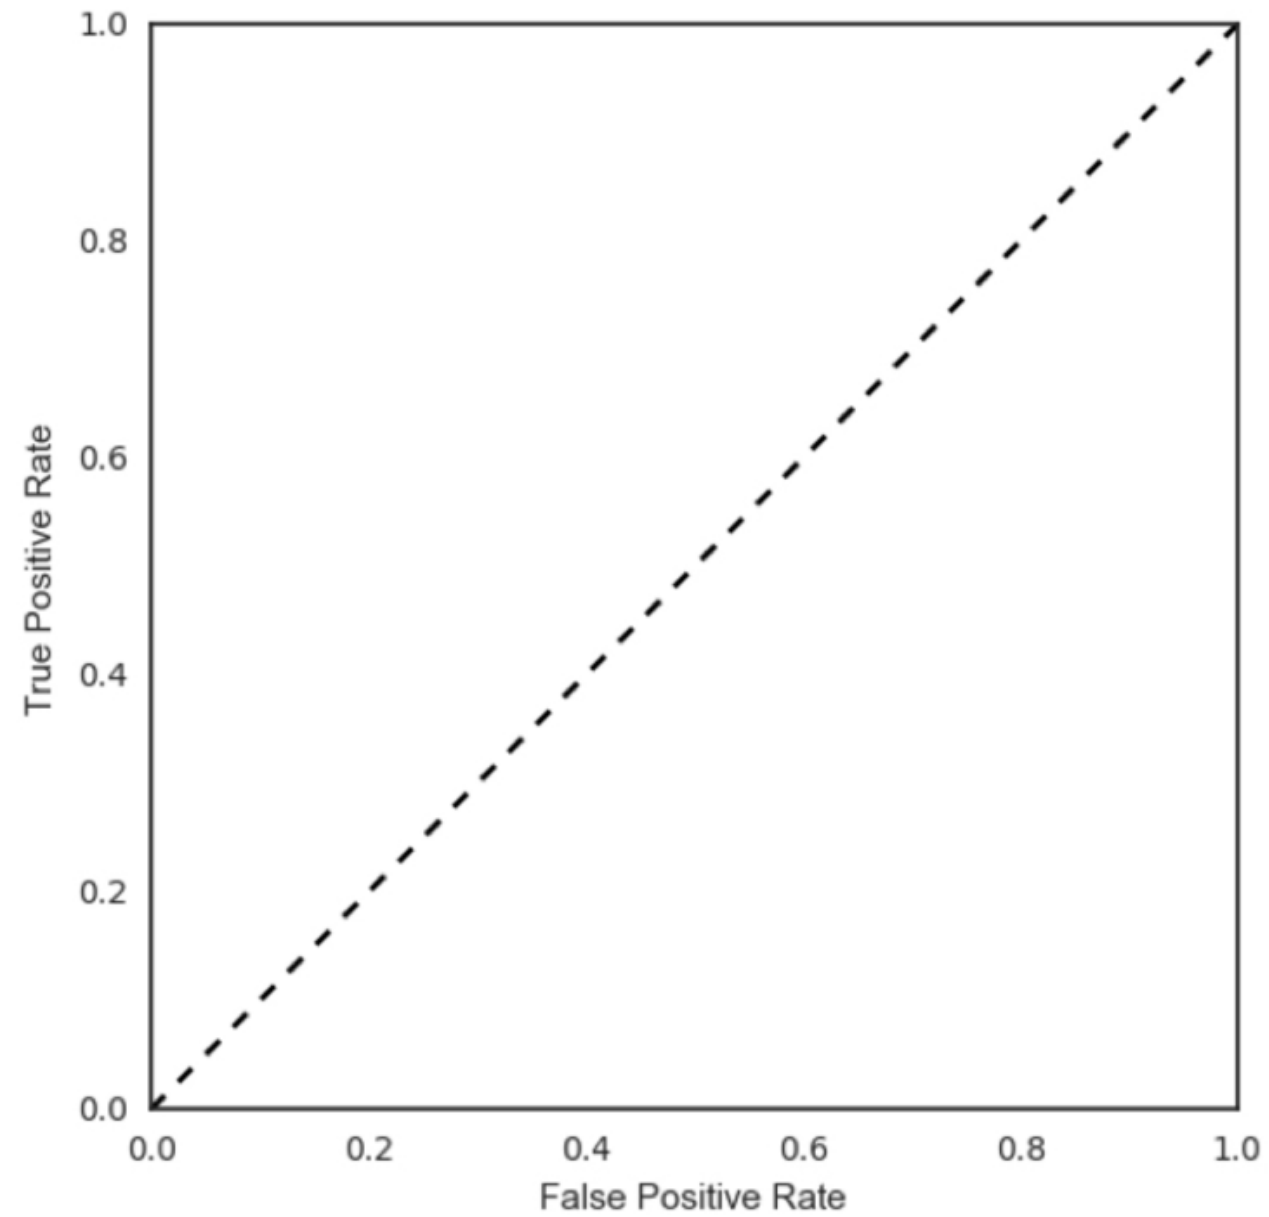


The ROC curve

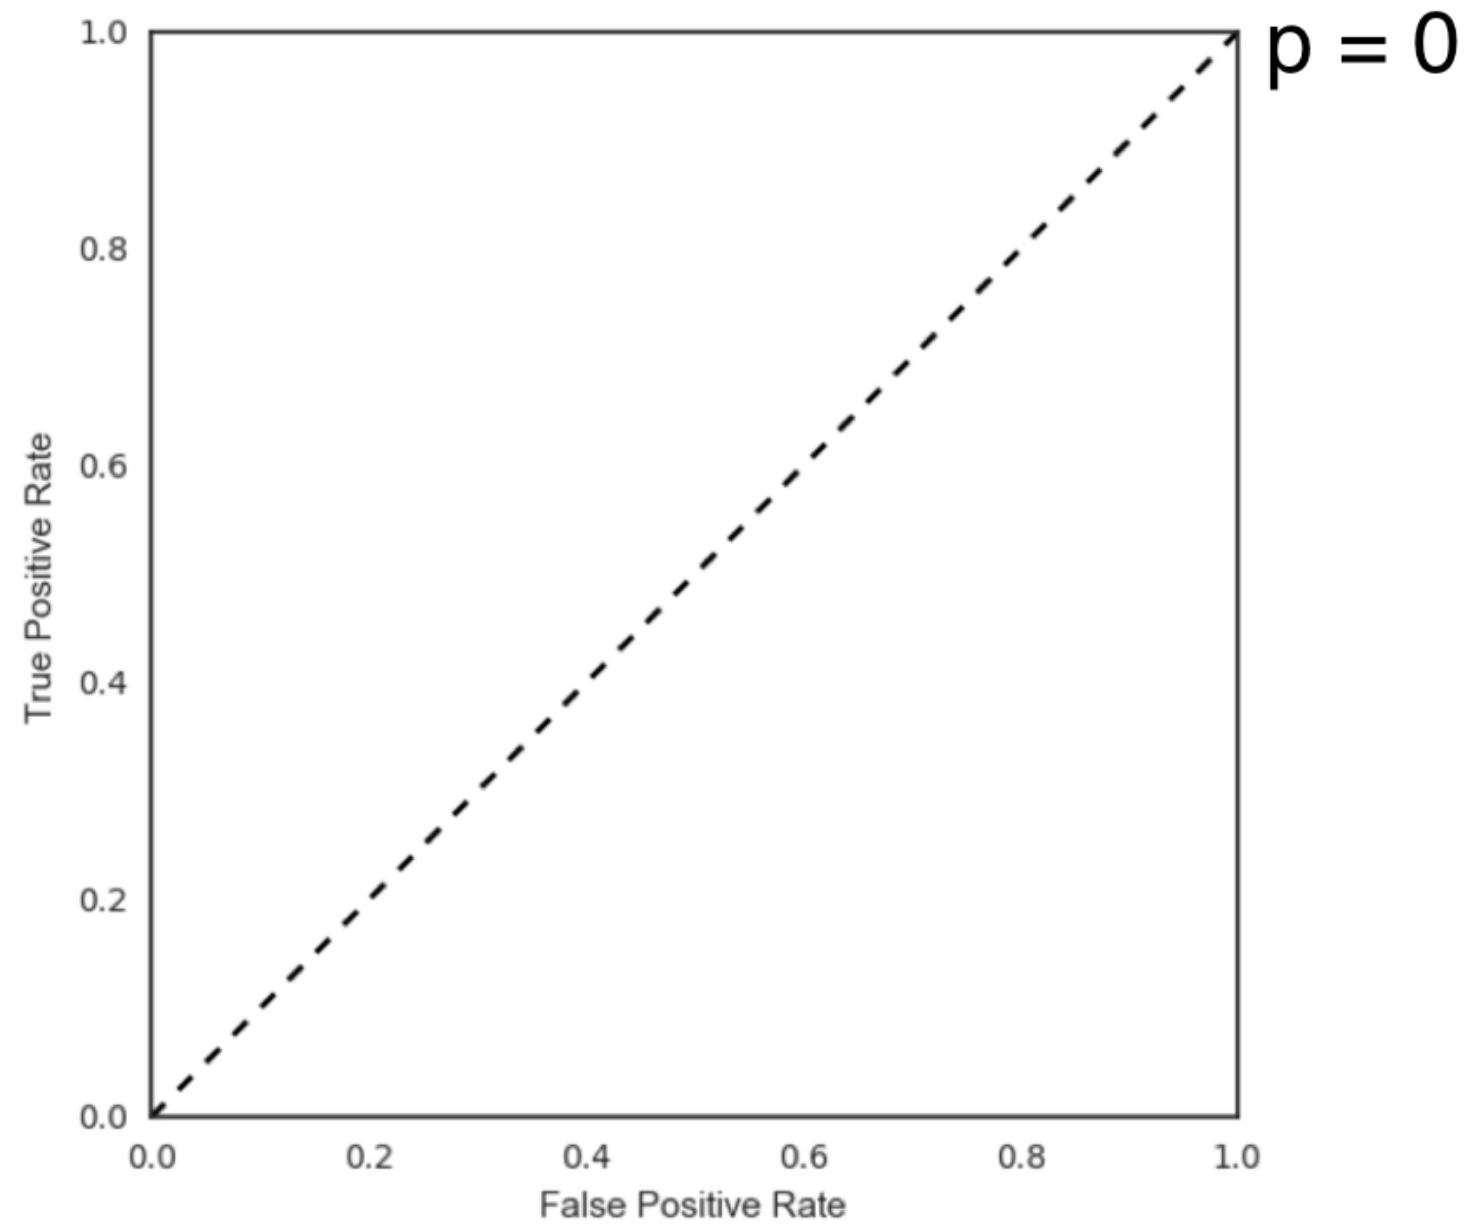


The ROC curve

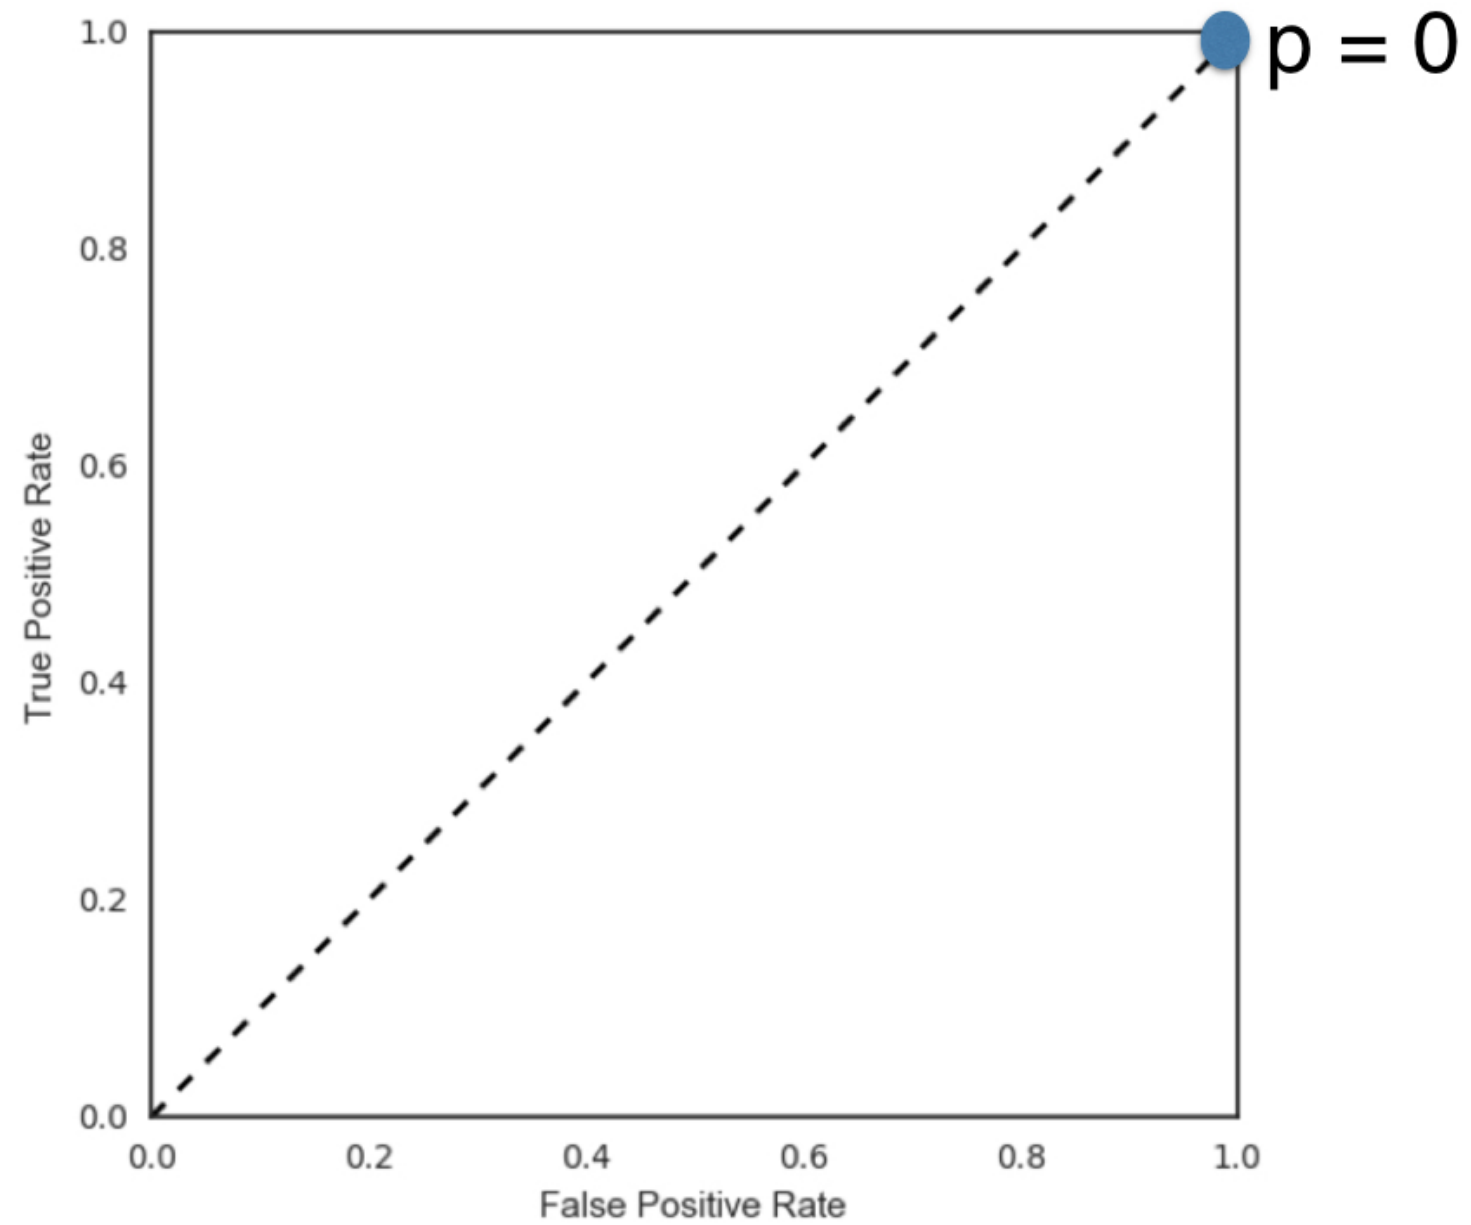


The ROC curve

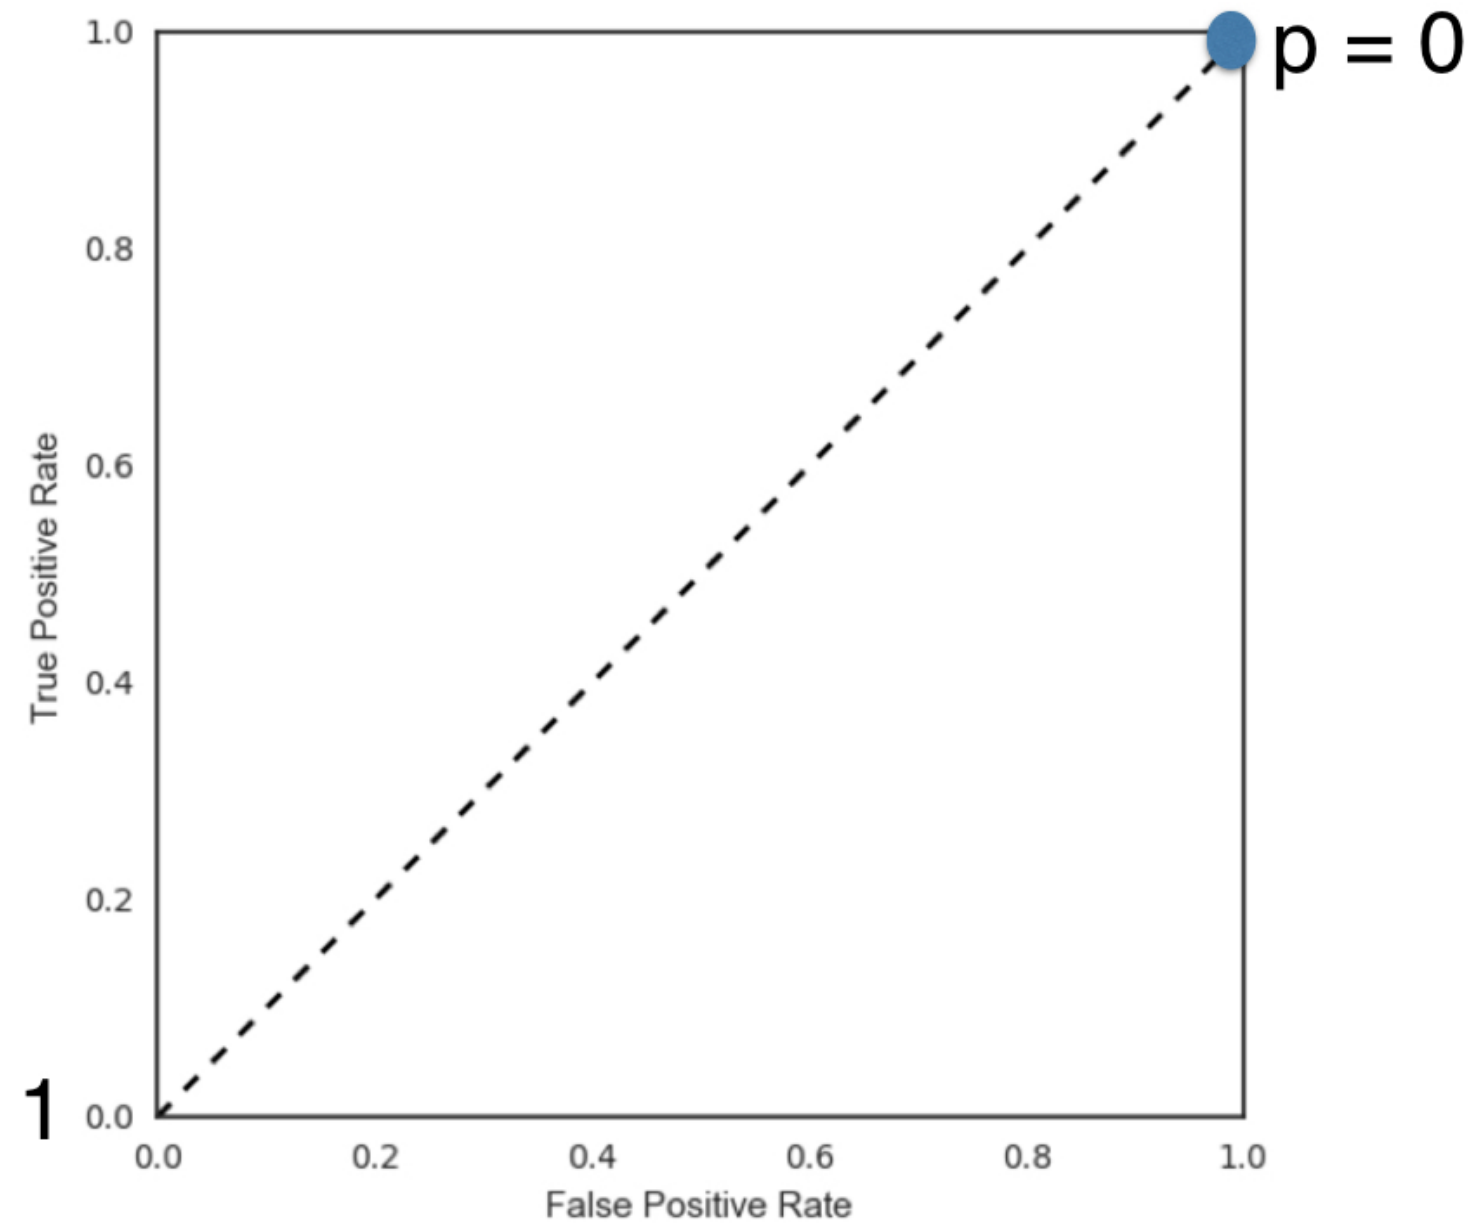


The ROC curve

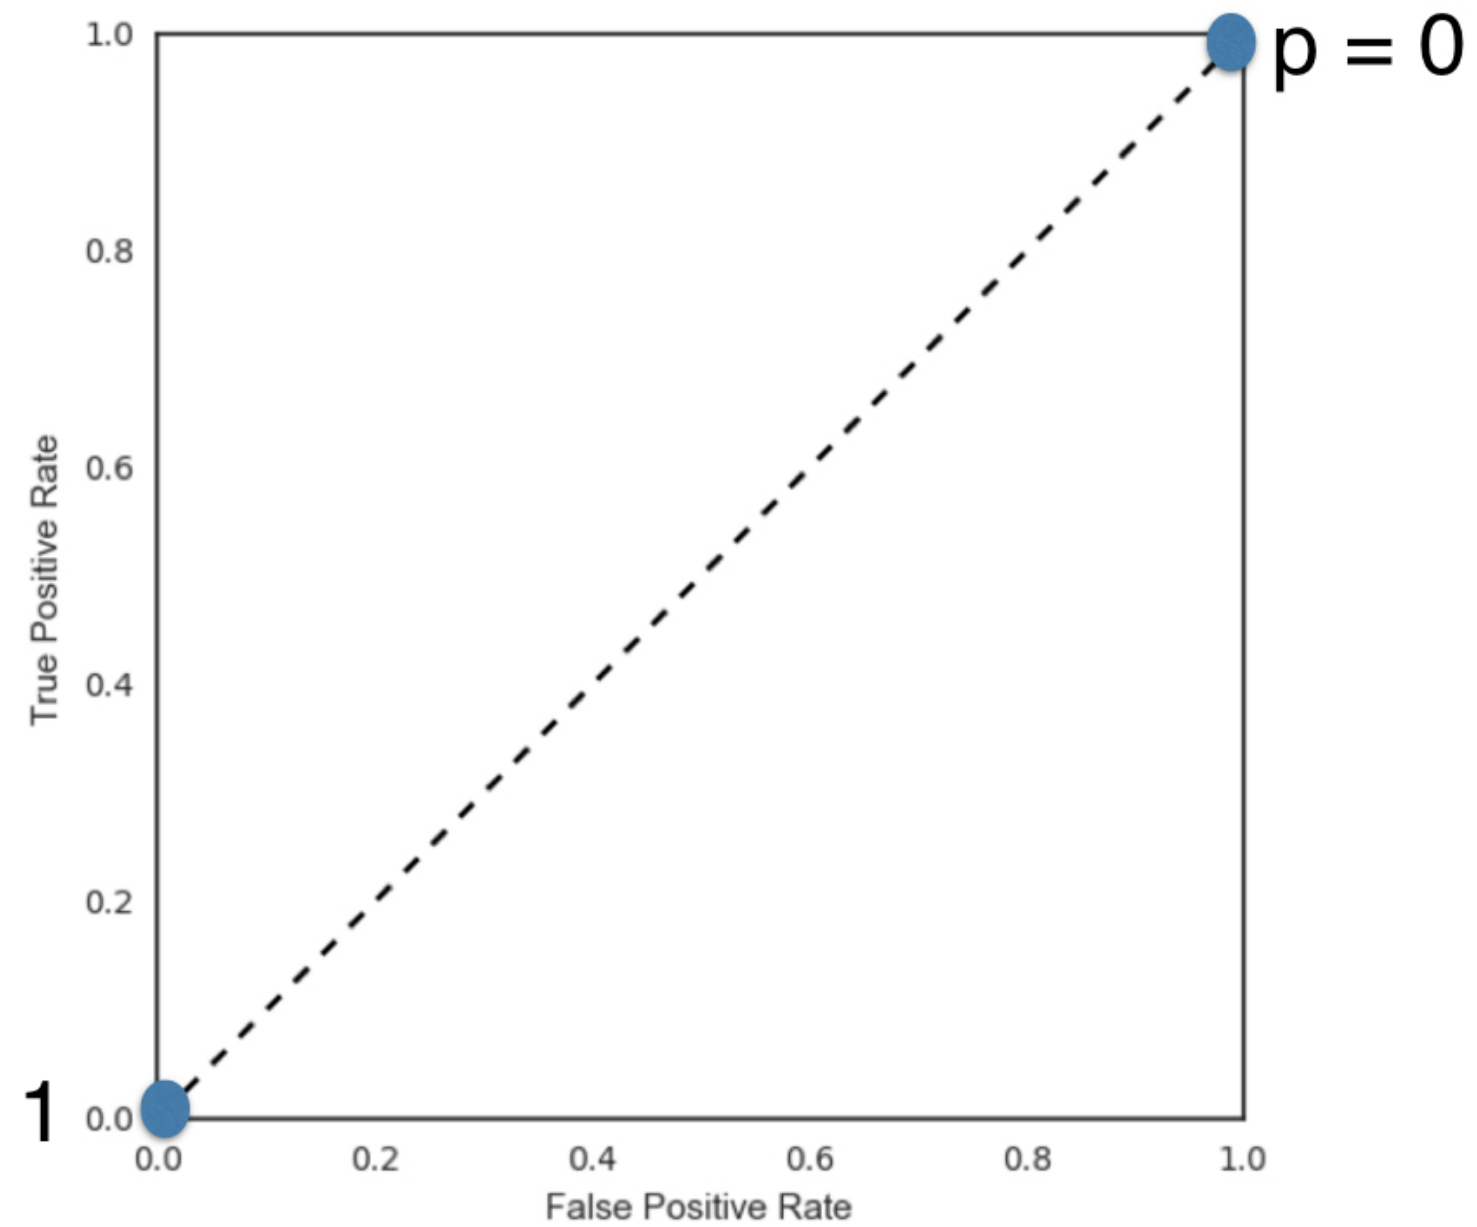

The ROC curve

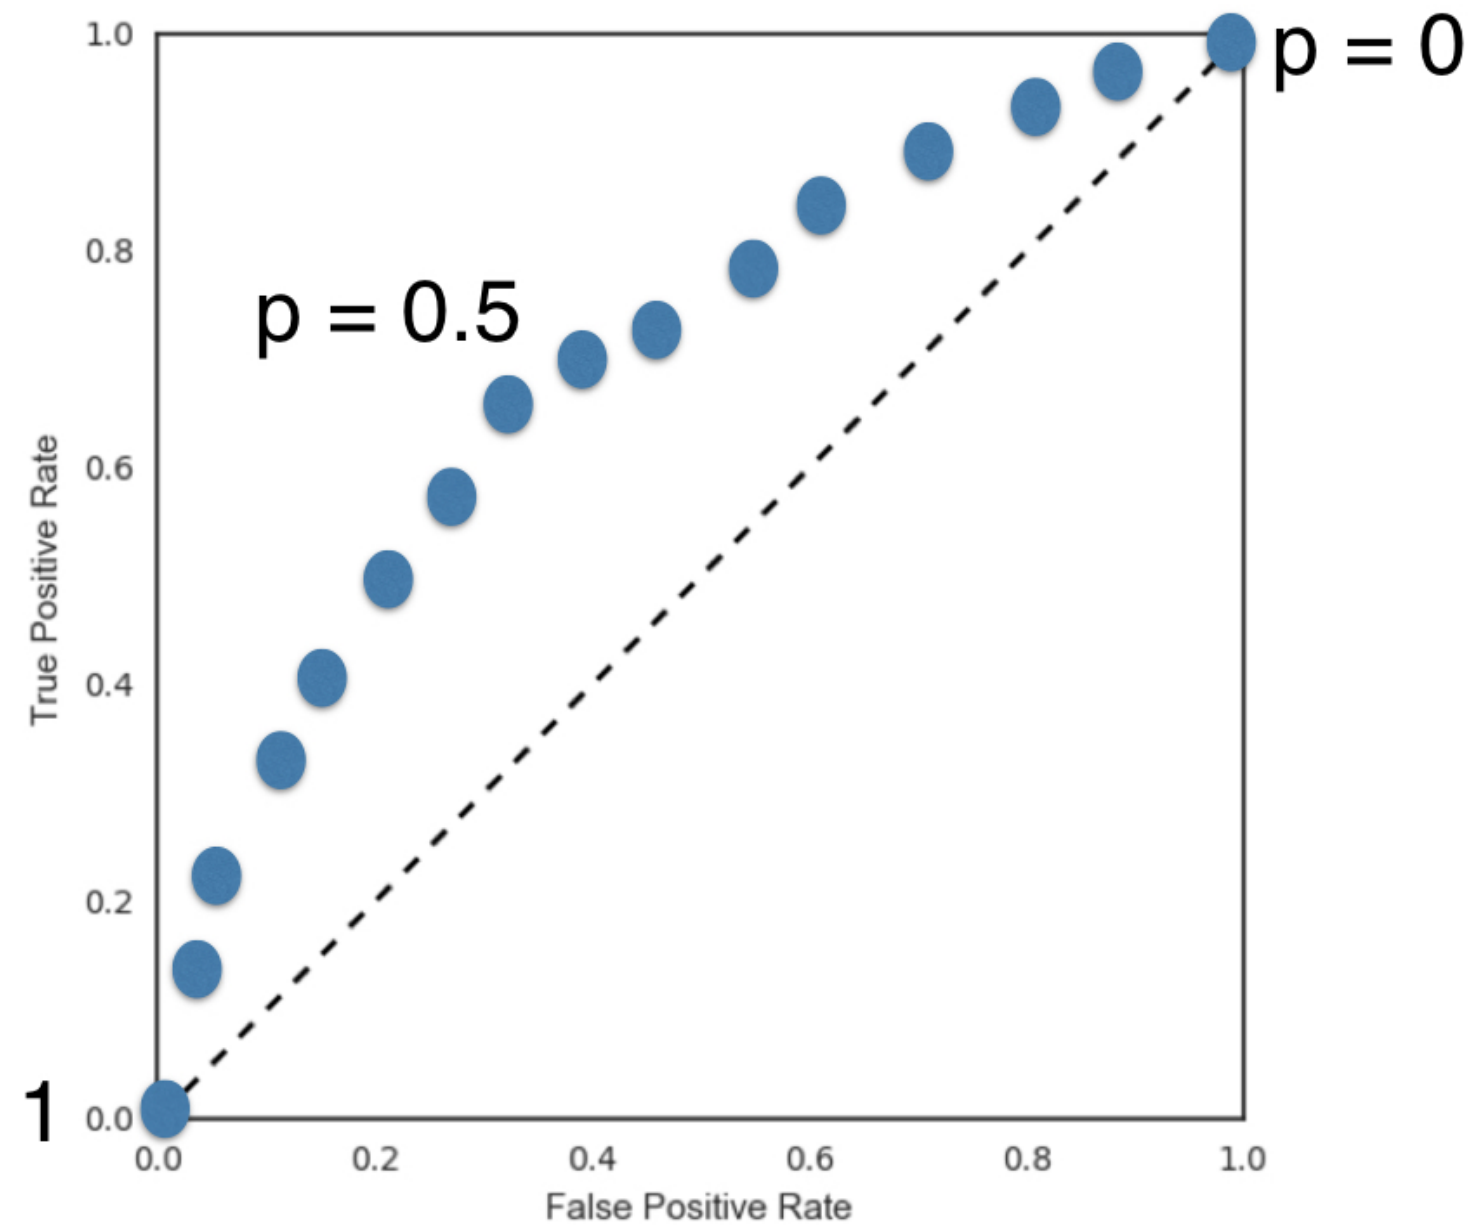

The ROC curve

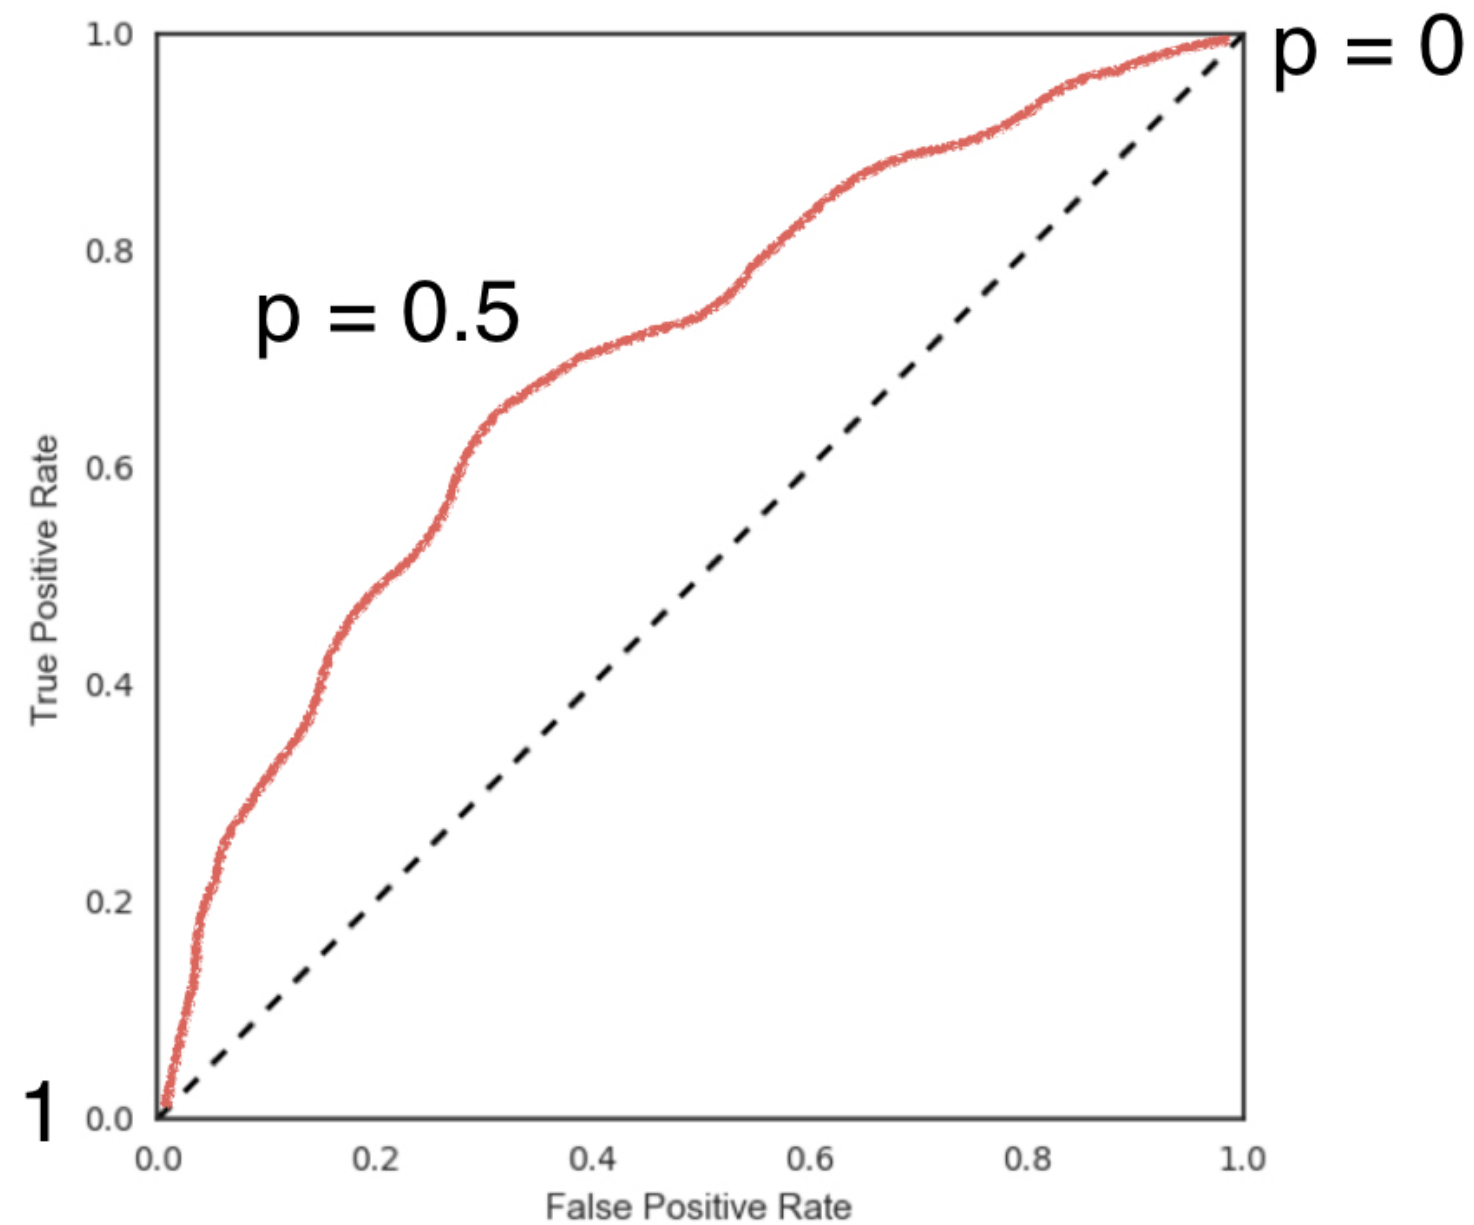


Plotting the ROC curve

```
from sklearn.metrics import roc_curve
y_pred_prob = logreg.predict_proba(X_test)[: , 1]
fpr, tpr, thresholds = roc_curve(y_test, y_pred_prob)

plt.plot([0, 1], [0, 1], 'k--')
plt.plot(fpr, tpr, label='Logistic Regression')
plt.xlabel('False Positive Rate')
plt.ylabel('True Positive Rate')
plt.title('Logistic Regression ROC Curve')
plt.show();
```

Plotting the ROC curve

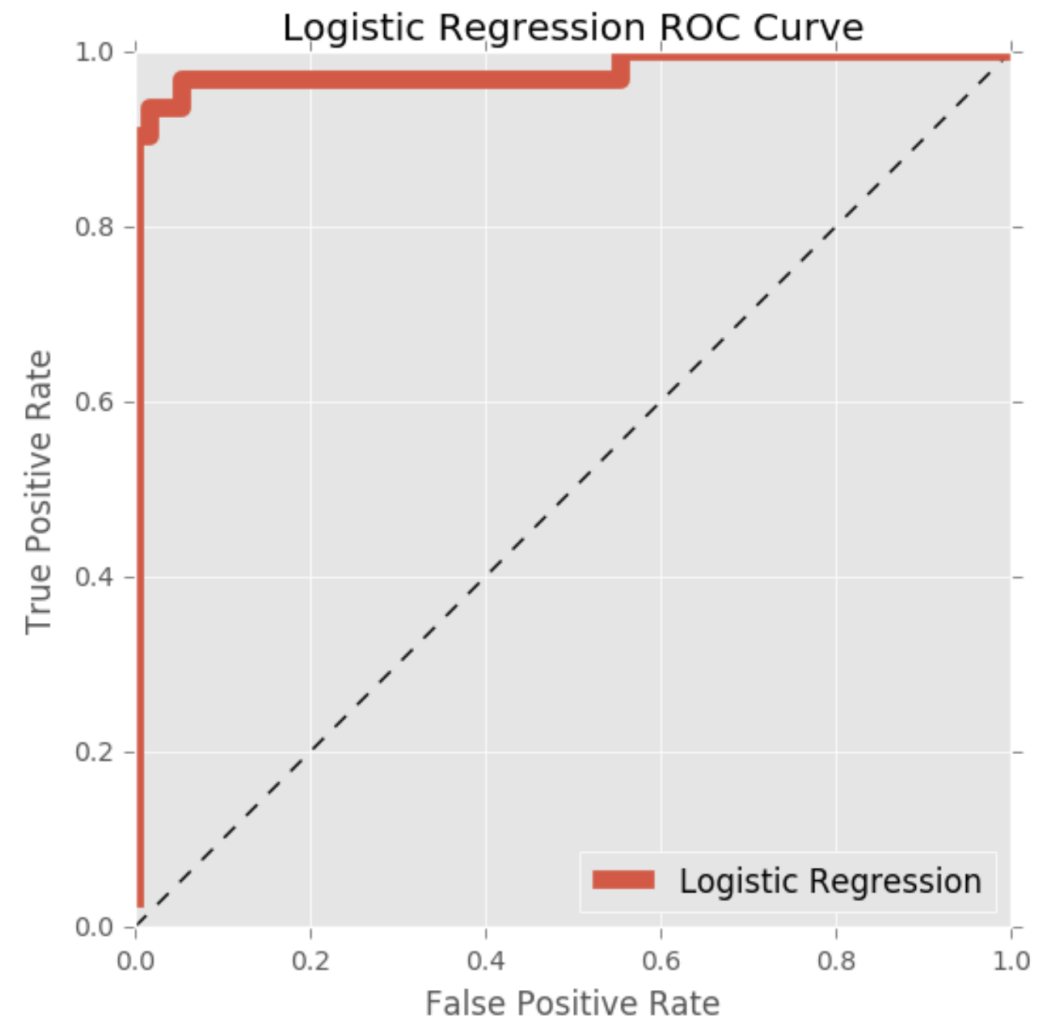

```
logreg.predict_proba(X_test)[ :, 1 ]
```

Let's practice!

SUPERVISED LEARNING WITH SCIKIT-LEARN

Area under the ROC curve


SUPERVISED LEARNING WITH SCIKIT-LEARN



Hugo Bowne-Anderson
Data Scientist, DataCamp


Area under the ROC curve (AUC)

- Larger area under the ROC curve = better model

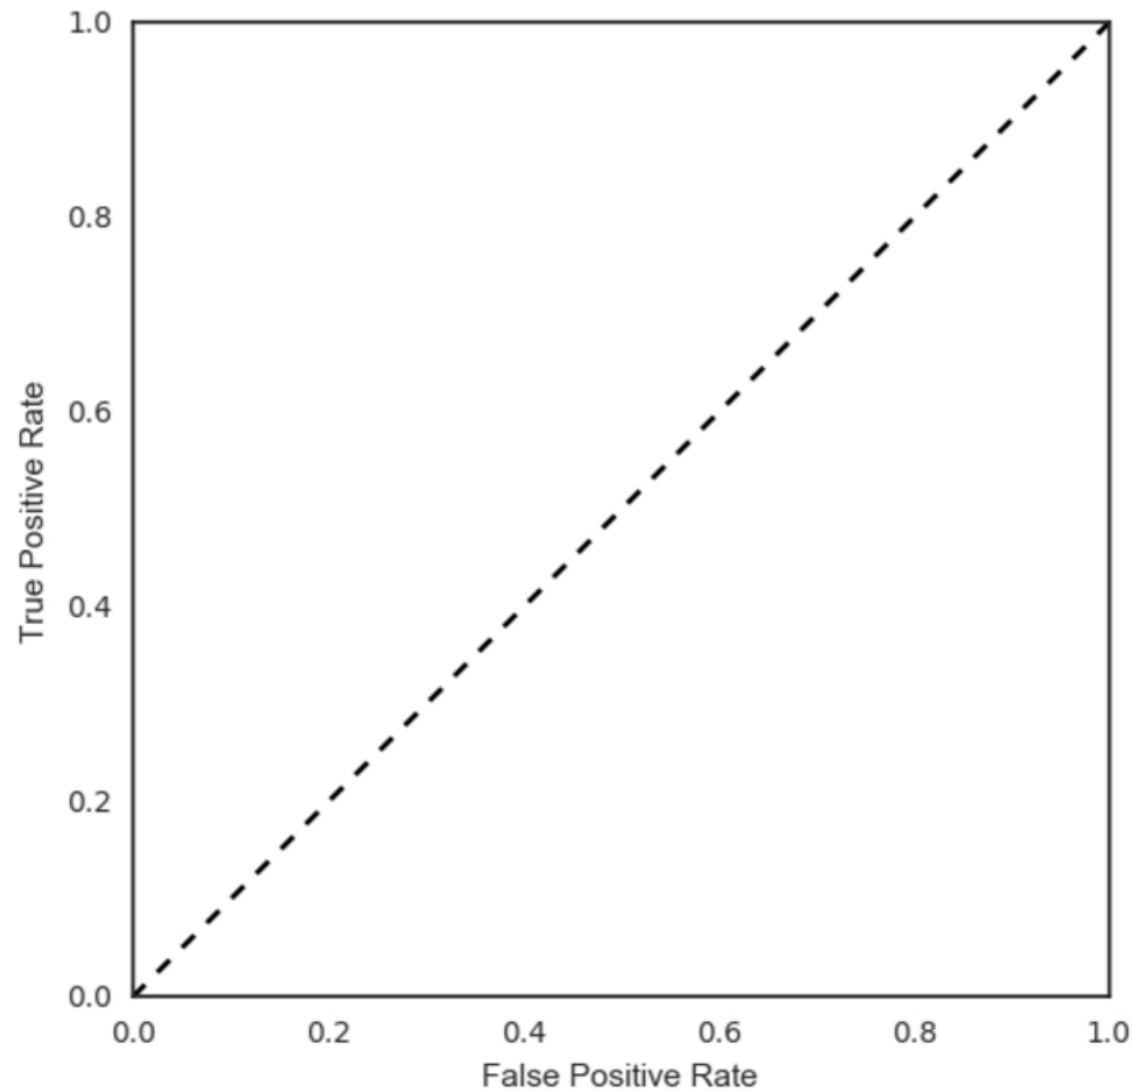


Area under the ROC curve (AUC)

- Larger area under the ROC curve = better model

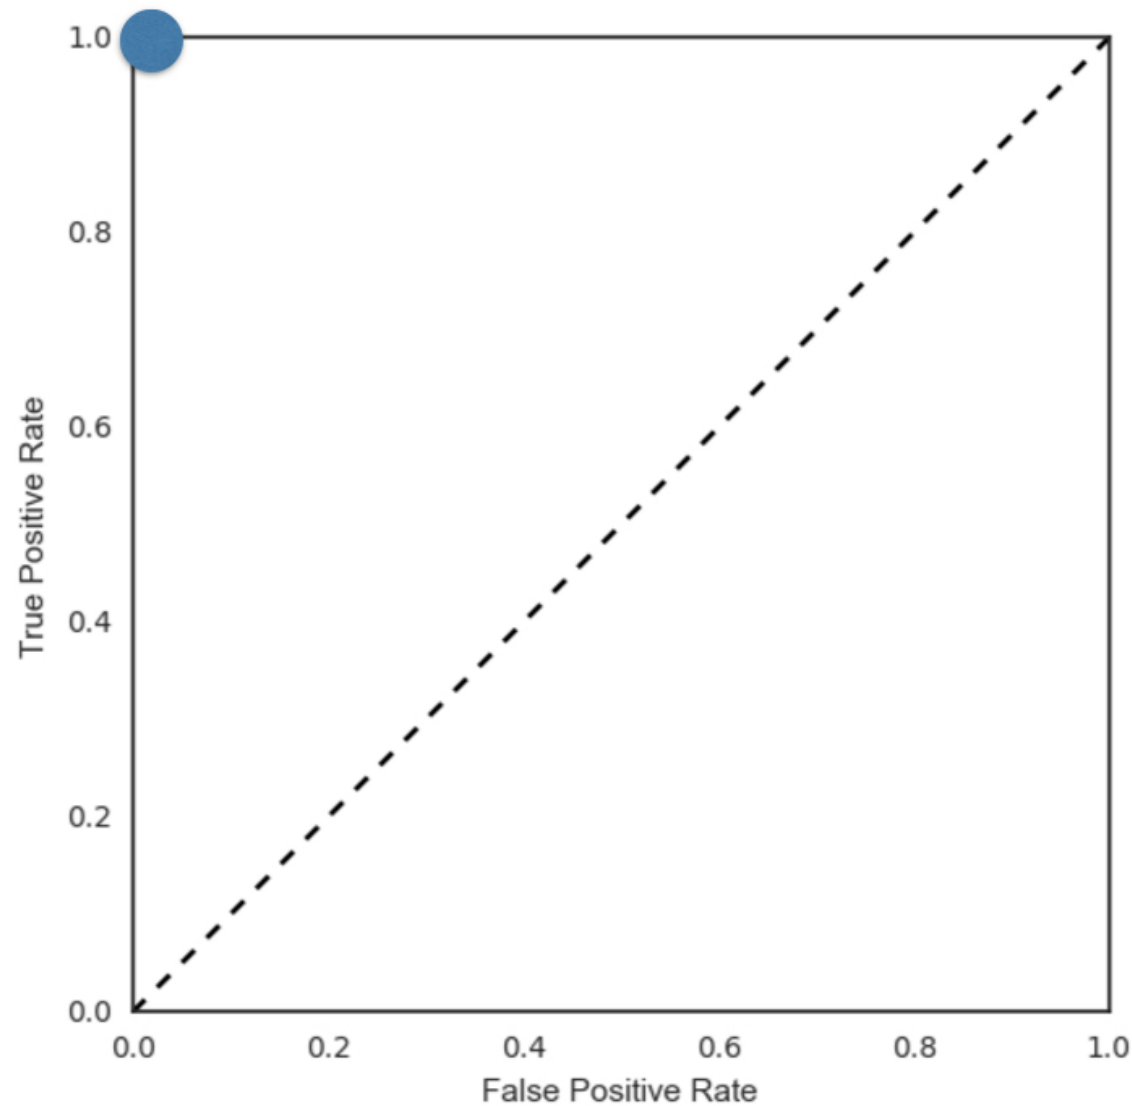


Area under the ROC curve (AUC)

- Larger area under the ROC curve = better model

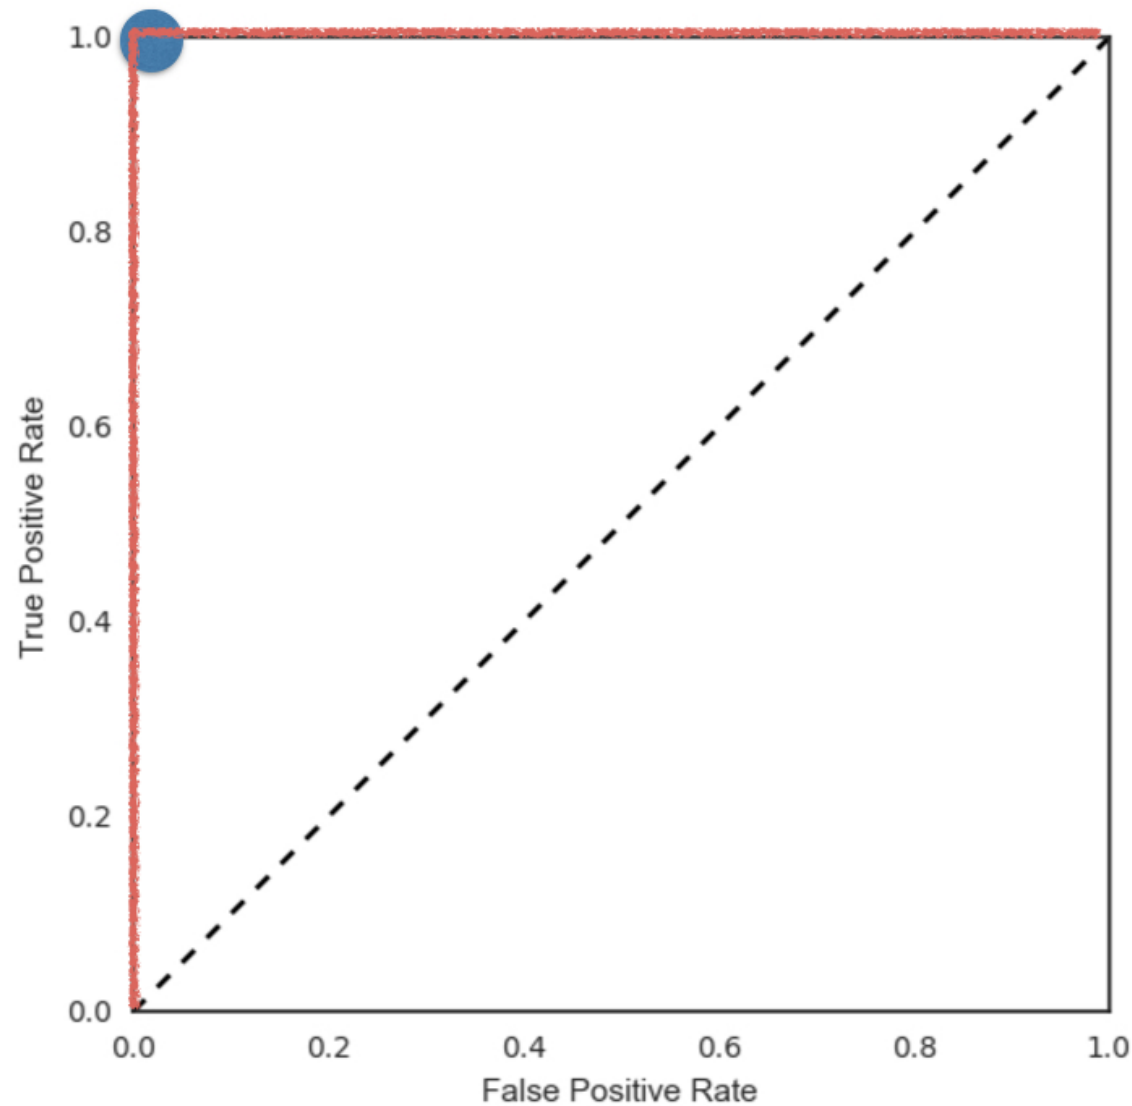

Area under the ROC curve (AUC)

- Larger area under the ROC curve = better model

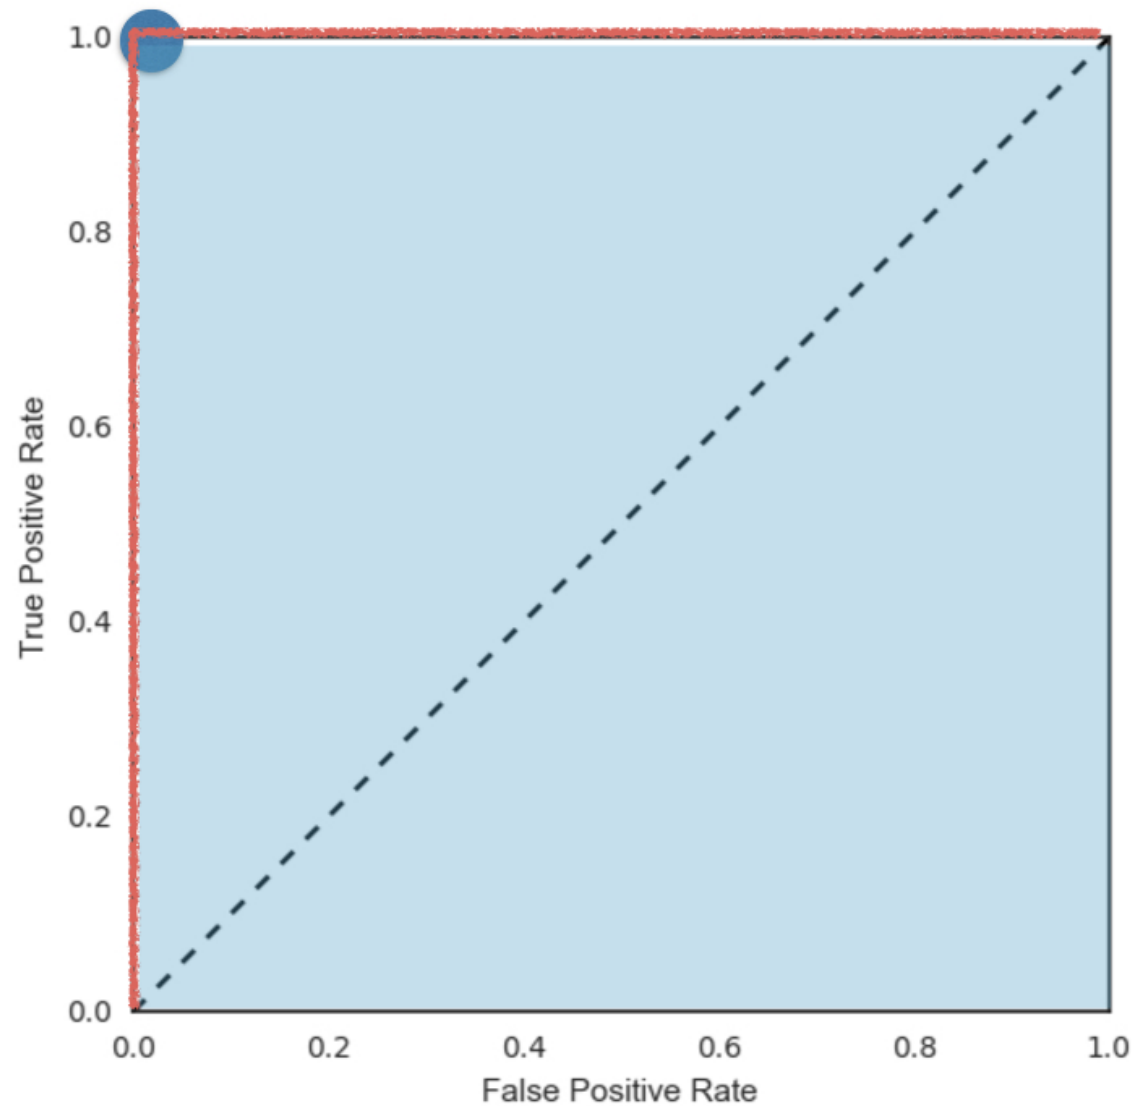

AUC in scikit-learn

```
from sklearn.metrics import roc_auc_score
logreg = LogisticRegression()
X_train, X_test, y_train, y_test = train_test_split(X, y,
                                                    test_size=0.4, random_state=42)
logreg.fit(X_train, y_train)
y_pred_prob = logreg.predict_proba(X_test)[:,1]
roc_auc_score(y_test, y_pred_prob)
```

```
0.997466216216
```

AUC using cross-validation

```
from sklearn.model_selection import cross_val_score
cv_scores = cross_val_score(logreg, X, y, cv=5,
                             scoring='roc_auc')

print(cv_scores)
```

```
[ 0.99673203  0.99183007  0.99583796  1.          0.96140652]
```

Let's practice!

SUPERVISED LEARNING WITH SCIKIT-LEARN

Hyperparameter tuning

SUPERVISED LEARNING WITH SCIKIT-LEARN



Hugo Bowne-Anderson
Data Scientist, DataCamp

Hyperparameter tuning

- Linear regression: Choosing parameters
- Ridge/lasso regression: Choosing alpha
- k-Nearest Neighbors: Choosing n_neighbors
- Parameters like alpha and k: Hyperparameters
- Hyperparameters cannot be learned by fitting the model

Choosing the correct hyperparameter

- Try a bunch of different hyperparameter values
- Fit all of them separately
- See how well each performs
- Choose the best performing one
- It is essential to use cross-validation

Grid search cross-validation

C	0.5				
	0.4				
	0.3				
	0.2				
	0.1				
		0.1	0.2	0.3	0.4

Alpha

Grid search cross-validation

C	0.5	0.701	0.703	0.697	0.696
	0.4	0.699	0.702	0.698	0.702
	0.3	0.721	0.726	0.713	0.703
	0.2	0.706	0.705	0.704	0.701
	0.1	0.698	0.692	0.688	0.675
		0.1	0.2	0.3	0.4
Alpha					

Grid search cross-validation

C	0.5	0.701	0.703	0.697	0.696
	0.4	0.699	0.702	0.698	0.702
	0.3	0.721	0.726	0.713	0.703
	0.2	0.706	0.705	0.704	0.701
	0.1	0.698	0.692	0.688	0.675
		0.1	0.2	0.3	0.4
Alpha					

GridSearchCV in scikit-learn

```
from sklearn.model_selection import GridSearchCV
param_grid = {'n_neighbors': np.arange(1, 50)}
knn = KNeighborsClassifier()
knn_cv = GridSearchCV(knn, param_grid, cv=5)
knn_cv.fit(X, y)
knn_cv.best_params_
```

```
{'n_neighbors': 12}
```

```
knn_cv.best_score_
```

```
0.933216168717
```

Let's practice!

SUPERVISED LEARNING WITH SCIKIT-LEARN

Hold-out set for final evaluation

SUPERVISED LEARNING WITH SCIKIT-LEARN



Hugo Bowne-Anderson
Data Scientist, DataCamp

Hold-out set reasoning

- How well can the model perform on never before seen data?
- Using ALL data for cross-validation is not ideal
- Split data into training and hold-out set at the beginning
- Perform grid search cross-validation on training set
- Choose best hyperparameters and evaluate on hold-out set

Let's practice!

SUPERVISED LEARNING WITH SCIKIT-LEARN