
A GP individual contains three role-specific trees

Illustrative valid expressions, not initialized seed or trained optimum. All nodes and edges are editable.

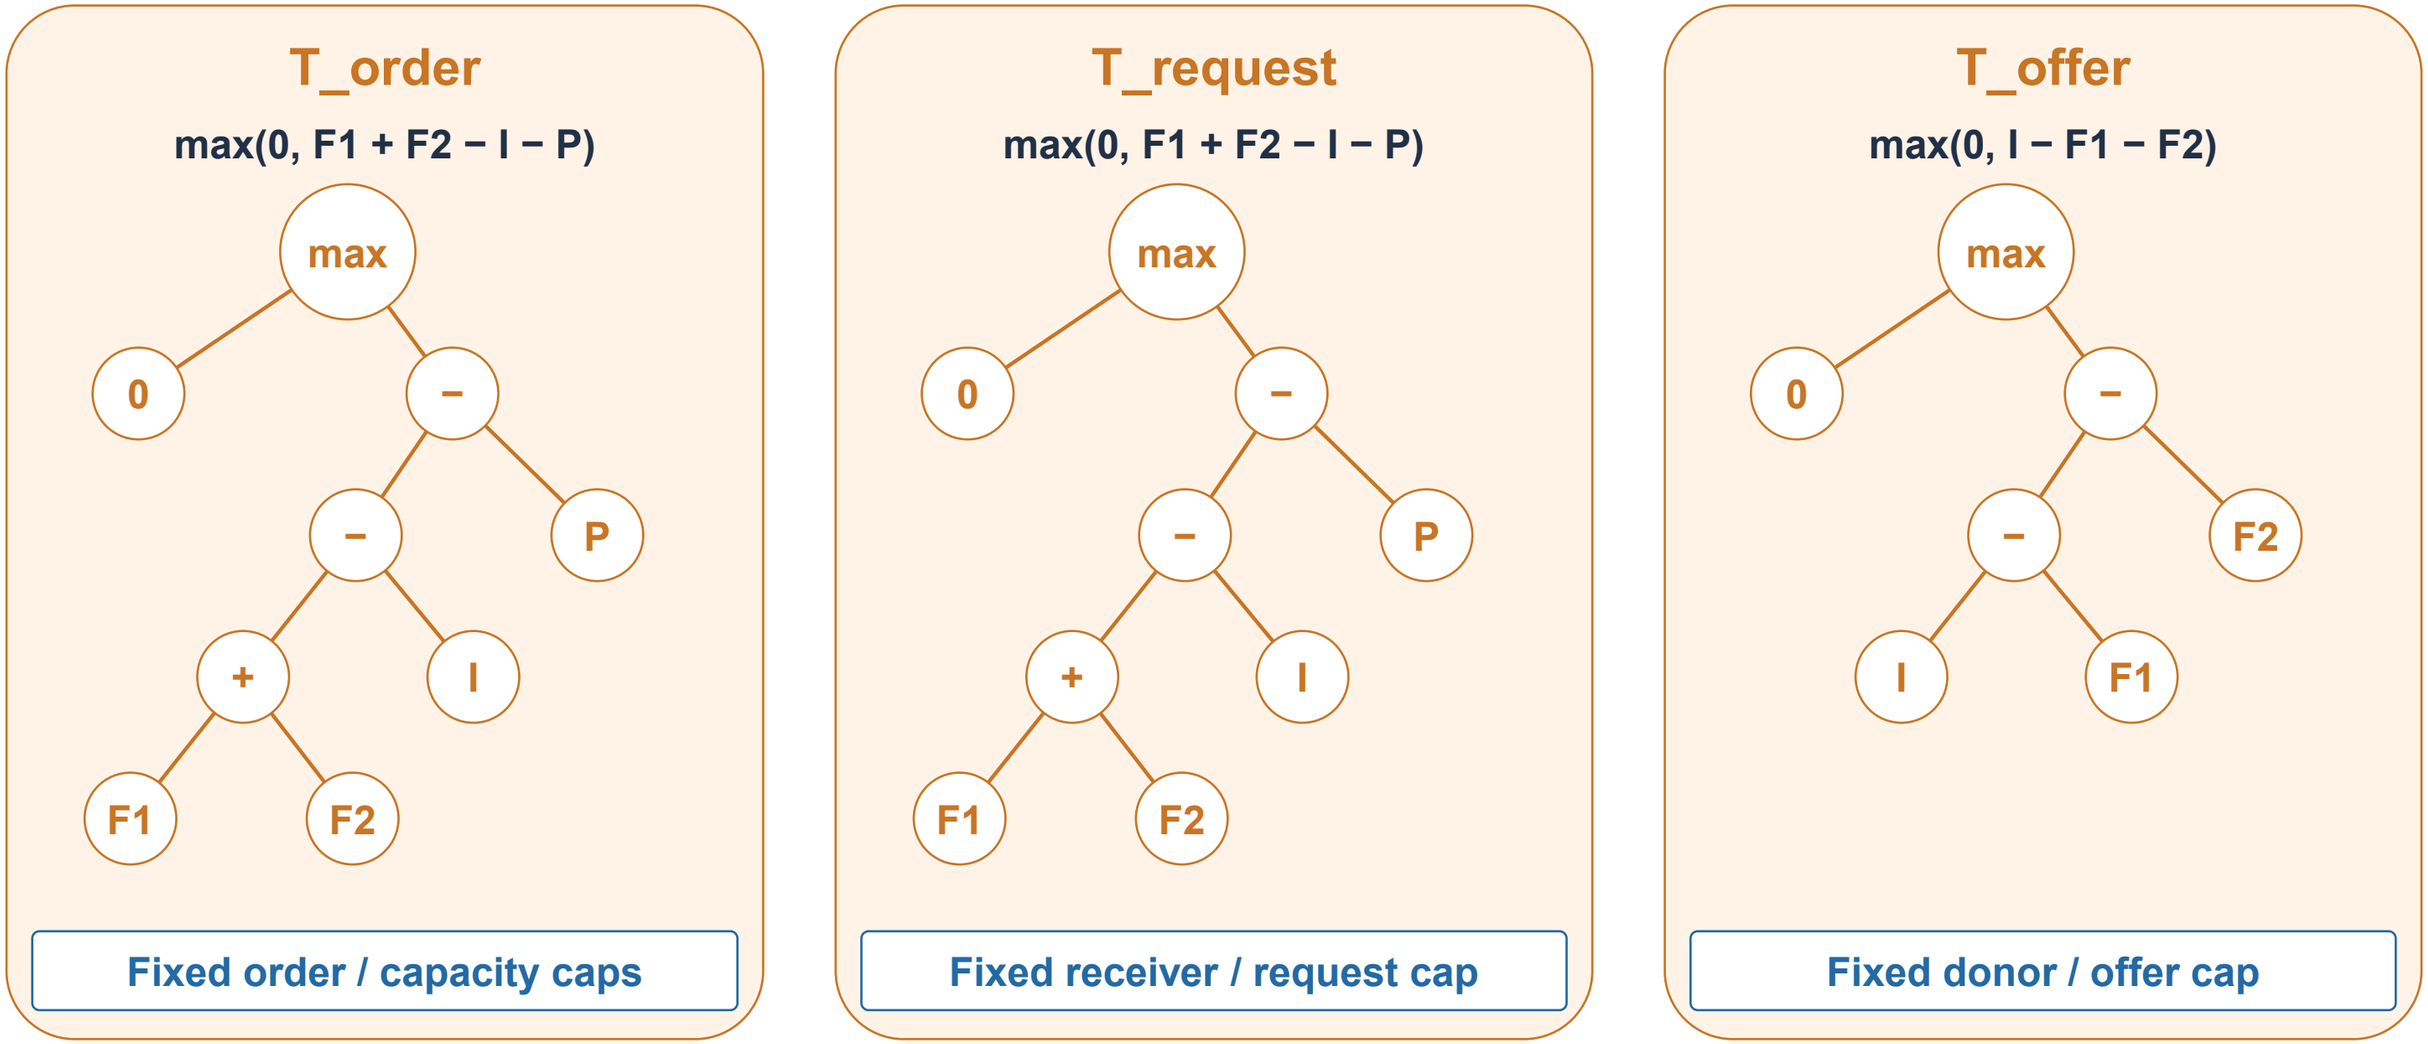

I: on-hand inventory P: own pipeline total F1, F2: exposed local forecasts. The fixed layer selects the active donor / receiver role.