

# Emotion recognition in computer games and films

Filip Rynkiewicz

**Abstract**—In last years technology used in game and film creations has formed need to check reaction of users on watched image. Human body react on external stimulus by face microchanges, distortions in electroencephalography, pupil adjustments etc. Those processes can be recorded by specified apparatus thus correct analysis of those characteristics can be automated. Thanks to this authors are able to check reaction of viewers on their creations, or even construct algorithms that can do it automatically.

**Index Terms**—emotion recognition, pupil reflex, EEG, electroencephalography, emotion classification

## 1 INTRODUCTION

Studies on recognition of the human emotions can be useful at many areas. Starting with psychology studies on behavioural disorder with patient that have problems with expressing emotions, through biology studies on creation of emotions in human body and ending with getting feedback from watched movie. Emotions allows to decide if user like what he see or not. That gives them an opportunity to choose if he wants to end it immediately, or even repeat those emotions again. For artists this informations is very desirable, because they can refine theirs creations based on information gathered under the influence of the viewer's reaction. Thanks to those researches artist will know when user will be more interest in action, and where it will be more dull or touching for them.

In [1] authors created theory witch explain generation of emotions in human body. They simplify it to few steps, like in algorithm. First there is a perception of an event then analysis of it based on user's own experience and norms, so finally the event could be classified as certain emotion.

Emotions can be detected by certain characteristics that could be classified to two groups:

- psychological:
  - EEG(electroencephalography),
  - EMG(electromyography),
  - EKG(electrocardiography),
  - pupil diameter.
- non-psychological:
  - text,
  - speech,
  - gestures,
  - facial expressions.

This paper will be focused on group of psychological signals, especially on EEG and pupil diameter. It will be explained how to detect certain emotion based on fusions of the stimuli. There are plenty of researches where authors combine EEG with pupil diameter or even with eye trackers

data, and those combined methods are more reliable and with better accuracy then individual ones [2], [3], [6].

### 1.1 Subjects and stimuli

Using variety of movie clips, especially selected to those research and shown to participants, the EEG signal and pupil diameter changes was recorded. Key feature of those movie clips is to cover different emotional responses to get results as best and accurate as possible. Psychologists recommended videos from 1 to 10 minutes long for elicitation of single emotion [14].

## 2 EEG

One of the most popular methods of emotion recognition are based on analysis of electroencephalography signals. Numerous researches [4], [5], [7]–[9] has shown that the brain activity, which EEG collect, is the most reliable source for emotion recognition. Main core of those studies is to find brain regions and frequency bands most related to those emotions. Studies of [10] showed that activation for unpleasant emotions was prominent over the right posterior regions in the alpha band. In [11] authors found that frontal brain electrical activity is closely related to musical emotions, and in [12] authors confirmed theory that gamma band is also related to music emotions.

### 2.1 Data acquisition

Gathering data of brain activity is done by special EEG cap, where AgCl electrodes placed on it are collecting brain activity in certain areas. Most common used layout of electrodes is 10-20 system, shown in Figure 1.

Signals were recorder mostly in 1000–1024 Hz sampling rate. To speed up calculations those characteristics were down sampled to 200–256 Hz. Noises and artefacts reduction were done by applying bypass filter between 0.5 to 70 Hz.

• Lodz University of Technology, Lodz, Poland,  
filip.rynkiewicz@dokt.p.lodz.pl

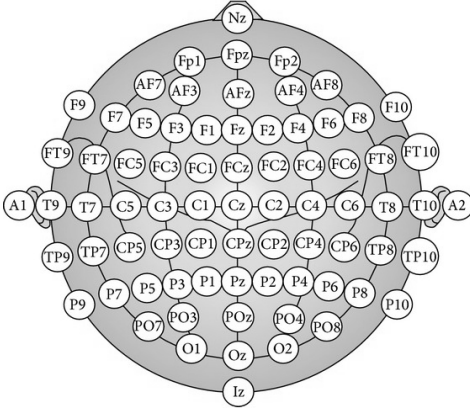


Fig. 1. The EEG cap arrangement for 10-20 system. [13]

## 2.2 Data extraction

Correlation of certain spectral power of EEG signal and emotions relevant processing was observed [15]. There are multiple methods of extracting power spectral density (PSD) from raw signals. Two of them will be expounded.

First [6] use Fourier transform and Welch algorithm. This method split signal into overlapping segments and the PSD is estimated by averaging the periodograms, in result the power spectrum is smoother. PSD of individual electrode was estimated using 15s long windows with 50 percent overlapping. PSD bands like theta (4 Hz < f < 8 Hz), slow alpha (6 Hz < f < 10 Hz), alpha (8 Hz < f < 12 Hz), beta (12 Hz < f < 30 Hz) and gamma 30Hz < f were extracted from electrodes. In additional 14 symmetrical pairs on the right and left hemisphere was extracted to measure possible asymmetry in brain activity.

Second one use more short-time Fourier transform with non-overlapped Hanning window of 4 s. In addition to PSD the differential entropy (DE), differential asymmetry (DASM) and rational asymmetry (RASM) were extracted and compared. Like in first method five frequency bands was used. Delta (1 Hz < f < 3 Hz), theta (4 Hz < f < 7 Hz), alpha (8 Hz < f < 13 Hz), beta (14 Hz < f < 30 Hz) and gamma (31 Hz < f < 50 Hz). Using equation 1, DE was calculated.

$$h(X) = \int_{-\infty}^{\infty} \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left(-\frac{(x-\mu)^2}{2\sigma^2}\right) \log \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left(-\frac{(x-\mu)^2}{2\sigma^2}\right) dx = \frac{1}{2} \log 2\pi e \sigma^2 \quad (1)$$

where X is Gauss distribution  $N(\mu, \sigma^2)$ , x is a variable  $\pi$  and e are constants. DASM and RASM are defined as :

$$DASM = h(X_{LEFT}) - h(X_{RIGHT}) \quad (2)$$

$$RASM = h(X_{LEFT})/h(X_{RIGHT}) \quad (3)$$

where  $X_{LEFT}$  and  $X_{RIGHT}$  are DE features of left and right hemisphere of brain.

## 2.3 Classification

After the data was collected and extracted the support vector machine (SVM) was used as classifier, in both examples. In [6] they smoothed features using linear dynamic system (LDS).

Feature		Frequency Bands					Total
		Delta	Theta	Alpha	Beta	Gamma	
PSD	Mean	51.60	51.87	54.74	53.23	51.36	<b>59.04</b>
	Std	19.56	14.48	16.58	18.06	16.10	20.31
DE	Mean	70.51	47.98	60.18	64.29	68.73	<b>71.77</b>
	Std	12.18	15.19	12.94	23.05	20.30	12.03
DASM	Mean	61.08	43.42	49.98	46.96	64.12	<b>68.37</b>
	Std	22.45	19.45	15.59	15.21	22.94	23.86
RASM	Mean	61.44	44.90	48.69	48.18	62.71	<b>66.03</b>
	Std	22.90	12.14	14.62	15.93	21.11	24.62
ASM	Mean	65.18	44.78	50.29	45.19	63.92	<b>67.91</b>
	Std	22.32	13.87	15.91	12.77	22.19	24.45

Fig. 2. The performance of classifiers in % using different kinds of frequency band features. For [6].

Result of classification can be seen at Figure 2. ASM feature is concatenation of DASM and RASM. As we can see, delta and gamma frequency bands perform better than theta and alpha frequency bands, and total frequency band has a stable and prominent accuracy. Also we can find that, differential entropy features get best accuracies in almost all frequency bands except Theta band (47.98% of DE features is less than 51.87% of PSD features).

In [3] in EEG there was only DE feature. They have used SVM classification with RBF kernel. The linear discrimination

Arousal classification			Valence classification		
Band	Electrode/s	$\sigma_{bw}^2/\sigma_{wn}^2$	Band	Electrode/s	$\sigma_{bw}^2/\sigma_{wn}^2$
Slow $\alpha$	PO4	0.18	$\beta$	T8	0.08
$\alpha$	PO4	0.17	$\gamma$	T8	0.08
$\theta$	PO4	0.16	$\beta$	T7	0.07
Slow $\alpha$	PO3	0.15	$\gamma$	T7	0.06
$\theta$	Oz	0.14	$\gamma$	P8	0.05
Slow $\alpha$	O2	0.14	$\gamma$	P7	0.05
Slow $\alpha$	Oz	0.14	$\theta$	Fp1	0.04
$\theta$	O2	0.13	$\beta$	CP6	0.04
$\theta$	FC6	0.13	$\beta$	P8	0.04
$\alpha$	PO3	0.13	$\beta$	P7	0.04

Fig. 3. The performance of classifiers using different kinds of frequency band features. For [3].

nation criterion was calculated for EEG signals. Dividing between class variance by within class variance for any given feature. For arousal classification, PSD in alpha bands of occipital electrodes was found to be the most discriminant features. In contrast, valence beta and gamma bands of temporal electrodes are more informative. The between class to within class variance ratios are higher for the best arousal EEG features. The higher linear discrimination criterion for best arousal features explains the superior classification rate for arousal dimension.

## 3 PUPIL DIAMETER

Based on human eye observation the theory was forged. Pupil diameter is changing in different emotional states. Disadvantage of this solution is that pupil is highly dependant

on the light. First step to gather data from pupil is to create lighting reflex model. Most common and simplest method is principal component analysis (PCA).

### 3.1 Light reflex model

Assuming that  $Y$  is the  $M \times N_p$  matrix of pupillary response for the same picture for  $N_p$  participant and  $M$  samples,  $Y$  consists of three components

$$Y = A + B + C \quad (4)$$

where  $A$  is the lighting influence,  $B$  is the emotional response and  $C$  is the noise. Extracting first component from PCA to approximate the pupil response for the lightning changes during the experiments.

### 3.2 Data acquisition

To gather data the Eye-Tracker devices was used. Those apparatus are able to collect position of the projected eye gaze on the screen, pupil diameter, the moments when the eyes were closed and distance of the participant's eyes to the gaze tracker device. Eye blinking creates gaps in eye gaze and pupil record, thus the linear interpolation was used to replace missing samples.

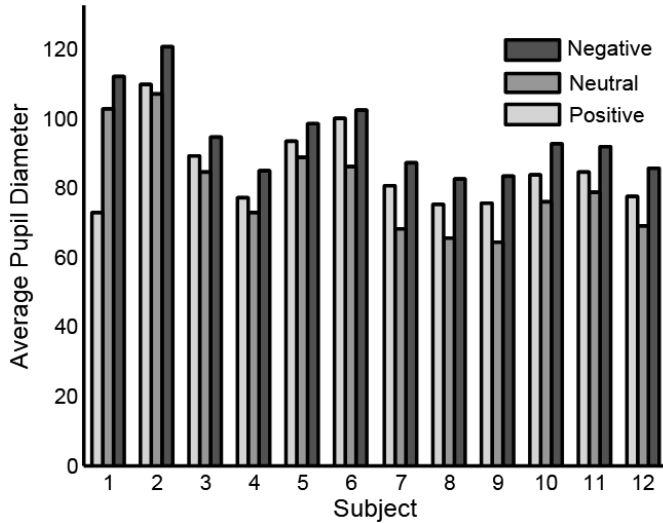


Fig. 4. Average pupil diameter. For [6].

As it can be seen at Figure 4 for 12 participants the smallest average value have neutral emotion, except subject 1.

At Figure 5 the examples of pupillary responses, extracted pupillary lighting reflex, and the residual component after removing the light reflex are given.

### 3.3 Classification

As in the EEG for classification of signal, for both examples, the SVM was used. As it can be seen at Figure 6 the DE feature performs much better than PSD, because DE features have the balance ability of discriminating patterns between low and high frequency energy.

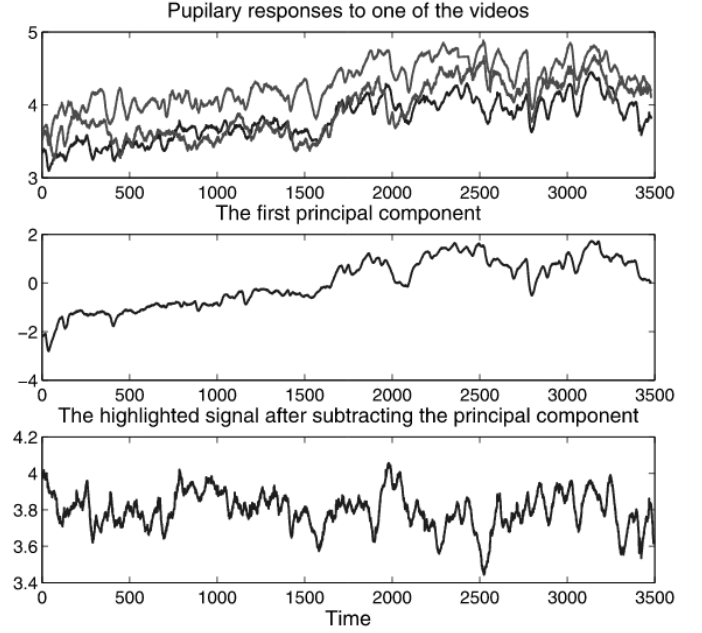


Fig. 5. From top to bottom: In the first plot, there is an example of pupil diameter measures from three different participants in response to one video. The second plot shows the first principal component extracted by PCA from the time series shown in the first plot (the lighting effect). The bottom plot shows the pupil diameter of the blue signal in the first plot after reducing the lighting effect [3]

Exp	Feature	Accuracy	Exp	Feature	Accuracy
1	PSD	65.43	7	PSD	33.95
	DE	<b>86.42</b>		DE	<b>61.73</b>
2	PSD	56.79	8	PSD	46.91
	DE	<b>70.37</b>		DE	<b>50.62</b>
3	PSD	54.94	9	PSD	43.83
	DE	<b>56.79</b>		DE	<b>59.88</b>
4	PSD	60.49	10	PSD	36.42
	DE	<b>63.58</b>		DE	<b>59.88</b>
5	PSD	37.65	11	PSD	44.44
	DE	<b>48.77</b>		DE	<b>50.62</b>
6	PSD	33.95	12	PSD	34.57
	DE	<b>47.53</b>		DE	<b>50.62</b>
Mean	PSD	45.78	Std	PSD	11.03
	DE	<b>58.90</b>		DE	<b>10.25</b>

Fig. 6. Performance in % of using different features from pupil diameter [6]

## 4 MULTIMODIAL FUSION

After the data was gathered the fusion of methods have left. Used in this article examples have implemented the feature level fusion and decision level fusion.

### 4.1 Feature level fusion

In this approach the features vector from different stimuli were concatenated to form larger feature vector.

### 4.2 Decision level fusion

Two classifiers were trained with different features, respectively, and were fused to generate a new classification using

some new principles or learning algorithms. In [6] they applied two principles. One was called max strategy which selected the higher probabilistic outputs of classifiers trained with a single modality separately as final result. Another was called sum strategy which summed up probabilities of same emotions from different frequency bands and selected higher one.

### 4.3 Results

Overall results of experiments for [6] are shown at Figure 7. We see that decision level fusion using max strategy and feature level fusion performed better than single modality like EEG or pupil diameter, which achieved average accuracies of 72.98% and 73.59%, respectively.

	EEG (DE)	Max Strategy	Sum Strategy	Feature Fusion
1	83.09	83.09	83.09	<b>93.59</b>
2	68.22	68.22	51.31	<b>78.72</b>
3	68.22	67.93	51.02	<b>68.22</b>
4	85.13	68.22	<b>85.13</b>	83.97
5	51.31	51.31	51.31	<b>77.55</b>
6	83.09	<b>83.09</b>	<b>83.09</b>	<b>83.09</b>
7	51.31	<b>68.22</b>	<b>68.22</b>	58.02
8	83.09	83.09	83.09	<b>83.38</b>
9	68.22	<b>83.09</b>	68.22	63.56
10	68.22	68.22	68.22	<b>69.10</b>
11	<b>68.22</b>	<b>68.22</b>	<b>68.22</b>	40.82
12	<b>83.09</b>	<b>83.09</b>	65.89	<b>83.09</b>
Mean	71.77	72.98	68.90	<b>73.59</b>
Std	12.03	<b>10.09</b>	12.85	14.43

Fig. 7. Performance in % of using different multimodal features [6]

Another results Figure 8 for [3] has shown that the DLF have the best accuracy for arousal and valence.

Modality	Classification rate	
	arousal	valence
dimension		
EEG	62.1%	50.5%
Eye gaze	71.1%	66.6%
Feature level fusion (FLF)	66.4%	58.4%
Decision level fusion (DLF)	76.4%	68.5%

Fig. 8. Performance in % of using different multimodal features [3]

Difference of results of both researches are really high. For FLF the percentage is accordingly 66.4 % and 73.59%. EEG for PSD feature 62.1 % and 71.77% for DE feature.

## 5 CONCLUSION

Emotions are sophisticated mechanism in human body, but knowledge how they work can be helpful in many areas. Those signals can be obtained from many of human impulses, such as pupil reflex or brain signals. Using appropriate techniques and devices those characteristics can be collected and analysed to detect emotions. Combining those modalities and fusing it with special techniques can lead to better accuracy of methods.

## REFERENCES

- [1] A. Ortony, G.L. Clore, A. Collins *The Cognitive Structure of Emotions.*, Cambridge University Press, July 1988.
- [2] R. A. Calvo, S.D'Mello *Affect detection: An interdisciplinary review of models, methods and their applications*, IEEE Transactions on Affective Computing, vol 1, no1, pp 18-37, 2010
- [3] M. Soleymani, M. Pantic, T. Pun *Multimodal Emotion Recognition in Responce to Videos*, IEEE Transaction on Affective Computing, vol. 3, no. 2, april-June 2012
- [4] R. Adolphs, D. Tranel, A.R. Damasio, *Dissociable Neural Systems for Recognizing Emotions*, Brain and Cognition, vol. 52, no. 1, pp. 61-69, June 2003.
- [5] A.R. Damasio, T.J. Grabowski, A. Bechara, H. Damasio, L.L.B. Ponto, J. Parvizi, and R.D. Hichwa, *Subcortical and Cortical Brain Activity during the Feeling of Self-Generated Emotions*, Nature Neuroscience, vol. 3, no. 10, pp. 1049-1056, Oct. 2000.
- [6] Z. Wei-Long, D. Bo-Nan, L. Bao-Liang *Multimodal Emotion Recognition using EEG and Eye Tracking Data*, IEEE, 2014
- [7] Y. P. Lin, *EEG-Based Emotion Recognition in Music Listening*, IEEE Transactions on Biomedical Engineering, vol. 57, no. 7, pp. 1798-1806, July 2010. <http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=5458075&isnumber=5484937>
- [8] Y. Gao, H. J. Lee and R. M. Mehmood, *Deep learning of EEG signals for emotion recognition*, IEEE, International Conference on Multimedia & Expo Workshops (ICMEW), Turin, 2015, pp. 1-5. <http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=7169796&isnumber=7169738>
- [9] Dan Nie, Xiao-Wei Wang, Li-Chen Shi, and Bao-Liang Lu, *EEG-based Emotion Recognition during Watching Movies*, IEEE, Proceedings of the 5th International IEEE EMBS Conference on Neural Engineering Cancun, Mexico, April 27 - May 1, 2011, <https://pdfs.semanticscholar.org/6511/590bc9677922c82747b5d183383f46b50db6.pdf>
- [10] M. Sarlo, G. Buodo, S. Poli, and D. Palomba, *Changes in EEG alpha power to different disgust elicitors: the specificity of mutilations* Neuroscience Letters, vol. 382, no.3, pp. 291-296, 2005.
- [11] L. A. Schmidt, and L. J. Trainor, *Frontal brain electrical activity distinguishes valence and intensity of musical emotions* Cognition and Emotion, vol. 15, no. 4, pp. 487-500, 2001.
- [12] M. Li, and B. L. Lu, *Emotion classification based on gamma-band EEG* IEEE Int. Conf. Engineering in Medicine and Biology Society, Minneapolis, 2009, pp. 1223-1226.
- [13] Jirayucharoensak, Suwicha Pan-ngum, Setha Israsena, Pasin. *EEG-Based Emotion Recognition Using Deep Learning Network with Principal Component Based Covariate Shift Adaptation*, TheScientificWorld-Journal. 2014.
- [14] A.Schaefer, F. Nils and X. Sanchez and P. Philippot, *Assessing the effectiveness of a large database of emotion-eliciting films: A new tool for emotion researchers*, 2010
- [15] Aftanas, L.I., Savotina, L.N., Makhnev, V.P. et al. *Neurosci Behav Physiol*, 2005