

# A rule-based geospatial reasoning system for trip price calculations



**Stefan Schenk**

Supervisor: Willem Brouwer

Advisor: Mewis Koeman

Department of Software Engineering  
Amsterdam University of Applied Sciences

This dissertation is submitted for the degree of  
*Bachelor Software Engineering*

June 2018



# **Todo list**

■ Abstract, will be the last step . . . . .	iii
■ Add fourth option from authentication proposals . . . . .	26
■ second poc is used . . . . .	30
■ how is state shared(jwt), why are all the choices made and why are they good? Talk about the patterns applied. . . . .	30
■ Doen alsof dit programma nog niet bestaat (dit gaan we doen, en dan dat...) . . . . .	31
■ Changes a lot, needs final version . . . . .	33
■ Working on locations . . . . .	38
■ Conclusion for chapter 4 . . . . .	45
■ Final Result (realization) . . . . .	56



# A rule-based geospatial reasoning system for trip price calculations

<i>Author</i>	<i>Stefan Schenk, 500600679, +31638329419</i>
<i>Place and date</i>	<i>Medemblik, 10 Mar 2018</i>
<i>Educational Institution</i>	<i>Amsterdam University of Applied Sciences</i>
<i>Department</i>	<i>HBO-ICT Software Engineering</i>
<i>Supervisor</i>	<i>Willem Brouwer</i>
<i>Company</i>	<i>taxiID, development team</i>
<i>Company address</i>	<i>Overleek 4 1671 GD Medemblik Netherlands</i>
<i>Company Advisor</i>	<i>Mewis Koeman</i>
<i>Period</i>	<i>01 Feb 18 t/m 30 Jun 18</i>



## Abstract

kks32: Abstract, will be the last step

A purely geometrical interpretation of user-defined locations would allow taxi-companies around the world to set up rules so that trip prices could be calculated without depending on distinct postal code systems. Geolocation datatypes provide part of the solution, but the benefits of geometrical definitions are lost when areas intersect. A hierarchy of precedence based rules tied to reusable locations would eliminate these competing rule matches.

A solution is proposed to implement a microservice with a single responsibility of calculating trip prices that is accessible to existing systems and portals in which users can define the pricing rules. The company for which this system is realized requires customers to be able to migrate to the new system without downtime, while keeping the existing rules that determine the prices of taxi trips.

The portals providing users access to company information must integrate a separate user interface allowing pricing rules to be managed. The microservice must be able to authenticate direct requests. The core system manages user and company data, complicating identity management in the microservice. A JSON Web Token would allow user identity to be stored in the payload of the token, thereby delegating authentication to the core system, safeguarding the single responsibility of the microservice.



# Table of contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Context . . . . .	1
1.2	Problem Definition . . . . .	2
1.3	Assignment . . . . .	3
1.4	Research . . . . .	3
1.4.1	Questions . . . . .	4
1.5	Process . . . . .	5
<b>2</b>	<b>Encoding Locations</b>	<b>7</b>
2.1	Introduction . . . . .	7
2.2	A Brief History Of Geographic Locations . . . . .	7
2.3	Requisite Location Types . . . . .	8
2.3.1	The Point . . . . .	8
2.3.2	The Area . . . . .	9
2.3.3	Postal Codes, Addresses, and Polygons . . . . .	10
2.3.4	Requirements for Location Matching . . . . .	11
2.4	Literature Review . . . . .	11
2.5	Database Prerequisites . . . . .	13
2.5.1	OpenGIS Compatible databases . . . . .	13
2.5.2	OpenGIS Incompatible databases . . . . .	15
2.6	Overlapping Locations . . . . .	17
2.7	Premise . . . . .	17
<b>3</b>	<b>System Architecture</b>	<b>19</b>
3.1	Introduction . . . . .	19
3.2	Architectural Patterns . . . . .	19
3.2.1	Monoliths . . . . .	20
3.2.2	Microservices . . . . .	21

3.2.3	Frontend and Backend . . . . .	21
3.3	Information Dependencies . . . . .	22
3.4	Authentication and Authorization . . . . .	23
3.4.1	OAuth 2.0 . . . . .	24
3.4.2	JSON Web Token . . . . .	24
3.4.3	API Gateway . . . . .	25
3.5	Methods and Techniques . . . . .	27
3.5.1	Backend Framework . . . . .	28
3.5.2	Frontend Framework . . . . .	28
3.5.3	Database . . . . .	28
3.6	Premise . . . . .	30
<b>4</b>	<b>Trip Price Calculation System</b>	<b>31</b>
4.1	Introduction . . . . .	31
4.2	The System Structure . . . . .	31
4.2.1	Rules . . . . .	33
4.2.2	Discounts . . . . .	33
4.3	The Trip Price Calculation . . . . .	34
4.3.1	Incoming Request . . . . .	34
4.3.2	Data Aggregation . . . . .	36
4.3.3	Calculation . . . . .	37
4.4	Locations . . . . .	38
4.5	Timeframes . . . . .	38
4.5.1	Conventional Approach . . . . .	38
4.5.2	Bitmap . . . . .	38
4.6	Price Calculation Types . . . . .	40
4.6.1	Dynamic . . . . .	40
4.6.2	Fixed . . . . .	41
4.6.3	Meter . . . . .	41
4.7	Threshold Calculations . . . . .	41
4.8	Breakdown . . . . .	42
4.9	Deterministic Outcomes . . . . .	44
4.10	Premise . . . . .	45
<b>5</b>	<b>Portal</b>	<b>47</b>
5.1	Introduction . . . . .	47
5.2	Design . . . . .	47

5.2.1	Essential Components . . . . .	47
5.2.2	Expressing Order . . . . .	48
5.3	Visual Hierarchy . . . . .	49
5.4	Products . . . . .	49
5.5	Timeframes . . . . .	50
5.5.1	Specific Week Days . . . . .	50
5.6	Locations . . . . .	50
5.6.1	Point . . . . .	51
5.6.2	Area . . . . .	51
5.7	Pricing . . . . .	51
5.7.1	Rules . . . . .	51
5.7.2	Discounts . . . . .	52
5.7.3	Priority . . . . .	52
5.8	Apps . . . . .	52
5.9	Premise . . . . .	52
<b>6</b>	<b>Realization</b>	<b>53</b>
6.1	Introduction . . . . .	53
6.2	Methods and Techniques . . . . .	53
6.3	Sprint 1 - Dynamic Price Calculations . . . . .	53
6.4	Sprint 2 - Authentication and Authorization . . . . .	54
6.5	Sprint 3 - Products and Pricing . . . . .	54
6.6	Sprint 4 - Apps and Timeframes . . . . .	55
6.7	Sprint 5 - Thresholds . . . . .	55
6.8	Sprint 6 - Locations . . . . .	56
6.9	Sprint 7 - Subrules . . . . .	56
6.10	Result . . . . .	56
<b>7</b>	<b>Conclusion</b>	<b>57</b>
<b>References</b>		<b>59</b>
<b>List of figures</b>		<b>61</b>
<b>List of tables</b>		<b>63</b>
<b>Appendix A Pregame</b>		<b>65</b>

<b>Appendix B Sprint Review and Proposal Slides</b>	<b>101</b>
B.1 Sprint 1 - review . . . . .	101
B.2 Sprint 2 - breakdown . . . . .	113
B.3 Sprint 2 - authentication . . . . .	123
B.4 Sprint 2 - review . . . . .	132
B.5 Sprint 3 - review . . . . .	143
B.6 Sprint 4 - review . . . . .	151
B.7 Sprint 5 - review . . . . .	163
B.8 Sprint 6 - review . . . . .	171

# **Chapter 1**

## **Introduction**

What was once an ordinary startup known as Uber, is now the most famous taxi dispatch company in the world [1]. In the same year that Uber was founded, a similar startup in the Netherlands called taxiID was launched; an Amsterdam based company providing end-to-end cloud solutions and mobile applications for taxi companies. Hailing a taxi has rarely been performed by sticking out ones hand, hoping to catch the attention of a bypassing taxi driver ever since. The ability to order a cab lies at everyones fingertips, literally. Recently, taxiID has started developing a new brand called YourDriverApp (YDA), a lighter and newer version of the original solution, being more focussed on smaller taxi companies. Despite the fact that YDA is new, it still depends on the price calculation functionality of the legacy system. This chapter expands on how this matter is translated into the assignment.

### **1.1 Context**

taxiID was founded as a startup that successfully introduced smartphone taxi booking in The Netherlands, offering a wide variety of IT solutions to serve the taxi market, including a passenger app, a driver app, and administrative panels. More specifically: an app for passengers to order a taxi, an app for drivers to receive their job assignments, and services for all size businesses, offering convenient planning and dispatching without requiring local installations. Businesses that make use of taxiID's services can be found anywhere in the world. This introduces complicated challenges when developing applications that rely on clearly defined locations and infrastructures, often vastly differing between countries, if these countries have such a postal code system to begin with. The taxiID development team responsible for solving these problems is located in Medemblik. Consisting of two mobile app developers (iOS and Android), two backend developers, a designer and two project managers.

## 1.2 Problem Definition

YDA depends on the price calculation module that is part of the legacy system for which it was designed and implemented. When a passenger books a ride, the departure and destination locations that have been selected are sent to the legacy system. It then proceeds and constructs a list of prices for each vehicle type that is available, based on matching pricing rules that have been defined by the taxi company offering the rides. If directors of a taxi company using YDA want to modify their pricing rules, they will be obligated to use the taxiID portal, which has to store company information in a platform that is different from YDA. This makes little sense, as much as it is efficient from a technical point of view, and being easy to maintain and extend. The current price calculation module knows three types of pricing rules: fixed prices based on postal codes or addresses, tier prices based on kilometer thresholds, and dynamic calculations based on the distance and duration of a ride. A company may have as many rules as required, only one rule will be used to calculate the final price, and the rules are matched in the same order as mentioned. The fixed rules are defined by downloading, modifying, and uploading a .csv file as presented in Table 1.1, the other types of rules are simply managed through a web form.

Departure	Destination	Nr Passengers	Price	Vehicle Type
1462	1313	4	125	...
1313	1462	4	125	...
1462	1313	8	150	...
1313	1462	8	150	...
1462	1012	4	65	...
1012	1462	4	65	...
0	1462	4	65	...
1462	0	4	65	...
1462	AIR1	4	89	...
AIR1	1462	4	89	...

Table 1.1 Comma Separated File containing Fixed Prices in cents

When a passenger books a ride, the price calculation module will first compare the postal codes / addresses, amount of passengers, and vehicle types in the fixed pricing rules with the information provided by the passenger's application. The fixed price is returned as soon as a match is found. If no match is found in any of the fixed pricing rules, the system proceeds to calculate a price using a kilometer threshold based rule, given that at least one exists. This type of calculation decreases or increases the price per kilometer for every successive amount of kilometers that have surpassed a predetermined threshold. This concept will be

discussed in chapter 4. If this rule does not exist, a dynamic rule is used to calculate the price based on distance and duration of the ride. Finally, on top of the prices that have been calculated, a discount may be applied as a fixed amount, as a percentage of the price, or as a so called alternative fixed pricing table. When this last option is selected, the price will be calculated all over, using a newly referenced fixed pricing rule. This process is not just hard to understand for a user, who has to reason about the companies prices. But it is also hard to understand for programmers, who have to maintain the code that supports this functionality. A small mistake in the csv file could lead to great issues if the mistake goes through processing undetected.

## 1.3 Assignment

The title of this thesis reads:

*"A rule-based geospatial reasoning system for trip price calculations".*

A Trip Pricing System (TPS) must be designed and implemented to calculate trip prices based on user defined pricing rules. Concisely, YourDriverApp requires its own pricing calculation functionality that is similar to the existing taxiID implementation but must not be incorporated into a non-related monolithic, highly coupled system, as it is today. Also, the response body should have the exact same format, and the new system must be able to handle the exact same requests that are made to the current system. Clients must be able to set up pricing rules through the YDA portal, and potentially other portals as well. It is also important that the feature which allows clients to define locations is usable in countries without a workable postal code system.

## 1.4 Research

Four main challenges that construct the assignment can be identified. Research must be conducted to attain the best possible way of mapping locations to pricing rules. What this means is that locations must be storable, comparable, and interpretable. The database must be able to store locations in an efficient manner, to which queries can be made as efficiently in order to find out whether a pricing rule applies to a given ride. For this to be the case, the stored locations must be comparable to the departure and destination location of the passenger. The user must be able to reason about his pricing rules, from which an understanding of

his defined locations logically follows. But edge cases must be covered completely. For example, a rule in the current system dictates that a user traveling to Schiphol should receive a discount. But how would the system detect that this is the case? Or what if hotel guests receive discounts, but the neighbour living next to the hotel shouldn't be allowed to benefit from these discounts unless he actually sleeps at the hotel? Secondly, a system has to be developed that encapsulates the solution that is the result of the finished research. It is helpful to extend the research of the problem beyond finding out how to incorporate the answers into a working system, where architecture has a major influence in the tools that are available. For example: if a solution to the main problem requires a database system capable of handling high quantities of geospatial queries, this requirement has to be satisfied in order to proceed in finding the final solution. Finally, a user interface has to be created that enables users to define the pricing rules. The complexity of the interface depends the straightforwardness of the price calculation system. The user interface should also be available in multiple portals. The best way of making the systems capabilities available to the user through the UI in the portal, must be investigated. The UI must be built keeping the user in mind, simplifying complex rule management to the highest possible degree.

### 1.4.1 Questions

From the description of the problem, one main important research question can be derived:

*How can a generic location-based price calculation system be implemented*

*that could be used in every country?*

This question encapsulates the four important challenges that have to be dealt with before the project can successfully be implemented. In order to give a clear direction to the research, sub-questions are separated into four groups; location mapping, architecture, trip pricing system, and user interface. All questions apply to this project unless explicitly stated.

1. In what way can locations be represented to be universally interpretable?
  - 1.1. Which location types matter?
  - 1.2. Can legacy location concepts be abstracted?
  - 1.3. Is there a way to improve location matching?
2. What is most fitting solution to integrate the backend and frontend into the existing architecture?

- 2.1. Which architectural patterns fit in with the existing system architecture?
- 2.2. How is state shared and synchronized between system components?
- 2.3. What is the most applicable authentication method?
3. Which logic and data is required in the backend to reliably calculate a trip price?
  - 3.1. Which criteria should regulate whether rules match?
  - 3.2. How can determinism of price computations be guaranteed?
  - 3.3. In what way can the three original pricing rule types be implemented? (fixed, dynamic, and threshold prices)
4. Is it possible to communicate the inner workings of the system through the user interface?
  - 4.1. Which backend concepts are essential to display in the frontend?
  - 4.2. Which design practices allow users to understand coherence of different elements that make up a rule?
  - 4.3. How should a user know what the outcome of his interactions with the system are?

Answering these questions will lead to the implementation of a solid, straightforward, user-friendly system that utilizes the user interface to communicate the inner-workings of the rule-based price calculation system.

## 1.5 Process

A desire from within taxiID to use the SCRUM methodology to potentially improve their development process is an important factor to set up this project in a way that would introduce the team to SCRUM without forcing developers and CEO's to adopt it right away. All team members are familiarized with tools, roles, workflows, and the project artifacts somewhat indirectly. Because of the novelty of SCRUM in regard to the product owner, a pregame phase is introduced for preparation purposes, see Table 1.2. A written working method is provided to the product owner, see Appendix A, Phase I - Pregame. This document clearly documents the interpretation of the product owners product vision and reflects from a developer viewpoint, so that miscommunications and misinterpretations can be resolved before the project is started. It contains an architectural vision and a proposed solution, which is agreed upon by the product owner before the backlog is created. Reading the document is recommended if more knowledge about the process and context of the assignment is desired.

	Phase I - Pregame		Phase II - Game								
product definition	week 1	week 2		week 4	week 5	week 6	week 7	week 8	week 9	week 10	week 11
architectural vision			sprint 1								
proposed solution			sprint 2								
			sprint 3								
			sprint 4								
			sprint 5								
			sprint 6								
			sprint 7								
			sprint 8								

Table 1.2 Project roadmap

# Chapter 2

## Encoding Locations

### 2.1 Introduction

The term 'geospatial' denotes "relating to the relative position of things on earth's surface". This chapter explains the general definition of locations, which types of locations are important for this project, and how these location types are to be abstracted in a way that is understood in every country on earth while allowing the system to aggregate locations that are associated with the pick up and drop off locations of a taxi ride.

### 2.2 A Brief History Of Geographic Locations

A location is roughly described as a place or position. Throughout history, various navigational techniques and tools like the sextant, nautical chart and marinner's compass were used, measuring the altitude of the North Star to determine the latitude  $\phi$ , in conjunction with a chronometer to determine the longitude  $\lambda$  of a location on the earth's surface. The combination of coordinates is a distinct encoding of a location. This particular system is still commonly used today.




Fig. 2.1 A perspective view of the Earth showing how latitude and longitude are defined on a spherical model.

Today, navigation relies on satellites that are capable of providing information to determine a location with a precision of 9 meters. Hybrid methods using cell towers, Wi-Fi Location Services, and the new Galileo global navigation satellite system, provide tracking with a precision down to the meter range. These locations are ordinarily communicated using the same established latitude and longitude encoding. For a human being, it is not practical to exchange day-to-day locations as geographical coordinates. For that, addresses much more suitable, but can be ambiguous, imprecise, and inconsistent in format. Addresses commonly make use of Postal Code systems, which have reliably been assigned to geographical areas with the purpose of sorting mail. Although even today, there are countries that do not have a Postal Code system. This forces the legacy system to support addresses for the fixed pricing functionality as well. In contrast to the geographic coordinate system, postal codes describe streets and areas of varying shapes and sizes. A location being roughly described as a place or position, can be decomposed as an abstract term to describe physical or imaginary areas with varying radiuses and shapes. You could prepend 'the location of' to the following terms as an example: America, the birthplace of Sokrates, Wall Street, the center of the universe, the Laryngeal Nerve of the Giraffe, churches in the Netherlands. The final example presents the main challenge of this project, how to communicate the location of a collection with points or areas of differing shapes and sizes that may overlap?

## 2.3 Requisite Location Types

While setting up a backlog for a project, a shared knowledge about the terminology used in the issues must be achieved in order to collaborate effectively. Words or symbols do not have an absolute meaning, and ambiguity of abstract linguistic terms should be elucidated. In section 3.2.1 of Appendix A, an agreement was made on what the terms "area" and "point" meant. The MySQL documentation notes that "The term most commonly used is geometry, defined as a point or an aggregate of points representing anything in the world that has a location." in [2]. During the process of implementing TPS, the definitions of a location have been refined to represent a common and useful understanding.

### 2.3.1 The Point

A point is a unique place expressed as a distinct coordinate pair. An address in the legacy system could be translated to a point. For example, the address that is tied to Schiphol arrival is: Aankomstpassage, 1118 AX Schiphol Centrum. The point that encodes this location is (52.308891, 4.760900). This location is contained in the set of all possible points on Earth,

which could be expressed using set builder notation:

$$P = \{(\phi, \lambda) \in \mathbb{R}^2 \mid -90 < \phi < 90, -180 < \lambda < 180\}$$

$$(52.308891, 4.760900) \in P$$

A point itself can not be used to match whether another point is contained within it, because the probability of a match is infinitesimal. Only when decimals were disregarded to decrease the precision of a point it would be possible, in which case it would still not be useful in this application, because the imprecise point would be a square.

### 2.3.2 The Area

An area is a set of points with an infinite granularity. This definition allows for an area to have holes inside them, consist of other locations and contain other locations, and be infinitely precise. The most useful property of this area is to check whether a point is contained within the area, or which areas contain a given point. For this to be the case, the points must be packed together as it would form a shape. This definition, however conceptually valuable, will not be of much practical use. For example,  $P$  is an infinitely long set of coordinates, an area that represents the earth's surface. If  $\phi$  ranged between 0 and 90, the set could describe all points located in the northern hemisphere, but would still be infinitely long. Checking whether a given point is contained by checking an infinite amount of real number pairs will take an infinite amount of time in the worst case scenario. An area can be described as a subset of all points:

$$a_1 \subseteq P$$

The set of all possible areas can be defined by the power set of  $P$ :

$$A = \mathcal{P}(P)$$

such that an arbitrary subset of points, called an area, is an element of all possible areas  $A$ :

$$a \in A$$

At the equator, 1 degree is 111320m, so 0.000001 degrees is around 11cm. Six decimal places will be sufficient for location matching for this application. But even when reducing coordinates to having six decimal places, it would be impractical. For this reason, it is more realistic to only describe the rough edges of an area using a polygon shape. Instead

of checking for a single point in a non-terminating iteration over all points in an area, a mathematical calculations could be used to check whether a unique point is contained within the polygon.

### 2.3.3 Postal Codes, Addresses, and Polygons

All postal codes that start with a ten describe the city of Amsterdam, the entire area of Amsterdam can be drawn as a big polygon containing all the postal codes that start with a ten.

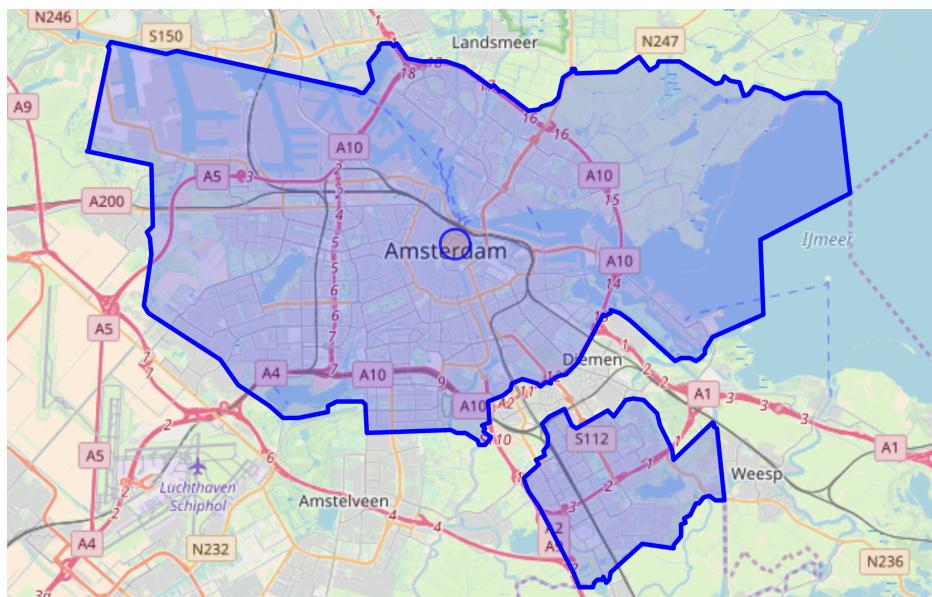


Fig. 2.2 Amsterdam - A single location comprised of multiple locations.

In reverse, this procedure would not work. If a polygon was drawn cutting Amsterdam in half diagonally, a single postal code pattern would never be flexible or precise enough to be able to describe the boundaries of the polygon. One big taxi company making use of taxiID's legacy system is located in the United Arab Emirates. This company would not be able to convert anything at all, because the United Arab Emirates does not have a postal code system to begin with.



Fig. 2.3 Postal codes by country with amount of digits ranging from three digits (lightblue) to eight digits (darkgreen) and no postal code system (gray).

Addresses and postal code systems do not provide universally interpretable and precise encodings of locations, especially for the locations that matter for this project: points and areas. They can be ambiguous, imprecise, nonuniform, or completely lacking. In the United Arab Emirates, addresses can be utilized, even though it is harder to ensure that two addresses match. Street numbers, punctuation, formats and special characters, can cause this matching process to fail. In contrast, polygons would provide unique and precise location definition that is uniform and universal. When moving to other encoding techniques, this usefulness must be preserved.

### 2.3.4 Requirements for Location Matching

If the following statements are true for a given location encoding using the definitions of the Point and Area, the location encoding is useful and able to operate independently from the postal code and address systems.

## 2.4 Literature Review

In [3], CEO Chris Cheldrick explains how locations can be communicated more effectively by describing a three by three meter areas using deterministically assigned triple of words. The system aims to solve the problem of ambiguity in address or postal code systems. The what3words API offers functionalities that can find what3word geocodings near a specified latitude and longitude location. The system is able to find results within a clamped area, as documented in [4], effectively acting like a spherical circle with a given radius in which points

Nr	Description
1.	Every location is stored in a database as a single entity
2.	Locations can consist of multiple locations (see figure 2.2)
3.	A deterministic predicate of whether a location is fully contained within a location is achievable
4.	A deterministic method of finding all locations containing a single location can be used
5.	A method of determining precedence of location in case of overlap must always yield one result, and discard all others
6.	Locations must be importable from external sources

Table 2.1 Location matching requirements.

can be contained. In the paper [5] Markus elaborates on the distinction between structure-based spatial data and point sets, stating that: "Structure-based spatial data types have prevailed and form the basis of a large number of data models and query languages for spatial data". He elaborates on distinctions of operations and predicates between different spatial data models in [6]. Operations such as point-in-polygon test and intersection are categorized as spatial modeling. Regular spatial database systems support a basic Geometry hierarchy of Points, Polygons, MultiPoint and MultiPolygon Classes, as described in the OGC [7] and ISO 19125 [8] standard. MySQL, PostgreSQL, MariaDB and other systems having distinct implementations adhere to the OGC standard. Some other databases like MongoDB adopt the GeoJSON standard [9], providing similar operations and data types. Xiang et al proposed conventional flattened R-Tree indexing for the less mature MongoDB spatial system [10]. The built in Geohashing method is typically used to index points and centroids, having the possibility to inaccuracies and missing data. Locations should be importable in geography formats. Holmberg extracts data from OpenStreetMap as shape files, see [11, Chapter 6]. He uses two sources: <https://www.openstreetmap.org> and <http://download.geofabrik.de> see [11, Chapter 7.3]. The latter is used to obtain data for whole countries. OpenStreetMap offers a downloadable dataset at <https://planet.openstreetmap.org> from which geographic data can be exported. The OSM Nominatim Usage policy states that no heavy usage is allowed, that bulk geocoding is restricted, that auto-complete is not supported, and that attribution must be displayed [12].

## 2.5 Database Prerequisites

The database that is used must be able to aggregate all polygons containing a given point. Conversely, it must be able to aggregate all points that are contained within a given polygon. The scenario presented in image 2.4 should at least be replicable.

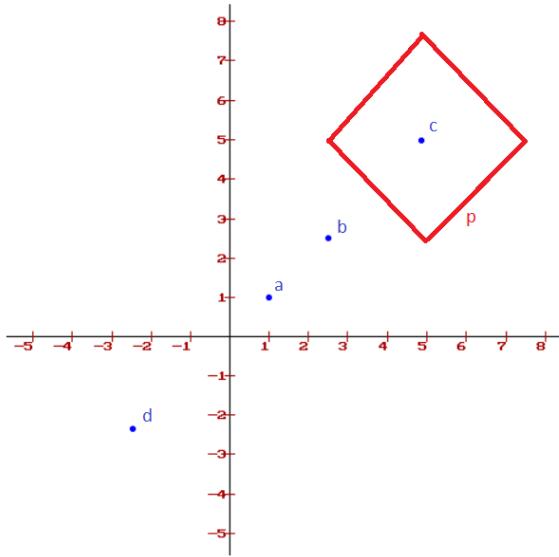


Fig. 2.4 Four Points, one Polygon p containing Point c.

As contained in Appendix A, this example provides a proof that a minimal requirement is satisfied, so that a list of candidate Database Management Systems could be constructed. In all cases, a polygon is a list of coordinates that define a closed path, meaning that the first and last index contain identical points.

### 2.5.1 OpenGIS Compatible databases

MYSQL's innate integrity is a good reason to opt for a full MYSQL database setup. MariaDB is a fork of MYSQL that performs better according to benchmarks, however they don't always translate to real life situations. It's easy to migrate from MYSQL to MariaDB, so choosing MYSQL at first could be preferable as an instance of MYSQL is already used at TaxiID. PostgreSQL offers a spatial database extender for that is OpenGIS compliant called PostGIS that adds support for geographic objects and location queries. All spatial data types inherit properties such as type and spatial reference identifier (SRID). For rigorous documentation, both PostGIS documentation [13] and MYSQL documentation [14] could be consulted. When a generic geometry column, or point column is created, points can be inserted as shown in snippet 2.1.

```

1 START TRANSACTION;
2 SET @a = ST_GeomFromText('POINT(1 1)');
3 INSERT INTO point (point) VALUES (@a);
4 SET @b = ST_GeomFromText('POINT(2.5 2.5)');
5 INSERT INTO point (point) VALUES (@b);
6 SET @c = ST_GeomFromText('POINT(5 5)');
7 INSERT INTO point (point) VALUES (@c);
8 SET @d = ST_GeomFromText('POINT(-2.5 -2.5)');
9 INSERT INTO point (point) VALUES (@d);
10 # also insert @b, @c, and @d
11 COMMIT;
12
13 START TRANSACTION;
14 # First and last point should be the same
15 SET @a = PolygonFromText('POLYGON((2.5 5,5 7.5,7.5 5,5 2.5,2.5 5))');
16 INSERT INTO polygon (polygon) VALUES (@a);
17 COMMIT;

```

Listing 2.1 Insert four points and one polygon in MySQL.

It is evident that c is contained in p. To determine which points are contained in p, the function as seen in Snippet 2.2 can be used, which returns the point with coordinates [5, 5] as expected.

```

1 // All points contained in polygon
2 SELECT ST_ASTEXT(POINT)
3 FROM POINT
4 WHERE
5 ST_CONTAINS(
6 (
7     SELECT POLYGON
8     FROM POLYGON
9     WHERE id = 1
10 ),
11 POINT
12 )
13
14 // All polygons containing point
15 SELECT ST_ASTEXT(POLYGON)
16 FROM POLYGON, POINT
17 WHERE
18 POINT.id = 3 AND ST_CONTAINS(
19     POLYGON.polygon,
20     POINT.point
21 )

```

Listing 2.2 Select points contained in polygon, and all polygons containing a point in MySQL.

A multipolygon can be inserted using triple braces, indicating a collection of polygons to be inserted as seen in Figure 2.3. The MultiPolygon class is able to support multiple polygons to be stored as a single entity. The standard provides containment predicate, and

methods to distinguish larger locations from smaller ones, which could be used in precedence checks.

```

1 START TRANSACTION;
2 # First and last point should be the same
3 SET @a = GeomFromText('MULTIPOLYGON(((1 1,2 2,3 3,1 1)),((5 5,6 6,8 8,5 5)))');
4 INSERT INTO multipolygon (multipolygon) VALUES (@a);
5 COMMIT;
```

Listing 2.3 Insert one multipolygon in MySQL.

## 2.5.2 OpenGIS Incompatible databases

MongoDB doesn't offer OpenGIS implementations but has geospatial query operators that may provide enough functionalities for current requirements [15]. The argument for choosing one over the other depends on the vast differences between SQL and NoSQL, next to performance and extensiveness of geospatial features. The setup displayed in image 2.4 is recreated in MongoDB using queries shown in snippets 2.4 and 2.5. Geometry datatypes can be inserted as objects having a type and coordinates property. A polygon can be inserted in the same manner, having multiple points as a list instead of a single point.

```

1 db.point.insertMany([
2   { shape: { type: "Point", coordinates: [1, 1] } },
3   { shape: { type: "Point", coordinates: [2.5, 2.5] } },
4   { shape: { type: "Point", coordinates: [5, 5] } },
5   { shape: { type: "Point", coordinates: [-2.5, -2.5] } },
6 ])
7
8 db.polygon.insert({
9   shape: {
10     type: "Polygon",
11     coordinates: [ [2.5, 5], [5, 7.5], [7.5, 5], [5, 2.5], [2.5, 5] ]
12   }
13 })
14
15 db.point.createIndex({ 'shape': '2dsphere' })
16 db.polygon.createIndex({ 'shape': '2dsphere' })
```

Listing 2.4 Insert four points and one polygon in MongoDB.

A method named `$geoWithin` can be used to return points that are contained within the polygon. Conversely, all polygons that contain a certain point can be queried using the `$geoIntersects` method as seen in 2.5.

```

1 // All points contained in polygon
2 var p = db.polygon.find({})
3
4 db.point.find(
5   shape: {
```

```

6   $geoWithin: {
7     $polygon: [
8       [2.5, 5],
9       [5, 7.5],
10      [7.5, 5],
11      [5, 2.5],
12      [2.5, 5]
13    ]
14  }
15 }
16 })
17
18 // All polygons containing point
19 var p = db.point.findOne({ coordinates: [5, 5] })
20
21 db.polygon.find({
22   shape: {
23     $geoIntersects: {
24       $geometry: {
25         type: "Point",
26         coordinates: [5, 5]
27       }
28     }
29   }
30 })

```

**Listing 2.5** Select points contained in polygon, and all polygons containing a point in MongoDB.

In MongoDB, a multipolygon can be inserted using extra pairs of braces, as shown in 2.6. Any predicate will fail if the type is defined as 'Polygon', but a MultiPolygon is stored in the coordinates property or vice versa. Therefore, it is important to manage the type property as more polygons are to be stored at once.

```

1 db.polygon.insert({
2   shape: {
3     type: "MultiPolygon",
4     coordinates: [
5       [ [ [2.5, 5], [5, 7.5], [7.5, 5], [5, 2.5], [2.5, 5] ] ],
6       [ [ [2.5, 5], [5, 7.5], [7.5, 5], [5, 2.5], [2.5, 5] ] ]
7     ]
8   }
9 })

```

**Listing 2.6** Insert one multipolygon in MongoDB.

## 2.6 Overlapping Locations

If the destination is contained in several polygons associated with multiple rules, which rule should then be used to calculate the final price? A database will just pick the first result when the results are limited to one. Several solutions have been proposed to solve this problem:

1. Using the location with the shortest distance from its centroid to the destination.
2. Picking the location with the smallest area.
3. Picking the location that has the rule with the lowest price.
4. Picking the rule that has the highest precedence assigned by the user.
5. A combination of these proposals.

All listed solutions will work in the databases listed in this chapter, as the centroid and area can be calculated in OGC and GeoJSON databases.

## 2.7 Premise

*"In what way can locations be represented to be universally interpretable?"*

Locations types that are of importance for this project are points and areas. Addresses and postal codes can be classified as one of these location categories. Every point and area that fits the definition used in this chapter, can be abstracted into geometric datatypes such as Polygons or MultiPolygons, yielding a consistent and universal solution of storing spatial data. Location matching is done at database level, depending on the selected database for this project. The OGC standard offers a mature and thorough set of geospatial features, of which some may not be included in MongoDB. The GeoJSON standard offers similar features that are sufficient for this project. The database selection depends on architectural trade-offs discussed in the next chapter, assuming that the selected database implements the required features layed out in this chapter.



# **Chapter 3**

## **System Architecture**

### **3.1 Introduction**

The term 'system' denotes "a set of things working together as parts of a mechanism or an interconnecting network". The family of systems that has formed through preceding architectural design decisions forms a collection of constrained connectors ready for new systems to assimilate. Flows of information are to be aligned with adjacent system components so that dependencies are satisfied, while making use of the most fitting technologies for great adaptation. Existing conventions, methods and styles throughout the technical and conceptual spectrums are applied, enabling the system architecture to evolve consistently at one pace. Additionally, adjacent systems are improved by solutions introduced in this chapter.

### **3.2 Architectural Patterns**

The current system architecture consists of three API's and nine services that connect to four databases, as can be seen in Figure 3.1. They provide functionalities to portals and mobile apps. A separation exists between user interface, business logic and data storage that is known as the three-tier or multi-tier architecture, as described in [16].



Fig. 3.1 Current System Architecture provided by taxiID.

The bigger and smaller shapes in the Figure represent large API's and smaller services respectively. The orange colored services are used internally, the green shapes are used by external partners. The smaller services adhere to the pattern that is called service-oriented architecture, where application components provide services over a network typically.

### 3.2.1 Monoliths

The bigger shapes in Figure 3.1 may be classified as monoliths. In the context of computer software, a monolithic system may have different definitions. Rod Stephens captures the meaning of a monolithic architecture quite broadly: "In a monolithic architecture, a single program does everything. It displays the user interface, accesses data, processes customer offers, prints invoices, launches missiles, and does whatever else the application needs to do" in [17]. In general, a monolith describes a software application which is designed without modularity. Even though the frontend is separated in some cases, it fits the description most accurately. Integration of TPS could be achieved by implementing TPS as a component of a

monolith. But what logically follows is either duplication, or dependencies between large systems. The first contradicts an important principle of software engineering; don't repeat yourself (DRY), the second limits scalability and independence of deployment. The legacy system has demonstrated this issue because it has its price calculation system implemented in this manner, now facing difficulties providing the price calculation functionality to newer projects.

### 3.2.2 Microservices

If the legacy price calculation system was implemented as a service, it could have been reused or redeployed as a second separate price calculation system for YDA instead. A consensual definition of microservices does not exist, but can be defined as a development technique that structures a system architecture as multiple loosely coupled services, exactly opposing the description of a monolith. The smaller shapes in Figure 3.1 can be described as miniservices or microservices. Philipp Hauer describes the advantages of independent services accurately in [18], mentioning; improvements in development speed through parallel development, isolated deployment and continuous delivery (CD), scalability and potential parallelism, and independence in case of failure. Fair points of criticism have been made in regard to microservices. Jan Stenberg has pointed out that microservices are information barriers in [19], meaning that the process of implementing a new system is degraded by the sense of ownership of specific services by developers. Technical downsides that have been discussed in general are: latency, testing, deployment, security, and message formats.

### 3.2.3 Frontend and Backend

A model-view-controller pattern is separating the business and presentation layers in various frontend projects. This would mean that separate views have to be developed for each portal, or the views should be provided to the portals via iframes. In the last case, it may be beneficial to combine the frontend and backend in the same project structure. However, this would be in conflict with this three-tier pattern, which is not desired in respect to the evolution of the system architecture. Integration of the backend would mean that the core system should contain the price calculation system as a component, and separation of the backend would mean that the backend would be set up as a separate service. If this pattern is to be respected, four possibilities remain with which the frontend and backend could be implemented:

1. Integrate views in existing portal, build TPS as a separate microservice
2. Build separate service providing iframe views, build TPS as a separate microservice

3. Integrate views in existing portal, integrate TPS as monolith component
4. Build separate service providing iframe views, integrate TPS as monolith component

The final decision, based on a comparison seen in table 4.1.1 in Appendix A, proposes to separate the backend and integrate the frontend. This leaves the requirement of implementing the frontend in multiple portals at once unresolved, but improves consistency of each individual portal implementation, and reduces dependencies of having to implement iframes.

### 3.3 Information Dependencies

The frontend separation or integration cases have little influence on the further design of the system. The backend separation case however, is only possible if information dependencies are satisfied. A conceptual model can be derived from the database schema design in Figure 4.7.1.1 of Appendix A. This conceptual model can be found in the next chapter, where the data for a price calculation is discussed, see chapter 4, Figure ???. Important information that must be acquired are: products, companies, applications, users, settings and VAT amounts. In isolation, this model contains all the required information to calculate a price, if the parameters shown in Listing 3.1 are provided.

```

1  {
2    "companyId": string
3    "daAppInstallId": string,
4    "vehicleTypes": string[],
5    "passengerCount": number,
6    "requestedDate": ISODate,
7    "departure": { "gps": { "lat": string, "lng": string } },
8    "destination": { "gps": { "lat": string, "lng": string } }
9  }
```

Listing 3.1 Minimal external information required for a trip price calculation.

The concrete data from the conceptual model could in theory be stored in one database, separate from the existing core database. How would the company data be synchronized? And does the system know which pricing rules should be used for the calculation? Assuming that companyId and daAppInstallId are provided in the authentication headers, the user can be identified. But this identity is futile if no pricing data is associated with it. There are three options with regard to storing the data in a way that user identity can be used to associate pricing information:

1. Centralized state - A single centralized database
2. Distributed state - Multiple distributed synchronized databases
3. Minimal state - Multiple independent databases with stateless references

A single source of truth, central database, would avoid having duplicate data all together. No synchronization, thus no network communication is necessary, and all data is always readily available. This design desecrates the independency aspect of microservices. The multiple synchronized databases in option 2, raises the problem of having duplicate, out of sync data.

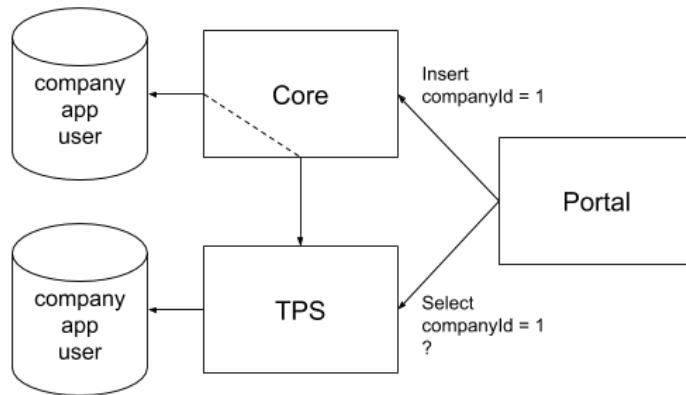


Fig. 3.2 Flow of data requests.

A one-way dataflow could reduce this problem, but it is not always entirely avoidable. This design does adhere to the concept of microservices by allowing independent deployments still. The minimal state option 3, would improve on the previous option 2, by only allowing data to be referenced back in a stateless manner. This means that a company in the core database could have related data stored in the TPS database, without being 'aware' of it. The entities that reference the company can be used in an autonomous fashion, where only the necessary information is sent to TPS whenever a request is made. Multiple proposals were made aiming to solve the combination of authentication, authorization and data consistency problems.

## 3.4 Authentication and Authorization

In the legacy system, authorization was achieved by sending extra headers for each crucial piece of information, this is clarified in Appendix A, chapter 3.4. To prevent data duplication, the microservice could be connected to the database that is used by the core system. But this makes the microservice less decoupled, and directly contradicts the desire to separate data dependencies. In the slides of Appendix B.3 four examples options are listed as to which authentication could be implemented. These examples are based on three proposals listed in Appendix A, chapter 4.4, which are further explained in the subsections below.

### 3.4.1 OAuth 2.0

This authentication mechanism delegates user identity management to a separate authentication service that, similar to the pricing microservice, has its own single task of authenticating users. OAuth 2.0 is a protocol that has been designed to allow third-party apps to grant access to an HTTP service on behalf of the resource owner. Although granting permissions should not necessarily be done by any user, this mechanism could be used for authentication purposes in the way that Facebook login would work as a central verification authority. The token is verified by the authority authentication server on each request, keeping the user identity management centralized inside one single service.

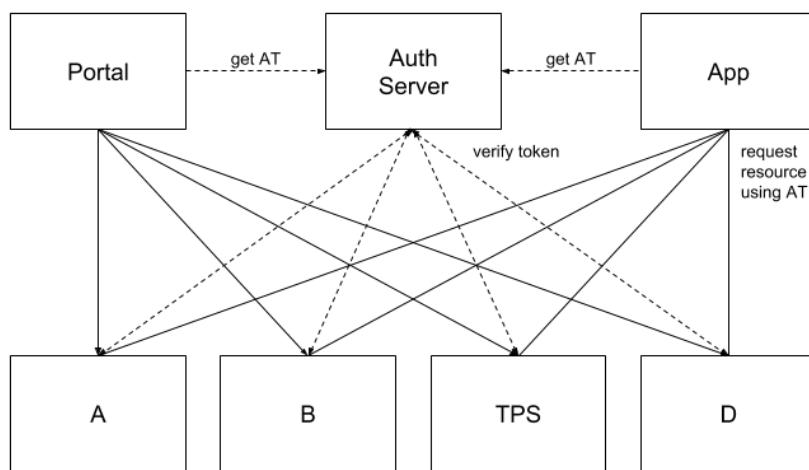


Fig. 3.3 OAuth requests where tokens are verified by Auth Server.

This proposal is used in example four of Appendix B.3.

### 3.4.2 JSON Web Token

This proposal entirely removes the database connection to any user data. This is possible when a JSON Web Token (JWT) is used. A JWT may be signed with a cryptographic algorithm or even a public/private key pair using RSA. After the user enters valid credentials, the core system validates the credentials by comparing them with user data in the database.

```

1  {
2      "companyId": "59ea0846f1fea03858e16311",
3      "daAppInstallId": "599d39b67c4cae5f11475e93",
4      "iat": 1521729818,
5      "exp": 1521816218,
6      "aud": "tps.dispatchapi.io",
7      "iss": "api.dispatchapi.io",
8      "sub": "getPrices"
9  }

```

---

Listing 3.2 Two user identifiers and registered claim names stored inside the payload of a JSON web token.

The keys other than companyId and daAppInstallId describe expiration date of the token, and other meta information. The core system signs a token that with a secret that is known by the microservice. The token consists of three parts, separated by a fullstop. The first part (header) of the token contains information about the hashing algorithm that is used to encrypt the payload. This part is Base64Url encoded. The payload itself contains information stored in JSON format as shown in Listing 3.2. The identity of the user is stored in the payload that can only be revealed by whoever holds the secret with which it is signed. Then the message can be verified using the third part of the token, which is the signature. The verification step prevents tampering with the payload. Claims can be added to the payload as shown in 3.2 to provide information about the token, as explained in [20]. Figure 3.4 adds statelessness to the previous proposal, thereby removing the verification step with the authentication server.

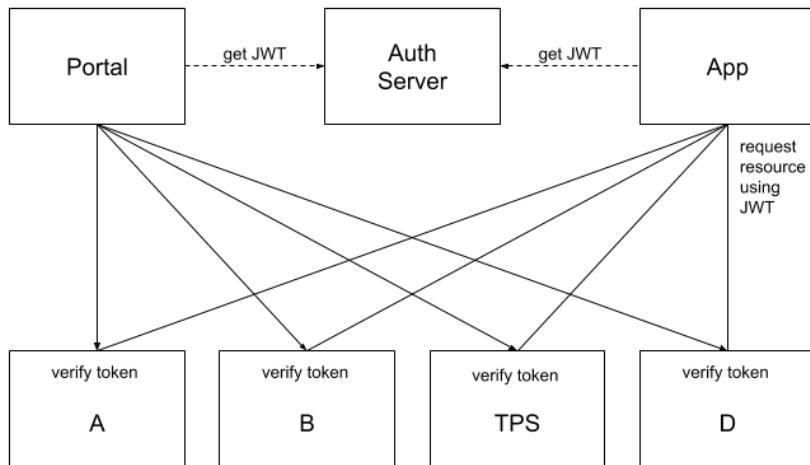


Fig. 3.4 OAuth with stateless JWT requests.

### 3.4.3 API Gateway

The final proposal allows services to be used by external agents via the API Gateway. This solution allows for a central middleware in which authentication and authorization is handled, where the microservices are shielded from public access, and all communication is established through the API Gateway [21]. Next to authentication, the gateway could optimize the endpoints so that no multiple requests are needed from external agents to gather different types of resources. These calls could be made internally to the microservices behind the gateway. This also opens the possibility the freely change the microservices

without changing the public endpoints exposed by the gateway, and even offers slow or instant transitions to different versions of microservices. The different proposals explain the improvements they may bring over some system. But the advice given is not tied to this project, instead to the entire Dispatch API. It's advised to have a constructive dialogue about the future of the company, and the way it's planning to scale. One could put a API Gateway in front of a monolithic app to help with transitioning to a microservice-oriented app.

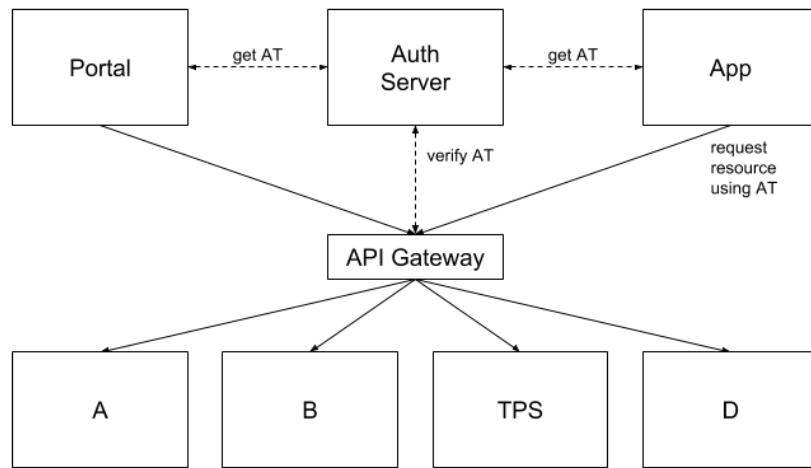


Fig. 3.5 API Gateway.

The fourth example is proposed as the best possible solution, as shown in Figure 3.6. This solution closely resembles the single responsibility authentication service as shown in Figure 3.3, and the minimal state option as shown in Figure 3.4. The user data resambles a database that holds the single source of truth.

kks32: Add fourth option from authentication proposals

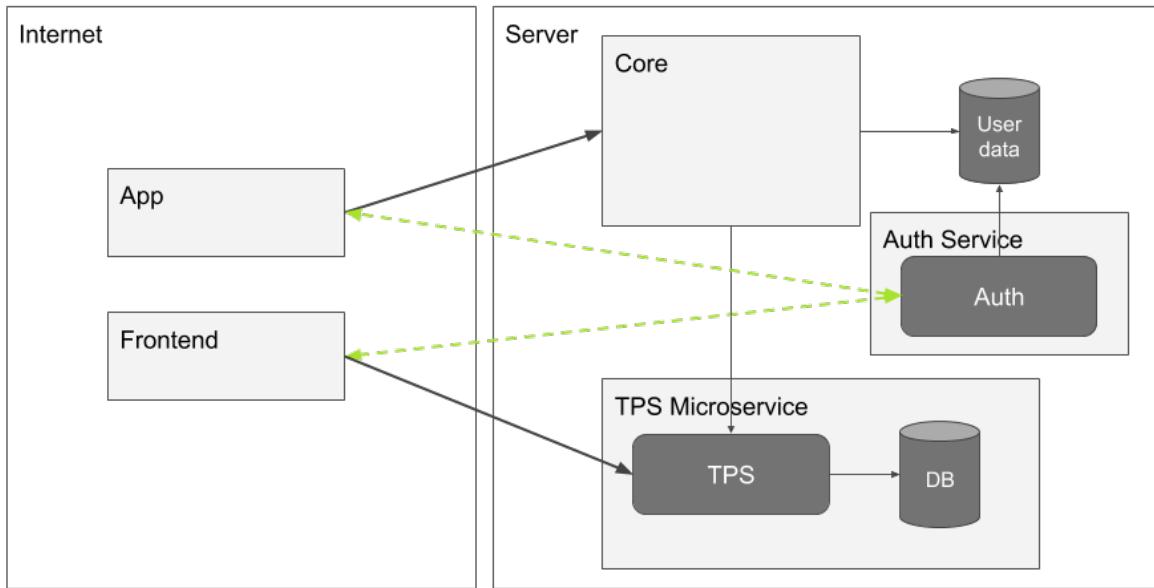


Fig. 3.6 Preferred authentication setup.

The only synchronization steps are executed when a new company or application is created, or when they are deleted. The proposal completely decouples the information requirements by keeping Core data and TPS data in their respective databases separated. But without the means of sharing the user identity, this solution wouldn't work. JSON Web Tokens are part of the solution that solves the problem of synchronizing user identity.

## 3.5 Methods and Techniques

All API projects in taxiID have been developed using PHP or JavaScript. Java and Swift are used for mobile applications. It is not beneficial to explore every single possible combination of technologies, as the range of possibilities is too big. It is important to look at some popular alternatives along the way. NodeJS offers more modern features and abilities to separate concerns in comparison with PHP. Speed and consistency of the codebase are important reasons to opt for a JavaScript NodeJS project, as advised in Appendix A, chapter 4.6. Two proofs of concept were made, one showcasing an Express solution using GraphQL to expose resource, and the other exposing resources using Loopback in a hybrid JavaScript Typescript project.

### 3.5.1 Backend Framework

The first proof of concept allows consumers of the API to dictate the information that they want to receive. Using this concept, an API Gateway could easily chain requests, mapping resources from multiple services to a single endpoint. The proof of concept is available at [github.com/Menziess/TypeScript-GraphQL-API](https://github.com/Menziess/TypeScript-GraphQL-API). This proof of concept was not advised to be used for TPS, because the inconsistencies between services introduce unnecessary complexity for developers. The second proof of concept, next to being the advised solution, is selected through concensus of developers working at taxiID. The team has experience with LoopBack 3.0 [22], enabling the team to reuse code, maintain their development velocity, and reason about this project more effectively. The project structure as shown in Appendix B.4 is made up of of loopback configuration files, and Typepscript files containing important logic. This separation is not ideal, but expresses the fact that some JavaScript files belong to a framework, and must adhere to a special framework format. The Typescript files offer more strict checks through static typing, interfaces and classes.

### 3.5.2 Frontend Framework

The first non-functional requirement states that the solution should be seamlessly integrated in the portal. On top of that, a user shouldn't have to log in again to make use of the pricing service from within that portal. For the portal, a proof of concept was made for the case of having the portal implemented as a separate project. The proof of concept is available at [github.com/Menziess/TypeScript-Reiskosten](https://github.com/Menziess/TypeScript-Reiskosten). This concept was used to illustrate the differences between Vue and Angular, embodying mostly application structure. Angular being more suitable for large corporate application, while Vue caters toward smaller, more flexible, less structured applications. Iframes, objects and embeds have been mentioned as potential solutions to integrate a frontend in several distinct portals. This problem affects more than just the pricing project, therefore a decision must be made on a higher level before the frontend will be integrated, but the decision is not required for the first sprint to start. The YourDriverApp portal has been constructed using Angular 5. If the frontend is to be integrated, Angular will be the framework that is used to construct the views.

### 3.5.3 Database

Agarwal and Rajan state that NoSQL takes advantage of cheap memory and processing power, thereby handling the four V's of big data more effectively, but lacks robustness in comparison to SQL databases in [23]. Performance of geoWithin and geoIntersect queries

have been tested between PostGIS and MongoDB. The report dives deeper into spatial queries and concludes that their tests suggest that MongoDB performs better by an average factor of 10, which increases exponentially as the data size increases, but lacks spatial functions that OpenGIS supports. Indexing of spatial fields is said to have a big impact on performance. The conclusion states that the downside of using NoSQL compared to SQL is the limitation in respect to spatial functions. The previous chapter discussed the important features that were required for the location matching functionality to operate properly. Both OGC and GeoJSON standards offered these features. After the paper Schmid et al. 2015 [24] was published. The team argues that clustering is much easier in MongoDB, which may be important in the future when a company grows. In respect to the CAP theorem, and ACID properties, SQL and MySQL have different strengths:

	SQL	NoSQL
Integrity	✓✓	x
Scaling	x	✓✓
Atomicity	✓	✓
Consistency	✓✓	✓
Isolation	✓	✓
Durability	✓	✓
Availability	✓	✓✓
Partition Tolerance	✓	✓
Performance	✓	✓✓
Maturity	✓✓	✓
JSON Documents	x	✓
Clustering	✓	✓
Sharding	✓	✓✓

Table 3.1 Comparison between SQL and NoSQL databases.

MySQL offers more robust data structures via integrity checks. MongoDB offers the possibility to embed one to many relationships in a single document, keeping the data locality. Within the systems architecture, MongoDB is highly represented,

Performance of spatial queries is very important,

NoSQL document storage allows for great horizontal scaling and sharding, catering more towards use cases that do not require overall consistency of the data, but makes the data highly available.

### 3.6 Premise

*What is most fitting solution to integrate the backend and frontend into the existing architecture?*

kks32: second poc is used

kks32: how is state shared(jwt), why are all the choices made and why are they good? Talk about the patterns applied.

It is advised to integrated frontend views in each required portal using the associated available technologies to maintain consistency within each portal and reduce dependencies. A separate NodeJS microservice with its own MongoDB database using Loopback as a framework to quickly implement functionalities written in Typescript should make the system readily available to all adjacent system components. Authentication should be established using a JWT provided by a single responsibility authentication service.

# Chapter 4

## Trip Price Calculation System

### 4.1 Introduction

kks32: Doen alsof dit programma nog niet bestaat (dit gaan we doen, en dan dat...)

The term 'rule-based' in the title caters to the proposition that trip price calculations hinge on information defined as something called a rule. This chapter demonstrates how the system should be structured, what logical flow of information is to be contrived, and how different pieces of information that are stored and processed should restrict the price rule dimensions of space and time. Also, how determinism in calculations can be achieved to consistently calculate a price breakdown that reflects that of the legacy system.

### 4.2 The System Structure

Framework related code is separated from the calculation logic, previously described as the second backend framework proof of concept. Figure 4.1 shows a high level class design. The calculation logic is only concerned about the calculation of a single product. The Price object is composed of a Directions and a Calculator Class, both of which expose only one instance method, directions and calculate respectively. The behaviour of the gathering of directions information and calculation type is achieved by applying the strategy pattern as described in [25]. Smaller classes and types are omitted in this diagram. The conceptual model mentioned in the previous chapter that is derived from the database schema design in Figure 4.7.1.1 of Appendix A can be seen in Figure 4.2. These model names and relations will be referenced throughout this chapter. When a price calculation request is made, it is to be handled by a Loopback model endpoint, which processes the request parameters, aggregates all the data

required for the calculation from the database, passes it to the calculation logic and returns the results.

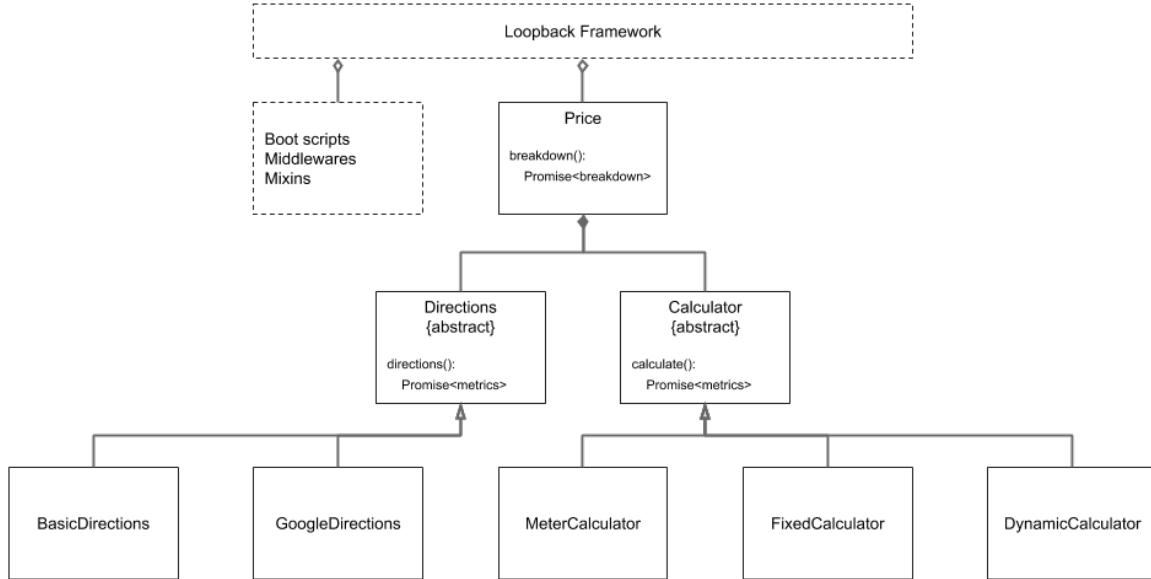


Fig. 4.1 High level class diagram.

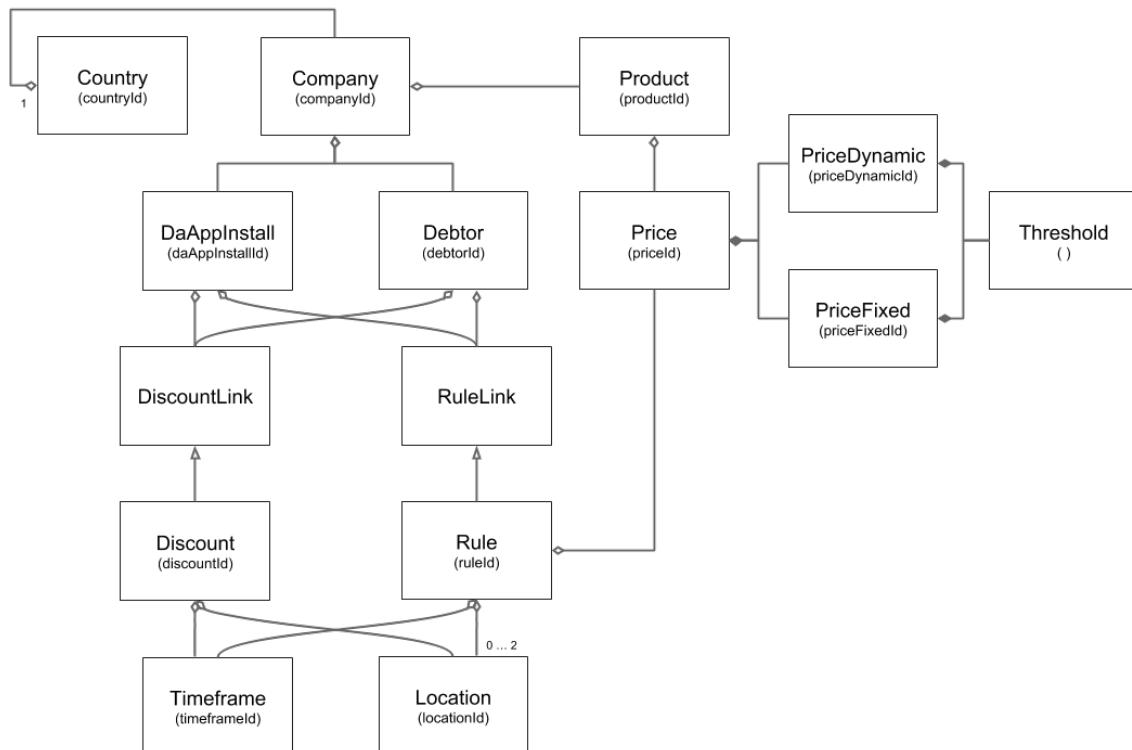


Fig. 4.2 Conceptual data model showing database entity relations.

### 4.2.1 Rules

kks32: Changes a lot, needs final version

Rules and discounts are queried for each requested product as shown in step three and five of Figure ???. MongoDB's aggregation framework allows documents to be aggregated in a multi-staged pipeline.

#### Identification

The first step in the pipeline matches all DaAppInstall entities with the identifiers sent along in the JWT payload: companyId and daAppInstallId.

#### Links

As shown in Figure ??, the DaAppInstall entities have multiple Links; ruleLinks and discountLinks. These links store data in a polymorphic hasManyThrough relation.

#### Country

Each company has a country, used to determine the default VAT and currency.

#### Rules

All documents are filtered based on geolocation and timeframes.

#### Prices

Prices are retrieved for each product that is associated with the matched rule. DynamicPrices and related thresholds, and FixedPrices and related thresholds.

#### Sorting and Formatting

The final step in the aggregate sorts and formats the results so that the Price class can calculate a price breakdown for each result.

### 4.2.2 Discounts

The price calculation matches rules and discounts separately. Discounts were associated with rules in the legacy system, eliminating the amount of combinations of prices with or without

discounts. A discount was either always active, or it was not. Having separation between the two enables users to define other locations and timeframes to both of them separately.

## 4.3 The Trip Price Calculation

This section will elaborate on the steps mentioned previously. The process from start to end is has many edge- and corner cases. The process of handling the incoming request, finding the matching price rule, and calculating the prices is explained coarsely in the following subsections. Individual parts are explained in later sections.

### 4.3.1 Incoming Request

The flowchart in Figure 4.3 shows the point where the request is received, up until the point where enough information is known to fetch rules and discounts from the database. When the request is received (1), the user is authenticated. The JSON Web Token contains the user identity, the companyId and daAppInstallId (2). The request body contains information about the ride: vehicle types, passenger count, requested date, departure, and destination.

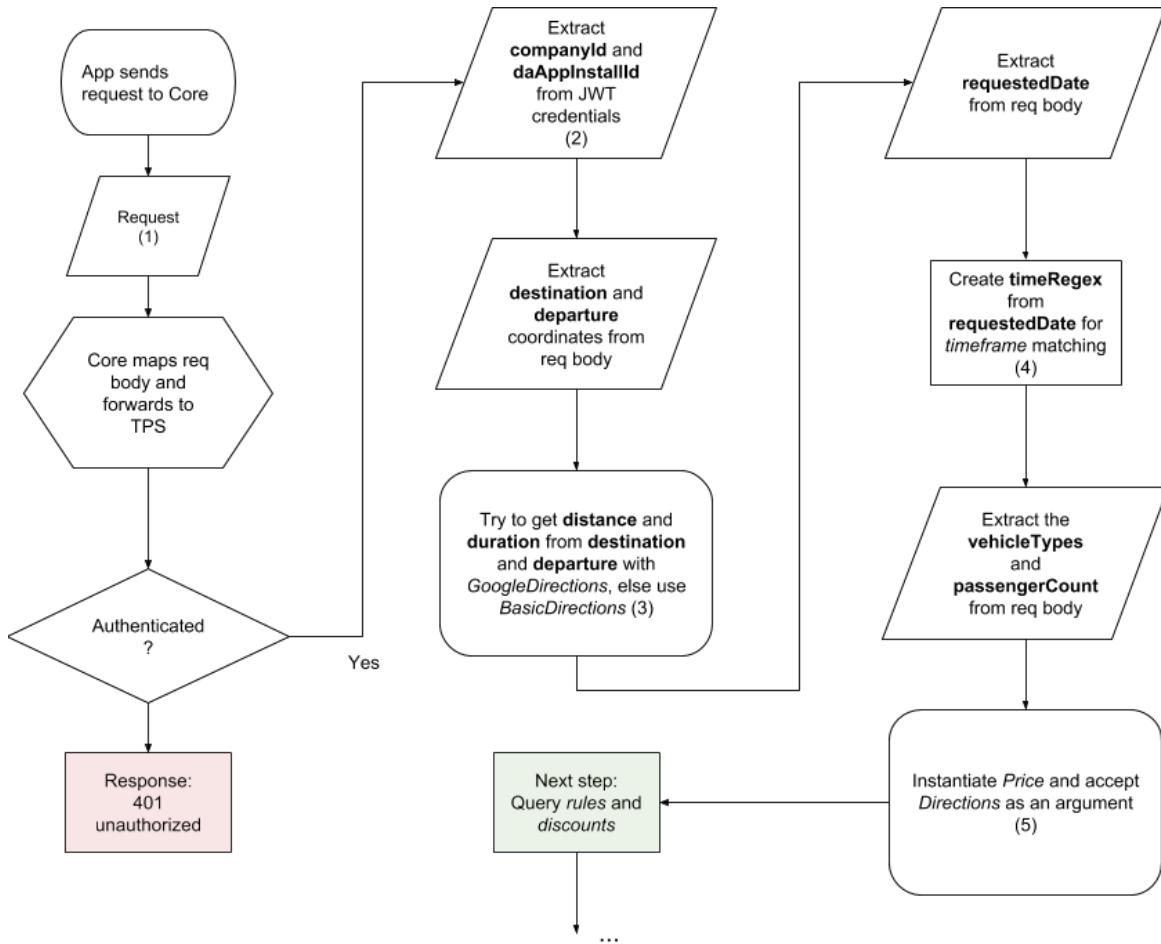


Fig. 4.3 The condensed flow of a trip price calculation - incoming request.

The Directions class will provide an interface to retrieve trip related data. The departure and destination are fed to the Directions class, which will proceed and work out the distance and duration of the trip (3). If the GoogleDirections class is unable to determine the trip details, the BasicDirections class returns a base case result. The trip price calculation flow changes drastically when no destination or departure locations are provided in the request body. Having alternative behaviours helps dealing with providing the most accurate information possible. The strategy pattern also improves the systems resistance to change. If a different service is needed to determine the trip details in the future, it can easily take the place of one of the current services. If the trip details have not been obtained, but at least one of the two, departure or destination locations, have been provided, a database query could still work out the best matching price rule based on partial information. The requestedDate is to be converted to a regex pattern (4) for reasons explained in the timeframes section of this chapter.

### 4.3.2 Data Aggregation

When the user is authenticated, the system immediately requests the distance and duration of a ride by providing the departure and destination locations to the directions service. This service awaits the trip details response while it is fed to a Price class instantiation (5). The Price class will wait until matched pricing rules are provided, upon which it will perform the price calculation. Before this is the case, the aggregate queries are performed (6), trying to find a matching rule and discount for a particular company/app combination.

Two separate queries start by finding the application and company combination for which a price is calculated. If a reference to a debtor is provided, rules and discounts linked to it are used instead. The rules and discounts contain criteria in the form of timeframes and locations. A discount has basic properties while the rule has complex pricing information for products. Figure 4.4 shows the most important stages of the rule aggregation pipeline. The discount aggregate is a more simple version and has some of the same stages, its flowchart is therefore excluded.

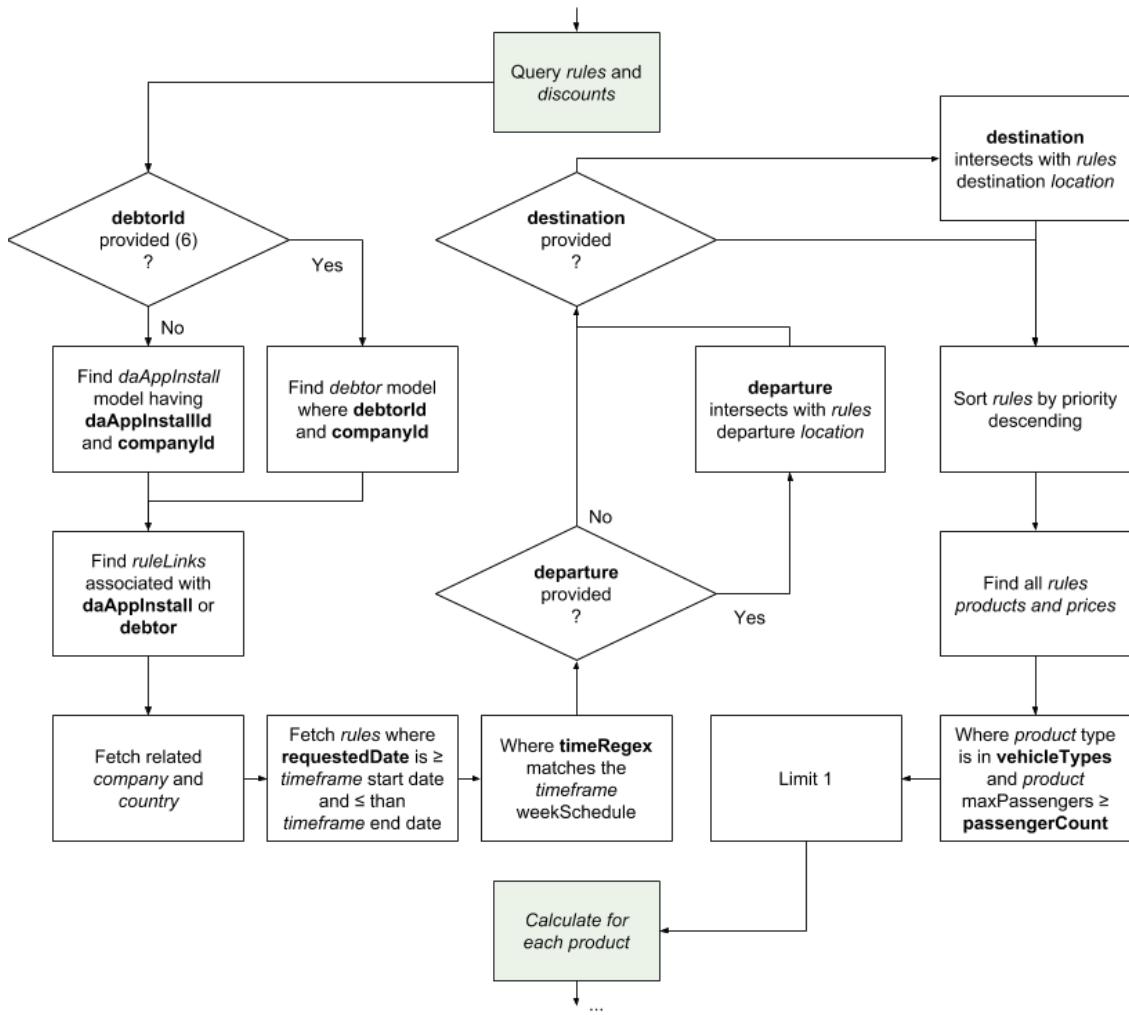


Fig. 4.4 The condensed flow of a trip price calculation - data aggregation.

### 4.3.3 Calculation

When both queries are finished, potential discounts are added to each pricing rule, which are then fed to the Price class asynchronously. A single rule has price information for each available product of that rule. If a company offers three products, it is possible to only offer two products in a given timeframe or area by associating them with a rule. For each product that is related to the price rule fetched from the database, a price breakdown is calculated. If the array of matched rules is empty, a map over the array will result in an empty array of price breakdowns. A price breakdown follows a series of logical steps, in which functions are created that have a certain default behaviour. The strategy pattern is once again applied to use the appropriate calculator for the type of calculation that is required.

In this case, the best match is found, and price breakdowns are returned without a calculated price. This is handled by the mobile applications, as it is the case with the legacy system. But if the trip details have successfully been obtained, the sys

## 4.4 Locations

Locations and timeframes are the big filters that reduce the amount of potential matching rules and discounts based on space and time. The implementation for location queries ...

kks32: Working on locations

## 4.5 Timeframes

Time plays a role in determining whether a rule has matched. The implementation of this concept should preferably offer enough freedom in the future, and should not be tailored toward one specific entity relation. Being able to reuse the timeframe entity improves maintainability of the system. The requirements state that the user must be able to define a start and end time, the days on which the times are active, and the start and end date of the timeframe. This either means that the timeframe one window of time, or that each given day has a single window of time. But if a discount should be active during night of New Years Eve, between 23h and 5h, this description would not be sufficient to cover this use case under any interpretation.

### 4.5.1 Conventional Approach

The legacy system takes a straight forward approach of storing time in a relational database. The begin and end of a window are stored in a record that is related to a parent timeframe entity. The timeframe has many windows that could contain a timestamp. It either finds one or many time windows that contain the timeframe. This approach covers all possibilities imaginable.

### 4.5.2 Bitmap

For this reason, a proposal was made to implement timeframes in a way that let users choose to describe each hour of the week, being stored as a bit map. The windows could be decreased to half an hour, resulting in twice as many bits. Three implementations have been tested, where the bitstring format offered the best outcome, as seen in B.6. A timeframe is stored

having two ISODates (international standard: ISO 8601), and a bitstring representing the schedule for which the insert statement is shown in Listing 4.1.

```

1 db.Timeframe.insert({
2   startDate: new Date(2018, 4, 7),
3   endDate: new Date(2019, 4, 7),
4   weekSchedule:
5     "001101000110011011000011
6     011010110011000010111100
7     101010101110100011111000
8     111110011111011100100001
9     101000000010111011100100
10    110010000001000010101101
11    010111101000000101001110"
12  })

```

Listing 4.1 Improved timeframe.

A string is a very flexible datatype. Using a regex in a query makes checking multiple bits in the string relatively easy, and enables different values next to 0 and 1. 3. A bitarray would only allow for 0 and 1 to be used. A bitstring also makes querying the data really stable, as the query will simply not match if the content of the data is not of expected length or value. Performance is not an issue if the regex column is indexed, and when prefix expressions ( $/^/$ ) are used, as per documentation in [26]. As noted before, the system is easy to scale if existing data can be migrated to deal with a new amount of bits, or new character usage over bits.

```

1 /**
2  * Date object days start at sunday, in order let monday be
3  * index 0, decrease the index by one, but limit numbers
4  * in the range of [0, 7].
5  */
6 const startMonday = (d: number) => (d - 1) % 7;
7
8 /**
9  * Creates a regex that spreads bits across hours of each
10 * day of the week.
11 */
12 export const regexFromDate = (date: Date) => {
13
14  const skip =
15    // Day of the week multiplied by hours a day
16    startMonday(date.getDay()) * 24
17    // Hour of the day
18    + date.getUTCHours();
19
20  return { skip, timeRegex: new RegExp(`^.{${skip}}1`) };
21};

```

Listing 4.2 Opening timeframe.

The regexFromDate could be used to create a regex that could be used in a query to check whether a single hour within a week is set. Skip is an integer representing the number of bits that should be skipped to get to the moment represented by the date. So in order to get 11 AM - 12 AM in the presented schedule,  $3 * 24 \text{ skips} + 11 \text{ skip} = 83$  skips are to be made to find the digit 1 on thursday. Because the getDay method on JavaScript date objects return an integer resembling the day, starting at sunday, the startMonday function is used to pretend that it starts on monday.

## 4.6 Price Calculation Types

Pricing information is validated before the calculation is started using the method shown in Listing 4.3. The system should throw an error, as a price calculation can not proceed without the required information.

```

1 /**
2  * Check if pricing contains valid properties and is not undefined.
3 */
4 public static validPricingOrError(pricing: pricing | undefined): void {
5   if (pricing === undefined) {
6     throw new HttpError('Pricing data is undefined.');
7   }
8   const missing = [
9     'prices',
10    'rules',
11    'country',
12    'company',
13    'type',
14    'maxPassengers',
15  ].filter(prop => !(prop in pricing));
16   if (missing.length) {
17     throw new HttpError('Pricing data is missing properties:\n\t' + missing);
18   }
19 }
```

Listing 4.3 Find missing properties.

Metrics are checked (distance duration)

Price calculator is picked depending on the rule type or if metrics are empty

### 4.6.1 Dynamic

The word dynamic in the dynamic price calculation means that the price can dynamically increase or decrease by a given values based on given parameters.

### 4.6.2 Fixed

The word fixed in the fixed price calculation means that a price is a given fixed amount under circumstances determined by the parameters.

### 4.6.3 Meter

The on-meter calculation simply returns a breakdown for which all values are zero. This is done by convention at taxiID, so that the mobile apps can calculate their own price based on a integrated meter inside the taxi.

## 4.7 Threshold Calculations

On top of each calculation type, prices can be defined after certain thresholds are surpassed. For example: if a taxi travels 25km, a threshold could be defined at 20km, after which the price will be 10 cents cheaper. In this case, the passenger pays a normal price for the 20 kilometers, and a cheaper price for the last 5 kilometers. The same holds for minute prices, but only for the dynamic price calculation. In the fixed price calculation, only kilometer thresholds can be defined. After a threshold is met, the fixed price will be replaced by a newly defined value. For any type of calculation, the algorithm works the same. Only the name of the metric used to measure thresholds and the actual calculation functions may change. For this reason, it is possible to define a function that recursively walks through all surpassed thresholds, then calculates a price using different calculations after each threshold was surpassed, as shown in Listing 4.4

```
1 public static recursiveThreshold(
2     thresholds: threshold[],
3     calculation: Function,
4     metric: number,
5     cascaded: boolean = true,
6 ): number {
7
8     if (thresholds === undefined || thresholds.length < 1) {
9         return calculation(undefined, metric);
10    }
11
12    if (!cascaded) {
13        return calculation((<threshold>thresholds.shift()).value, metric);
14    }
15
16    const nextMetric = thresholds[0].threshold;
17    const newMetric = metric - nextMetric;
18    const price = calculation((<threshold>thresholds.shift()).value, newMetric);
19}
```

```

20     return price + Price.recursiveThreshold(
21       thresholds,
22       calculation,
23       nextMetric,
24     );
25   }

```

Listing 4.4 Recursive threshold calculation.

The Typescript type definitions reveal that calculation is of type Function, and thresholds is of type threshold[]. The base case returns the calculation with an undefined first argument. This forces the calculation method to use its default value, which is actually the normal kilometer or minute price. The base case will have the value of the first threshold that is met, assuring that the passenger pays the normal price up until that point. If the base case is not satisfied, the function checks whether the cascading boolean is true. This boolean determines whether each threshold should be evaluated, or only the last one. In case of the fixed price calculation, only the last threshold fixed price will be computed. But for the dynamic prices, each step has to be added to the total amount. Finally, the calculation is made using the next threshold, and the recursive call is summed up with the calculated price. It is worth noting that even though this function is static and does not modify instance data, it is impure, leaving the passed thresholds array empty at the end.

## 4.8 Breakdown

The final result of the trip price calculation is a breakdown for every requested product. For example: if the mobile application requests prices for 'saloon' and 'limo' vehicle types, the response will at most contain an array with two breakdowns, for saloon and limo products. To ensure a seamless transition from the legacy price calculation system to TPS, the response formats should be identical. Still an improvement, if profitable enough, could be taken into consideration. One requirement of the price breakdown states that the tax should be included, but as shown in Listing 4.5 the included tax is part of the breakdown. Is it by mistake or design?

```

1 [
2   {
3     "vehicleType": "saloon",
4     "maxPassengers": "4",
5     "price": {
6       "currency": "EUR",
7       "total": 850,
8       "breakdown": {
9         "route": 802,
10        "tax": 48,

```

```

11     "toll": 0,
12     "parking": 0,
13     "waiting": 0,
14     "discount": 0
15   }
16 },
17 "fixedPrice": "true"
18 }
19 ]

```

Listing 4.5 Legacy price breakdown

Two possible solutions were proposed having VAT included in the price. The first solution extracts the tax element from the breakdown, so that the sum of the breakdown would add up to the total price where VAT is included in the price as shown in Listing 4.6. As demonstrated in Appendix B.2, a breakdown is easily constructed in four steps when VAT is included.

```

1 [
2 {
3   "vehicleType": "estate",
4   "maxPassengers": 4,
5   "isEstimated": false,
6   "price": {
7     "breakdown": {
8       "route": 8300,
9       "toll": 0,
10      "parking": 0,
11      "waiting": 0,
12      "discount": -1650
13    },
14     "currency": "EUR",
15     "total": 6650,
16     "tax": {
17       "amount": 400,
18       "percentage": 6
19     }
20   },
21 },
22 ...
23 ]

```

Listing 4.6 Improved price breakdown

Keep in mind that unlike the listings the prices in the proposal are not displayed in cents. The second solution maintains the legacy format, but has to recalculate the prices without VAT. This could have downsides unlike the first approach:

1. If an error is detected in the calculation, it is hard to trace back which components contributed to the total VAT. This would be even harder when each component uses its own VAT percentage.

2. It takes extra steps to calculate the price of each component excluding VAT.
3. Rounding the individual components could result in a sum that is not equal to the total displayed in the breakdown.

The first proposal is chosen to be implemented, where the flag 'fixedPrice' is replaced by the 'isEstimated' flag to clearly reflect its purpose.

## 4.9 Deterministic Outcomes

- Database query return same result - Classes and project structure operate in the same way each time - Side effects like google maps reduced by enlarging points locations - FP pure functions programming styles - tests - CI CD - interfaces - static strong types - type hinting - OOP en FP mixen - OOP voor grote structuur - FP voor solide operaties - SOLID - Gang of Four - Loose coupling high cohesion - Async - Strategy pattern

Unit tests are to be written to cover the most important aspects of the system. New features often introduce bugs by adding functionalities that are broken, although the reliability of the existing functionalities may also be impacted because of changes in the existing code. To prevent units of code from malfunctioning, regression tests may be implemented to validate whether a unit still functions according to a set of conditions. Static and dynamic tests may be performed using the framework Mocha [27] and the assertion library Chai [28]. To further reduce the chances of introducing bugs, some additional techniques could be used, including Software Validation techniques. Linting is the process of running a program that will analyse code for potential errors. Static analysis tools may be used to find code smells. Continuous Integration may be implemented to ensure that valid builds are deployed. A comparison was made in Appendix A, chapter 4.9, between CI tools. Various CI tools were implemented in previously mentioned proofs of concept.

State and mutations should be fully encapsulated, leaving only static functions exposed. These functions aim to mutate data in a pure way, meaning that no state is changed outside of the function scope, and that the function is absolutely honest about its parameters and return values. As discussed in the previous chapter, Typescript plays an important role in mixing OOP and FP together. The database schema design as shown in the previous chapter gives an impression on the different pieces of information required to calculate a price. Such a schema provides a good insight in the relationships that different entities have, but may distract from the actual story that is happening within each calculation.

The object-oriented programming (OOP) paradigm offers many ways to keep a system structured. Good software design has low coupling and high cohesion, meaning that software components should have a high degree of belongingness, and a low degree of dependence

in respect of eachother. As stated in the previous chapter, another paradigm that could potentially improve the price calculation system is called: functional programming (FP).

## 4.10 Premise

*Which logic and data is required in the backend to reliably calculate a trip price?*

kks32: Conclusion for chapter 4



# **Chapter 5**

## **Portal**

### **5.1 Introduction**

The term 'reasoning' in the title, meaning "the action of thinking about something in a logical, sensible way", may have been redundant if a system were to calculate trip prices autonomously — this system is designed with the user in mind. That is why the inner workings of the system must be expressed in such a way that given some rule as input, the user will be able to logically derive the consequential output with confidence.

### **5.2 Design**

A pricing rule is nothing more than a set of prices and collection of criteria by which a trip must abide in order for those prices to apply. These criteria and pricing information are stored in database entities, which could be expressed as components in a view. For example, "the pickup location of a trip must be located in Amsterdam" is a criterion that is stored in a location entity, that may be expressed as polygon on a world map component. Even if the possible combinations of criteria could be graphed, it would be highly dimensional.

#### **5.2.1 Essential Components**

The main entities that make up a the price calculation system are visualized in Figure 5.1. The plurality of the child entities define whether more than one child are present within the parent entity. For example, rules have many products, with each product having one price, which has one priceFixed and one priceDynamic.

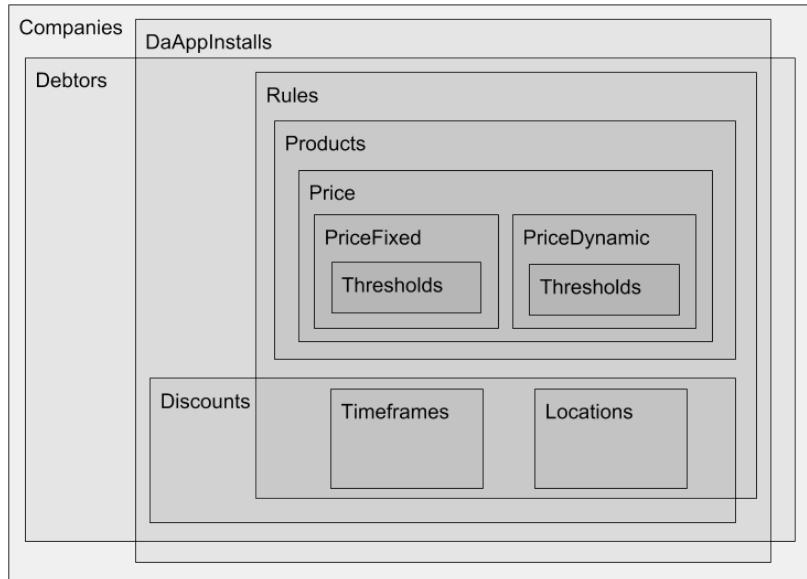


Fig. 5.1 Treemap of components.

### 5.2.2 Expressing Order

Figure 5.1 taps into the ability of the reader to preattentively process the images structure. The human brain has already ordered the differently sized boxes by enclosure, proximity, intensity, and spatial grouping. Stephen Few states that "Perception of these basic visual attributes is called 'preattentive' processing, in contrast to the conscious part of perception, which is called 'attentive' processing. Preattentive processing is extremely fast and broadband in that we can simultaneously perceive a large number of these basic visual attributes, called 'preattentive attributes'. Preattentive perception is done in parallel, but attentive processing is done serially and is, therefore, much slower." in [29, p. 3]. This fact can be used to construct a hierarchy through visual queues. A famous phrase often used in data visualizations called Shneiderman's mantra [30], lays the foundation of principles that enable a user to maintain an understanding of the context in which data is visualized. The sentences in the mantra dictate that there are three stages in data exploration.

1. Overview First
2. Zoom and Filter
3. Details on Demand

Pricing rules cannot be plotted in a graph, yet this mantra in combination with preattentive attributes could be put to good use in reducing the cognitive overhead while reasoning about pricing rules.

## 5.3 Visual Hierarchy

In order to communicate the criteria of one pricing rule, the system must guide the user from an overview down to the less important details of the rule. This is to be achieved by splitting up the various criteria into multiple views. What this means is that the user is limited to only reason about a subset of the criteria at once. For example, the user is obligated to first define a location, before it is assigned to a rule, splitting problems into smaller portions. The mantra could be translated into the design on multiple levels.

Entities that are part of a many to many relation, should possibly have their own tabs, overview and detail pages. The reason ...

Entities with one to one can easily incorporate the relation in the same view ...

Entities with one to many can directly incorporate the components into the same view, if possible (like thresholds) ...

Some components are easy to reason about, and could be combined with other components to make up one view. For example, one rule can have many product entities, and each product has a price entity. These components could compose a single view, having one rule and a list of products with their respective prices. Each view can be categorized as one of the following:

1. Overview: enumerates over a list of entities
2. Detail page: contains one particular entity
3. Composite page: displays a combination of lists of entities and/or single entities that belong together

The mantra could also be used to present properties of entities in the same fashion. But for each enumeration, a direction of space on the page must be filled. As a webpage only has two dimensions of space, the properties that fill up the space must be grouped in some fashion. Preattentive attributes can be utilized to illustrate that some elements on composite pages belong to each other, or are in fact distinct.

## 5.4 Products

Users are allowed to view the list of products that have been created. Products can be selected, upon which the user is taken to the detail page where the type, name and other properties can be set, and where the product may be deleted.

## 5.5 Timeframes

No overview or detail page has been created for this entity. This is because the reuse potential of this entity is too low, and the belongingness to a rule or discount is too high. Timeframes consist of two dates between which a discount or rule is active.

### 5.5.1 Specific Week Days

A toggle can be activated so that the hours for each day can be defined.



Fig. 5.2 Timeframe with specific week days.

When this toggle is set, the time aspect of the start and end date is hidden.

## 5.6 Locations

Locations have been defined as either points or areas. In technical terms, this is sound. For an average user, this does not sound intuitive. That is why locations are shown as two groups: locations and areas. In technical terms, and in this chapter, location is used to refer to the entity that can be of type point and area. Again, an overview allows the user to select a location in order to modify or delete it.



Fig. 5.3 Overview of points and areas.

### 5.6.1 Point

The distinction between points and areas is made in the sense that points are small locations a person could point at, like a house, hotel or a shop. Areas are bigger and more complex locations, like Schiphol or The Hague.

When a point is created, a user searches for a place in Google Places, gives it a name and a descriptor, and saves it as if it were a string of characters that would be matched within the system.

When an existing point is selected, the actual polygon is showing on the map.

### 5.6.2 Area

The map allows users to have more freedom in describing the location.

When an area is created, the user has the freedom to start drawing on

## 5.7 Pricing

Intro

### 5.7.1 Rules

Timeframe selector

Location picker

Challenge fitting rule information, prices per products per rule and even thresholds

### 5.7.2 Discounts

Discounts mirror rule entities

### 5.7.3 Priority

Sorting by dragging

## 5.8 Apps

Apps are included in the overview, while Debtors are not.

Discounts can be enabled for apps

Rules can be linked to apps

Is estimated or fixed can be defined for enabled rules

## 5.9 Premise

*Is it possible to communicate the inner workings of the system through the user interface?*

# **Chapter 6**

## **Realization**

### **6.1 Introduction**

During the second phase, issues from the backlog were implemented in an iterative SCRUM process. In this chapter, the final realization of the project is evaluated. Findings and observations by considering the assumptions and limitations are discussed. During development, two main applications were written. The price calculation system, and the portal that enables users to manage pricing rules in the price calculation system.

### **6.2 Methods and Techniques**

In the first sprint, a project was set up in NodeJS using Typescript. The existing projects were built using Javascript, but Typescript is a much safer language due to type checks warning programmers early on. Types also document code, expressing the intention of the programmer.

### **6.3 Sprint 1 - Dynamic Price Calculations**

A basic dynamic price calculation system was implemented in the first sprint, aiming to deliver a first version of the price calculation system, including fake data generators, validation of models, a single service to determine the distance and duration of a ride, rules that contain pricing information, a calculation that produces the total price of a ride using a companies rules, a formatter that produces an expected response, and tests for all of the functionalities. Before the beginning of the sprint, different techniques and project structures have been tried, providing a headstart.

## 6.4 Sprint 2 - Authentication and Authorization

Company pricing rules can be used by applications so that each application uses a subset of the pricing rules. For this reason, TPS requires two identifiers to make a price calculation using rules for a particular company application: a companyId and a daAppInstallId. Authentication has been implemented in this sprint using JSON Web Tokens that are signed by the core system. This implementation saves a lot of maintenance in relation to the TPS project, and other projects that adopt this token format. The token stores two important identifiers that are structurally used in taxiId projects: companyId and daAppInstallId. Companies have one country assigned by default, which determines the currency and VAT percentage. In the breakdown, the VAT percentage is calculated from the actual price, as VAT is included. Discounts are part of the breakdown, being a percentage of the route price, or a fixed price. On top of that, it is possible that a company application uses rules that are related to a debtor, instead of its own subset of rules. These basic steps have been implemented during this sprint. Finally, the project is deployed to a staging environment so that the system could be used by the applications in the staging environment for testing.

## 6.5 Sprint 3 - Products and Pricing

At this point the system is fully operational, but company and daAppInstall information has to be inserted in the database manually. An endpoint is made that inserts a full company setup into the database so that prices can be calculated with five products by default. No wireframes were made beforehand, adding to the preliminary tasks of setting up the portal project. Angular in conjunction with Covalents UI platform is used to make the user interface, consisting of an overview and detail page for products and pricing rules. The pricing rules overview shows pricing information for each product that a company has. Whenever a product is added, the pricing information for that new project is automatically added to each rule. Conversely, whenever a new rule is added, all the existing products get their pricing information added to the new rule. On top of that, threshold rules can be added or deleted for distances and durations, making this particular view very complex. This final task is only operational in the backend, so the task of displaying thresholds in the frontend is moved to the next sprint.

## 6.6 Sprint 4 - Apps and Timeframes

Feedback is given by the product owner after each sprint, resulting in new requirements and modifications to requirements. A functionality is desired that enables users to sort pricing rules and special rates (discounts), by dragging the rows in a table to the correct positions. Whenever a priority changes, all subsequent rows need to be updated in order to maintain a consistent prioritized list without duplicate priorities. Another requirement will enable products to be returned in the breakdown as 'on-meter' results. This means that, whenever a destination or departure location is undefined, the system will return products without a price, so that the apps can assign a price later, but will still be aware of the available products. A view is added that displays all apps of a company, and a detail page is added in which rules and discounts can be associated with those apps. This detail page is created in three short iterations. All titles, labels and other texts are replaced by references to a localization api for internationalization purposes as seen in Figure 3.1. Timeframe components are added to multiple views, in which hours per week can be specified between two dates.

## 6.7 Sprint 5 - Thresholds

Thresholds, just like prioritized rules and discounts, had to be ordered, as they were independently embedded in multiple price entities that had to be synchronized consistently. A rule has pricing information for every product, and every product has many thresholds. Whenever a threshold property is mutated, every other threshold must be updated as well. Also no duplicates were allowed, and no empty price values were allowed inside the thresholds. Thresholds can independently be removed and added, where in the last case values will be copied from the last to the newly added threshold so that the user will not need to manually insert all values. The timeframes were expanded so that either hours per week were used to determine whether a rule should be triggered, or a time can be set to further restrict the begin and end date of the timeframes. Price estimations were added as a setting on all relations between all entities and rules, or discounts. Authentication is implemented in the portal so that a JWT is requested at the core system, the token stored in localstorage and used to communicate with TPS. The automatic call to generate synchronized company data is enabled for the core system, such that every time a company is created in the core system, it is also created in TPS.

## 6.8 Sprint 6 - Locations

A locations overview is added, displaying a list of areas and points.

The detail page for each location is showing a map with the shape or point displayed.

These views were split up in two subcategories to resemble smaller and bigger locations.

A search bar allows users to find addresses, provinces, cities, and allows a polygon to be drawn around them. This polygon can be edited on the map.

- query - destination - departure - overview - locations - areas - new - locations - search (google places) - addresses - name - locations types - areas - search (osm) - map - drawing polygons - name - locations types - edit - locations - map - editing polygons - name - locations types - areas - search (osm) - map - drawing polygons - editing polygons - name - locations types

Rule subrules had to be added in the rule detail page, for the user to be able to edit multiple rules at once. This issue was not resolved during this sprint, and was moved to the next sprint.

## 6.9 Sprint 7 - Subrules

Sub rules were initially estimated to take up two days of development. Each time a sub rule was added, it had to be activated for the same apps as the parent rule. Whenever the parent rule changed its type from 'fixed' to 'dynamic', all sub rules had to be deactivated somehow. Whenever a parent rule was deleted, all relations had to be deleted in a cascading fashion. And whenever a parent rule's priority changed, the ordering that had to be maintained had to keep the child rules separately updated. This task of micromanaging small properties, keeping data consistent, caused this task to take twice the estimated story points. The dropdown in the app detail page was - on meter results removed - sub rules choice between frontend or backend responsibility - sorting trouble -

## 6.10 Result

kks32: Final Result (realization)

# **Chapter 7**

## **Conclusion**

Onderzoek 1 Onderzoek 2 Onderzoek 3 Onderzoek 4 Calculatie systeem Portal Wat is af?



# References

- [1] U. T. Inc. (2011) The uber story. [Online]. Available: <https://www.uber.com/en-NL/our-story/>
- [2] (2018) Mysql 5.7 reference manual - spatial data types. [Online]. Available: <https://dev.mysql.com/doc/refman/5.7/en/spatial-types.html>
- [3] C. Sheldrick, “Efficient and future-proof.” April 2018. [Online]. Available: <https://what3words.com/2018/04/read-our-white-paper-efficient-and-future-proof/>
- [4] (2016) what3words - restful api. [Online]. Available: <https://docs.what3words.com/api/v2/#autosuggest-params>
- [5] M. Schneider, “Spatial data types.” [Online]. Available: <https://www.cise.ufl.edu/~mschneid/Research/papers/Sch09BoChb.pdf>
- [6] ——. Conceptual foundation for the design and implementation of spatial database systems and gis. [Online]. Available: <https://www.cise.ufl.edu/~mschneid/Service/Tutorials/TutorialSDT.pdf>
- [7] J. R. Herring, “Implementation standard for geographic information - simple feature access - part 1: Common architecture.” May 2011. [Online]. Available: [http://portal.opengeospatial.org/files/?artifact\\_id=25355](http://portal.opengeospatial.org/files/?artifact_id=25355)
- [8] (2004) Geographic information – simple feature access – part 1: Common architecture. [Online]. Available: <https://www.iso.org/standard/40114.html>
- [9] H. Butler, M. Daly, A. Doyle, S. Gillies, S. Hagen, and T. Schaub. (2016) The geojson format. [Online]. Available: <https://tools.ietf.org/html/rfc7946>
- [10] L. Xiang, , X. Shao, and D. Wang. (2016) Providing r-tree support for mongodb . [Online]. Available: <https://www.int-arch-photogramm-remote-sens-spatial-inf-sci.net/XLI-B4/545/2016/isprs-archives-XLI-B4-545-2016.pdf>
- [11] K. Holmberg, “On using openstreetmap and gps for optimization,” Linköping Institute of Technology, SE-581 83 Linköping, Sweden, Tech. Rep., November 2015. [Online]. Available: <https://www.diva-portal.org/smash/get/diva2:867759/FULLTEXT01.pdf>
- [12] O. Tech. (2017) Nominatim usage policy. [Online]. Available: <https://operations.osmfoundation.org/policies/nominatim/>
- [13] (2018) Postgis 2.4.5dev manual. [Online]. Available: [https://postgis.net/docs/manual-2.4/using\\_postgis\\_dbmanagement.html#PostGIS\\_GeographyVSGeometry](https://postgis.net/docs/manual-2.4/using_postgis_dbmanagement.html#PostGIS_GeographyVSGeometry)

- [14] (2018) Mysql 5.7 reference manual - geometry class. [Online]. Available: <https://dev.mysql.com/doc/refman/5.7/en/gis-class-geometry.html>
- [15] (2018) Geospatial query operators — mongodb manual 3.6. [Online]. Available: <https://docs.mongodb.com/manual/reference/operator/query-geospatial/>
- [16] I. K. Center. (2018) Three-tier architectures. [Online]. Available: [https://www.ibm.com/support/knowledgecenter/en/SSAW57\\_8.5.5/com.ibm.websphere.nd.doc/ae/covr\\_3-tier.html](https://www.ibm.com/support/knowledgecenter/en/SSAW57_8.5.5/com.ibm.websphere.nd.doc/ae/covr_3-tier.html)
- [17] R. Stephens, *Beginning Software Engineering*. John Wiley & Sons, 2015.
- [18] P. Hauer. (2015) Microservices in a nutshell. pros and cons. [Online]. Available: <https://blog.philippauer.de/microservices-nutshell-pros-cons/>
- [19] J. Stenberg. (2014) Experiences from failing with microservices. [Online]. Available: <https://www.infoq.com/news/2014/08/failing-microservices>
- [20] N. S. M. Jones, J. Bradley, “Json web token (jwt).” May 2015. [Online]. Available: <https://tools.ietf.org/pdf/rfc7519.pdf>
- [21] M. Palladino. (2019) Microservices & api gateways. [Online]. Available: <https://www.nginx.com/blog/microservices-api-gateways-part-1-why-an-api-gateway>
- [22] (2018) Loopback 3.x - loopback documentation. [Online]. Available: <https://loopback.io/doc/en/lb3>
- [23] K. R. Sarthak Agarwal, “Analyzing the performance of nosql vs. sql databases for spatial and aggregate queries.” September 2017. [Online]. Available: <https://scholarworks.umass.edu/cgi/viewcontent.cgi?article=1028&context=foss4g>
- [24] W. R. Stephan Schmid, Eszter Galicz, “Performance investigation of selected sql and nosql databases.” June 2015. [Online]. Available: [https://agile-online.org/conference\\_paper/cds/agile\\_2015/shortpapers/68/68\\_Paper\\_in\\_PDF.pdf](https://agile-online.org/conference_paper/cds/agile_2015/shortpapers/68/68_Paper_in_PDF.pdf)
- [25] E. Gamma, R. Helm, R. Johnson, and J. Vlissides, *Design Patterns: Elements of Reusable Object-Oriented Software*. Addison-Wesley, 1994.
- [26] (2015) Mongodb evaluation query operators. [Online]. Available: [docs.mongodb.com/manual/reference/operator/query/regex/#index-use](https://docs.mongodb.com/manual/reference/operator/query/regex/#index-use)
- [27] (2018) Mocha - the fun, simple, flexible javascript test framework. [Online]. Available: <https://mochajs.org>
- [28] (2018) Chai assertion library. [Online]. Available: <http://chaijs.com>
- [29] S. Few, “Tapping the power of visual perception.” September 2004. [Online]. Available: [https://perceptualedge.com/articles/ie/visual\\_perception.pdf](https://perceptualedge.com/articles/ie/visual_perception.pdf)
- [30] “A thousand-fold increase in human capabilities.” 1997. [Online]. Available: <http://www.ifp.illinois.edu/nabhcs/abstracts/shneiderman.html>

# List of figures

2.1	LatLngSphere . . . . .	7
2.2	Amsterdam . . . . .	10
2.3	PostalCodes . . . . .	11
2.4	Square . . . . .	13
3.1	Current System Architecture . . . . .	20
3.2	DataSync . . . . .	23
3.3	OAuth 2.0 . . . . .	24
3.4	Stateless JWT . . . . .	25
3.5	API Gateway . . . . .	26
3.6	Authentication . . . . .	27
4.1	Class Diagram . . . . .	32
4.2	Data Model . . . . .	32
4.3	Incoming Request . . . . .	35
4.4	Data Aggregation . . . . .	37
5.1	Treemap of Components . . . . .	48
5.2	Timeframe Component . . . . .	50
5.3	Locations Overview . . . . .	51



# List of tables

1.1	Fixed Prices . . . . .	2
1.2	Planning . . . . .	6
2.1	Location Matching Requirements . . . . .	12
3.1	Databases Comparison . . . . .	29



# **Appendix A**

## **Pregame**

**Pregame**

# Phase I - Pregame

Prices API - 05 Feb 18 t/m 30 Jun 18

subject Afstudeerstage bij TaxID

year 2018



Author: Stefan Schenk  
500600679

Tutor: Willem Brouwer

TaxID  
05-02-2018 te Medemblik

Hogeschool van Amsterdam  
Software Engineering

# Index

<b>1. Introduction</b>	<b>3</b>
<b>2. Requirements Specification</b>	<b>4</b>
2.1. Purpose	4
2.2. Scope	4
2.2.1. Deliverables:	4
2.2.2. Impact:	4
2.2.3. Assumptions:	4
2.3. Stakeholders	4
2.4. Use Case Diagram	5
2.5. Requirements	6
2.5.1. Non-functional Requirements	6
2.5.2. Functional Requirements	6
2.6. Constraints	7
2.7. Definitions, Acronyms, and Abbreviations	7
2.8. Use Cases	8
<b>3. Definition</b>	<b>12</b>
3.1. Non-functional Requirements	12
3.2. Functional Requirements	12
3.2.1. Defining an Area	12
3.2.2. Requirements for Rules	13
3.2.3. Other Requirements	14
3.3. Architecture	14
3.4. Authentication and Authorization	15
3.5. Database	16
3.6. API	16
3.7. User Interface	16
3.8. Database Schema	16
3.9. Continuous Integration, Continuous Deployment & Testing	16
<b>4. Solution</b>	<b>18</b>
4.1. Non-functional Requirements	18
4.2. Functional Requirements	18
4.2.1. Trip Price Calculation	19
4.2.2. Defining Price Rules	20
4.2.3. Defining Locations	20
4.2.4. Defining Timeframes	21
4.2.5. Defining Discounts	21
4.2.6. Defining Debtors	21
4.2.7. Defining Vehicle Types	21
4.3. Architecture	22

4.4. Authentication and Authorization	22
4.4.1. Proposal oauth 2.0 refactor	22
4.4.2. Jwt token format proposal	23
4.4.3. Proposal API Gateway	24
4.5. Database	25
4.5.1. OpenGIS Compatible databases	26
4.5.2. OpenGIS Incompatible databases	27
4.5.3. Performance and Clustering Trade-offs	28
4.6. API	28
4.6.1. Required Endpoints	28
4.6.2. Express VS Loopback	28
4.7. Database Schema	28
4.7.1. Relational Database	29
4.7.2. Non-Relational Database	29
4.8. User Interface	30
4.9. Continuous Integration, Continuous Deployment & Testing	30
4.10. Testing	31
<b>5. Conclusion</b>	<b>32</b>
5.1. Frontend	32
5.2. Backend	32
5.3. Functionalities	32
5.4. Authentication and Authorization	33
5.5. Database	33
5.6. User Interface	33
<b>6. References</b>	<b>34</b>

# 1. Introduction

The pregame phase concerns about planning and architecture, also called sprint zero, which is usually adopted when scrum is used as a business process for practical purposes. The first step is creating the backlog - a list with things that have to be implemented during the game phase. Because scrum is not fully adopted within the project team, this document contains another chapter that translates the requirements, written by the product owner and one developer of the team (in chapter 2), to a problem definition (in chapter 3), whereafter an architectural solution is presented (in chapter 4).

## 2. Requirements Specification

This section introduces the requirements set for the trip price calculation system written by one developer of the team and the product owner.

### 2.1. Purpose

YDA (YourDriverApp) requires a pricing calculation functionality that is similar to the existing taxid implementation. All functionalities within the current system align with the clients wishes, but some features bring certain difficulties along, for example: region names are too vague for specific database queries. Some features could be abstracted so more possibilities can be implemented, some features are still unimplemented, and some features could be improved along the way.

### 2.2. Scope

#### 2.2.1. Deliverables:

1. A trip price calculation microservice or module in the dispatch api platform (for simplicity will be referred to as microservice).
2. The communication between other services within the architecture, and alignment of changes to support this new microservice.
3. Documentation describing the API.
4. A user interface in the driver portal wherein the User can define trip prices that exist in the current system.
5. A English user manual explaining the user interface.

#### 2.2.2. Impact:

1. No costs other than a possible substitution for Google services tackling the problem of inaccurate GPS to road mappings.
2. Small strain on developers for supporting integration and possible modifications within the system architecture.

#### 2.2.3. Assumptions:

1. NodeJS will be used to develop systems, unless a very good reason is given to deviate from this established technology.
2. MongoDB is used in many projects, and therefore is preferable over other RDB systems.
3. Authorization will be handled, and is being discussed internally.
4. GPS coordinates will be provided in addition to ambiguous place descriptors on every price calculation.

### 2.3. Stakeholders

Name	Role	Expectations
YourDriverApp Group Admin	End user	A price calculation system.
taxid Account Admin	End user	Seamless transition without loss of functionalities from Taxid price calculations to the new system

Driver App User	End user	No changes
Passenger	End user	No changes
Project team	Project members	Well documented easy to maintain and easy to extend system
Product Owner	Project manager	A working version at the end of every sprint with added functionalities each iteration

## 2.4. Use Case Diagram

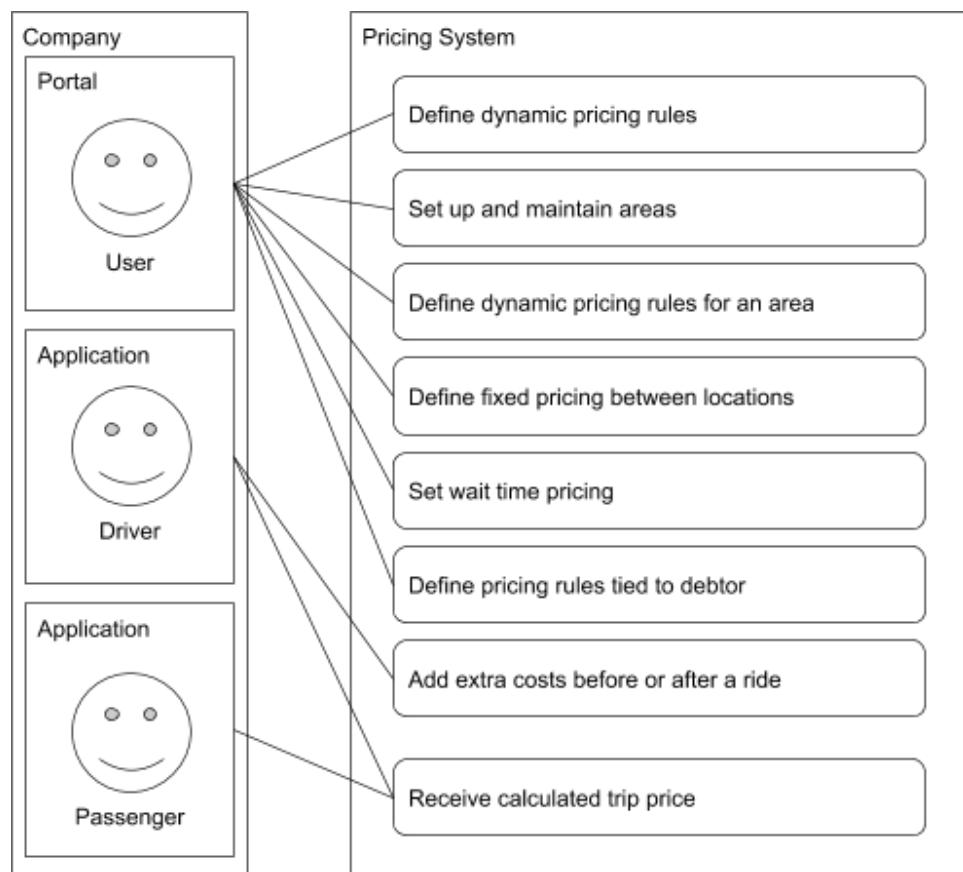


Image 2.4.1 - Use case diagram.

## 2.5. Requirements

### 2.5.1. Non-functional Requirements

ID	Non-functional Requirement
<b>NFR1</b>	For a logged in driver portal user (yourdriverapp.com or white labeled build) the solution should be seamlessly integrated in the portal.
<b>NFR2</b>	A logged in taxiID partner portal user should be able to set my rates without having to log in again. Visual integration is not important but the brand yourdriverapp.com should not be visible.
<b>NFR3</b>	The prices should be attached to a DaApInstal.

### 2.5.2. Functional Requirements

ID	Functional Requirement
<b>FR1</b>	<p>A user should be able to set up and maintain dynamic rules for a calculation based travel time and travel distance between a pickup and drop off position.</p> <p>This price should be calculated taking into account:</p> <ol style="list-style-type: none"> <li>1. Starting rate</li> <li>2. Rate per km / mile - it should be possible to add at least 5 user defined segments (i.e. a price for the first km, a lower rate for km 2 to 3, an even lower rate for every km after 4 km)</li> <li>3. Rate per minute - it should be possible to add at least 5 user defined segments (i.e. a price for the first travel minute, a lower rate for minute 2 to 3, an even lower rate for every minute after 4)</li> <li>4. This calculation may be done in advance based on online route planner service calculations or afterwards based on trip data from the driver app.</li> </ol>
<b>FR2</b>	A user can define a price per minute for waiting time, the spent wait time can be sent by the driver.
<b>FR3</b>	As a user I want to select areas from a predefined list to set up fixed price calculations.
<b>FR4</b>	A user should be able to set up and maintain areas for a company. Examples of areas are: neighborhood, province, region, city, hospital, airport, train stations, hotels. We should have some types/tags predefined.
<b>FR5</b>	A user should be able to set up and maintain distinct calculations based on travel time and travel distance for different areas defined by the user.
<b>FR6</b>	A user can define fixed prices based on specific clients, potentially tied to a debtor. This is going to be based on polygons/areas too.
<b>FR7</b>	A driver can add positive or negative additions to the cost of the ride at any point in time. <ul style="list-style-type: none"> <li>- Percentage (discount)</li> </ul>

	<ul style="list-style-type: none"> <li>- Driver defined (toll, parking, other)</li> <li>- Variable (waiting time - it has to be calculated inside the system, from an input of time)</li> </ul>
<b>FR8</b>	It should be possible to set up a price with time constraints only (hire a limo) - this is just a dynamic rule
<b>FR9</b>	A user can have pricing rules based on different services than Google Maps. Defined per rule.

## 2.6. Constraints

As stated in the scope, the system that is to be implemented will either be implemented as a microservice or a module. In the latter case, the existing and adjacent systems will make way for the new module. This adds extra requirements for the new system to be integratable.

## 2.7. Definitions, Acronyms, and Abbreviations

<b>Bulk:</b>	Either in the context of time or distance, a threshold that can be set after which the price per unit will be cheaper (or more expensive).
<b>CD:</b>	Continuous Delivery / Deployment.
<b>CI:</b>	Continuous Integration.
<b>Company:</b>	A company that owns Applications.
<b>DaAppInstall</b>	An application installation.
<b>Debtor:</b>	A person or company responsible for the payment of a ride, on upon which the pricing can depend.
<b>Driver Portal:</b>	Portal that brings information from diverse sources.
<b>Discounts:</b>	A discount that is either a percentage, fixed amount or reference to rule containing prices.
<b>Location:</b>	A zip code or geometric location.
<b>ORM:</b>	Object Relational Mapping.
<b>User:</b>	A person, group or company that owns applications.
<b>Passenger:</b>	Uses an Application to order a taxi ride.
<b>Product / Application:</b>	An application bought by the User to which data is tied.
<b>Pricing Rule:</b>	A body of information that can be triggered when a ride is selected that matches the destination, departure and perhaps other variables, which contains pricing information about that ride depending on distance, time and other parameters.
<b>taxiID Partner Portal</b>	Portal that brings information from taxiID sources.
<b>Timeframe:</b>	A collection of start and end times + days of the week.
<b>Zones / Regions:</b>	Polygons drawn on a map.
<b>Core API:</b>	Available through Developer Dashboard ( <a href="https://developer.dispatch.io">developer.dispatch.io</a> ).
<b>Passenger API:</b>	Available through Passenger App.
<b>Vehicle API:</b>	Available through DriverPortal ( <a href="https://portal.yourdriverapp.com">portal.yourdriverapp.com</a> ).

## 2.8. Use Cases

The following use cases are describing a passenger who orders a ride, for which a price is calculated by the API. The primary actor, preconditions and other information is omitted for conciseness.

The first step for every case is the following:

1. The passenger books a ride where properties are sent to the API unless mentioned otherwise:
  - a. Departure location
  - b. Destination location
  - c. Pickup datetime
  - d. Vehicle Type
  - e. DaAppInstall token
  - f. Debtor identifier
  - g. Number of passengers

ID	Use Case
1	Passenger app sends debtor identifier, a pricing rule is found, discount is found
2	Passenger app doesn't send debtor identifier, a pricing rule is found, discount is found
3	Passenger app doesn't send debtor identifier, a pricing rule is found, multiple discount are found
4	Passenger app doesn't send debtor identifier, a pricing rule is found, no discount are found
5	Passenger app doesn't send debtor identifier, a pricing rule isn't found, discount is found
6	Departure contains a point that matches with an area in a rule, there are multiple rules tied to the location
7	Departure location is contained locations A <sub>1</sub> and B <sub>1</sub> , Destination location is contained in locations A <sub>2</sub> and B <sub>2</sub> , therefore two rules are matched

ID	1
Description	Passenger app sends debtor identifier, a pricing rule is found, discount is found
Basic Flow	<ol style="list-style-type: none"> <li>1. Debtor identifier is sent to the API</li> <li>2. The API checks if a debtor identifier is sent, and it exists in the database</li> <li>3. The API tries to match the pricing rules that are tied to the debtor by:           <ol style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Ride time</li> </ol> </li> <li>4. A rule is found, the API tries to find a discount that is tied to the debtor based on:           <ol style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Ride time</li> </ol> </li> </ol>

	<p>5. A discount rule is found</p> <p>6. The fixed price is calculated with the discount</p>
--	--

ID	2
Description	Passenger app doesn't send debtor identifier, a pricing rule is found, discount is found
Basic Flow	<p>1. Debtor identifier is not sent to the API</p> <p>2. The API checks if a debtor identifier is sent, it isn't</p> <p>3. The API tries to match general pricing rules tied to the company by:</p> <ul style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Current time</li> </ul> <p>4. A pricing rule is found, the API checks whether a discount is available that matches:</p> <ul style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Ride time</li> </ul> <p>5. A discount is found</p> <p>6. The fixed price is calculated with the discount</p>

ID	3
Description	Passenger app doesn't send debtor identifier, a pricing rule is found, multiple discount are found
Basic Flow	<p>1. The API tries to match general pricing rules tied to the company by:</p> <ul style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Current time</li> </ul> <p>2. A pricing rule is found, the API checks whether a discount is available that matches:</p> <ul style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Ride time</li> </ul> <p>3. Multiple discount are found</p> <p>4. The discount rule with the highest precedence is taken</p> <p>5. The fixed price is calculated with the discount</p>

ID	4
Description	Passenger app doesn't send debtor identifier, a pricing rule is found, no discount are found
Basic Flow	<p>1. The API tries to match general pricing rules tied to the company by:</p> <ul style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Current time</li> </ul> <p>2. A pricing rule is found, the API checks whether a discount is available that matches:</p>

	<ul style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Ride time</li> </ul> <p>3. No discount is found</p> <p>4. The fixed price is calculated</p>
--	---

ID	5
Description	Passenger app doesn't send debtor identifier, a pricing rule isn't found, discount is found
Basic Flow	<ul style="list-style-type: none"> <li>1. The API tries to match general pricing rules tied to the company by: <ul style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Current time</li> </ul> </li> <li>2. A pricing rule isn't found, the API tries to find a dynamic price rule</li> <li>3. A dynamic price rule is found, the API checks whether a discount is available that matches: <ul style="list-style-type: none"> <li>a. Departure location</li> <li>b. Destination location</li> <li>c. Ride time</li> </ul> </li> <li>4. A discount rule is found</li> <li>5. The fixed price is calculated with the discount</li> </ul>

ID	6
Description	Departure contains a point that matches with an area in a rule, there are multiple rules tied to the location
Basic Flow	<ul style="list-style-type: none"> <li>1. The API tries to match general pricing rules tied to the company by: <ul style="list-style-type: none"> <li>a. Departure location <ul style="list-style-type: none"> <li>i. The point is found in the area in the database</li> </ul> </li> <li>b. Destination location <ul style="list-style-type: none"> <li>i. The point is found in the area in the database</li> </ul> </li> <li>c. Ride time <ul style="list-style-type: none"> <li>i. The timeframe contains this ride time</li> </ul> </li> </ul> </li> <li>2. Multiple rules are found that match locations and timeframe <ul style="list-style-type: none"> <li>a. The rule with the highest precedence (highest number) is picked to calculate the price</li> </ul> </li> <li>3. A discount is not found, the price is calculated</li> </ul>

ID	7
Description	Departure location is contained locations A1 and B1, Destination location is contained in locations A2 and B2, therefore two rules are matched
Basic Flow	<ul style="list-style-type: none"> <li>1. The API tries to match general pricing rules tied to the company:</li> </ul>

- |  |  |
|--|--|
|  | <ul style="list-style-type: none"><li>a. Departure location<ul style="list-style-type: none"><li>i. The gps location is found in polygon collections of rule A and B</li></ul></li><li>b. Destination location<ul style="list-style-type: none"><li>i. The gps destination location is found in rule A and B</li></ul></li><li>c. Ride time<ul style="list-style-type: none"><li>i. The timeframe contains this ride time</li></ul></li></ul> <ul style="list-style-type: none"><li>2. Multiple rules are found<ul style="list-style-type: none"><li>a. The rule with the highest precedence is picked to calculate the price<br/>(optionally the precedence can be set on the location level, from which an average can be used to determine the rule precedence)</li></ul></li><li>3. A discount is not found, the price is calculated</li></ul> |
|--|--|

## 3. Definition

The requirements are written in a vague way as the user would describe his or her wishes. The most important question that must be answered before the development phase is commenced is: are the requirements achievable tasks, and can they be translated to backlog tasks available to be assembled to a sprint backlog? This will be researched in chapter four, before research can be conducted, the problem must be well defined, which is the purpose of this chapter.

### 3.1. Non-functional Requirements

A user who is logged in on yourdriverapp.com or a white labeled build, the solution should be readily available. The most straightforward answer would be to directly integrate the frontend into yourdriverapp. The requirements state that a taxiID partner should also be able to use the frontend. This means that multiple frontends should be developed for multiple external portals that plan to make use of the system, or that some solution should be developed that integrates in different external portals seamlessly, for example: using iframes or objects, as visual integration is not important as long as the brand (yourdriverapp) is not visible. The requirements also state that a logged in taxiID user should not be required to log in again, this directly demands that a user is authenticated and authorized from any external frontend to the prices system.


### 3.2. Functional Requirements

#### 3.2.1. Defining an Area

As most FR's depend on the term "area", it is a top priority to define what an area is. It's important to define locations in an unambiguous way so that no mistakes can be made like: selecting an area that is called the same. In some third-world countries, zip codes are not available, and area names can be ambiguously defined. Take for example "Third Main Street", a street name that may be used in thousands of distinct locations around the world. Therefore a different representation must be implemented for specific and general locations.

An area is a collection of 3 or more coordinate pairs on a geographical map. This definition of an area is precise, unambiguous and easy to use in compare in computer programs. A single point may match another single point if it's the exact same point. A point may be sitting on top of a line or is contained within an area. The only other option is the negation of these statements. Because use cases for lines will be non-existent, points and areas are the proper candidates for spatial queries.

The requirements state that a user must be able to define locations, or that he should be able to select predefined locations. It would be extremely easy for a user to search for a city, be able to import the polygon from some external source, edit it, save it, and perhaps even share it with other companies. A user should be able to find his own defined locations easily, or even distinguish between different types by tagging them.

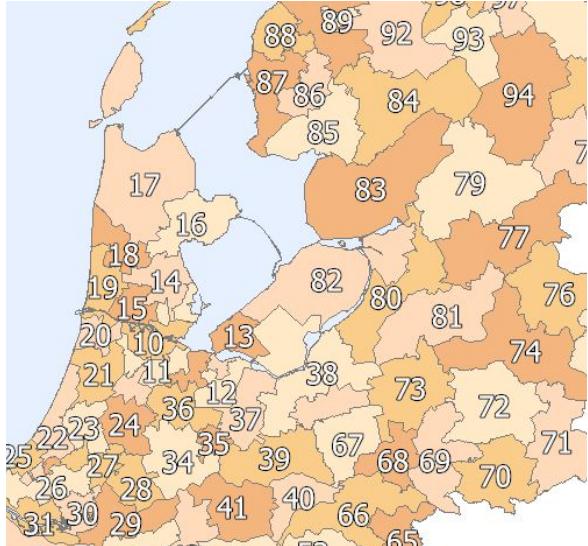Countries with advanced zip code systems	Countries without zip codes
	
Collection of zip codes to define an area	Polygon on a map to define an area

	
A single point defined by street, street nr, zip code, city name	A set of GPS coordinates with a range to define a single point

### 3.2.2. Requirements for Rules

The requirements state that users should be able to define dynamic prices, and that these dynamic prices should be tied to an area, or not. Dynamic prices can have zero values so that only a price per minute can be set. The requirements state that users should be able to define fixed prices from area to area. This implies that all types of pricing rules should be able to be tied to an area. The user should be able to assign different rules and discounts to a debtor, the same holds for DaAppInstalls. It should be possible to define the timeframe in which rules hold as well.

### 3.2.3. Other Requirements

The user should be able to specify a price per minute that a driver has to wait for the passenger. The driver should also be able to add additions, additional costs, discounts or the amount of minutes that he waited for the passenger. Some additions must be expressed in percentages, continuous or discrete values. The user should also be able to specify the service that calculates the route of a trip.

## 3.3. Architecture

The existing architecture is shown below in image 3.3.1. The colored circle represents the change while the less colored shapes visualize the current state of the architecture.


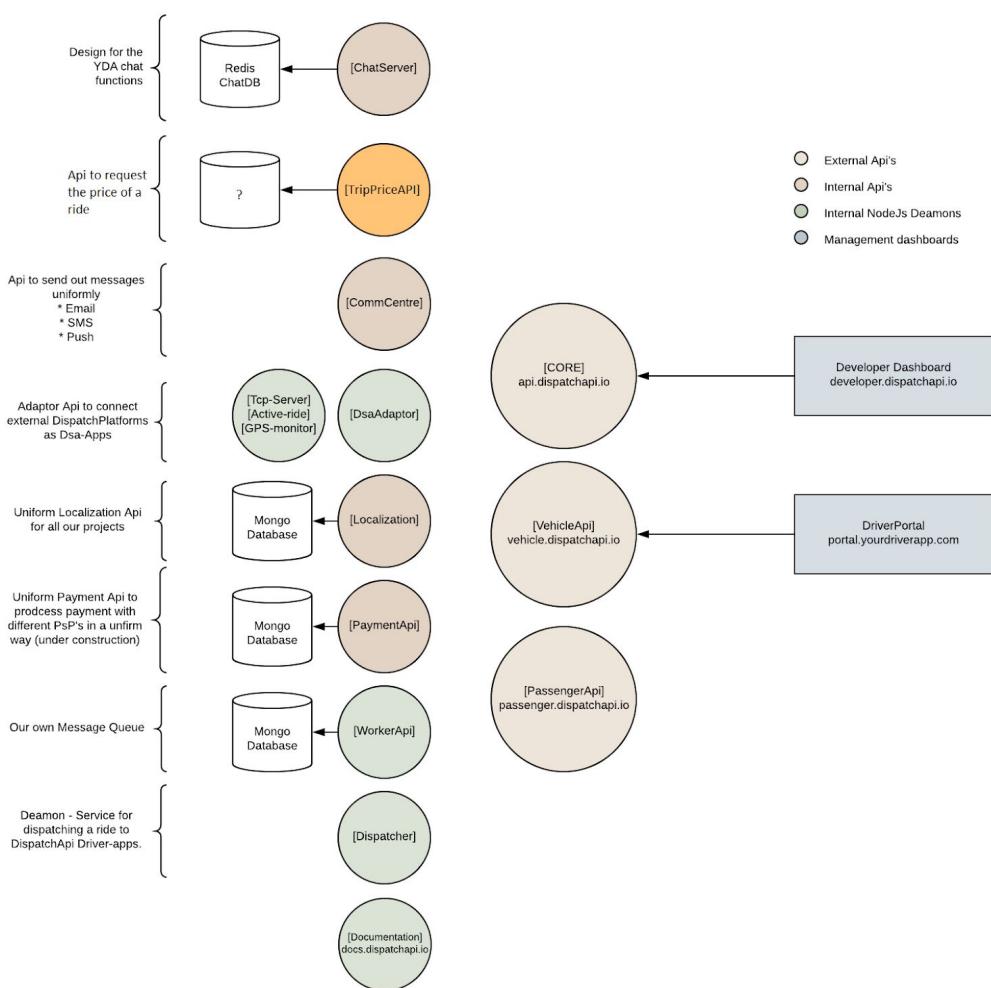


Image 3.3.1 - Current system architecture of the dispatch api.

The discussion that has risen from this image is whether the new system should be implemented as a microservice, or as a module in the existing project, see image 3.3.2. The orange and blue shapes can be in either state independently, meaning that four potential options exist, but are omitted for conciseness.

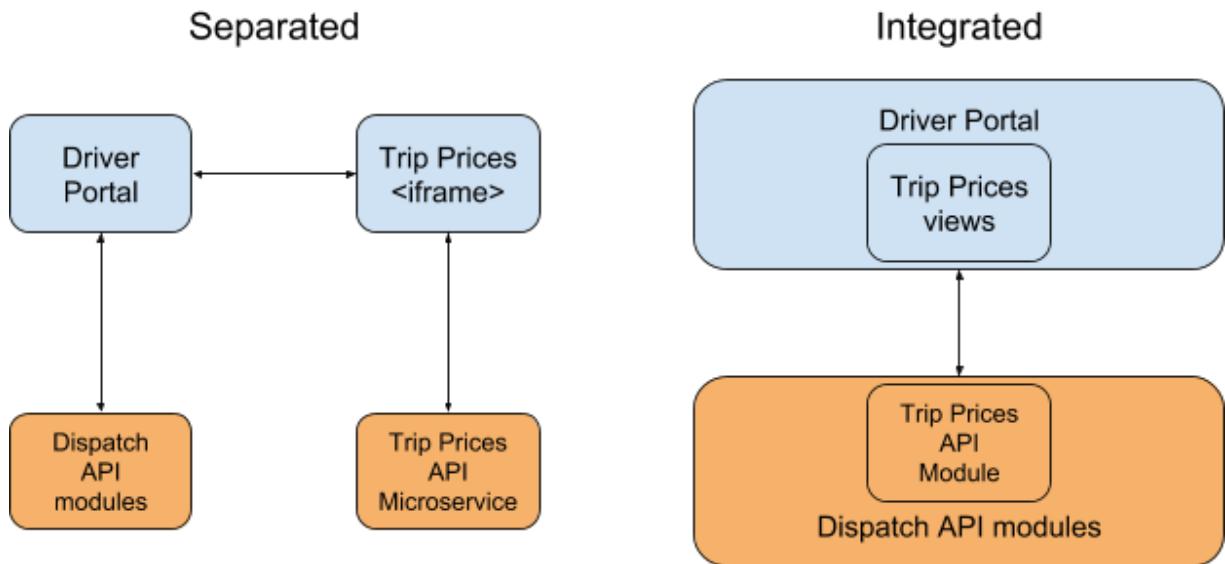

*Image 3.3.2 - Separated and integrated frontend and/or backend.*

NFR2 either demands that a separate frontend is built, but this is not necessary if one frontend is built that can be integrated in existing pages, using the blue separated part of image 3.3.2.

### 3.4. Authentication and Authorization

The system must be autonomous and usable by agents from within and from outside the architecture it sits in. Therefore, authentication and authorization should be a matter of concern. It either changes the surrounding authentication solution, or implements a different solution to establish autonomy. For now, Drivers will make use of this service.

Marco Strijker has [documented](#) the three user types: Drivers, Passengers and Admins. Admins are a superset of Administrators, Developers and Organizations. All users log in with a username (email), password combination. After successfully logging in, an access token is provided which the user sends in the Authorization header to the corresponding API's.

Drivers log into the Vehicle API through the DriverPortal (or log in using their phone number in the Driver app), using headers:

1. **Authorization:** containing the access token
2. **X-Installation-Hash:** containing the authenticated installation of a Driver app.

Passengers log into the Passenger API through their Passenger app using headers:

1. **X-Access-Token:** containing the access token
2. **X-Company-Id:** containing encrypted company id with which

Admins are the developers working for TaxilD, developers are external developers, Organizations are external organizations, using the core API. This user type can install API apps by logging into the Developer Dashboard and granting permissions in a custom separate OAuth flow using headers:

1. Authorization: containing the access token

This project must have knowledge about who the user (Driver) is. Settings, prices, discounts and other required information to calculate a price are tied to the user.

### 3.5. Database

The only data that the system depends on is Master Data stored for each product, that the User will provide through the user interface. This system requires polygons to be drawn on a map that can be used to bivalently check whether a coordinate resides within it. For this reason it's important that the database supports complex spatial data, and performs well on complex queries. OpenGIS provides a way to define geometry models within MYSQL that is worth researching, [1] [2]. An ORM should be used to enable easy transitions between database systems.

### 3.6. API

Depending on the architectural choice described in chapter 2.1, the API will be integrated in an existing system, or will be set up from scratch. In the former case, extra models and endpoints must be added. In the latter case, a choice of framework and optional technologies must be made.

As Loopback is the framework that has been used extensively at TaxilD, this project could be an opportunity to test Loopback 4 in conjunction with Typescript for typesafe code. Alternatively Express or any other framework in conjunction with GraphQL could be interesting to look at.

### 3.7. User Interface

Just like the API, the App could be integrated or separated. The integrated solution considers the expansion of the existing Driver Portal, having the advantage of sharing resources efficiently and ensuring the exact same style. Alternatively the application could be developed independently, which could then be loaded into existing web pages using iframes or objects. Again, just like the API, the App is created from scratch if a separated solution is preferred, opening up the possibility to make use of the most modern techniques.

### 3.8. Database Schema

The schema's that will support the system should be concise and efficient naturally. Perhaps multiple databases should be used to support different data types, and therefore the schema's will look totally different. Therefore, this matter is succeeding the database topic.

### 3.9. Continuous Integration, Continuous Deployment & Testing

Lastly, Continuous Integration and Continuous Deployment may be utilized in early stages of development for the same reasons as Typescript and other new technologies could be trialled. TaxilD is a customer of Buddy.works, and therefore it may not be necessary to use other providers like: Jenkins, Travis CI, CircleCI or others.

Next to automated tests and linting, deployment may be automated upon successful integration. Heroku provides a free product that integrates easily with nearly all CI providers. Until the project is in production, Heroku can be used to make the product previewable for other developers or stakeholders.


# 4. Solution

Now that the problems are well defined, research can be conducted to come up with a workable solution.

## 4.1. Non-functional Requirements

As stated in the NFR's, the frontend must be integrated in more than one application. This can be achieved using iframes or objects. More information on frontend and backend architecture is given in chapter 4.3.


The company's pricing rules should be attached to a DaAppInstall. This means that all applications within a company have their own subset of the pricing rules within that company:

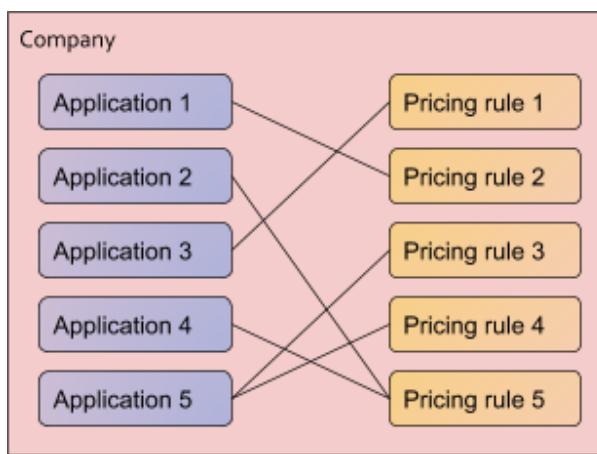

*Image 4.1.1 - Company with applications and pricing rules.*

## 4.2. Functional Requirements

When we assume that the user is logged in, and has a company owning applications, several flows can be recognized: the trip price calculation, defining pricing rules, defining locations, defining discounts, defining timeframes. An important point to notice is how debtor should play a role in this calculation.

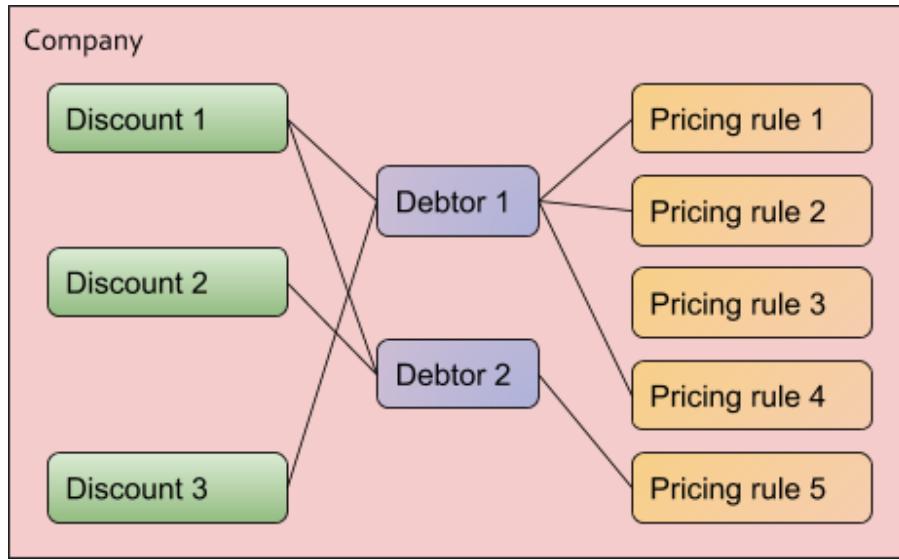

*Image 4.2.1 - Debtors and the relation with pricing rules & discounts.*

#### 4.2.1. Trip Price Calculation

1. APP: Passenger books a ride providing pickup location, drop off location, ride datetime, vehicle type array, amount of passengers, DaApplInstall token, (optional) debtor identifier. We will denote the fact that these properties fall within the criteria of pricing rules or discounts by using the word 'match'.
2. API: See if the company has a debtor, get debtor pricing rules and discounts, fallback to DaApplInstall rules.
3. API: If no debtor was linked, find DaApplInstall pricing rules and discounts.
4. API: Find pricing rules and discounts where the ride time is within the pricing rule timeframe.
5. API: Find pricing rules and discounts where the departure location contains the location provided by the user, and the rule location is of type:
  - a. Point
  - b. Polygon
6. API: Find pricing rules and discounts where the destination location contains the location provided by the user, and the rule location is of type:
  - a. Point
  - b. Polygon
7. API: If no rules were found, an error is returned.
8. API: To match points on points, we're gonna decrease the precision of the gps on queries.
9. API: Calculate prices depending on vehicle type and amount of passengers.
10. API: If more than one pricing rule was found, take the rule with highest precedence (highest number wins).
11. API: If more than one discount was found, take the rule with highest precedence (highest number wins).
12. API: Calculate discount.
13. API: Add additions defined by driver.app
14. API: Returns the trip price.

#### 4.2.2. Defining Price Rules

1. Portal: User accesses the pricing rule tab.
2. Portal: User adds or modifies a pricing rule.
3. Portal: User selects pricing rule type: (a or b).
  - a. Fixed: properties are provided
    - i. Pick up location is provided
    - ii. Drop off location is provided
    - iii. A price is provided
  - b. Dynamic: properties are provided
    - i. Start rate
    - ii. Minimum rate
    - iii. Waiting rate per minute
    - iv. Riding rate per minute
    - v. Riding rate for bulk minutes
    - vi. Riding rate per kilometer / mile
    - vii. Riding rate for bulk kilometers / miles
    - viii. Toggle: calculate each bulk using the bulk price, or only calculate the bulk units that have passed the threshold.
    - ix. Optional: A single location is provided for which these rules hold
4. Portal: User selects a timeframe for which the rule holds.
  - a. Timeframe can be disabled to enable the rule always
  - b. The timeframe editor view can be opened to make or modify a timeframe on the fly
5. Portal: User enables rule (activates it)
6. Portal: User can define a pricing rules for multiple debtors.
7. Portal: User can delete rules that have been created, except one fallback dynamic rule.

#### 4.2.3. Defining Locations

1. Portal: User accesses the locations tab.
2. Portal: User adds or modifies location.
3. Portal: There are two types of locations.
  - a. A single collection of points
  - b. A multipolygon / collection of polygons
4. Portal: Location can be defined and modified in two ways (a or b)
  - a. Single points can be added to a collection
    - i. By searching point of interests on Google Places API points will be suggested with fixed GPS coordinates
    - ii. Multiple points can be added to a point collection
  - b. An area can be added by drawing on a Google integrated [Maps JS API](#)
    - i. Areas can be added to the map by selecting from a predefined list
    - ii. Areas can be removed from the map
    - iii. Areas can be modified by dragging the edges of a polygon
    - iv. All areas can be stored as a single location (multipolygon)
5. Portal: User can delete custom locations that have been created.

#### 4.2.4. Defining Timeframes

1. Portal: User accesses timeframe tab.
2. Portal: User adds or modifies timeframe.
3. Portal: Timeframe can be defined in one way.
  - a. Optional: start date (absolute boundary)
  - b. Optional: end date (absolute boundary)
  - c. Hours enabled: (every single week)
    - i. Monday
    - ii. Tuesday
    - iii. Wednesday
    - iv. Thursday
    - v. Friday
    - vi. Saturday
    - vii. Sunday
4. Portal: User can delete timeframes, but only if they are not used by pricing rules, discounts or other entities.

#### 4.2.5. Defining Discounts

1. Portal: User accesses discounts tab.
2. Portal: User adds or modifies discounts.
3. Portal: User can link discount to multiple debtors.
4. Portal: User specifies properties:
  - a. Type: fixed or percentage
  - b. Amount
  - c. Optional: Timeframe
  - d. Optional: start location
  - e. Optional: end location
  - f. Toggle: Retour trip (present taxiID)

#### 4.2.6. Defining Debtors

1. Portal: User accesses debtors tab.
2. Portal: User can add or modify a debtor.
3. Portal: User can delete debtors.

#### 4.2.7. Defining Vehicle Types

1. Portal: User accesses vehicle types tab.
2. Portal: User can add or modify vehicle types.
  - a. User can copy a default vehicle type and modify properties of the copy, called a product:
    - i. Amount of passengers
    - ii. Image
    - iii. Name
  - b. User can store the product
3. Portal: User can delete products after a strict safety check (because they are potentially used in rules).

## 4.3. Architecture

The possibilities visualized in image 3.1.2. have great implications on adjacent systems, development time and maintainability. Table 4.1.1 shows the advantages (green) and downsides (red) of separation.

Frontend	Backend
Improves progressiveness of the entire architecture by incremental modernization steps.	
Improves maintainability by separation of concern.	
Brings the advantage of including the application in any portal in the future.	Improves testability by having small subsystems that can be isolated and tested while other systems can be relied upon.
May introduce a technical difficulty of presenting the view correctly into the portal.	May require extra http calls between services.
May hurt the visual style.	
Separation introduces a slight overhead because two separate views must be downloaded.	

*Table 4.3.1 - Pros and Cons of separation.*

After discussing the proposal to segregate this project from the existing Dispatch API, it is advised to implement the backend as a microservice, not as a module within the existing system because the only downside that was listed is trivial if the services are running on the same server. From the viewpoint of this project, it is also advised to integrate the frontend in the existing portal


## 4.4. Authentication and Authorization

A microservice architecture is an architectural style that focuses on loosely-coupled services, enabling continuous deployment of complex applications. Each microservice is responsible for managing and containing state that is used or exposed to other services that make use of the microservices, and must be authenticated and authorized to be able to use or request resources. In the present architecture, different services implement different authentication methods, store different information about different users. Authorization is managed by sending extra headers as described in chapter 2.2. By adding more services, the amount of authentication, authorization and user types will increase. For this reason it's profitable and even requested to investigate whether a better structure could be implemented.

### 4.4.1. Proposal oauth 2.0 refactor

There exists a protocol to have a single source of authentication called oauth [3], which allows third-party apps to grant access to an HTTP service on behalf of the owner of the resource, or by allowing the third-party application


to obtain access on its own behalf. This protocol solves the problem of having different implementations and tokens for authentication within the architecture.

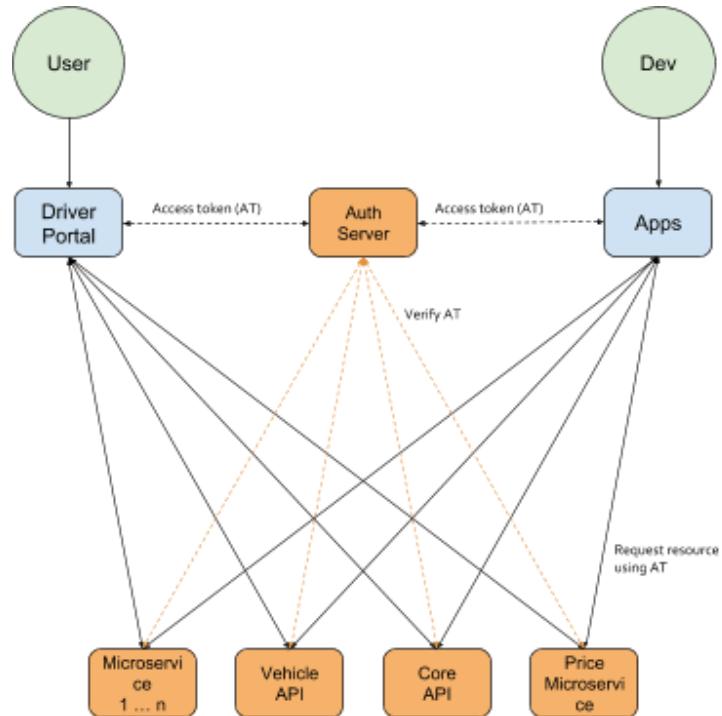

*Image 4.4.1.1 - OAuth requests where tokens are verified by Auth Server.*

#### 4.4.2. Jwt token format proposal

Although this is a great improvement over the current implementation, it still requires each service to track the state of the users authentication. JSON Web Tokens (JWT) provides a self-contained way of authenticating a user, eliminating the need to query the database more than once. JWT uses a cryptographic signature algorithm to verify user data that is stored in the token payload, this may bring a security concern to the table. If the private key is lost, all requests may be compromised.

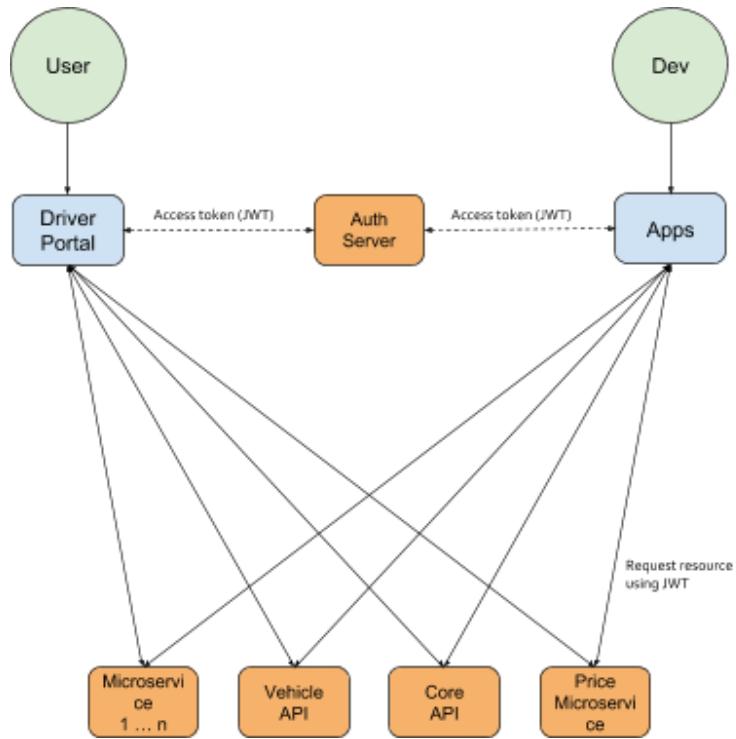


*Image 4.4.2.1 - OAuth with stateless JWT token requests.*

#### 4.4.3. Proposal API Gateway

Another common structure that allows services to be used by external agents is the API Gateway. It allows for a central middleware in which authentication and authorization is handled, where the microservices are shielded from public access, and all communication is established through the API Gateway [4].

Next to authentication, the gateway could optimize the endpoints so that no multiple requests are needed from external agents to gather different types of resources. These calls could be made internally to the microservices behind the gateway. This also opens the possibility to freely change the microservices without changing the public endpoints exposed by the gateway, and even offers slow or instant transitions to different versions of microservices.

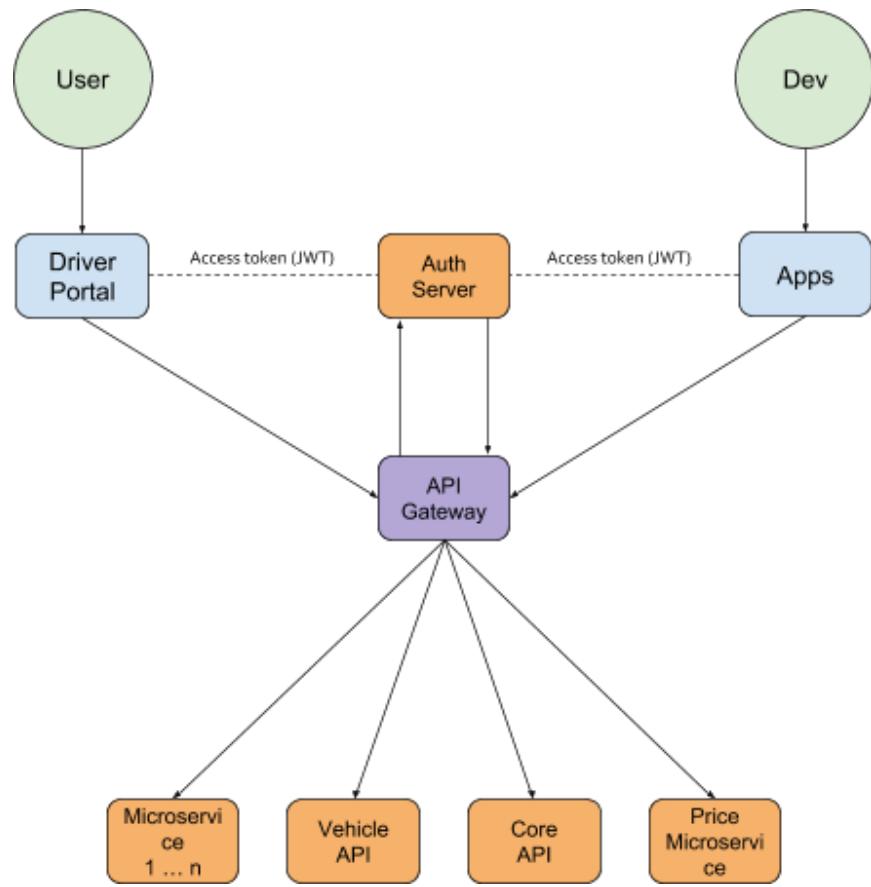


*Image 4.4.3.1 - API Gateway.*

The different proposals explain the improvements they may bring over some system. But the advice given is not tied to this project, instead to the entire Dispatch API. It's advised to have a constructive dialogue about the future of the company, and the way it's planning to scale. One could put a API Gateway in front of a monolithic app to help with transitioning to a microservice-oriented app.

## 4.5. Database

The database must be capable of determining whether a virtual perimeter contains a set of coordinates, more specifically, it must adhere to The Open Geospatial Consortium (OGC) Simple Feature Access ISO 19125-1 [5] and ISO 19125-2 [6], including spatial data types, analysis functions, measurements and predicates for this requirement, or have some comparable implementation. The scenario presented in image 4.5.1 should be replicable.

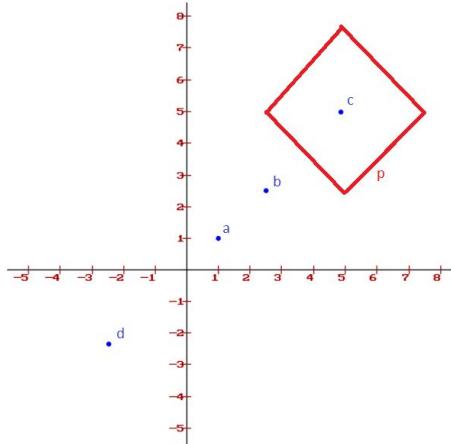

*Image 4.5.1 - Four Points and one Polygon p containing Point c.*

#### 4.5.1. OpenGIS Compatible databases

MYSQL's innate integrity is a good reason to opt for a full MYSQL database setup. MariaDB is a fork of MYSQL that performs better according to benchmarks, however they don't always translate to real life situations. It's easy to migrate from MYSQL to MariaDB, so choosing MYSQL at first could be preferable as an instance of MYSQL is already used at TaxilD. PostgreSQL offers a spatial database extender for that is OpenGIS compliant called PostGIS that adds support for geographic objects and location queries.

All spatial data types inherit properties such as type and spatial reference identifier (SRID). For rigorous documentation, both PostGIS documentation [7] and MYSQL documentation [8] could be consulted. When a generic geometry column, or point column is created, points can be inserted as shown in snippet 4.5.1.1.

```

START TRANSACTION;
    SET @a = ST_GeomFromText('POINT(1 1)');
    INSERT INTO point (point) VALUES (@a);
    SET @b = ST_GeomFromText('POINT(2.5 2.5)');
    INSERT INTO point (point) VALUES (@b);
    SET @c = ST_GeomFromText('POINT(5 5)');
    INSERT INTO point (point) VALUES (@c);
    SET @d = ST_GeomFromText('POINT(-2.5 -2.5)');
    INSERT INTO point (point) VALUES (@d);
COMMIT;

START TRANSACTION;
    # First and last point must be the same
    SET @a = PolygonFromText('POLYGON((2.5 5.5 7.5,7.5 5.5 2.5,2.5 5))');
    INSERT INTO polygon (polygon) VALUES (@a);
COMMIT;
```

*Snippet 4.5.1.1 - Inserting points or polygons in an SQL database.*

It is evident that c is contained in p. To determine which points are contained in p, the function as seen in Snippet 4.5.1.2 can be used, which returns the point with coordinates [5, 5] as expected.

<pre>// All points contained in polygon SELECT ST_ASTEXT(POINT) FROM POINT WHERE     ST_CONTAINS(         (             SELECT POLYGON             FROM POLYGON             WHERE id = 1         ),         POINT     );</pre>	<pre>// All polygons containing point SELECT ST_ASTEXT(POLYGON) FROM POLYGON, POINT WHERE     POINT.id = 3 AND ST_CONTAINS(         POLYGON.polygon,         POINT.point     )</pre>
--	--

*Snippet 4.5.1.2 - Find points in polygon, Find polygons containing point.*

#### 4.5.2. OpenGIS Incompatible databases

MongoDB doesn't offer OpenGIS implementations but has geospatial query operators that may provide enough functionalities for current requirements [9]. The argument for choosing one over the other depends on the vast differences between SQL and NoSQL, next to performance and extensiveness of geospatial features. The setup displayed in image 4.5.1 is recreated in MongoDB using queries shown in snippet 4.5.2.1.

<pre>db.point.insertMany([     { shape: { type: "Point", coordinates: [1, 1] } },     { shape: { type: "Point", coordinates: [2.5, 2.5] } },     { shape: { type: "Point", coordinates: [5, 5] } },     { shape: { type: "Point", coordinates: [-2.5, -2.5] } }, ])  db.polygon.insert({     shape: {         type: "Polygon",         coordinates: [ [ [2.5, 5], [5, 7.5], [7.5, 5], [5, 2.5], [2.5, 5] ] ]     } })  db.point.createIndex({ 'shape': '2dsphere' }) db.polygon.createIndex({ 'shape': '2dsphere' })</pre>
--

*Snippet 4.5.2.1 - Inserting points or polygons in a NoSQL database.*

<pre>// All points contained in polygon var p = db.polygon.find({})  db.point.find({     shape: {         \$geoWithin: {             \$polygon: [                 [2.5, 5],                 [5, 7.5],                 [7.5, 5],                 [5, 2.5],                 [2.5, 5]             ]         }     } })</pre>	<pre>// All polygons containing point var p = db.point.findOne({ coordinates: [5, 5] })  db.polygon.find({     shape: {         \$geoIntersects: {             \$geometry: {                 type: "Point",                 coordinates: [5, 5]             }         }     } })</pre>
---	--

#### *Snippet 4.5.2.2- Find points in polygon, Find polygons containing point.*

Next to database solutions for this requirement, services exist that are capable of geofencing. Although these services may not be free, and the added dependencies restrict extensibility.

#### 4.5.3. Performance and Clustering Trade-offs

Agarwal & Rajan state that NoSQL take advantage of cheap memory and processing power, thereby handling the four V's of big data more effectively, but lack the robustness over SQL databases [10]. The report dives deeper into spatial queries and concludes that their tests suggest that MongoDB performs better by an average factor of 10, which increases exponentially as the data size increases, but lack many spatial functions that OpenGIS supports.

Although improvements have been made [11] after the cited paper Schmid et al. 2015 [12] was published. The team argues that clustering is much easier in MongoDB, which may be important in the future when the company grows. As the required functionalities exist in both SQL and NoSQL, it is beneficial to opt for MongoDB for its performance and alignment with the teams experience. Although if robustness is desired, or extra GIS functionalities required, SQL should be taken into consideration.

### 4.6. API

An important choice that has to be made is the framework in which the project is going to be built. The team has experience with Loopback 3.0 [13], but considering the fact that this microservice is very small, and may not need the large amount of abstractions, Express.js is more suitable for the job. Although this means that required functionalities, that come out of the box with Loopback, have to be replaced.

#### 4.6.1. Required Endpoints

The API should be capable of exposing endpoints (that are going to be specified in more detail in the next phase) that are available to the DriverPortal and to external services. The endpoints for the DriverPortal should expose CRUD operations on resources that are used to calculate a trip. The endpoint for external services has only one task, given some trip information, a price has to be calculated based on the rules of the application that has been used.

#### 4.6.2. Express VS Loopback

As mentioned, the team has experience with Loopback, and having most code written in Loopback, making it easier to transfer pieces of functionality between projects. It has a built in ORM including CRUD endpoints.

On the other hand, Loopback has a steeper learning curve, stagnating velocity among external or new developers. Keeping the code base up to date may be harder because of increased amount of dependencies. There's no clear winner. The best choice should be the result of a consensus between core developers.

### 4.7. Database Schema

When a user being tied to a application is authenticated, prices can be calculated depending on various variables. Some variables should be passed each call, like the destination, departure location, timestamps and other important information. Some information will not change each ride, this should be defined and could be changed by the user, and should be stored in the database of the Price API.

#### 4.7.1. Relational Database

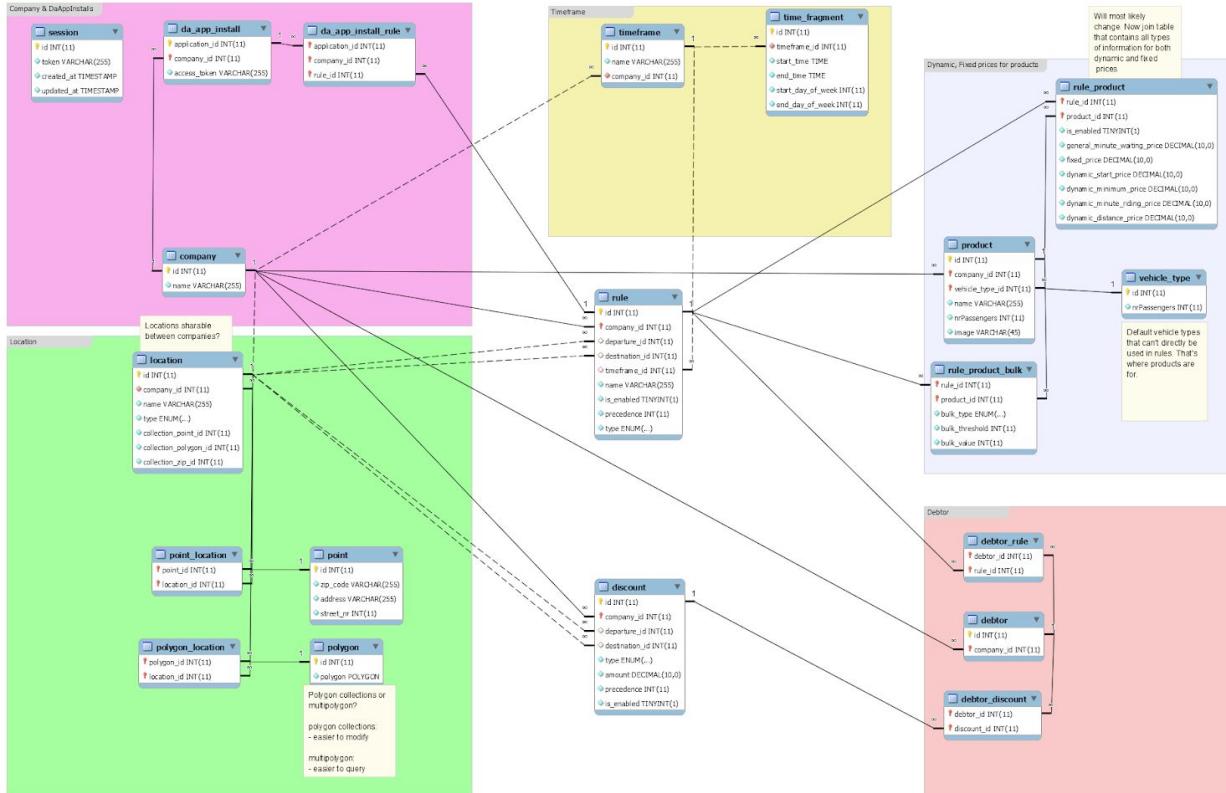


Image 4.7.1.1 - Rough schema for a relational database.

This schema cannot represent a NoSQL database, where relations are embedded. But the general idea in this schema could still be used and translated to NoSQL. The MongoDB documentation communicates schema information by presenting a document diagram. The main differences between relational and non-relational databases have to be taken into account, embedding and referencing over.

#### 4.7.2. Non-Relational Database

```
// Application document
// with embedded settings
{
  _id: <ObjectId1>,
  user_token: "",
  settings: {
    is_begin_end_same_address: true
  }
}
```

```

// Rule document
// with embedded rule type
// with references to one discount (or many)
{
  _id: <ObjectId2>,
  application_id: <ObjectId1>,
  created_at: ISODate("2013-10-02T01:11:18.965Z"),
  updated_at: ISODate("2013-10-02T01:11:18.965Z"),
  is_enabled: true,
  type: "dynamic",
  rule_settings: {
    minimum_price: ... ,
    start_price: ... ,
    ...
  },
  discount: {
    ...
  }
}

```

*Snippet 4.7.2.1 - Difference relational and non-relational database.*

## 4.8. User Interface

Following the principles Shneiderman's mantra, the user should be able to have an overview of the data, then be able to zoom and filter, then get details on demand [14]. The dashboard displays the most crucial components in which items (rules, discounts, vehicle types, e.g.) cannot be edited, but can be enabled or disabled. The settings panel may contain inputs that are allowed to mutate information because the settings are seen as a single item. The rules table should visualize to the user in which order the rules fire (either the order of rows, or a specific column with ordering numbers).

Clicking on a row in one of the tables brings the user to the corresponding detail page: rules, discounts, or vehicles. In each detail page, the rule can be mutated in a most flexible way. The rules detail page contains all the information linked to one single rule. The rule has one type but many options. Each option adds more information to the rule, but some options should be constrained. For example, defining two start prices should not be possible, but defining two bulk price thresholds should be.

## 4.9. Continuous Integration, Continuous Deployment & Testing

Depending on the way a project is set up, different CI providers offer better choices over others. This chapter will only dive into the subject shallowly, because TaxID has already adopted BuddyWorks.

	Jenkins	Travis	Circle	BuddyWorks
Team preference				✓
Free	✓	public repo	✓	✓ max 5 projects

Cloud-based		✓	✓	✓
GUI pipeline-builder				✓
SSH	✓ local		✓	Indirect through predefined script
Metadata collection	✓ local		✓	coverage report gives 404

Table 4.9.1 - Comparison between CI providers.

## 4.10. Testing

Software Reliability is defined as the probability of an item to perform a required function under stated conditions for a specified period of time. New features often introduce bugs by adding functionalities that are broken, although the reliability of the existing functionalities may also be impacted because of changes in the existing code. To prevent units of code from malfunctioning, regression tests may be implemented to validate whether a unit still functions according to a set of conditions.

Static and dynamic tests may be performed using the framework Mocha [15] and the assertion library Chai [16].

On top of that, Microsoft's new language Typescript could be used to replace Ecmascript, enabling type checking during development, boosting development velocity in the long run by preventing type related bugs from being introduced.

# 5. Conclusion

## 5.1. Frontend

The first non-functional requirement states that the solution should be seamlessly integrated in the portal. On top of that, a user shouldn't have to log in again to make use of the pricing service from within that portal. Iframes, objects and embeds have been mentioned as potential solutions to integrate a frontend in several distinct portals. This problem affects more than just the pricing project, therefore a decision must be made on a higher level before the frontend will be integrated, but the decision is not required for the first sprint to start. The options that are available are: an integrated view inside the existing DispatchAPI project or a separate solution built in Vue<sup>2</sup> with a material design style that can be integrated using an iframe.

## 5.2. Backend

The backend should be loosely coupled, but should be accessible by all users who are able to authenticate and authorize themselves. It's advised to implement the system as a microservice, because it separates the concern effectively. By implementing the system as a module, the implementation is entirely dependent on the existing system it's implemented in, stalling modernization of architecture in the long run. The solution that is presented in the pregame solves this challenge by having one microservice handle the requests that are in some cases routed through the DispatchAPI. The requests sent by a user from any portal should be directed at the microservice, while price calculation requests should be routed through the DispatchAPI. Loopback should be used as a framework, preferably in combination with typescript.

## 5.3. Functionalities

The core functionality of the system is to calculate a price based on rules defined by the user. The user is able to define which Dispatch API application installations (DaAppInstallations) may use these rules, but also which debtors may use these rules. If a ride is booked by the passenger, the passenger may be entitled to a discount if he or she orders the ride while being related to a debtor that is linked to a discount, or if the company has discounts that are matched with the ride. In this case other rules may apply. In any other case, the rules that are tied to the DaAppInstallation from which a ride is booked are used.

The other main functionality encapsulates all the steps that a user must take to set up the prices for the company. By generalizing concepts such as time and place as much as possible, the user can reason about his decisions more easily. For example, a location can be defined as a collection of zip codes, a collection of points or a collection of area's. To be more concrete, a user may define a location named 'Falke Hotels', using a list of zip codes. Next the user draws an area on top of Schiphol to define another location. Now these locations may be used in a rule that defines fixed prices from Falke Hotels to Schiphol. The user selects the price, the start location and end location he has just defined. The user also wants to give passengers that have a relation with the Falke debtor have a 10% discount on fridays. The user creates a discount, fills in 10% discount and adds a timeframe within which this discount is applicable. The user selects 'add timeframe', and selects the hours of the week in a timeframe view. He selects all the hours on friday and names this timeframe 'fridays'. The user connects the rule and the discount to a debtor name 'Falke', now all the passengers will pay fixed prices from hotels to Schiphol with a 10% discount on friday.

A passenger who books a ride from a Falke hotel requests the price, as he's tied to a debtor, he sends a debtor identifier to the system. The API selects the rules that are tied to the debtor (if no rules are tied, the system will fall back on rules defined for the DaApplInstallation) within the company. The API tries to find a departure location that matches with a rule. But the passenger travels to Amsterdam, not to Schiphol, therefore no rule was found. The API finds a dynamic pricing rule, so the price is calculated using a start price, price per kilometer and price per minute. The passenger has ordered an electric limousine (defined as a custom vehicle type by the user), so the most expensive tariffs are used. The passenger also lets the limousine wait for 10 minutes, so the price goes up a bit. Because it's Friday, the passenger is lucky to have a 10% discount and passes a bulk threshold at 30 kilometers traveled, lowering the price per kilometer from that point onward. As the electric limousine reaches the location in Amsterdam, the driver adds a small additional fee on top of the calculated price because the passenger spilled a drink inside the limousine, which is handled outside of the price calculation.

All the steps demonstrated in the story can be handled by the proposed system functionalities and data structure as explained in the Phase I - Pregame document. Some edge cases like layered area's are resolved by defining precedences on rules and discounts. The edge case of having a neighbour profit from hotel discounts, is by having rules and discounts be tied to debtors. The edge case of having to define many hotels by drawing area's around them on a map can be handled by defining specific points instead. The edge case of no rules being found is resolved by returning an error, this may be subject to change.

## 5.4. Authentication and Authorization

When speaking about microservices, authentication is the immediate next concern. If requests can be sent to the microservice directly, there must be a solution implemented to authenticate and authorize the user autonomously. As with the frontend discussion, this matter is of importance if more microservices are implemented in the future. It may be beneficial to introduce a single solution of authentication and authorization. This is suggested in the document by implementing an authentication server that provides a token that can be validated at a microservice level. If this is not desired, a similar authentication flow can be implemented as described by Marco as used in current systems.

## 5.5. Database

MongoDB should be used over an SQL database because of its scalability. MongoDB supports geographical location types, geospatial queries including the predicate to check which polygons contain a single point, or retrieving all points contained within a single polygon.

## 5.6. User Interface

The user interface will contain an overview showing the main concepts that a user has to maintain: pricing rules, locations, discounts. The UI should be focussed on linear navigation with overviews of detail pages. The UI will contain a screen to assign rules and discounts to DaApplInstallations and debtors, a screen to define locations, a screen to edit rules, a screen to modify vehicle types, and a screen to define timeframes.

## 6. References

- [1] "ST\_Contains." [Online]. Available: [https://postgis.net/docs/ST\\_Contains.html](https://postgis.net/docs/ST_Contains.html). [Accessed: 06-Feb-2018].
- [2] "MySQL :: MySQL 5.7 Reference Manual :: 12.15.9.1 Spatial Relation Functions That Use Object Shapes." [Online]. Available: [https://dev.mysql.com/doc/refman/5.7/en/spatial-relation-functions-object-shapes.html#function\\_st-contains](https://dev.mysql.com/doc/refman/5.7/en/spatial-relation-functions-object-shapes.html#function_st-contains). [Accessed: 07-Feb-2018].
- [3] "OAuth 2.0 — OAuth." [Online]. Available: <https://oauth.net/2/>. [Accessed: 09-Feb-2018].
- [4] "Why Use an API Gateway in Your Microservices Architecture?," NGINX, 19-Apr-2017. [Online]. Available: <https://www.nginx.com/blog/microservices-api-gateways-part-1-why-an-api-gateway/>. [Accessed: 15-Feb-2018].
- [5] "Simple Feature Access - Part 1: Common Architecture | OGC." [Online]. Available: <http://www.opengeospatial.org/standards/sfa>. [Accessed: 07-Feb-2018].
- [6] "Simple Feature Access - Part 2: SQL Option | OGC." [Online]. Available: <http://www.opengeospatial.org/standards/sfs>. [Accessed: 07-Feb-2018].
- [7] "Chapter 2.4. Using PostGIS: Data Management and Queries." [Online]. Available: [https://postgis.net/docs/manual-2.4/using\\_postgis\\_dbmanagement.html#PostGIS\\_GeographyVS\\_Geometry](https://postgis.net/docs/manual-2.4/using_postgis_dbmanagement.html#PostGIS_GeographyVS_Geometry). [Accessed: 07-Feb-2018].
- [8] "MySQL :: MySQL 5.7 Reference Manual :: 11.5.2.2 Geometry Class." [Online]. Available: <https://dev.mysql.com/doc/refman/5.7/en/gis-class-geometry.html>. [Accessed: 07-Feb-2018].
- [9] "Geospatial Query Operators — MongoDB Manual 3.6." [Online]. Available: <https://docs.mongodb.com/manual/reference/operator/query-geospatial/>. [Accessed: 07-Feb-2018].
- [10] K. S. R. Sarthak Agarwal, "Analyzing the performance of NoSQL vs. SQL databases for Spatial and Aggregate queries," International Institute of Information Technology Hyderabad Gachibowli, India, Sep. 2017.
- [11] "Geospatial Performance Improvements in MongoDB 3.2," MongoDB. [Online]. Available: <https://www.mongodb.com/blog/post/geospatial-performance-improvements-in-mongodb-3-2>. [Accessed: 12-Feb-2018].
- [12] Stephan Schmid Eszter Galicz, "Performance investigation of selected SQL and NoSQL databases," Bundeswehr University Munich, June 9-12, 2015.
- [13] "LoopBack 3.x | LoopBack Documentation." [Online]. Available: <https://loopback.io/doc/en/lb3/>. [Accessed: 12-Feb-2018].
- [14] C. T. Architecture, "Shneiderman's mantra - Coding the Architecture." [Online]. Available: [http://www.codingthearchitecture.com/2015/01/08/shneidermans\\_mantra.html](http://www.codingthearchitecture.com/2015/01/08/shneidermans_mantra.html). [Accessed: 15-Feb-2018].
- [15] "Mocha - the fun, simple, flexible JavaScript test framework." [Online]. Available: <https://mochajs.org/>. [Accessed: 21-Feb-2018].
- [16] "Chai." [Online]. Available: <http://chaijs.com/>. [Accessed: 21-Feb-2018].

## **Appendix B**

### **Sprint Review and Proposal Slides**

Online collection of slides

#### **B.1 Sprint 1 - review**

# Sprint 1

# Dynamic Price Calculations

Most complex but basic calculation using companyId, vehicleTypes, maxPassengers, enabled pricing rules ordered by precedence, trip distance and duration

## Data Fixtures

Fake data is generated so that the process of developing the dynamic price calculation is consistent and swift across developer machines

# Faking Data

Random data is inserted in the database using data fixtures

_id	name	maxPassengers	type	imagePath	companyId
Saa00f3ddd433...	Saloon	3	limo	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Estate	4	estate	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Bus	6	bus	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Minivan	6	minivan	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Limo	20	limo	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Granite purple car	9	limo	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Soft orange car	1	minivan	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Frozen violet car	2	saloon	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Plastic orchid car	8	minivan	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Plastic cyan car	7	limo	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Steel turquoise car	10	estate	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Soft azure car	9	estate	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Rubber silver car	6	estate	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Steel fuchsia car	5	bus	https://goo.gl/TA...	Saa00f3ddd433...
Saa00f3ddd433...	Concrete white car	3	bus	https://goo.gl/TA...	Saa00f3ddd433...

```
1 * User: ...
9
10 * Company: ...
13
14 * Product:
15   product{1..10}:
16     maxPassengers: ...
17     type: "{{random.arrayElement([
18       \"saloon\",
19       \"estate\",
20       \"bus\",
21       \"minivan\",
22       \"limo\"
23     ])}}"
24     name: "{{commerce.productMaterial}} {{commerce.color}} car"
25
26     imagePath: "https://goo.gl/TA829X"
27     companyId: "@{company}"
28
29
30
31
32 * PricingRule:
33   pricingRule{1..10}:
34     name: "{{commerce.productName}} Vehicle"
35     isEnabled: "{{random.boolean}}"
36     type: "{{random.arrayElement([
37       \"dynamic\",
38       \"fixed\"
39     ])}}"
40     precedence: "{{random.number}}"
41     companyId: "@{company}"
42
43 * ProductPricing:
44   productPricing{1..100}:
45     isEnabled: "{{random.boolean}}"
46     minuteWaitingPrice: "0.25"
47     fixedPrice: "0"
48     dynamicStartPrice: "3.00"
49     dynamicMinimumPrice: "5.00"
50     dynamicMinutePrice: "0.32"
51     dynamicDistancePrice: "2.22"
52     pricingRuleId: "@{pricingRule.*}"
53     productId: "@{product.*}"
54
```

# Price Calculation

In this first sprint, the basic steps of a dynamic price calculation are orchestrated

## Step 1 - PassengerApp sends request to TPS

The next couple of slides show the process of sending the request to our TPS service, and the way that our server processes the request before returning a response with a price calculation for each requested product

5

Price

POST /Prices/calculate

Show/Hide | List Operations | Expand Operations

Response Class (Status 200)  
Request was successful

Model | Example Value  
Inline Model ()

Response Content Type: application/json

Parameters

Parameter	Type	Description	Parameter Type	Data Type
data	body	Data required to calculate the price for a trip.	Model	Example Value

```
{ "companyId": "5aa0ef3ddd433723c832b566", "vehicleTypes": ["\\limo\\"], "checkAvailability": false, "passengerCount": 2, "requestedDate": "2017-18-01T12:30:00Z", "departure": { "city": "string", "streetName": "string", "postalCode": "string", "houseNumber": "string", "synonym": "string", "internationalAlias": "string", "gps": { "lat": "52.373805", "lng": "4.896701" }, "gpsSpeed": 0, "gpsBearing": 0, "gpsAccuracy": 0, "gpsTime": "2018-03-07T08:25:55.955Z", "gpsOrigin": "string", }
```

# Request

As the documentation of the old system suggests, the query format in the yellow box is expected, and used as an example

Source:  
<https://docs.dispatchapi.io/#get-prices-per-vehicle-type>

6

```
{  
    companyId:  
    vehicleTypes:  
    passengerCount:  
    departure: {  
        gps: {  
            lat:  
            lng:  
        }  
        destination: {  
            gps: {  
                lat:  
                lng:  
            }  
        }  
    }  
}
```

# Data

The values on the left side of this slide are the only values that are currently being accepted by the endpoint

## Step 2 - Obtaining ride distance and duration

The distance and duration of a trip are provided by the google directions API

The next slide shows the request parameters sent to google directions API, and the desired response attributes

# Request

Fields used in google directions:

1. departure (gps: lat, lng)
2. destination (gps: lat, lng)

# Response

Returned by google:

1. distance (in m)
2. duration (in s)

## Step 3 - Querying our database for matches

While location matching is not part of the system yet, we could theoretically pass all the information we have at this moment to our database query to get the best possible match while ignoring the locations and timeframes for now

The query is performed for every vehicle type that the user wants to see, and returns exactly one best result for each

The next slide shows the request that would be sent by the Passenger App to our TPS microservice

# Query

Fields used in query:

1. companyId
2. vehicleTypes
3. passengerCount

Fields unused:

4. departure
5. destination
6. pickupTime

## Step 4 - Calculating the prices

This query grows when complexity of the application increases

```
const aggregateQuery = () => {
  Product.dataSource.connector.db.collection('Product')
    .aggregate([
      {
        $match: {
          // for a given company
          companyId: ObjectId(body.companyId),
          // vehicles requested must match the product vehicle type
          type: { $in: JSON.parse(body.vehicleTypes) },
          // passengers requested must equal to passengerCount
          maxPassengers: { $gte: body.passengerCount }
        }
      },
      {
        $lookup: {
          from: "ProductPricing",
          localField: "_id",
          foreignField: "productId",
          as: "productPricings"
        }
      },
      {
        $unwind: {
          path: "$productPricings",
          preserveNullAndEmptyArrays: false
        }
      },
      {
        $match: {
          // product for given rule is enabled
          "productPricings.isEnabled": true
        }
      },
      {
        $lookup: {
          from: "PricingRule",
          localField: "productPricings.pricingRuleId",
          foreignField: "_id",
          as: "pricingRules"
        }
      },
      {
        $unwind: {
          path: "$pricingRules",
          preserveNullAndEmptyArrays: true
        }
      },
      {
        $match: {
          // rule is enabled
          "pricingRules.isEnabled": true
        }
      },
      {
        $sort: {
          "pricingRules.precedence": -1,
          // should be -1 later, because fixed should go first
          "pricingRules.type": 1
        }
      },
      {
        $limit: 1
      }
    ]).toArray((err, data) => {
      ...
    })
}
```

After the query to the database has been made, the most complex work is done to calculate prices based on different rules provided and stored in our database by the group admins

A group admin can choose whether he would like the price to be calculated using tiers. He can flip a switch after he's defined the thresholds and tier prices for every one of his products

E.g. \$0.5 dollar per km for the first 10 km, plus \$0.4 \* the next 10 km, plus \$0.35 for the rest 2.54 km.  
total = 5 + 4 + 0.889  
final = max(9.89 + 3, 5)  
final = 9.89

(this example only uses the distance metric)

```
total = total: km * kmPrice  
metric * metricPrice or  
or if tier pricing km - thresholds * kmPrice  
each(threshold * thresholdPrice) + (threshold * tierPrice)  
  
final = max(  
    total + startAmount,  
    minAmount  
) Final: the price that is finally returned
```

13

## Step 5 - Sending back the response

When all the prices have been calculated (for each vehicle type / product), the response is sent back to the PassengerApp

14

# Response

Each vehicle type / product has a maximum of one result


```
[  
  {  
    "vehicleType": "saloon",  
    "maxPassengers": 8,  
    "fixedPrice": true,  
    "price": {  
      "currency": "EUR",  
      "total": 1165,  
      "breakdown": {  
        "route": 1099,  
        "tax": 66,  
        "toll": 0,  
        "parking": 0,  
        "waiting": 0,  
        "discount": 0  
      }  
    }  
  },  
  {  
    "vehicleType": "limo",  
    "maxPassengers": 5,  
    "fixedPrice": true,  
    "price": {  
      "currency": "EUR",  
      "total": 1165,  
      "breakdown": {  
        "route": 1099,  
        "tax": 66,  
        "toll": 0,  
        "parking": 0,  
        "waiting": 0,  
        "discount": 0  
      }  
    }  
  },  
]
```

15

# Project Structure

As Loopback 3 does not support Typescript out of the box, a separation between inherent loopback files and external functionality files is made, so that Typescript can be used for pieces of software that are decoupled from the framework

16

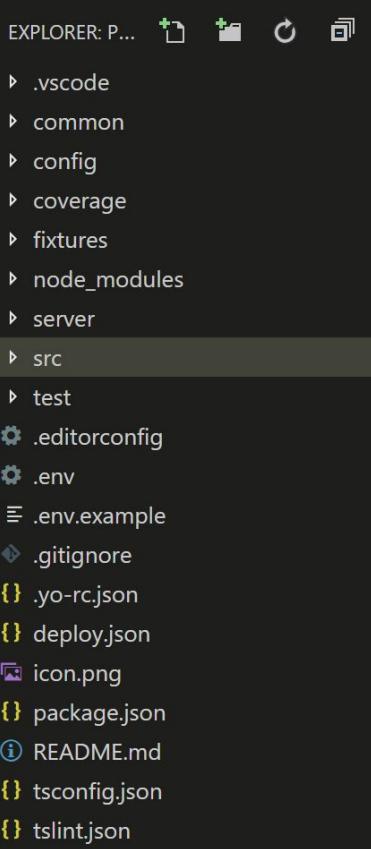

# File Structure

common	Loopback models & schemas
config	Loopback config files
coverage	Test reporting
fixtures	Data fixtures for generating test data in db
server	Loopback server files
src	Typescript project
test	Typescript tests
.editorconfig	Space, tabs, line-ending styles
.env	Environmental variables
.tsconfig	Typescript settings
.tslint	Typescript linting

17

# Tests

Tests are written using Mocha and Chai to guarantee that a functionalities continue to operate consistently, adhering to the FIRST mnemonic

1. Fast
2. Isolate
3. Repeatable
4. Self validating
5. Timely

18

# Output

## 1. UNIT:

Aims to test small units of code

## 2. INTEGRATION:

Tests whether different parts of the system work together

## 3. Note:

Current tests assume that the environment in which it resides is operational. For example: a google directions api key is set, the system is connected to the network, et cetera.

```
stefan@DESKTOP-M590E8U:/mnt/c/Projects/pricing-api$ yarn test
yarn run v1.5.1
$ tslint --fix src/**/*.{x} --config tslint.json --project tsconfig.json
$ yarn run test:coverage
$ TS_NODE_COMPILER_OPTIONS='{"target":"es6"}' nyc --reporter=lcov yarn run test:unit
$ mocha -r ts-node/register './test/**/*spec.ts' --exit
```

```
INTEGRATION: The .env file and environmental variables
✓ should load without throwing an error
```

```
INTEGRATION: Server response status
✓ returns 200 on root page
✓ returns 404 everything else
```

```
UNIT: GoogleDirections Settings
✓ can be mutated
✓ can accept an API key
✓ should detect invalid API key
✓ has API key set
✓ has travelMode defined
```

```
INTEGRATION: Google API Service
✓ instantiation will succeed
✓ current environment has valid API key
✓ response to have { distance: 19.17, duration: 28.65 } (219ms)
```

```
UNIT: PriceCalculation Class
✓ should throw an error on duplicate thresholds
✓ should have readonly taxPerc property
✓ should throw an error invalid pricing
```

```
INTEGRATION: Price Calculation Different Cases
✓ should calculate a price without thresholds
✓ calculates price with distance threshold
✓ calculates price with duration threshold
✓ has a recursive function to calculate cascading thresholds
✓ calculates price with distance and duration thresholds
✓ should calculate a price with cascaded duration thresholds
```

```
20 passing (360ms)
```

```
Done in 9.98s.
```

```
stefan@DESKTOP-M590E8U:/mnt/c/Projects/pricing-api$ █
```

19

```
4 passing (93ms)
```

```
5 failing
```

1) INTEGRATION: Price Calculation Different Cases  
should calculate a price without thresholds:

```
AssertionError: expected { Object (vehicleType ...
```

```
+ expected - actual
```

```
{
- "fixedPrice": false
- "maxPassengers": 3
- "price": {
-   "breakdown": {
-     "discount": 0
-     "parking": 0
-     "route": 83
-     "tax": 5
-     "toll": 0
-     "waiting": 0
-   }
-   "currency": "EUR"
-   "total": 88
- }
- "vehicleType": "saloon"
+ "discount": 0
+ "parking": 0
+ "route": 83
+ "tax": 5
+ "toll": 0
+ "waiting": 0
}
```

Set the debug flag to true to display errors and logs during the tests

```
import debug from 'debug';

debug(true);

describe('UNIT: PriceCalculation Class', () => {

  it('should throw an error on duplicate...
```

20

## Tests: coverage reporting

All files														
	Statements	Branches	Functions	Lines	File	Statements	Branches	Functions	Lines	File				
src	84.88% 146/172	72% 36/50	87.18% 34/39	85.37% 148/164	src	76.47%	26/34	44.44%	4/9	src	60%	3/5	80.65%	25/31
src/boot					src/boot	100%	4/4	100%	0/0	src/boot	100%	1/1	100%	4/4
src/services/directions					src/services/directions	75.44%	43/57	69.57%	16/23	src/services/directions	93.75%	15/16	74.55%	41/55
src/services/prices					src/services/prices	94.81%	73/77	88.89%	16/18	src/services/prices	88.24%	15/17	94.59%	70/74

Istanbul tests checks to see what lines of code were run. The report shows useful information to improve the test coverage of a project.

```
14  /**
15   * Start price calculations. The distance and duration metrics
16   * are fetched by the directionsService using an async function
17   * before calculate is used to calculate the trip price.
18   */
19  public async breakdown(pricing: pricing): Promise<object> {
20
21  5x  if path not taken  calculator.validPriceOrError(pricing);
22  5x  metrics = await this.directionsService.directions();
23  5x  if (!metrics) {
24  5x    throw new HttpError('Metrics not provided for price calculation.');
25  }
26
27  5x  const routePrice = this.calculate(pricing, <metrics>metrics);
28  5x  const taxPrice = PriceCalculator.taxPerc * routePrice;
29  5x  const tollPrice = 0; // @todo
30  5x  const parkingPrice = 0; // @todo
31  5x  const waitPrice = pricing.prices.minuteWaitingPrice * 0; // @todo
32  5x  const discountPrice = 0; // @todo
```

## **B.2 Sprint 2 - breakdown**

# Price Breakdown Proposal

Including and excluding VAT

## Property types

- **number**
- **hidden**
- **computed**
- **total**

A number is a fixed amount that has been calculated

Hidden is not included in the price calculation breakdown, but is included to demonstrate sub-calculations

Computed is a price calculated using the numbers in the breakdown

Total is the aggregated price based on computed and number properties

## Requirements

- The breakdown contains computed numbers
- VAT is included in all the properties
- Total is the sum of all the properties in the breakdown

In the future, waiting, toll, and parking properties may have their own VAT percentage

In the future, waiting, toll, and parking properties are included in the breakdown, therefore we will assume that they are provided

## Including VAT

The following slides present the calculation assuming that VAT is included

```
"price": {  
  "breakdown": {  
    "discount":  
    "parking":  
    "route":  
    "toll":  
    "waiting":  
  }  
  "currency": "EUR"  
  "total":  
  "tax": {  
    amount:  
    percentage: 6  
  }  
}
```

```
"price": {  
  "breakdown": {  
    "discount":  
    "parking": 2  
    "route": 65  
    "toll": 5  
    "waiting": 2.8  
  }  
  "currency": "EUR"  
  "total":  
  "tax": {  
    amount:  
    percentage: 6  
  }  
}
```

The breakdown, total and currency are properties of the price

As said before, the total must aggregate all properties in the breakdown

The currency is EUR

Steps:

1. Parking, toll, waiting and route prices are calculated, tax percentage is added

```

"price": {
  "breakdown": {
    "discount": -11.22
    "parking": 2
    "route": 65
    "toll": 5
    "waiting": 2.8
  }
  "currency": "EUR"
  "total": 74.8
  "tax": {
    amount:
    percentage: 6
  }
}

```

```

"price": {
  "breakdown": {
    "discount": -11.22
    "parking": 2
    "route": 65
    "toll": 5
    "waiting": 2.8
  }
  "currency": "EUR"
  "total": 63.58
  "tax": {
    amount:
    percentage: 6
  }
}

```

### Steps:

1. Parking, toll, waiting and route prices are calculated, tax percentage is added
2. Discount
  - a. Is stated as a positive or negative fixed amount ✓ -11.22
  - b. Is negative or positive percentage of subtotal ✓  $(-15\%) 74.8 * -0.15 = -11.22$

### Steps:

1. Parking, toll, waiting and route prices are calculated, tax percentage is added
2. Discount
  - a. Is stated as a positive or negative fixed amount
  - b. Is negative or positive percentage of subtotal
3. Total is added ✓ 63.58

```
"price": {  
    "breakdown": {  
        "discount": -11.22  
        "parking": 2  
        "route": 65  
        "toll": 5  
        "waiting": 2.8  
    }  
    "currency": "EUR"  
    "total": 63.58  
    "tax": {  
        "amount": 3.6  
        "percentage": 6  
    }  
}
```

### Steps:

1. Parking, toll, waiting and route prices are calculated, tax percentage is added
2. Discount
  - a. Is stated as a positive or negative fixed amount
  - b. Is negative or positive percentage of subtotal
3. Total is added
4. Tax calculated ✓  $63.58 / (100 + \text{tax.percentage}) * \text{tax.percentage} = 3.6$

## Excluding VAT

The following slides provide a calculation assuming VAT is excluded

```
"price": {  
  "breakdown": {  
    "discount":  
    "parking":  
    "route":  
    "tax":  
    "toll":  
    "waiting":  
  }  
  "currency": "EUR"  
  "total":  
}
```

The breakdown, total and currency are properties of the price

As said before, the total must aggregate all properties in the breakdown

The currency is EUR

```
"price": {  
  "breakdown": {  
    "discount":  
    "parking": 2  
    "route": 65  
    "tax":  
    "toll": 5  
    "waiting": 2.8  
    "subtotal":  
  }  
  "currency": "EUR"  
  "total":  
}
```

Steps:

1. Parking, toll, waiting and route prices are calculated

```

"price": {
  "breakdown": {
    "discount": 0
    "parking": 2
    "route": 65
    "tax": 0
    "toll": 5
    "waiting": 2.8
    "subtotal": 74.8
  }
  "currency": "EUR"
  "total": 74.8
}

```

```

"price": {
  "breakdown": {
    "discount": -11.22
    "parking": 2
    "route": 65
    "tax": 0
    "toll": 5
    "waiting": 2.8
    "subtotal": 74.8
  }
  "currency": "EUR"
  "total": 74.8
}

```

### Steps:

1. Parking, toll, waiting and route prices are calculated
2. A subtotal = parking + route + toll + waiting, is calculated

$65+5+2+2.8 = 74.8$

### Steps:

1. Parking, toll, waiting and route prices are calculated
2. A subtotal = parking + route + toll + waiting, is calculated
3. Discount..
  - a. Is stated as a positive or negative fixed amount -11.22
  - b. Is negative or positive percentage of subtotal  $(-15\%) 74.8 * -0.15 = -11.22$

```

"price": {
  "breakdown": {
    "discount": -11.22
    "parking": 2
    "route": 65
    "tax": 3.8148
    "toll": 5
    "waiting": 2.8
    "subtotal": 74.8
  }
  "currency": "EUR"
  "total": 67.3948
}

```

### Steps:

1. Parking, toll, waiting and route prices are calculated
2. A subtotal = parking + route + toll + waiting, is calculated
3. Discount..
  - a. Is stated as a positive or negative fixed amount
  - b. Is negative or positive percentage of subtotal
4. Tax = (discount + subtotal) \* tax\_percentage

✓ (-11.22+74.8)\*0.06 = 3.8148

```

"price": {
  "breakdown": {
    "discount": -11.22
    "parking": 2
    "route": 65
    "tax": 3.8148
    "toll": 5
    "waiting": 2.8
    "subtotal": 74.8
  }
  "currency": "EUR"
  "total": 67.3948
}

```

### Steps:

1. Parking, toll, waiting and route prices are calculated
2. A subtotal = parking + route + toll + waiting, is calculated
3. Discount..
  - a. Is stated as a positive or negative fixed amount
  - b. Is negative or positive percentage of subtotal
4. Tax = (discount + subtotal) \* tax\_percentage
5. Total = discount + subtotal + tax

✓ -11.22+74.8 = 63.58  
+3.8148 = 67.3948

```
"price": {  
  "breakdown": {  
    "discount": -11.22  
    "parking": 2  
    "route": 65  
    "tax": 3.8148  
    "toll": 5  
    "waiting": 2.8  
    "subtotal": 74.8  
  }  
  "currency": "EUR"  
  "total": 67.5  
}
```

## Steps:

1. Parking, toll, waiting and route prices are calculated
2. A subtotal = parking + route + toll + waiting, is calculated
3. Discount..
  - a. Is stated as a positive or negative fixed amount
  - b. Is negative or positive percentage of subtotal
4. Tax = (discount + subtotal) \* tax\_percentage
5. Total = discount + subtotal + tax
6. Round total price to half a decimal

## **B.3 Sprint 2 - authentication**

# Authentication and Identity Management of the Microservice Proposal

Taking or delegating responsibility of authentication within the system architecture



## Definition of a Microservice

- Small service decomposed from a monolith
- Isolated and independently deployable
- Stateless and less fragile when changes are introduced
- Single responsibility
- Advice was provided in the [Phase I - Pregame](#) document

## Aspects of Authentication and Identity Management

Name	Explanation	Example
- Responsibility	System concerned of authenticating users?	Core, external service or microservice itself
- Locality	Where is user data stored?	A single database, all databases
- Authorization	How do we identify user and CompanyId, DaAppInstall ... roles?	CompanyId, DaAppInstallId, a separate combined id
- Statefulness	How is the state of authentication shared between services?	In the request, in shared or separate sessions

## Aspects of Authentication and Identity Management

Name	Explanation	Example
Responsibility	System concerned of authenticating users	Core system, external service or the microservice itself
Locality	Where user data stored	One single database, every database, a separate database
Authorization	How users and roles are identified	CompanyId, DaAppInstallId, a separate combined id
Statefulness	How the user state is synchronized between services	In the request, in shared or separate sessions, via a token


# Examples

Here are four examples 1 ... 4 increasing from basic to more extreme implementations.


The four aspects are discussed after each figure:

- Responsibility
- Locality
- Authorization
- Statefulness

## Symbols used in the Examples

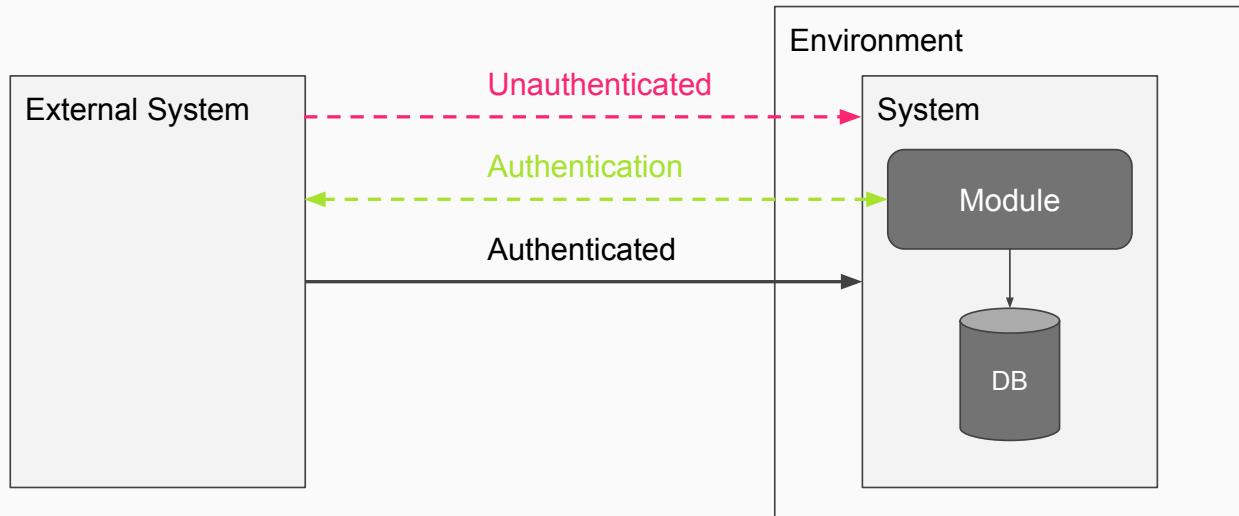

## Ex 1

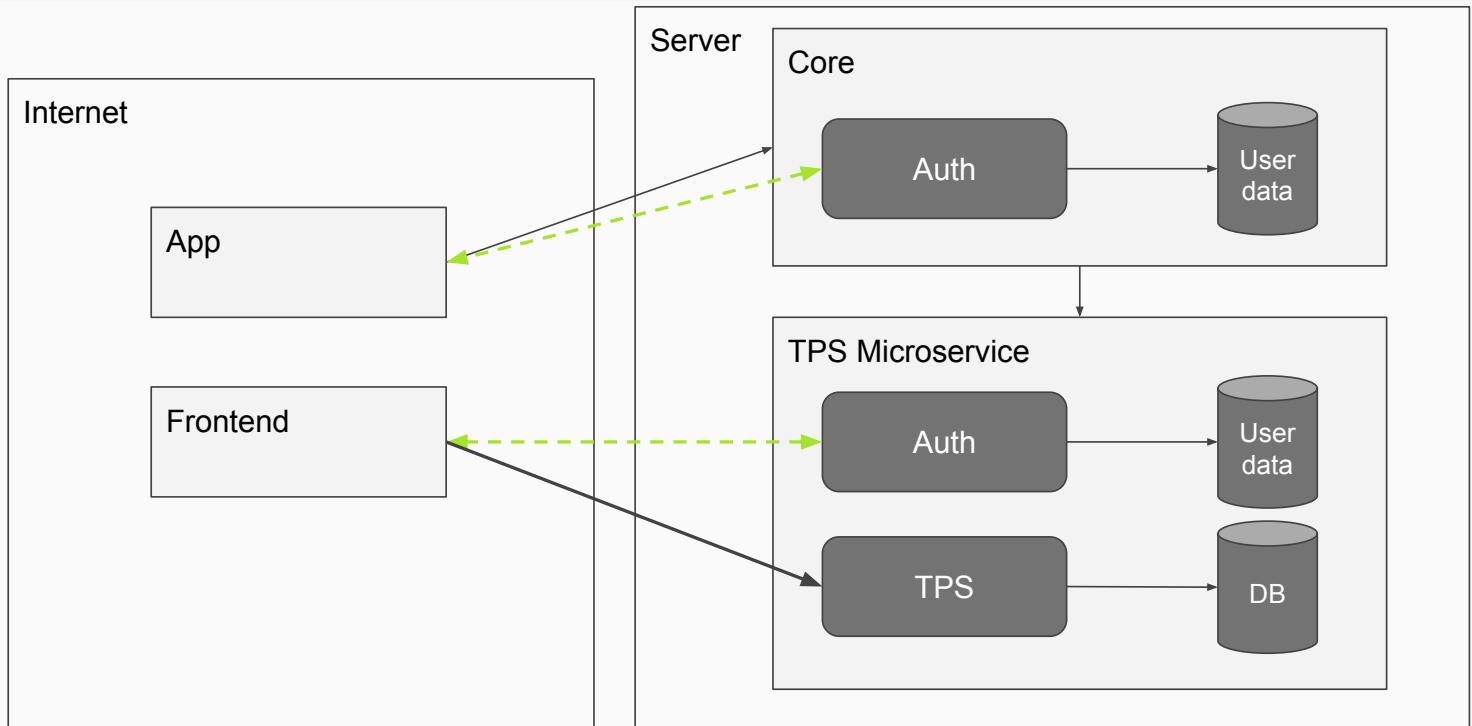


## Ex 1 - Aspects

The TPS microservice authenticates its users. It has its own database with user and company data.

Authorization is handled by checking the user data in the database. Sessions are handled by the microservice. So the state resides in the microservice.

The microservice is totally independent, except for the fact that the data that is mutated in other systems must be synchronized in some fashion.

## Ex 2

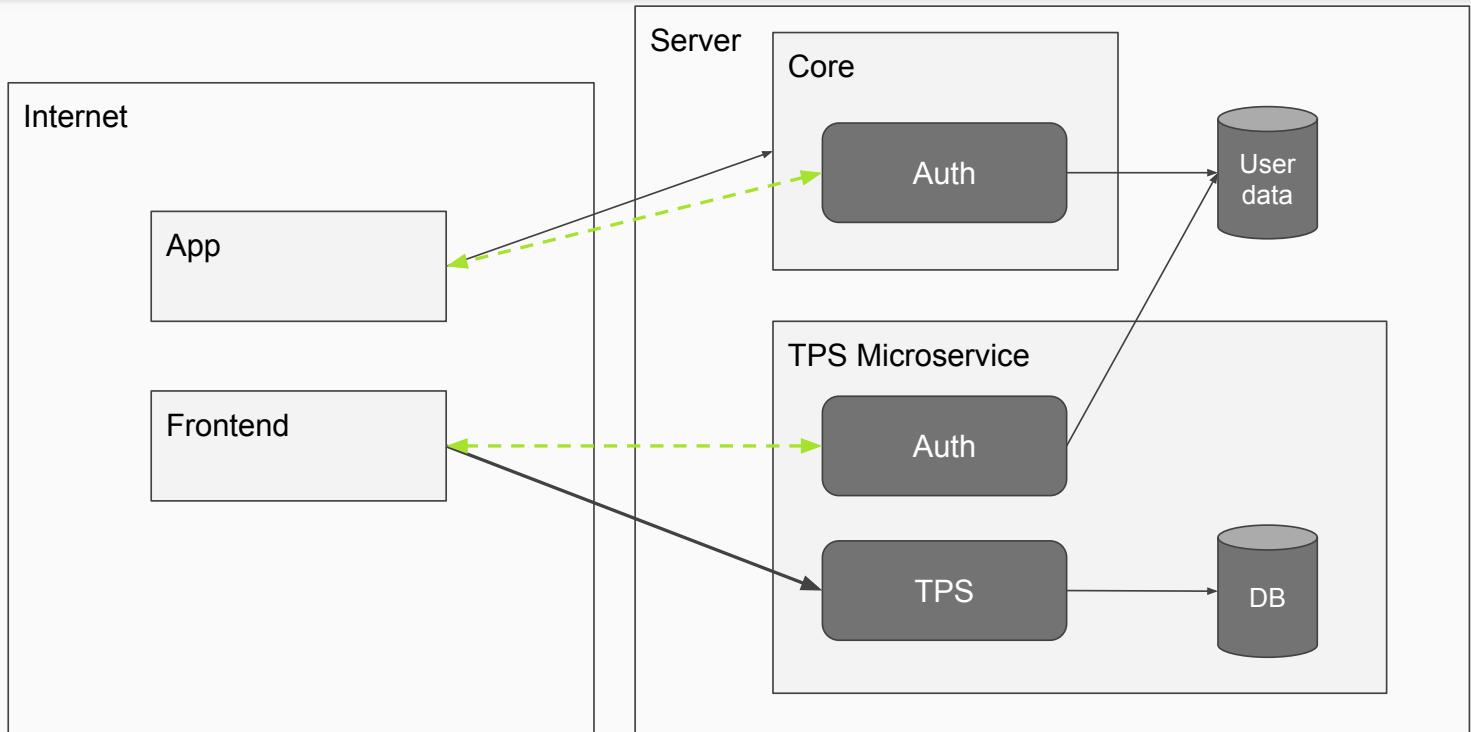


## Ex 2 - Aspects

Like example 1, authentication is handled by the microservice. Only this time it connects directly with a database that stores user information.

Depending on how sessions are handled, the state can be shared amongst systems. But when other systems are required to make use of the microservice, more and more sources that contain the state of users need to be shared with the microservice.

## Ex 3

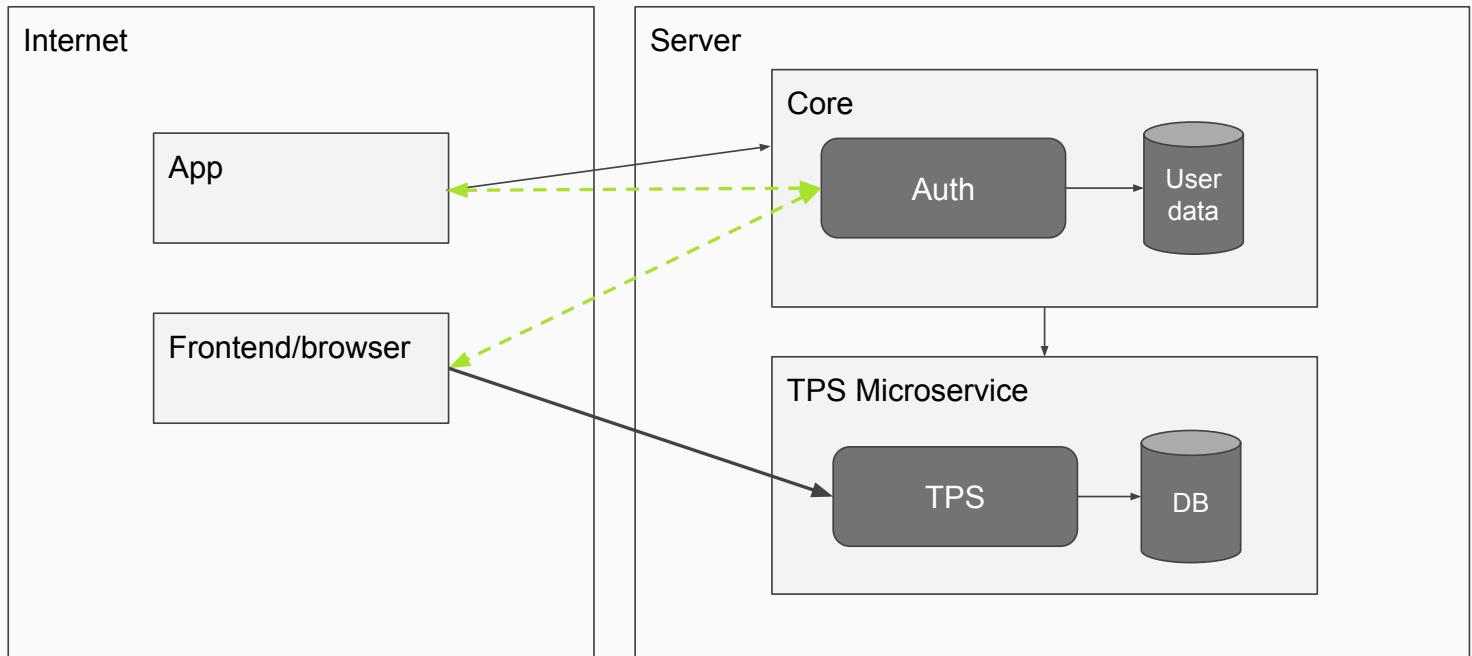


## Ex 3 - Aspects

In example 3, the Core system is the only system able to provide authentication tokens. This token must be used to transfer authorization and identity information to the microservice in a stateless manner, because the microservice has no concept of the state of authentication.

A JWT can be used to transfer state in this case.

If more systems have to make use of the microservice in the future, they depend on the core system anyhow.

## Ex 4

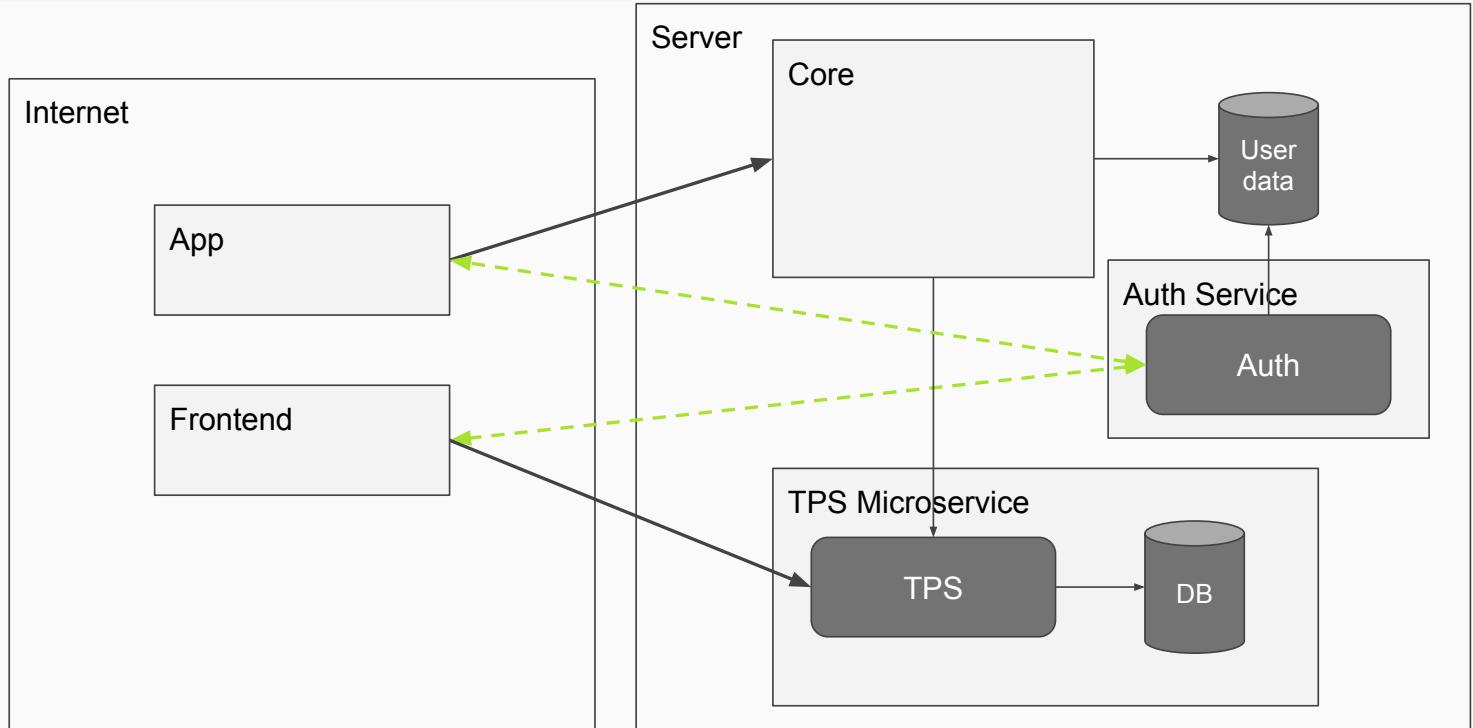

## Ex 4 - Aspects

In this example, future systems don't depend on the core system. But the core system does depend on the Authentication service in order to make use of other microservices.

# Concluding

- Managing invalidation of JWT's
  - Invalidating individual tokens conditionally
  - <https://stormpath.com/blog/token-auth-spa>
- Keeping payloads up-to-date when data changes
  - User switches from company, therefore the frontend must act!

## B.4 Sprint 2 - review


# Sprint 2

## Authentication and Authorization

Authentication, VAT, Discounts, Improved Breakdown, Cascading Threshold Calculations, and refactors

### Selected Authentication Proposal

Applications communicate with the core system which provides a JWT that includes important identity information in the token payload. The TPS microservice has a simple concept of a User that references the DaApplInstall of a company.

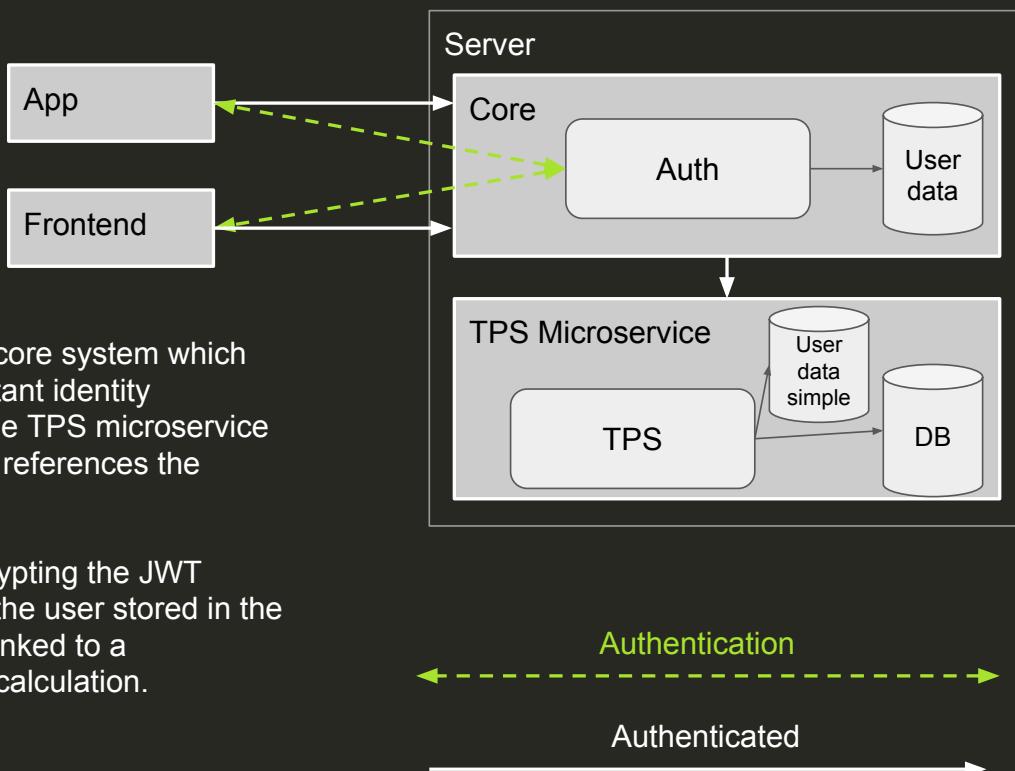


The Microservice is capable of decrypting the JWT revealing the identity details to find the user stored in the database, so that the correct rules linked to a DaApplInstall are used for the price calculation.

# Authentication

Core signs JWT that has the identity of the user contained in the payload, e.g.:


```
const cert = process.env.JWT_SECRET;  
const HOURS_24 = 86400;  
  
jwt.sign({ companyId: '666' }, cert, {  
  expiresIn: HOURS_24,  
  algorithm: 'HS256'  
}, (err, token) => {  
  if (err) return cb(err);  
  return cb(null, token);  
});
```

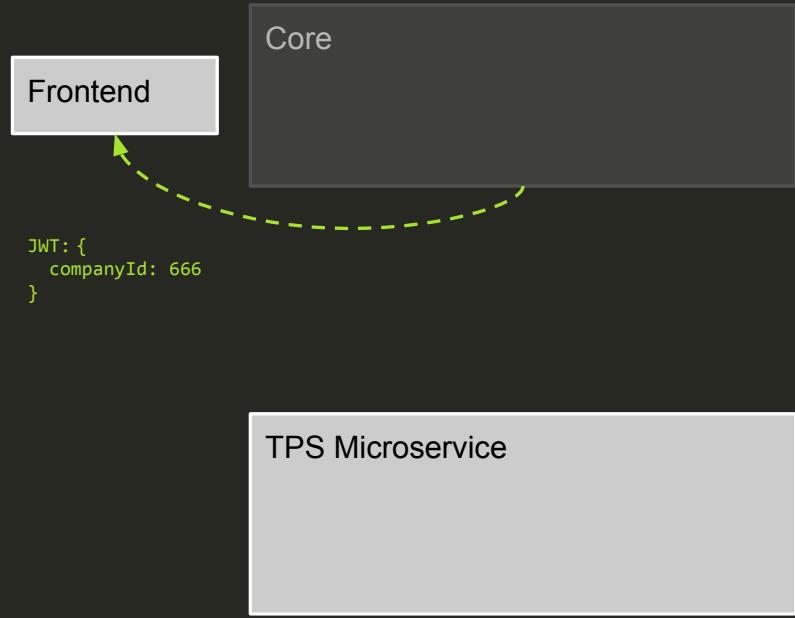

# Authentication

The frontend makes a request directed at the Microservice, which is tunneled through the core system. The Microservice decrypts the token to reveal the user company.

```
jwt.verify(token, cert, (err: Error, decoded: any) => {  
  if (err) {  
    return res.status(500)  
      .send({  
        auth: false,  
        message: 'Invalid token provided.',  
      });  
  }  
  console.info(decoded);  
  // { companyId: 666, iat: 1521552244, exp: 1521638644 }  
  next();  
});
```

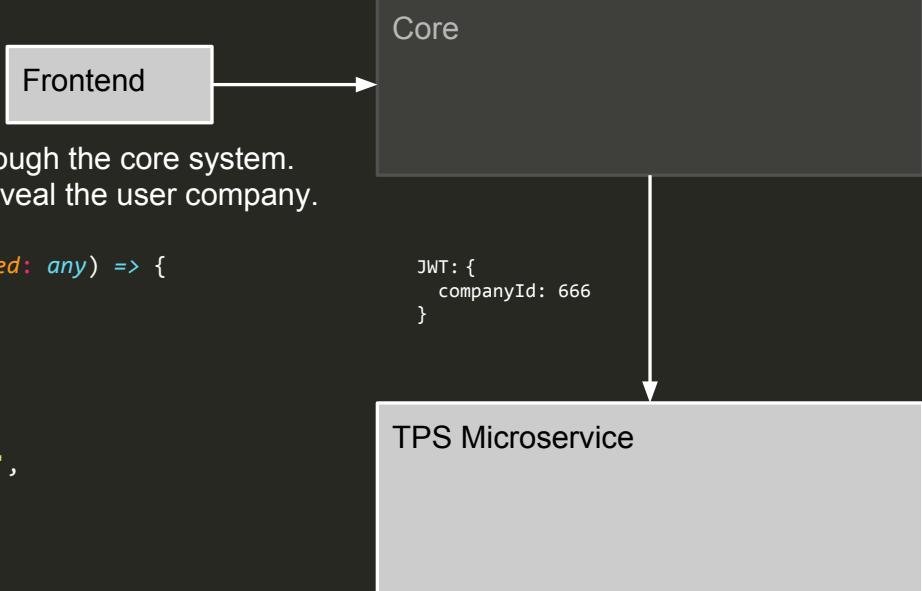

# Authentication

Middleware:

1. Fetches token
2. Fetches secret
3. Verifies token with secret or public key
4. Adds credentials to req
5. next( )

```
/*
 * Authentication middleware.
 */
export const auth = (req: Request, res: Response, next: NextFunction) => {

  // Don't use this cert in any of the warning responses, it's secret
  const cert = process.env.JWT_SECRET;
  const JWT_HEADER = process.env.JWT_HEADER || 'x-access-token';
  const token = req.headers[JWT_HEADER] : req.query.access_token;

  // It can be safe under the following circumstances:
  // 1. the JWT is one-time time usage only
  // 2. the jti and exp claims are present in the token
  // 3. the receiver properly implements replay protection jti and exp
  if (process.env.NODE_ENV === 'development' && req.query.access_token) {
    return warn(res, 449, `Don't send tokens via an URL (preferably)`);
  }

  // No token, no access
  if (!token) return warn(res, 403, 'No token provided.');

  // No secret found, still no access
  if (!cert) return warn(res, 403, 'Authentication unavailable.');

  // Verify token and add to request
  jwt.verify(token, cert, (err: Error, decoded: any) => {
    if (err) return warn(res, 403, 'Invalid token provided.');
    addCredentialsToReq(req, decoded);
    next();
  });
};
```

# Authentication

1. Changes must be made to the core system
2. All communications will be held through the core system
3. Secrets must be known to both core and microservice
4. Secrets should be stored in the .env file
5. Secrets should be updated regularly

# Breakdown Proposal

```
{ "price": {  
    "breakdown": {  
        "discount": -11.22  
        "parking": 2  
        "route": 65  
        "toll": 5  
        "waiting": 2.8  
    }  
    "currency": "EUR"  
    "total": 63.58  
    "tax": {  
        "amount": 3.6  
        "percentage": 6  
    }  
}
```

These values are a sum of the total

# Breakdown Proposal

```
{ "price": {  
    "breakdown": {  
        "discount": -11.22  
        "parking": 2  
        "route": 65  
        "toll": 5  
        "waiting": 2.8  
    }  
    "currency": "EUR"  
    "total": 63.58  
    "tax": {  
        "amount": 3.6  
        "percentage": 6  
    }  
}
```

The tax is calculated but is part of the total, as VAT is included

# Improved Breakdown

1. Total is the sum of the breakdown
2. Tax is included in the total, and thus included in the breakdown prices
3. Tax is based on country default tax percentage
4. The discussion is found in [the breakdown proposal slides](#)

## VAT

```
instance.breakdown(copy)
    .then((data: Response) => {
        expect(data)
        .deep.equal({
            price: {
                breakdown: {
                    route: 83,
                    toll: 0,
                    parking: 0,
                    waiting: 0,
                    discount: 0,
                },
                tax: {
                    amount: 4.5,
                    // 4.7 = 83 / 106 * 6
                    percentage: 6,
                },
                currency: 'EUR',
                // 66.32 = 82.83 - 16.5
                total: 66.5,
            }
        });
    });
});
```

# VAT

1. Tax is calculated back from included VAT prices
2. Tax percentages differ per country
3. More details in [the price breakdown proposal](#)

Established formula:

$$[\text{price} / (100 + \text{tax.percentage}) * \text{tax.percentage}]$$

# Discounts

```
// copy.discount
discount:
{ name: 'Discount percentage test',
  value: -20
  isEnabled: true,
  type: 'percentage',
  precedence: 88547,
  companyId: 5aa1585990e4d72312f882db }
  instance.breakdown(copy)
    .then((data: Response) => {
      expect(data)
        .deep.equal({
          price: {
            breakdown: {
              route: 83,
              toll: 0,
              parking: 0,
              waiting: 0,
              // -16.6 = -.2 * 83
              discount: -16.5,
            },
            ...
            currency: 'EUR',
            // 66.32 = 82.83 - 16.5
            total: 66.5,
          }
        });
    });
}
```

# Discounts


1. A discount can be negative or positive
  2. A discount can be disabled or enabled
  3. A discount can be a fixed amount or percentage
  4. A discount is calculated and is part of the breakdown total
  5. Discounts are not constrained by location or timeframes yet

# Cascading Threshold Calculations

# Cascading Threshold Calculations


1. Either no thresholds have been provided, the normal calculation function is called straight away.
2. If thresholds are provided, there are two options:
  - a. Cascade option is true
  - b. Cascade option is false
3. If cascade is false, the price of the last threshold that has been surpassed will be used to calculate the price per metric.
4. If cascade is true, the first couple of km say, will be calculated with the normal price. The next km's will be calculated using the first surpassed threshold, the next km's with the next threshold price ...

## Refactors: DB Schema

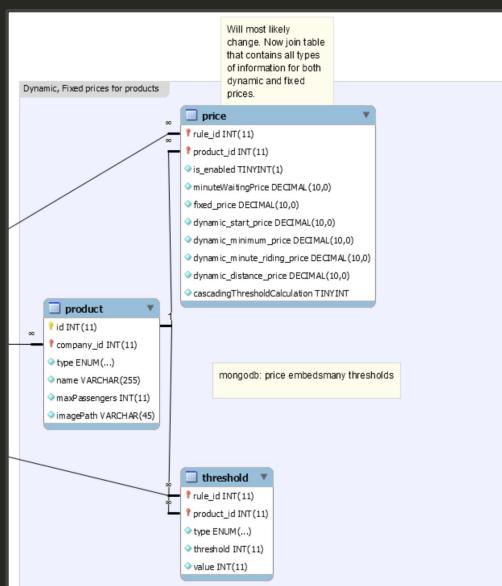

Old:

Contained pricing information of all types in one table.

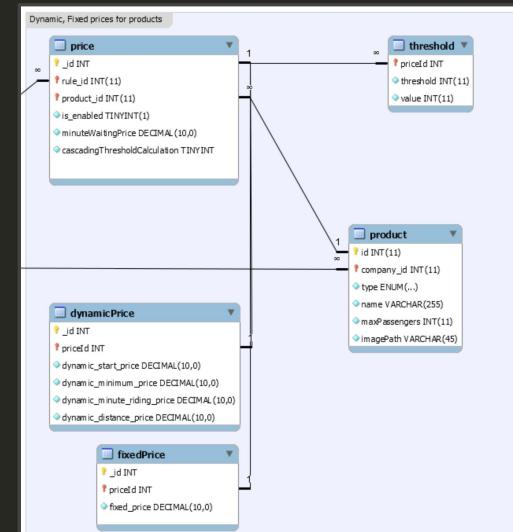

New:  
Separated information into individual tables while retaining core information in original price table.

# Refactors: Aggregate

```
// utils.ts
const exhaustList = (array, func, next) => {
  if (array.length < 1) return next(array);
  const pop = array.pop();
  func(pop, array, next);
};

// common/price.js
const queryPoppedVehicle = (pop, array, next) => {
  aggregateQuery(pop, (result) => {
    exhaustList(array, queryPoppedVehicle, (newArray) => {
      if (result[0]) newArray.push(result[0]);
      return next(newArray);
    })
  })
}

exhaustList(vehicleTypes, queryPoppedVehicle, (rules) => {
  const promises = rules.map(rule => {
    return priceCalculator.breakdown(rule);
  });
  Promise.all(promises)
    .then((breakdowns) => {
      cb(null, breakdowns);
    })
    .catch((error) => {
      cb(error);
    })
})
})
```

Old:

Executed query for every vehicle type in the vehicleTypes array recursively, limit 1.

```
// common/price.js
aggregateQuery(vehicleTypes, (rules) => {
  const promises = rules.map(rule => {
    return priceCalculator.breakdown(rule);
  });
  Promise.all(promises)
    .then((breakdowns) => {
      cb(null, breakdowns);
    })
    .catch((error) => {
      cb(error);
    })
});
```

New:

Executes one aggregate.

# Refactors

## 1. DB Schema

- a. Split the price table into three tables
- b. `price` is the junction table
- c. `fixedPrice` is the fixed price table
- d. `dynamicPrice` is the dynamic price table
- e. etc

## 2. Aggregate

- a. Now performs 1 query instead of sum(vehicleTypes) queries

# Flow

1. Price.calculate endpoint is called
2. JWT token payload is decrypted
3. Directions service instance created
  - a. Immediately fetches distance & duration
4. Price calculator instance created
  - a. Directions service is passed async
5. Aggregate query is created taking vehicleTypes from body & companyId from JWT payload
6. The query is performed and the resulting pricing rules are mapped to the Price calculator instance
7. The instance calculates:
  - a. totalPrice (routePrice + tollPrice + parkingPrice + waitPrice + discountPrice)
  - b. priceVAT (% VAT of totalPrice)The Price calculator promises a calculation for each pricing rule (per vehicle type)
8. If a promise fails, an empty array is returned
9. Else all breakdowns are returned in an array

## Flow: Breakdown Method

```
/*
 * Start price calculations. The distance and duration metrics
 * are fetched by the directionsService using an async function
 * before calculate is used to calculate the trip price.
 */
public async breakdown(pricing: pricing): Promise<breakdown> {

    Price.validPricingOrError(pricing);
    const metrics = await this.directionsService.directions();
    if (!metrics || metrics.distance < 0 || metrics.duration < 0) {
        return Promise.reject('Metrics not valid for price calculation.');
    }

    const parkingPrice = 0;
    const routePrice = Price.calculators[pricing.rules.type](pricing, metrics);
    const tollPrice = 0;
    const waitPrice = pricing.prices.minuteWaitingPrice * 0;
    const discountPrice = pricing.discount;
    if (pricing.discount.type === 'percentage') {
        ? percentOf(pricing.discount.value, routePrice)
        : pricing.discount.value
    } : 0;

    ...
    ...
    const vatPerc = pricing.country.defaultTax;
    const totalPrice = Math.max(0, routePrice
        + tollPrice
        + parkingPrice
        + waitPrice
        + discountPrice);
    const { priceExVAT, priceVAT } = excludeVatOf(vatPerc, totalPrice);

    return Promise.resolve({
        vehicleType: <vehicleType>pricing.type,
        maxPassengers: pricing.maxPassengers,
        price: {
            breakdown: {
                route: roundHalfDecimal(routePrice),
                toll: roundHalfDecimal(tollPrice),
                parking: roundHalfDecimal(parkingPrice),
                waiting: roundHalfDecimal(waitPrice),
                discount: roundHalfDecimal(discountPrice),
            },
            currency: pricing.country.defaultCurrency,
            total: roundHalfDecimal(totalPrice),
            tax: {
                amount: roundHalfDecimal(priceVAT),
                percentage: vatPerc,
            },
        });
    }
}
```

## **B.5 Sprint 3 - review**

# Sprint 3

# Products and Pricing

Products and pricing rules, automatically managing the innate many-to-many relations

## Views

During this sprint, the portal project was set up for development, and two categories were added to the group sidebar:

1. Products
2. Pricing

The following slides show the views that have been implemented

A screenshot of a mobile application sidebar menu. The header reads "yourdriverapp". The sidebar contains the following items:

Category	Item	Notes
taxiID Developers Group	dashboard	
	Dashboard	pricing-rules works!
	Jobs	
	Members	
	Products	
Pricing		

Pricing/rules			
taxiID Developers Group	Search here		
	name	type	enabled
 Dashboard	Empty RULE	dynamic	<input checked="" type="checkbox"/>
 Jobs	Empty rule	dynamic	<input checked="" type="checkbox"/>
 Members			<input type="checkbox"/>
 Products			
 Pricing			

Row per page: 1-3 of 3 |◀|◀|▶|▶|

3 +

Copyright © 2016 - 2018 YourDriverPortal. All rights reserved

## Pricing

The pricing overview displays the rules that contain pricing information for each product

taxiID Developers Group

Pricing/rules

-  Dashboard
-  Jobs
-  Members
-  Products
-  Pricing

**Empty RULE**

Name: Empty RULE      Type \*: dynamic      Precedence: 0       Enabled

[Add your first product](#)

save\_rule\_button

delete\_rule\_button

taxiID Developers Group

Pricing/rules

-  Dashboard
-  Jobs
-  Members
-  Products
-  Pricing

**Empty RULE**

Name: Empty RULE      Type \*: dynamic      Precedence: 0       Enabled

**Add new product**

You will be redirected to the products panel. After you've created your first vehicle, you'll be able to set up prices in the pricing tab.

[OK](#)

delete\_rule\_button

The screenshot shows a web application interface for managing products. On the left, there's a sidebar with icons for Dashboard, Jobs, Members, Products, and Pricing. The main area has a header "taxiID Developers Group" and "Products". Below the header, a form titled "Expensive Product" is displayed. It contains fields for "Name" (set to "Expensive Product") and "Max Passengers" (set to "30"). At the bottom of the form are two buttons: "save\_product\_button" (dark blue) and "delete\_product\_button" (red). To the right of the form, a vertical dropdown menu lists vehicle types: saloon, estate, minivan, bus, and limo. The "minivan" option is highlighted in blue. The bottom right corner of the screen shows the number "7".

Copyright © 2016 - 2018 YourDriverPortal. All rights reserved

## Products

When no products exist, the user is guided to the product creation view, where products may be created and modified

taxiID Developers Group

-  Dashboard
-  Jobs
-  Members
-  Products
-  Pricing

## Empty RULE

Name: Empty RULE    Type \*: dynamic    Precedence: 0     Enabled

			
<b>Product</b>	<b>Stefan</b>	<b>test</b>	<b>Expensive Prod...</b>
Enabled	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Cascading	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Waiting price	70	70	70
Minimum price	1	0	0
Start price	1	123	0
Kilometer price	1	2	2
Minute price	1	0	0
after 100 duration	—	0	0
after 100 dynamic	—	100	

[save\\_rule\\_button](#)[delete\\_rule\\_button](#)

Copyright © 2016 - 2018 YourDriverPortal. All rights reserved

taxiID Developers Group

Products

Search here		
 all (28)	 saloon (4)	 estate (9)
 minivan (6)	 bus (5)	 limo (4)
name	maxPassengers ↑	
asdfsdfsdf	342	
Cotton salmon car	8	
Minivan	6	
Minivan	6	
aasdfasdfsdf	2	
Fresh ivory car	1	

Row per page: 1-6 of 6 |&lt; &gt;|

Copyright © 2016 - 2018 YourDriverPortal. All rights reserved

The screenshot shows a web-based application interface for managing products. On the left, there's a sidebar with icons for Dashboard, Jobs, Members, Products, and Pricing. The main area is titled "Products" and contains a form for creating a new product named "Test". The form includes fields for "Name" (set to "test"), "Max Passengers" (set to "2"), and "Type" (set to "minivan"). A modal window is centered over the form, prompting the user with "Delete product" and asking "Are you sure you wish to delete this product?". There are "CANCEL" and "DELETE" buttons at the bottom of the modal.

## Data Management

1. When a product is created, pricings (pricing, dynamicPricing, fixedPricing) are automatically attached to each rule.
2. When a rule is created, pricings are created for each product.

## Reflection - Must Haves

1. Thresholds that are incrementally bigger should be added to each pricing of a rule if the add button is pressed.
2. A threshold of a rule should be deleted for each pricing with the click of a button.
3. An error is sometimes shown when a particular combination of fields is mutated and saved.
4. Display prices in € instead of cents.
5. Test pricing calculation with data inserted by the user.

13

## Reflection - Could Haves

1. Before leave warning, when a user has modified a form.
2. Order rules by precedence automatically.
3. Set precedence by dragging rules up and down.

14

## **B.6 Sprint 4 - review**

# Sprint 4

# Apps and Timeframes

Apps, time limited pricing rules and special rates, on-meter price calculations

## PM2 / TS Compatibility

Best case scenario: ([on server](#))

1. \$ npm install pm2@latest -g
2. \$ pm2 update
3. \$ pm2 install typescript@2.6.2

Worst case scenario solution: (locally)

1. Transpile .ts files locally
2. Push resulting .js files to the repository
3. Run project like normal on the server

# Timeframes Proposal

Timeframes were added as a definition of time restrictions to rules and discounts by disabling and enabling hours of a repeating week schedule, between two timestamps

## The hours of the week as binary

1. The hours that are active within a week can be stored as bits.
2. Each day would have 24 bits, so a week would have  $24 * 7 = 168$  bits.
3.  $168 / 8 = 21$  bytes of data storage would be required.
4. Scalability is limited by the ability to bulk update existing binary values, for example: when in the future half hours should be represented instead of hours. Updating from 21 bytes to 42 bytes.

## Test 1: BinData

1. See the [BSON spec](#) for more information about BinData(number, string)
2. Type 0 would allow an arbitrary length of data to be stored.
3. Loopback stores encoded strings, making it hard to store and retrieve data.
4. When forcing loopback to store as buffer, the data cannot be read, and must manually be modified.

## Inserting

Type 0 BinData is a generic BinData type that accepts generic formats

```
db.Timeframe.insert({  
  
    startDate: new Date(2018, 4, 7),  
    endDate: new Date(2019, 4, 7),  
    weekSchedule: BinData(0,  
  
        "001101000110011011000011  
        011010110011000010111100  
        101010101110100011111000  
        111110011111011100100001  
        101000000010111011100100  
        110010000001000010101101  
        010111101000000101001110"  
    )  
})
```

## Test 2: boolean[]

1. A boolean[] can be queried by indexes, which makes it easy to find results where the indexes have a truthy value.
2. The query however must be constructed dynamically by adding clauses for each index. Errors may be thrown when indexes don't match.
3. This solutions makes it hard to check more than one index, having to build complex queries in advance.

# Inserting

An array of booleans can be quite verbose

```
db.Timeframe.insert({  
  
    startDate: new Date(2018, 4, 7),  
    endDate: new Date(2019, 4, 7),  
    weekSchedule: [  
        true,  
        false,  
        true,  
        ...           // 162 more  
        false,  
        false,  
        false  
    ]  
})
```

# Querying

The resulting query matching values verbosity increases depending on amount of indexes checked

```
db.Discount.find({  
    timeframes: {  
        weekSchedule: {  
            3: true,  
            16: true,  
            ...  
            128: true,  
            129: true,  
        }  
    }  
})
```

## Test 3: string

1. A string is a very flexible datatype.
2. Using a regex in a query makes checking multiple bits in the string relatively easy, and enables different values next to 0 and 1.
3. It also makes querying the data really stable, as the query will silently fail if the content of the data is not of expected length or value.
4. Performance is not an issue if the regex column is indexed, and when prefix expressions (/^/) are used:  
[docs.mongodb.com/manual/reference/operator/query/regex/#index-use](https://docs.mongodb.com/manual/reference/operator/query/regex/#index-use)
5. Another advantage is freedom and scalability. If multiple values, or ranges need to be matched, a simple regex modification is sufficient.

# Inserting

1. startDate and endDate: absolute boundaries of the schedule
2. weekSchedule: every 24 bits represent 24 hours of a day of the week

```
db.Timeframe.insert({  
  
    startDate: new Date(2018, 4, 7),  
    endDate: new Date(2019, 4, 7),  
  
    weekSchedule:  
  
        "001101000110011011000011 //m  
        011010110011000010111100 //t  
        101010101110100011111000 //w  
        111110011111011100100001 //t  
        101000000010111011100100 //f  
        110010000001000010101101 //s  
        010111101000000101001110" //s  
  
})
```

# Querying

Patterns matching fields support indexing, improving performance

```
// First bit is 1  
Db.Discount.find({  
  
    "timeframes.weekSchedule": {  
        $regex: /^1/  
    }  
  
})  
  
// 2 4 6 8 10 12 15 bits are 1  
/^.{127}11.1/  
  
// 128 129 and 131 bits are 1  
/^.{127}{11.1}/
```

# Views

The following slides show the views that were added during this sprint

## Apps, Enabled Rules and Special Rates

A modal opens up when 'Change x' is clicked, showing a table that allows users to add or remove pricing rules and / or special rates to the App

The screenshot shows the 'yourdriverapp' application interface. On the left, there's a sidebar with icons for Dashboard, Jobs, Members, Products, Pricing, and Apps. The 'taxiID Developers Group' is selected. In the main area, under the 'Stefan Buddy App' section, there's a heading 'Available Pricing Rules and Special Rates for this App'. A modal window titled 'Rules' is open, showing a table with two rows:

Enabled	Priority	Name	Type
<input checked="" type="checkbox"/>	1	Stefan's Rule #1	Dynamic
<input type="checkbox"/>	2	Test rule	Dynamic

At the bottom of the modal is a 'Close' button. Below the modal, there's a 'Special Rates' section with a table:

Priority	Name	Type
1	50% discount	Percentage

At the very bottom of the page, there's a footer note: 'Copyright © 2016 - 2018 YourDriverPortal. All rights reserved.'

## Pricing Rules / Special Rates

The Pricing tab now shows two tabs.  
Both having a table in which the rows can be sorted, using the exact same logic

Priority	Name	Type	Enabled
1	New Years Eve +20%	Percentage	✓
2	50% discount	Percentage	✓

## Dragging Pricing Rules / Special Rates

Automatically sorts stuff in the backend when an entity is picked up and dropped at some location

Priority	Name	Type	Enabled
1	Stefan's Rule #1	Dynamic	✓
2	Test rule	Dynamic	✓

## Pricing Rule

A timeframe is added to the pricing rule as a component

taxiID Developers Group Pricing rules

**Stefan's Rule #1**

This pricing rule can be filled in to describe prices for each one of your products

Name	Type *	Priority
Stefan's Rule #1	Dynamic	1

Enabled

Start date: 4/24/2018 End date: 2/2/2017  Entire period

Start time: 00:00 End time: 00:00

Product pricing	Saloon	Estate	Minivan	Bus	Limo
Enable / Disable	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Waiting price	€1	€1	€1	€1	€1
Minimum price	€1	€1	€1	€1	€1
Start price	€3.02	€3.02	€3.02	€3.02	€3.02
Kilometer price	€2.22	€2.22	€2.79	€2.79	€2.79
Minute price	+ €0.37	€0.37	€0.42	€0.42	€0.42

**Save** **Delete**

Copyright © 2016 - 2018 YourDriverPortal. All rights reserved

## Special Rate

The Special Rate page is added, having the same timeframe component as the Pricing Rule page

taxiID Developers Group Pricing special rates

**New Years Eve +20%**

This special rate can be filled in to act as a discount or premium

Name	Priority
New Years Eve +20%	2

Type \* Percentage Value 20  Enabled

Start date: 12/31/2018 End date: 1/1/2019  Entire period

Start time: 22:00 End time: 10:00

**Save** **Delete**

Copyright © 2016 - 2018 YourDriverPortal. All rights reserved

## Special Rate

Alternatively, when the 'Entire Period' checkbox is unchecked, the hour selector for the week is shown, allowing the user to customize every single hour of the week, from start till end date

The screenshot shows a web application interface for managing special rates. On the left, a sidebar lists navigation options: Dashboard, Jobs, Members, Products, Pricing (which is selected), and Apps. The main content area is titled 'taxiID Developers Group' and 'Pricing special rates'. It displays a rule named 'New Years Eve +20%' with a priority of 2. The rule is described as a discount or premium. The 'Type' is set to 'Percentage' with a value of 20. The 'Enabled' checkbox is checked. Below this, there are fields for 'Start date' (12/31/2018) and 'End date' (1/1/2019). Under 'Start time' and 'End time', both are set to '00:00'. To the right of these fields is a checkbox labeled 'Entire period', which is currently unchecked. A large red arrow points to this checkbox. Below these fields, a note says: 'Each row represents 24 hours of a day in the week. Click on the hours in the schedule to mark them as active.' A 7x24 grid of checkboxes follows, representing the days of the week (Mon-Sun) and hours (0-23). The grid shows that for Monday, all hours are active (checked). For Tuesday, hours 1-6 are active. For Wednesday through Sunday, no hours are active. At the bottom of the form are 'Save' and 'Delete' buttons, and a copyright notice: 'Copyright © 2016 - 2018 YourDriverPortal. All rights reserved.'

## Data Management

1. When a new pricing rule or discount is created, its priority will be 1, other element priorities get incremented
2. When an element is deleted, all elements with larger priority get decremented
3. When an element is modified, all other elements are modified so that the priority order 1 ... n is maintained
4. A priority that is given, higher than n is capped at n
5. A priority lower than 1 is defaulted to 1
6. A timeframe is added by default

## Reflection - Must Haves

1. Thresholds that are incrementally bigger should be added to each pricing of a rule if the add button is pressed
2. Thresholds should be deletable with a simple button click
3. Display fixed special ratings and fixed threshold prices in € instead of cents, display percentages with the % symbol
4. Pricing Rules are stored in the database before save is pressed for technical simplicity. This should not be the case ideally

## Reflection - Could Haves

1. Show warning if user has modified form fields, and tries to leave the page
2. Remove isEnabled flag for pricing rules and special rates, as they have to be enabled in the Apps view as well

## **B.7 Sprint 5 - review**

# Sprint 5

## Thresholds

Improving thresholds, specific week days, price estimations, portal authentication, and implementing location to location rules

## Thresholds

1. Thresholds are embedded as arrays in the fixedPrice and dynamicPrice entities
2. Thresholds do not rely on id's
3. Thresholds are sorted before they are added based on threshold property ASC
4. There must not be duplicate thresholds, ex: that there are two thresholds at 15 min
5. Thresholds can be edited, but will not automatically sort in the frontend

## Thresholds

The + icon adds a threshold under the kilometer or minute price. The x icon removes a threshold.

yourdriverapp

taxiID Developers Group | Pricing rules

**Dynamic Test Rule**  
This pricing rule can be filled in to describe prices for each one of your products

Name	Type *	Priority
Dynamic Test Rule	Dynamic	2

Start date: 5/4/2018 | Start time: 12:16 | End date: 12/31/2117 | End time: 00:00 | Specific week days:

Product pricing	Saloon	Estate	Minivan	Bus	Limo
Enable / Disable	<input checked="" type="checkbox"/>				
Waiting price	€1	€1	€1	€1	€1
Minimum price	€1	€1	€1	€1	€1
Start price		€1	€1	€1	€1
Kilometer price	+ €1	€1	€1	€1	€1
- after 10 km	X	€3	€4	€5	€6
- after 15 km	X	€2	€3	€4	€6
Minute price	+ €1	€2	€2	€3	€4
- after 10 min	X	€3	€4	€5	€6

**Save** | **Delete**

## Thresholds

The threshold property can be modified, just like the prices in each product column.

yourdriverapp

taxiID Developers Group | Pricing rules

**Dynamic Test Rule**  
This pricing rule can be filled in to describe prices for each one of your products

Name	Type *	Priority
Dynamic Test Rule	Dynamic	2

Start date: 5/4/2018 | Start time: 12:16 | End date: 12/31/2117 | End time: 00:00 | Specific week days:

Product pricing	Saloon	Estate	Minivan	Bus	Limo
Enable / Disable	<input checked="" type="checkbox"/>				
Waiting price	€1	€1	€1	€1	€1
Minimum price	€1	€1	€1	€1	€1
Start price	€1	€1	€1	€1	€1
Kilometer price	- €1	€1	€1	€1	€1
- after 12 km	X	€3	€4	€5	€6
- after 15 km	X	€2	€3	€4	€6
Minute price	+ €1	€2	€2	€3	€4
- after 10 min	X	€2	€3	€4	€6

**Save** | **Delete**

## Thresholds

A warning is shown if thresholds thresholds exists, or if zero threshold prices are submitted.

The screenshot shows the 'Pricing' section of the 'yourdriverapp' web interface. On the left, there's a sidebar with 'TaxiID Developers Group' and several menu items: Dashboard, Jobs, Members, Products, Pricing (which is selected), Locations, and Apps. The main area has a heading 'This pricing rule can be filled in to describe prices for each one of your products'. Below it, a 'Dynamic Rule' is defined with 'Name: Dynamic Rule', 'Type: Dynamic', and 'Priority: 1'. A table for 'Product pricing' lists 'Saloon' and 'Estate' categories. Under 'Kilometer price', there are three rows: '- after 10 km' (marked with a red X), '- after 15 km' (marked with a red X), and '- after 15 km' (marked with a red X). A modal dialog box titled 'Failed to update' appears, stating 'No duplicate thresholds or zero threshold prices allowed.' with an 'OK' button. A pink arrow points from the text 'thresholds exists, or if zero threshold prices are submitted.' to the row with two identical '- after 15 km' entries.

## Thresholds, functional filter

```
/**  
 * Check all prices for no duplicate thresholds etc.  
 */  
  
getDuplicates = (array: any[]) => array.reduce((acc, el, i, arr) => {  
  if (arr.indexOf(el) !== i && acc.indexOf(el) < 0) { acc.push(el); }  
  return acc;  
}, []);  
  
noDuplicateThresholds = (prices: Price[]) => prices.every(p =>  
  ['priceDynamic', 'priceFixed'].every(priceType =>  
    ['distance', 'duration'].every(metricType =>  
      !this.getDuplicates(p[priceType].thresholds  
        .filter(t => t.type === metricType)  
        .map(t => t.threshold)).length));  
  noZeroThresholdPrices = (prices: Price[]) => prices.every(p =>  
    p.priceDynamic.thresholds.every(t => t.value > 0)  
    && p.priceFixed.thresholds.every(t => t.value > 0));  
    if (  
      !this.checkIf(this.form.value.prices,  
        this.noDuplicateThresholds,  
        this.noZeroThresholdPrices)  
    ) {  
      this._dialogService.openAlert({  
        title: 'Failed to update',  
        message: 'No duplicate thresholds or ...',  
        disableClose: true,  
        closeButton: 'OK',  
      });  
    }  
  );  
});
```

# Specific Week Days

1. When specific week days is unchecked, start time and end time can be specified
2. When specific week days is checked, the usual timeframe selector is displayed

## Specific Week Days

When the specific week days option is disabled, start and end time can be defined to make the date definitions more precise

The screenshot shows the 'Pricing rules' section of the 'taxiID Developers Group' dashboard. A red arrow points to the 'Specific week days' checkbox, which is currently unchecked. The interface includes fields for 'Name' (Location to Location Test Rule), 'Type' (Location to location), 'Priority' (set to 1), and date/time inputs for 'Start date' (1/1/2018) and 'End date' (12/31/2117). Below this, there's a table for 'Product pricing' with columns for Saloon, Estate, Minivan, Bus, and Limo, each with a toggle switch and price entries. At the bottom are 'Save' and 'Delete' buttons.

## Specific Week Days


When the specific week days option is enabled, days in the week can be defined more precisely with the granularity of an hour

The screenshot shows the 'Pricing rules' section of the 'yourdriverapp' web application. On the left, a sidebar lists various categories: Dashboard, Jobs, Members, Products, Pricing, Locations, and Apps. The main area is titled 'Location to Location Test Rule' and describes it as a pricing rule for products. It includes fields for 'Name' (Location to Location Test Rule), 'Location to location' (Priority 1), 'Start date' (1/1/2018), and 'End date' (12/31/2117). A red arrow points to the 'Specific week days' checkbox, which is checked. Below these fields is a large grid representing a week's schedule from 0-1 to 23-24 hours. The grid contains numerous checkboxes, many of which are checked, indicating active time slots. At the bottom of the grid, there are sections for 'Product pricing' (Saloon, Estate, Minivan, Bus, Limo) and vehicle status ('Enable / Disable' for Saloon, Estate, Minivan, Bus, Limo, all of which are enabled). There are also sections for 'Waiting price' and 'Fixed price'.


## Price Estimations

1. Relations between the following entities have been made polymorphic hasMany through:
  - a. DaAppInstall - Rule
  - b. DaAppInstall - Discount
  - c. Debtor - Rule
  - d. Debtor - Discount
2. The relations are defined as models called links: ruleLink & discountLink
3. The link between rule and DaAppInstall has a property 'isEstimated': true | false

## Portal Authentication

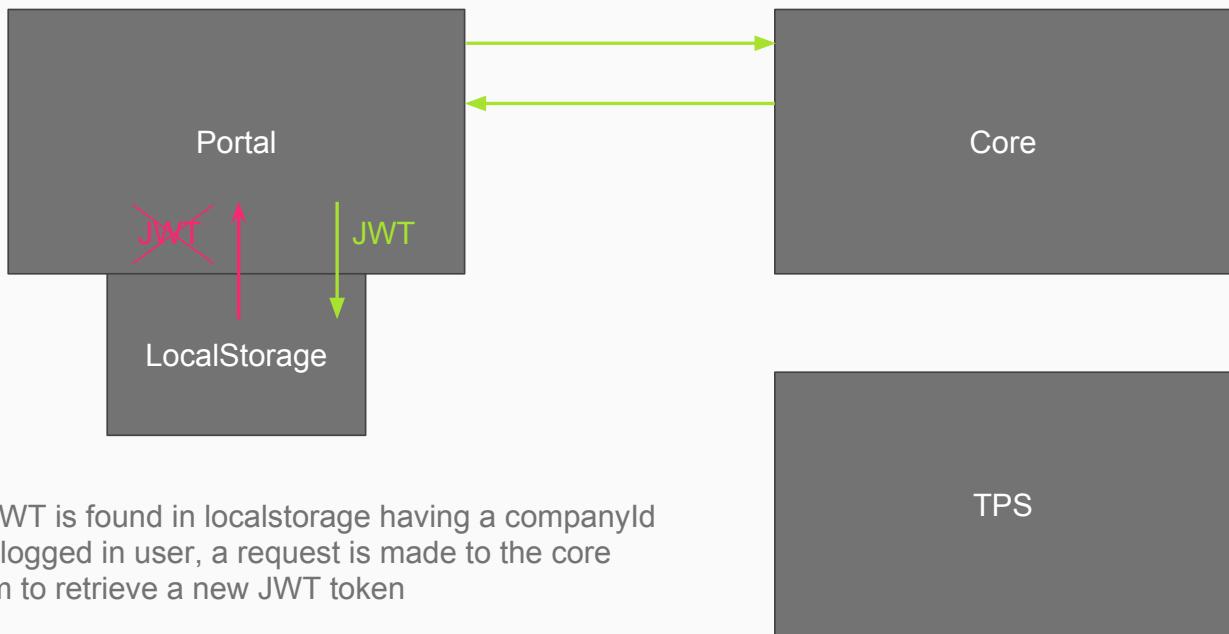

## Portal Authentication

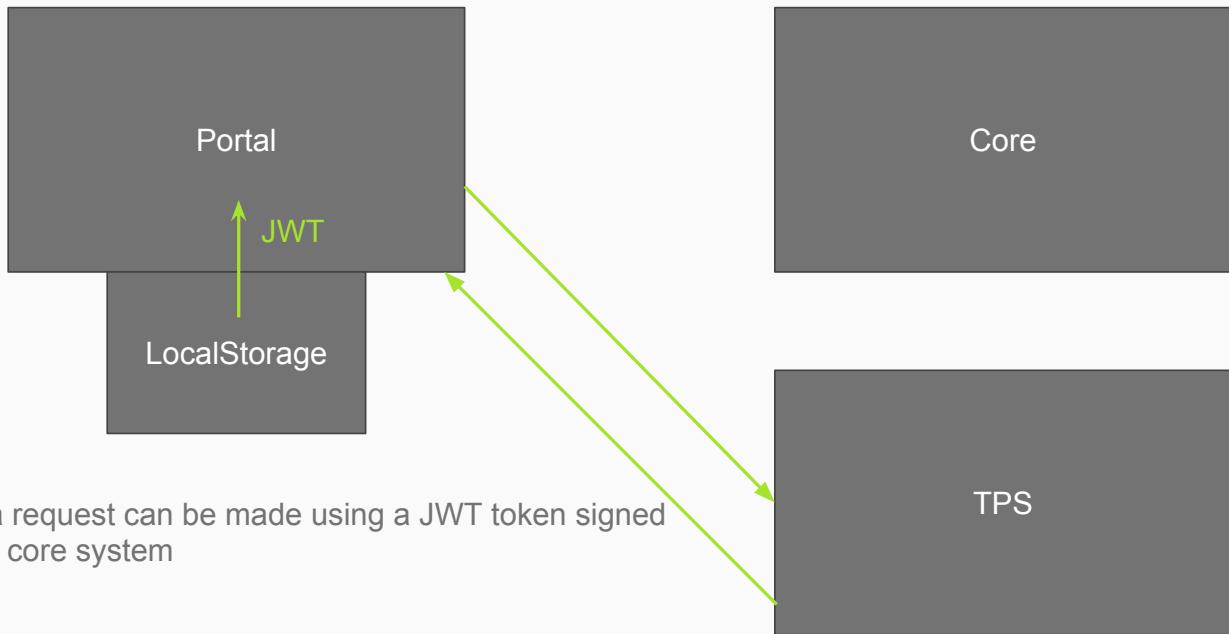

# Automatic Company and DaApplInstall Sync

1. An endpoint allows companies and daApplInstall entities to be created in TPS
2. The following properties are required:
  - a. companyId
  - b. daApplInstallId
  - c. name
  - d. country: ISO Alpha-2 country code
3. The Core tries to keep TPS up to date on companies and daApplInstalls that are added

## **B.8 Sprint 6 - review**

# Sprint 6

## Locations

Searching, importing, and drawing polygons to define locations

## Location Overviews

### Locations

This screenshot shows the 'Locations' overview page for the 'TaxiID Developers Group'. The left sidebar includes links for Dashboard, Jobs, Members, Products, Pricing, Locations, and Apps. The main area features a search bar with 'Search here' and two tabs: 'Locations (2)' and 'Areas (2)'. Below is a table with columns: ID, Name, Type, and Address. Two entries are listed:

ID	Name	Type	Address
152665599723	Flamingoalaan 65	Address	Flamingoalaan 65, 1619 VC Andijk, Netherlands
1526655657366	Overleek 4	Address	Overleek 4, 1671 GD Medemblik, Netherlands

At the bottom, it says 'Row per page: 1-2 of 2'.

### Areas

This screenshot shows the 'Areas' overview page for the 'TaxiID Developers Group'. The left sidebar includes links for Dashboard, Jobs, Members, Products, Pricing, Locations, and Apps. The main area features a search bar with 'Search here' and two tabs: 'Locations (2)' and 'Areas (2)'. Below is a table with columns: ID, Name, and Type. Two entries are listed:

ID	Name	Type
1526656463487	Noord-Holland	Province
1526656590931	Andijk	City

At the bottom, it says 'Row per page: 1-2 of 2'.

# Location Detail Views

## Locations:

1. **Search** location from <https://www.google.com/maps>
2. **Select** location from the search results
3. **Import** small polygon around the point
4. **Edit** the shape, position, name and type
5. **Save** location

## Areas:

1. **Search** location from <https://nominatim.openstreetmap.org/>
2. **Select** location from the search results
3. **Import** polygon
4. **Edit** the shape, position, name and type
5. **Save** location

3

## Search

Search autocomplete allows the user to select a result

The screenshot shows the 'yourdriverapp' web interface. On the left, there's a sidebar with icons for Dashboard, Jobs, Members, Products, Pricing, Locations (which is selected), and Apps. The main area has a header 'TaxiID Developers Group' and 'Areas'. Below the header, there's a search bar with the placeholder 'Search schiphol'. A dropdown menu lists several location suggestions: 'Schiphol, Haarlemmermeer, North Holland, Netherlands; The Netherlands', 'Schiphol, Haarlemmermeer, North Holland, Netherlands, 1118, The Netherlands', 'Schiphol, Haarlemmermeer, North Holland, Netherlands, 1431, The Netherlands', and 'Schiphol, Ceintuurbaan Noord, Schiphol, Haarlemmermeer, North Holland, Netherlands, 1431, The Netherlands'. At the bottom of the page, there's a map of the Netherlands and a copyright notice: 'Copyright © 2016 - 2018 YourDriverPortal. All rights reserved.'

4

## Select and Import

The selected search result is imported as a polygon, and shown on the map

This screenshot shows the 'Locations' section of the YouDriverApp. On the left, a sidebar lists various categories like Dashboard, Jobs, Members, Products, Pricing, Locations, and Apps. The main area displays a map of a residential street with a red polygon drawn around a specific address. A search bar at the top has 'Flamingolaan 65' typed into it. Below the search bar, there are dropdown menus for 'Address', 'Name', 'City', 'Country', 'Custom', 'Neighbourhood', 'Province', and 'State'. At the bottom of the map are 'Save' and 'Delete' buttons.

5

This screenshot shows the 'Areas' section of the YouDriverApp. The sidebar is identical to the previous screenshot. The main area displays a map of the Amsterdam region, specifically focusing on Schiphol and surrounding areas. A large red polygon is drawn around the Schiphol Airport area. A sidebar on the left shows a list of locations: Schiphol, Haarlemmermeer, North Holland, Netherlands, The Netherlands. Below this is a note: 'Locations can be used to assign pricing rules and special rates to geographical area's or points'. At the bottom of the map are 'Save' and 'Delete' buttons.

## Edit and Save

The search results are imported as polygons, and shown on the map

This screenshot shows the 'Locations' section of the YouDriverApp. The sidebar is identical to the previous screenshots. The main area displays a map of a residential street with a red polygon drawn around a property. A search bar at the top has 'Stefan's Property' typed into it. Below the search bar, there are dropdown menus for 'Address', 'Name', 'City', 'Country', 'Custom', 'Neighbourhood', 'Province', and 'State'. At the bottom of the map are 'Save' and 'Delete' buttons.

6

This screenshot shows the 'Areas' section of the YouDriverApp. The sidebar is identical to the previous screenshots. The main area displays a map of the Amsterdam region, specifically focusing on Schiphol and surrounding areas. A large red polygon is drawn around the Schiphol Airport area. A sidebar on the left shows a list of locations: Schiphol Airport. Below this is a note: 'Locations can be used to assign pricing rules and special rates to geographical area's or points'. At the bottom of the map are 'Save' and 'Delete' buttons.

# Location Searching Filters

Google locations can be filtered on the following types:

1. Geocode
2. Address
3. Establishment
4. Regions
5. Cities

<https://developers.google.com/places/web-service/autocomplete>

The OpenStreetMaps counterpart does not allow filtering yet:

<https://wiki.openstreetmap.org/wiki/Nominatim>

7

# Location Searching Restrictions

<https://operations.osmfoundation.org/policies/nominatim/> forbids auto-complete search, but bulk queries are allowed while limited to one thread, one machine, and cached

For this reason, it is advised to use Google Places for searching. When a place has been found, the polygon data should be imported once

Alternatively, datasets could be downloaded at  
<https://planet.openstreetmap.org/> and used locally

8

## Estimations Select

A select dropdown  
communicates the  
intentions of the setting  
more directly over a  
checkbox

The screenshot shows a web application interface for 'yourdriverapp'. On the left, there's a sidebar with navigation links: Dashboard, Jobs, Members, Products, Pricing (which is selected), Locations, and Apps. The main content area is titled 'Stefan Buddy App' and says 'Available Pricing Rules and Special Rates for this App'. Below this, there are sections for 'Rules' and 'Special Rate'. A modal dialog is open over the 'Rules' section, titled 'Enable or disable pricing rule for this app'. It lists a single rule: 'Location to Location Test Rule' (Enabled, Name: Location to Location Test Rule, Estimated, Type: Location to location). A dropdown menu is open next to 'Estimated', showing two options: 'Use as estimation' (selected) and 'Use as fixed price'. At the bottom of the modal is a 'SAVE AND CLOSE' button. In the top right corner of the main content area, there's a 'Configure pricing rules' button.