
Cucumber Report

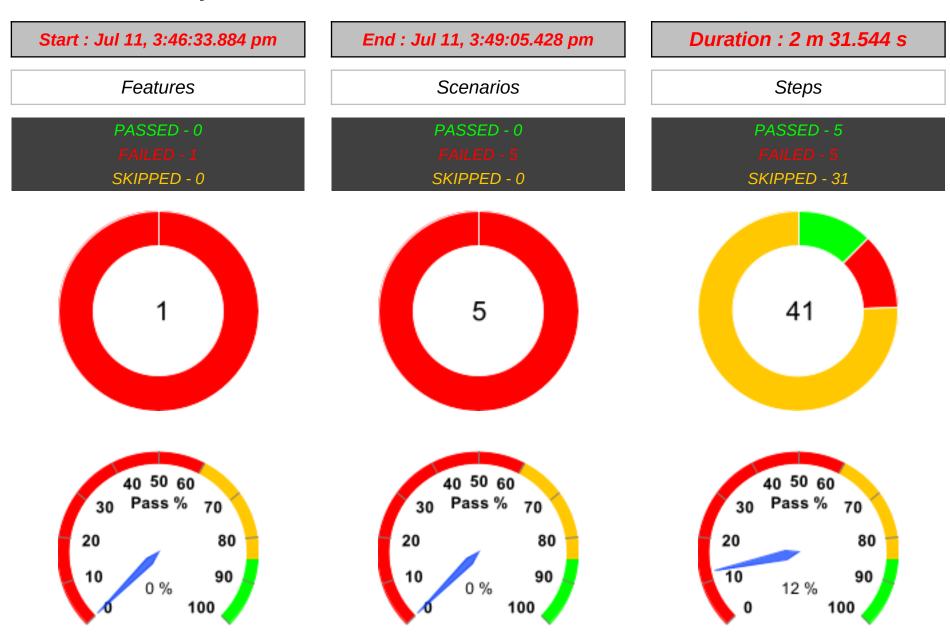


| Feature | | Scenario | | | | Step | | | |
|---|--------------|----------|---|---|---|------|---|---|----|
| Name | Duration | T | P | F | S | T | P | F | S |
| US07 Deans should be able to see the messages sent by users | 2 m 31.544 s | 5 | 0 | 5 | 0 | 41 | 5 | 5 | 31 |

FAIL & SKIP SCENARIOS -- 3 --

| # | Feature Name | Scenario Name |
|---|---|--|
| 1 | US07 Deans should be able to see the messages sent by users | TC_01 Deans should be able to see the messages sent by users |
| 2 | | Dean should be able to see the e-mails |
| 3 | | Dean should be able to see sending dates |
| 4 | | Dean should be able to see subject information |
| 5 | | Dean should be able to see message on this page |


| TAG | Scenario | | | Feature | | | | |
|------------|----------|---|---|---------|---|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @US07-TC01 | 5 | 0 | 5 | 0 | 1 | 0 | 1 | 0 |
| @US07-TC02 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @US07-TC03 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @US07-TC04 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @smokeTest | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @US07-TC05 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

FEATURES SUMMARY -- 5 --

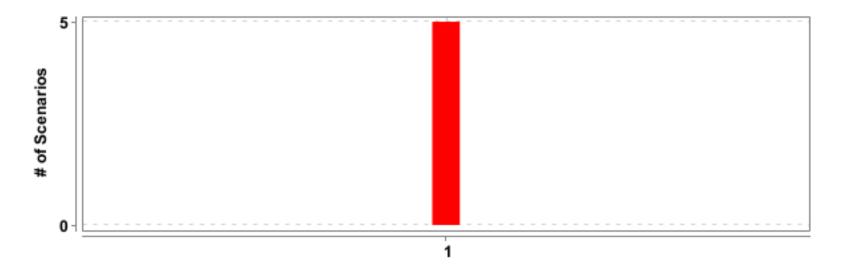

| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|--------------|
| 1 | US07 Deans should be able to see the messages sent by users | 5 | 0 | 5 | 0 | 2 m 31.544 s |


SCENARIOS SUMMARY -- 6

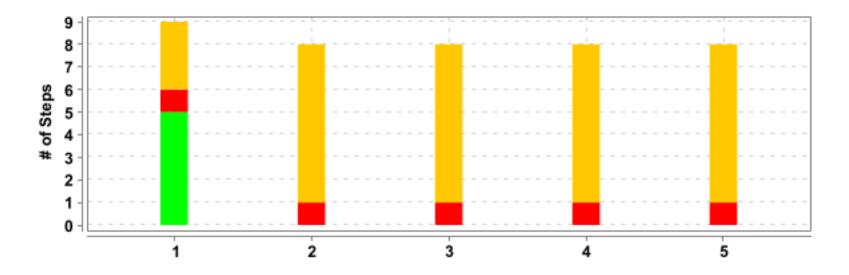


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|--|----------|---|---|---|--------------|
| 1 | US07 Deans should be able to see the messages sent by users | TC_01 Deans should be able to see the messages sent by users | 9 | 5 | 1 | 3 | 1 m 33.078 s |
| 2 | | Dean should be able to see the e-mails | 8 | 0 | 1 | 7 | 18.105 s |
| 3 | | Dean should be able to see sending dates | 8 | 0 | 1 | 7 | 11.925 s |
| 4 | | Dean should be able to see subject information | 8 | 0 | 1 | 7 | 12.077 s |
| 5 | | Dean should be able to see message on this page | 8 | 0 | 1 | 7 | 16.213 s |

DETAILED SECTION -- 7 --

US07 Deans should be able to see the messages sent by users

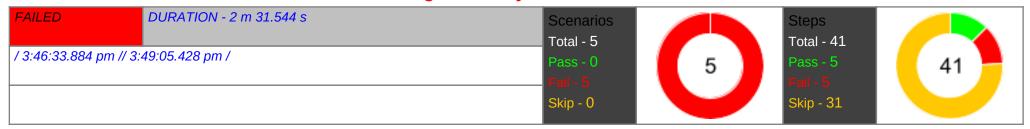

TC_01 Deans should be able to see the messages sent by users

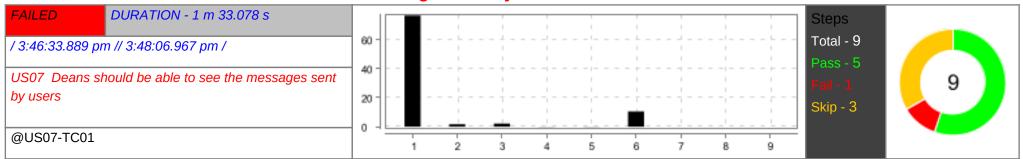


| # | Step / Hook Details | Status | Duration |
|---|--|--------|--------------|
| 1 | Given Dean goes to "MosUrl" | PASSED | 1 m 16.654 s |
| 2 | When Dean clicks the login button | PASSED | 1.698 s |
| 3 | And Dean enters "DeanUserName" on login page | PASSED | 2.160 s |
| 4 | And Dean enters "DeanPassword" on the login page | PASSED | 0.121 s |
| 5 | And Dean clicks the loginBlue button | PASSED | 0.079 s |
| 6 | And Dean clicks the menu option on the page that opens | FAILED | 10.450 s |
| | org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//button[.='Menu']"} (Session info: chrome=114.0.5735.199) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/ troubleshooting/errors#no-such-element-exception Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os. arch: 'amd64', os.version: '10.0', java.version: '19.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [7bb6260c0f4cf9846ce33f17a5e4afb1, findElement {using=xpath, value=//button[.='Menu']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f, userDataDir: C:\Users\Hacer\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:50776}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:50776/devtoo, se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 7bb6260c0f4cf9846ce33f17a5e4afb1 at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) | | |

DETAILED SECTION -- 8 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:132) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:132) at org.openqa.selenium.remote.odec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:131) at org.openqa.selenium.remote.service.DriverCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:350) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.openqa.selenium.support.pagefactory.DefaultElement(CemoteWebDriver.java:344) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy28.click(Unknown Source) at stepdefinitions.US_07UI_StepDefs.deanClicksTheMenuOptionOnThePageThatOpens(US_07UI_StepDefs.java:58) at ?Dean clicks the menu option on the page that opens(file:///C:/Users/Hacer/IdeaProjects/managementOnSchools_05/./src/test/resources/ features/US_07%20Deans%20%20Can%20see%20messages/UI_Test01.feature:13) * Not displayable characters are replaced by '?'. | | |
| 7 | And Dean clicks "Contact Get All"option from main menu | SKIPPED | 0.000 s |
| 8 | Then Dean verifies that authors are displayed on the page | SKIPPED | 0.000 s |
| 9 | Then Close the application | SKIPPED | 0.000 s |
| | AFTER - hooks.Hooks.tearDown(io.cucumber.java.Scenario) screenshots Victoria for the form of the form | PASSED | 1.880 s |

Dean should be able to see the e-mails

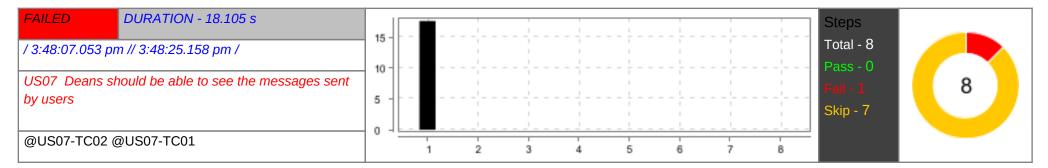


| # | Step / Hook Details | Status | Duration |
|----------|---|--------|----------|
| 1 | When Dean clicks the login button | FAILED | 17.591 s |
| \vdash | When Dean clicks the login button org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//a[@href=//login]"} (Session info: chrome=114.0.5735.199) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/ troubleshooting/errors/ino-such-element-exception Build info: version: '4.10.0', revision: 'c1.4d967899' System info: os.name: Windows 11', os. arch: 'amd64', os.version: '10.0', java.version: '19.0.2' Driver info: org.openqa.selenium.chrome.chromeDriver Command: [b916f630d9c940fe200627c053f4cec2, findElement {using=xpath, value=//a[@href=//login]]} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f, userDataDir: C'Users!HacerAppDataLloca}, goog:chromeOptions: {debuggerAddress: localhost:50818}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:50818/devtoo, se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:inpril.ength: true, webauthn:extension:prf: true, webauthn:vitualAuthenticators: true} Session ID: b916f630d9c940fe200627c053f4cec2 at java.base/java.lang.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:199) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:19) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(PriverCommandExecutor.java:171) at org.openqa.selenium.remote.Ser | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy28.click(Unknown Source) | | |
| | at stepdefinitions.US 07UI StepDefs.deanClicksTheLoginButton(US 07UI StepDefs.java:38) | | |
| | at ?.Dean clicks the login button(file:///C:/Users/Hacer/IdeaProjects/managementOnSchools_05/./src/test/resources/features/ | | |

DETAILED SECTION -- 10 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | US_07%20Deans%20%20can%20see%20messages/UI_Test01.feature:20) * Not displayable characters are replaced by '?'. | | |
| 2 | And Dean enters "DeanUserName" on login page | SKIPPED | 0.000 s |
| 3 | And Dean enters "DeanPassword" on the login page | SKIPPED | 0.000 s |
| 4 | And Dean clicks the loginBlue button | SKIPPED | 0.000 s |
| 5 | And Dean clicks the menu option on the page that opens | SKIPPED | 0.000 s |
| 6 | And Dean clicks "Contact Get All"option from main menu | SKIPPED | 0.000 s |
| 7 | Then Dean verifies emails are displayed on the page | SKIPPED | 0.000 s |
| 8 | Then Close the application | SKIPPED | 0.000 s |
| | AFTER - hooks.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.509 s |
| | screenshots | | |
| | | | |
| | | | |
| | | | |
| | | | |

Dean should be able to see sending dates

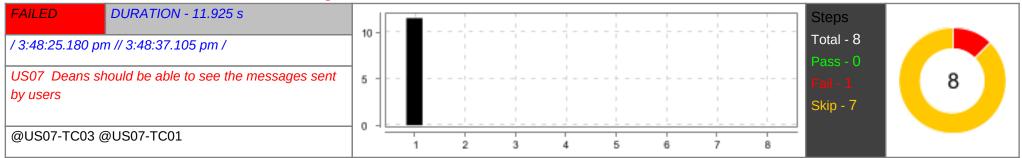

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | When Dean clicks the login button | FAILED | 11.512 s |
| | org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//a[@href='/login']"} (Session info: chrome=114.0.5735.199) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os. arch: 'amd64', os.version: '10.0', java.version: '19.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [489b46f5b5e098901dbd79863d760391, findElement {using=xpath, value=//a[@href='/login']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f, userDataDir: C:\Users\Hacer\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:50833}, networkConnectionEnabled: false, | | |

DETAILED SECTION -- 11 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), setcdp: ws://localhost:50833/devtoo, set.cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:vitualAuthenticators: true} Session ID: 489b46f5b5e098901dbd79863d760391 at java.base/java.lang.reflect.DirectConstructor.handleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:199) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:192) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:51) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:191) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:351) at org.openqa.selenium.remote.RemoteWebDriver.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:350) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:350) at org.openqa.selenium.support.pagefactory.DefaultElement(RemoteWebDriver.java:350) at org.openqa.selenium.support.pagefactory.internal.Location.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy28.click(Unknown Source) at | | |
| 2 | And Dean enters "DeanUserName" on login page | SKIPPED | 0.000 s |
| 3 | And Dean enters "DeanPassword" on the login page | SKIPPED | 0.000 s |
| 4 | And Dean clicks the loginBlue button | SKIPPED | 0.000 s |
| 5 | And Dean clicks the menu option on the page that opens | SKIPPED | 0.000 s |
| 6 | And Dean clicks "Contact Get All"option from main menu | SKIPPED | 0.000 s |
| 7 | Then Dean verifies that the date the messages were sent is displayed on the page | SKIPPED | 0.001 s |
| 8 | Then close the application | SKIPPED | 0.000 s |
| | AFTER - hooks.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.408 s |
| | screenshots | | |

| # | Step / Hook Details | Status | Duration |
|---|---------------------|--------|----------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Dean should be able to see subject information


| FAILED DURATION - 12.077 s | | | - | | | | | | - | | | | Steps | | |
|---|----|------|---|---|---|---|---|---|---|---|---|---|----------------------|---|--|
| / 3:48:37.117 pm // 3:48:49.194 pm / | 10 | 1 | | | | | | | | | | | Total - 8 | | |
| US07 Deans should be able to see the messages sent by users | 5 | - | | - | | | | | | | | | Pass - 0 Fail - 1 | 8 | |
| by users | | | | | | | | | _ | | | | Skip - 7 | | |
| @US07-TC04 @US07-TC01 | | -1.5 | | 1 | 2 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | When Dean clicks the login button | FAILED | 11.435 s |
| | org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//a[@href='/login']"} (Session info: chrome=114.0.5735.199) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/ troubleshooting/errors#no-such-element-exception Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: 'Windows 11', os. arch: 'amd64', os.version: '10.0', java.version: '19.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Occ4bf57ccf5e61a1ab06320ca0e5ecd, findElement {using=xpath, value=//a[@href='/login']]} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f, userDataDir: C:\Users\Hacer\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:50847}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), secdp: ws://localhost:50847/devtoo, se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad3 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:prf: true, webauthn:extension:p | PAILED | 11.455 5 |

DETAILED SECTION -- 13 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:350) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy28.click(Unknown Source) at stepdefinitions.US_07UI_StepDefs.deanClicksTheLoginButton(US_07UI_StepDefs.java:38) at ?.Dean clicks the login button(file:///C:/Users/Hacer/IdeaProjects/managementOnSchools_05/./src/test/resources/features/ US_07%20Deans%20%20can%20see%20messages/UI_Test01.feature:42) * Not displayable characters are replaced by '?'. | | |
| 2 | And Dean enters "DeanUserName" on login page | SKIPPED | 0.001 s |
| 3 | And Dean enters "DeanPassword" on the login page | SKIPPED | 0.000 s |
| 4 | And Dean clicks the loginBlue button | SKIPPED | 0.000 s |
| 5 | And Dean clicks the menu option on the page that opens | SKIPPED | 0.001 s |
| 6 | And Dean clicks "Contact Get All"option from main menu | SKIPPED | 0.000 s |
| 7 | Then Dean verifies that subject information is displayed on the page | SKIPPED | 0.000 s |
| 8 | Then close the application | SKIPPED | 0.000 s |
| | AFTER - hooks.Hooks.tearDown(io.cucumber.java.Scenario) screenshots | PASSED | 0.638 s |

Dean should be able to see message on this page

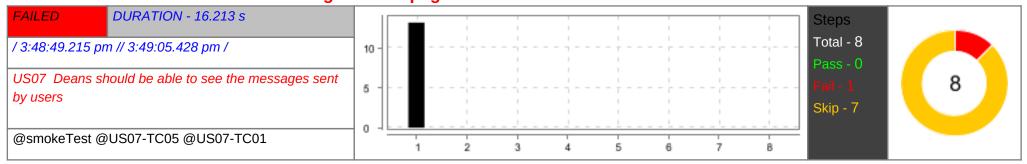

DETAILED SECTION -- 14 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | When Dean clicks the login button | FAILED | 13.187 s |
| | org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: ("method":"xpath", "selector":"//a[@href=/login]") (Session info: chrome=114.0.5735.199) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/ troubleshooting/errors/ino-such-element-exception Build info: version: '4.10.0', revision: '21.40667899' System info: os.name: Windows 11', os. arch: 'amd64', os.version: '10.0', java.version: '19.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [90e897eafd754492649fb90b89bc894, findElement (using=xpath, value=//a[@href=*login*]] Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.90 (3866609e84fa, userDataDir: C:\Users\Hacer\AppData\Loca}, goog:chromeOptions: (debuggerAddress: localhost:50866, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:50866/devtoo, se:cdp\version: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:vitualAuthenticators: true? Session ID: 90e897eaff754492649fbf9098be894 at java.base/java.lang.reflect.Constructor.rewInstance(Constructor.java:190) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:340) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:340) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:190) at org.openqa.selenium.remote.edec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.edec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.emote.WebDriver.findElement(CelementLocation.java:195) at org.openqa.selenium.remote.Element.eator.infidElement(PelmentLocation.java:195 | | |
| 2 | And Dean enters "DeanUserName" on login page | SKIPPED | 0.000 s |
| 3 | And Dean enters "DeanPassword" on the login page | SKIPPED | 0.000 s |
| 4 | And Dean clicks the loginBlue button | SKIPPED | 0.001 s |
| 5 | And Dean clicks the menu option on the page that opens | SKIPPED | 0.000 s |
| 6 | And Dean clicks "Contact Get All"option from main menu | SKIPPED | 0.000 s |
| 7 | Then Dean verifies that messages are displayed on the page | SKIPPED | 0.000 s |
| 8 | Then close the application | SKIPPED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | AFTER - hooks.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 3.022 s |
| | screenshots | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |