



Tech Saksham

Final Project Report

Track Name

“JOB RECOMMENDER SYSTEM”

**“Avanthi Institute of Engineering and
Technology”**

ROLL NO	NAME
19Q61A0589	MERUGU SINDHU
19Q61A05B7	SAMBANGI SAI SRAVANI

Trainer Name: Uma Maheshwari

Master Trainer

ABSTRACT

Recent researches show that the increasing demands of technologies for human resource management in general and recruiting processes in particular. Most companies put the focus on their own e-recruiting platforms as primary recruitment channels. Job ads are published automatically on the job portal as soon as they are entered into the system. On the other hand, the applicant creates a profile to apply it for one of the listed job positions. The user profile is stored in the system, letting the applicant reuse it for other job position. The last functionality gives the companies possibility to create the applicants pool. Thus, the companies achieved a uniform view for all applicants' data in one candidate pool. This pool is used by the recruitment department to find the applicant documents. Appropriate applicants' documents are directed to the human resource departments for more processing. In addition, the system supports all required communication processes as well as tracks applicant status inside the application process

1.INTRODUCTION

When the whole world is coming back on its feet, those businesses affected by this pandemic disease slowly tries to gain back the momentum it lost. Now is the time when the companies or businesses seek to invest in human resources, which would help them to gain the momentum it lost during this period. When the governments across the world ask businesses to halt the operation in the effort of controlling the pandemic, many companies asked their employees to work remotely. In contrast, many other companies started to reduce their operational cost by terminating employees who were in permanent and contract roles. Individuals who lost their job to the consequence of shutdown are awaiting for their next opportunity. Naturally, we human tries to strive through all difficulties to serve the purpose of our life. A daily job provides a sense of purpose to an individual(Stillman, 2019), and he tries to get better at it, which results in leaving current employment and looking for a new one; this is a constant cycle of the hiring process.

To serve the constant cycle of the hiring process in the job applicant's perspective, many job companies have come up with solutions for providing the job board. Here a seeker looks up for the job he would find relevant to him and apply for it. As there are many job boards, applicants tend to use the tool that provides better services to them, services such as writing a CV, creating a job profile, and recommending new jobs to a job seeker.

Job applicants have become more persistent and proactive in searching for new opportunities that fit their skills. However, companies that are targeting these job seekers are finding it challenging to identify the job seeker's skill and provide personalized job recommendations.

2.SYSTEM ANALYSIS

2.1 EXISTING SYSTEM

In the earlier days, searching job becomes critical, if any jobseeker want to search for a job, he must search job through his required skills, it the long process to find job and send request to the particular job.

DISADVANTGAES

1. Time consumes
2. We need to spend man power

2.2 PROPOSED SYSTEM

As we have seen, the present-day job seeker is faced with an array of problems before they can find a suitable job for themselves. All existing work is so promising but lacks in some of the other aspects. The need is to eliminate these issues posed by past research and minimize the weaknesses of the systems. The proposed system is designed to go forth with developing a fully functional user interface supporting a job aggregator and recommendation system. Every aspect of the operation is made from scratch and in a customized sort of manner.

ADVANTAGES

1. Less time to get job
2. Automatically recommend job details
3. No need of more man power

3.SYSTEM TESTING

The purpose of testing is to discover errors. Testing is the process of trying to discover every conceivable fault or weakness in a work product. It provides a way to check the functionality of components, sub assemblies, assemblies and/or a finished product. It is the process of exercising software with the intent of ensuring that the

Software system meets its requirements and user expectations and does not fail in an unacceptable manner. There are various types of test. Each test type addresses a specific testing requirement.

TYPES OF TESTS:

3.1 Unit testing

Unit testing involves the design of test cases that validate that the internal program logic is functioning properly, and that program inputs produce valid outputs. All decision branches and internal code flow should be validated. It is the testing of individual software units of the application. It is done after the completion of an individual unit before integration. This is a structural testing, that relies on knowledge of its construction and is invasive. Unit tests perform basic tests at component level and test a specific business process, application, and/or system configuration. Unit tests ensure that each unique path of a business process performs accurately to the documented specifications and contains clearly defined inputs and expected results.

3.2 Integration testing

Integration tests are designed to test integrated software components to determine if they actually run as one program. Testing is event driven and is more concerned with the basic outcome of screens or fields. Integration tests demonstrate that although the components were individually satisfactory, as shown by successful unit testing, the combination of components is correct and consistent. Integration testing is specifically aimed at exposing the problems that arise from the combination of components.

3.3 Functional test

Functional tests provide systematic demonstrations that functions tested are available as specified by the business and technical requirements, system documentation, and user manuals.

Functional testing is centered on the following items:

Valid Input : identified classes of valid input must be accepted.

Invalid Input : identified classes of invalid input must be rejected.

Functions : identified functions must be exercised.

Output : identified classes of application outputs must be exercised.

Systems/Procedures: interfacing systems or procedures must be invoked.

Organization and preparation of functional tests is focused on requirements, key functions, or special test cases. In addition, systematic coverage pertaining to identify Business process flows; data fields, predefined processes, and successive processes must be considered for

testing. Before functional testing is complete, additional tests are identified and the effective value of current tests is determined.

3.4 System Test

System testing ensures that the entire integrated software system meets requirements. It tests a configuration to ensure known and predictable results. An example of system testing is the configuration oriented system integration test. System testing is based on process descriptions and flows, emphasizing pre-driven process links and integration points.

3.4 White Box Testing

White Box Testing is a testing in which in which the software tester has knowledge of the inner workings, structure and language of the software, or at least its purpose. It is purpose. It is used to test areas that cannot be reached from a black box level.

3.5 Black Box Testing

Black Box Testing is testing the software without any knowledge of the inner workings, structure or language of the module being tested. Black box tests, as most other kinds of tests, must be written from a definitive source document, such as specification or requirements document, such as specification or requirements document. It is a testing in which the software under test is treated, as a black box .you cannot “see” into it. The test provides inputs and responds to outputs without considering how the software works.

Unit Testing:

Unit testing is usually conducted as part of a combined code and unit test phase of the software lifecycle, although it is not uncommon for coding and unit testing to be conducted as two distinct phases.

Test strategy and approach

Field testing will be performed manually and functional tests will be written in detail.

Test objectives

- All field entries must work properly.
- Pages must be activated from the identified link.
- The entry screen, messages and responses must not be delayed.

Features to be tested

- Verify that the entries are of the correct format
- No duplicate entries should be allowed
- All links should take the user to the correct page.

Integration Testing

Software integration testing is the incremental integration testing of two or more integrated software components on a single platform to produce failures caused by interface defects.

The task of the integration test is to check that components or software applications, e.g. components in a software system or – one step up – software applications at the company level – interact without error.

Test Results: All the test cases mentioned above passed successfully. No defects encountered

3.6 Acceptance Testing

User Acceptance Testing is a critical phase of any project and requires significant participation by the end user. It also ensures that the system meets the functional requirements.

Test Results: All the test cases mentioned above passed successfully. No defects encountered.

4.SYSTEM STUDY

4.1 FEASIBILITY STUDY:

The feasibility of the project is analyzed in this phase and business proposal is put forth with a very general plan for the project and some cost estimates. During system analysis the feasibility study of the proposed system is to be carried out. This is to ensure that the proposed system is not a burden to the company. For feasibility analysis, some understanding of the major requirements for the system is essential.

Three key considerations involved in the feasibility analysis are

- ◆ ECONOMICAL FEASIBILITY
- ◆ TECHNICAL FEASIBILITY
- ◆ SOCIAL FEASIBILITY

4.2 ECONOMICAL FEASIBILITY

This study is carried out to check the economic impact that the system will have on the organization. The amount of fund that the company can pour into the research and development of the system is limited. The expenditures must be justified. Thus the developed system as well within the budget and this was achieved because most of the technologies used are freely available. Only the customized products had to be purchased.

4.3 TECHNICAL FEASIBILITY

This study is carried out to check the technical feasibility, that is, the technical requirements of the system. Any system developed must not have a high demand on the available technical resources. This will lead to high demands on the available technical resources. This will lead to high demands being placed on the client. The developed system must have a modest requirement, as only minimal or null changes are required for implementing this system.

4.4 SOCIAL FEASIBILITY

The aspect of study is to check the level of acceptance of the system by the user. This includes the process of training the user to use the system efficiently. The user must not feel threatened by the system, instead must accept it as a necessity. The level of acceptance by the users solely depends on the methods that are employed to educate the user about the system and to make him familiar with it. His level of confidence must be raised so that he is also able to make some constructive criticism, which is welcomed, as he is the final user of the system.

5.SYSTEM REQUIREMENTS

5.1 HARDWARE REQUIREMENTS:

- System : Pentium IV 2.4 GHz.
- Hard Disk : 40 GB.
- Floppy Drive : 1.44 Mb.
- Monitor : 15 VGA Colour.
- Mouse : Logitech.
- Ram : 1GB

5.2 SOFTWARE REQUIREMENTS:

- Operating system : - Windows 10.
- Coding Language : JAVA
- Data Base : MS SQL

6. Software Environment

Java Technology


Java technology is both a programming language and a platform.

The Java Programming Language

The Java programming language is a high-level language that can be characterized by all of the following buzzwords:


- Simple
- Architecture neutral
- Object oriented
- Portable
- Distributed
- High performance
- Interpreted
- Multithreaded
- Robust
- Dynamic
- Secure

With most programming languages, you either compile or interpret a program so that you can run it on your computer. The Java programming language is unusual in that a program is both compiled and interpreted. With the compiler, first you translate a program into an intermediate language called *Java byte codes* —the platform-independent codes interpreted by the interpreter on the Java platform. The interpreter parses and runs each Java byte code instruction on the computer. Compilation happens just once; interpretation occurs each time the program is executed. The following figure illustrates how this works.

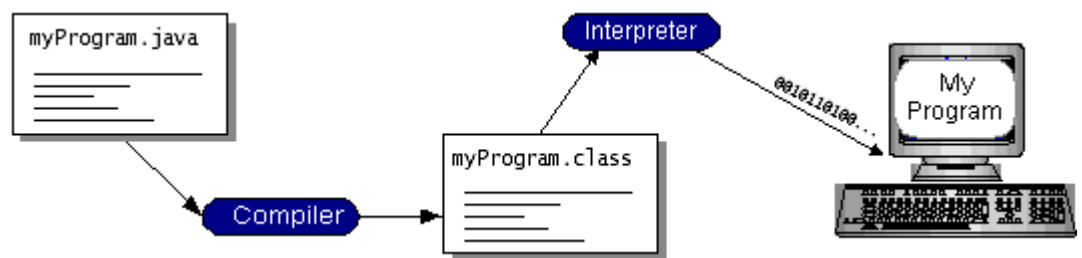

You can think of Java byte codes as the machine code instructions for the *Java Virtual Machine* (Java VM). Every Java interpreter, whether it's a development tool or a Web browser that can run applets, is an implementation of the Java VM. Java byte codes help make “write once, run anywhere” possible. You can compile your program into byte codes on any platform that has a Java compiler. The byte codes can then be run on any implementation of the Java VM. That means that as long as a computer has a Java VM, the same program written in the Java

programming language can run on Windows 2000, a Solaris workstation, or on an iMac.

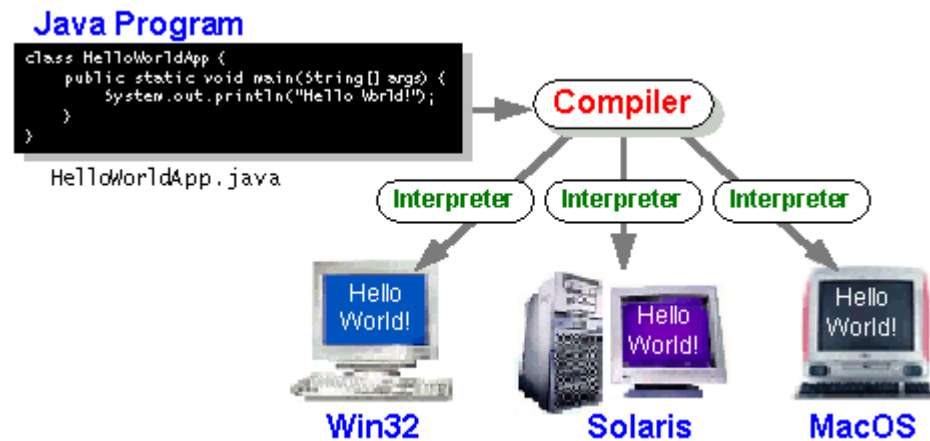

The Java Platform

A *platform* is the hardware or software environment in which a program runs. We've already mentioned some of the most popular platforms like Windows 2000, Linux, Solaris, and MacOS. Most platforms can be described as a combination of the operating system and hardware. The Java platform differs from most other platforms in that it's a software-only platform that runs on top of other hardware-based platforms.


The Java platform has two components:

- The *Java Virtual Machine* (Java VM)
- The *Java Application Programming Interface* (Java API)

You've already been introduced to the Java VM. It's the base for the Java platform and is ported onto various hardware-based platforms.

The Java API is a large collection of ready-made software components that provide many useful capabilities, such as graphical user interface (GUI) widgets. The Java API is grouped into libraries of related classes and interfaces; these libraries are known as *packages*. The next section, What Can Java Technology Do? Highlights what functionality some of the packages in the Java API provide.

The following figure depicts a program that's running on the Java platform. As the figure shows, the Java API and the virtual machine insulate the program from the hardware.

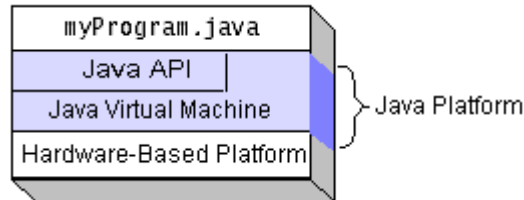

Native code is code that after you compile it, the compiled code runs on a specific hardware platform. As a platform-independent environment, the Java platform can be a bit slower than native code. However, smart compilers, well-tuned interpreters, and just-in-time byte code compilers can bring performance close to that of native code without threatening portability.

What Can Java Technology Do?

The most common types of programs written in the Java programming language are *applets* and *applications*. If you've surfed the Web, you're probably already familiar with applets. An applet is a program that adheres to certain conventions that allow it to run within a Java-enabled browser.

However, the Java programming language is not just for writing cute, entertaining applets for the Web. The general-purpose, high-level Java programming language is also a powerful software platform. Using the generous API, you can write many types of programs.

An application is a standalone program that runs directly on the Java platform. A special kind of application known as a *server* serves and supports clients on a network. Examples of servers are Web servers, proxy servers, mail servers, and print servers. Another specialized program is a *servlet*. A servlet can almost be thought of as an applet that runs on the server side. Java Servlets are a popular choice for building interactive web applications, replacing the use of CGI scripts. Servlets are similar to applets in that they are runtime extensions of applications. Instead of working in browsers, though, servlets run within Java Web servers, configuring or tailoring the server.


How does the API support all these kinds of programs? It does so with packages of software components that provides a wide range

of functionality. Every full implementation of the Java platform gives you the following features:

- **The essentials:** Objects, strings, threads, numbers, input and output, data structures, system properties, date and time, and so on.
- **Applets:** The set of conventions used by applets.
- **Networking:** URLs, TCP (Transmission Control Protocol), UDP (User Datagram Protocol) sockets, and IP (Internet Protocol) addresses.
- **Internationalization:** Help for writing programs that can be localized for users worldwide. Programs can automatically adapt to specific locales and be displayed in the appropriate language.
- **Security:** Both low level and high level, including electronic signatures, public and private key management, access control, and certificates.
- **Software components:** Known as JavaBeansTM, can plug into existing component architectures.
- **Object serialization:** Allows lightweight persistence and communication via Remote Method Invocation (RMI).
- **Java Database Connectivity (JDBCTM):** Provides uniform access to a wide range of relational databases.

The Java platform also has APIs for 2D and 3D graphics, accessibility, servers, collaboration, telephony, speech, animation,

and more. The following figure depicts what is included in the Java 2 SDK.

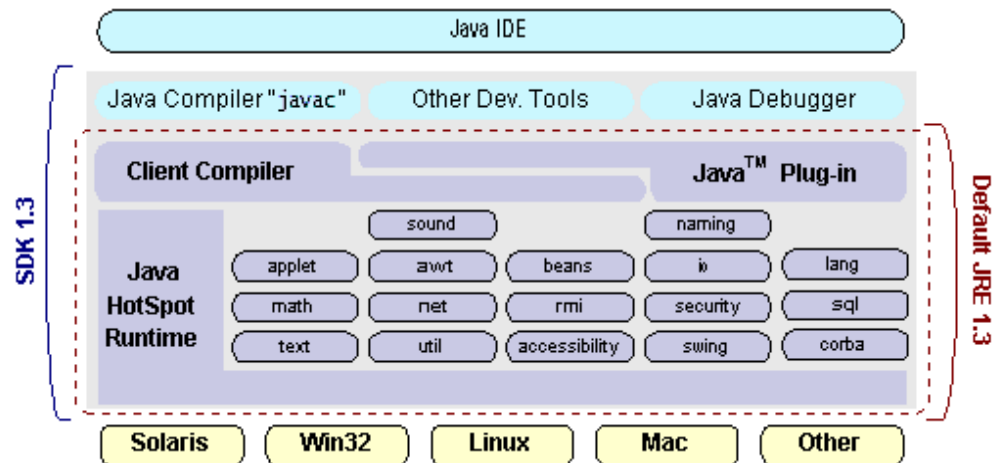

How Will Java Technology Change My Life?

We can't promise you fame, fortune, or even a job if you learn the Java programming language. Still, it is likely to make your programs better and requires less effort than other languages. We believe that Java technology will help you do the following:

- **Get started quickly:** Although the Java programming language is a powerful object-oriented language, it's easy to learn, especially for programmers already familiar with C or C++.
- **Write less code:** Comparisons of program metrics (class counts, method counts, and so on) suggest that a program

written in the Java programming language can be four times smaller than the same program in C++.

- **Write better code:** The Java programming language encourages good coding practices, and its garbage collection helps you avoid memory leaks. Its object orientation, its JavaBeans component architecture, and its wide-ranging, easily extendible API let you reuse other people's tested code and introduce fewer bugs.
- **Develop programs more quickly:** Your development time may be as much as twice as fast versus writing the same program in C++. Why? You write fewer lines of code and it is a simpler programming language than C++.
- **Avoid platform dependencies with 100% Pure Java:** You can keep your program portable by avoiding the use of libraries written in other languages. The 100% Pure Java™ Product Certification Program has a repository of historical process manuals, white papers, brochures, and similar materials online.
- **Write once, run anywhere:** Because 100% Pure Java programs are compiled into machine-independent byte codes, they run consistently on any Java platform.
- **Distribute software more easily:** You can upgrade applets easily from a central server. Applets take advantage of the

feature of allowing new classes to be loaded “on the fly,” without recompiling the entire program.

ODBC

Microsoft Open Database Connectivity (ODBC) is a standard programming interface for application developers and database systems providers. Before ODBC became a *de facto* standard for Windows programs to interface with database systems, programmers had to use proprietary languages for each database they wanted to connect to. Now, ODBC has made the choice of the database system almost irrelevant from a coding perspective, which is as it should be. Application developers have much more important things to worry about than the syntax that is needed to port their program from one database to another when business needs suddenly change.

Through the ODBC Administrator in Control Panel, you can specify the particular database that is associated with a data source that an ODBC application program is written to use. Think of an ODBC data source as a door with a name on it. Each door will lead you to a particular database. For example, the data source named Sales Figures might be a SQL Server database, whereas the Accounts Payable data source could refer to an Access database. The physical database referred to by a data source can reside anywhere on the LAN.

The ODBC system files are not installed on your system by Windows 95. Rather, they are installed when you setup a separate database application, such as SQL Server Client or Visual Basic 4.0.

When the ODBC icon is installed in Control Panel, it uses a file called ODBCINST.DLL. It is also possible to administer your ODBC data sources through a stand-alone program called ODBCADM.EXE. There is a 16-bit and a 32-bit version of this program and each maintains a separate list of ODBC data sources.

From a programming perspective, the beauty of ODBC is that the application can be written to use the same set of function calls to interface with any data source, regardless of the database vendor. The source code of the application doesn't change whether it talks to Oracle or SQL Server. We only mention these two as an example. There are ODBC drivers available for several dozen popular database systems. Even Excel spreadsheets and plain text files can be turned into data sources. The operating system uses the Registry information written by ODBC Administrator to determine which low-level ODBC drivers are needed to talk to the data source (such as the interface to Oracle or SQL Server). The loading of the ODBC drivers is transparent to the ODBC application program. In a client/server environment, the ODBC API even handles many of the network issues for the application programmer.

The advantages of this scheme are so numerous that you are probably thinking there must be some catch. The only disadvantage of ODBC is that it isn't as efficient as talking directly to the native database interface. ODBC has had many detractors make the charge that it is too slow. Microsoft has always claimed that the critical factor in performance

is the quality of the driver software that is used. In our humble opinion, this is true. The availability of good ODBC drivers has improved a great deal recently. And anyway, the criticism about performance is somewhat analogous to those who said that compilers would never match the speed of pure assembly language. Maybe not, but the compiler (or ODBC) gives you the opportunity to write cleaner programs, which means you finish sooner. Meanwhile, computers get faster every year.

JDBC

In an effort to set an independent database standard API for Java; Sun Microsystems developed Java Database Connectivity, or JDBC. JDBC offers a generic SQL database access mechanism that provides a consistent interface to a variety of RDBMSs. This consistent interface is achieved through the use of “plug-in” database connectivity modules, or *drivers*. If a database vendor wishes to have JDBC support, he or she must provide the driver for each platform that the database and Java run on.

To gain a wider acceptance of JDBC, Sun based JDBC’s framework on ODBC. As you discovered earlier in this chapter, ODBC has widespread support on a variety of platforms. Basing JDBC on ODBC will allow vendors to bring JDBC drivers to market much faster than developing a completely new connectivity solution.

JDBC was announced in March of 1996. It was released for a 90 day public review that ended June 8, 1996. Because of user input, the final JDBC v1.0 specification was released soon after.

The remainder of this section will cover enough information about JDBC for you to know what it is about and how to use it effectively. This is by no means a complete overview of JDBC. That would fill an entire book.

JDBC Goals

Few software packages are designed without goals in mind. JDBC is one that, because of its many goals, drove the development of the API. These goals, in conjunction with early reviewer feedback, have finalized the JDBC class library into a solid framework for building database applications in Java.

The goals that were set for JDBC are important. They will give you some insight as to why certain classes and functionalities behave the way they do. The eight design goals for JDBC are as follows:

1. *SQL Level API*

The designers felt that their main goal was to define a SQL interface for Java. Although not the lowest database interface level possible, it is at a low enough level for higher-level tools and APIs to be created. Conversely, it is at a high enough level for application programmers to use it confidently. Attaining this goal allows for

future tool vendors to “generate” JDBC code and to hide many of JDBC’s complexities from the end user.

2. *SQL Conformance*

SQL syntax varies as you move from database vendor to database vendor. In an effort to support a wide variety of vendors, JDBC will allow any query statement to be passed through it to the underlying database driver. This allows the connectivity module to handle non-standard functionality in a manner that is suitable for its users.

3. *JDBC must be implemental on top of common database interfaces*

The JDBC SQL API must “sit” on top of other common SQL level APIs. This goal allows JDBC to use existing ODBC level drivers by the use of a software interface. This interface would translate JDBC calls to ODBC and vice versa.

4. *Provide a Java interface that is consistent with the rest of the Java system*

Because of Java’s acceptance in the user community thus far, the designers feel that they should not stray from the current design of the core Java system.

5. *Keep it simple*

This goal probably appears in all software design goal listings. JDBC is no exception. Sun felt that the design of JDBC should be very simple, allowing for only one method of completing a task per

mechanism. Allowing duplicate functionality only serves to confuse the users of the API.

6. *Use strong, static typing wherever possible*

Strong typing allows for more error checking to be done at compile time; also, less error appear at runtime.

7. *Keep the common cases simple*

Because more often than not, the usual SQL calls used by the programmer are simple SELECT's, INSERT's, DELETE's and UPDATE's, these queries should be simple to perform with JDBC. However, more complex SQL statements should also be possible.

Finally we decided to proceed the implementation using Java [Networking](#).

And for dynamically updating the cache table we go for MS [Access](#) database.

Java ha two things: a programming language and a platform.


Java is a high-level programming language that is all of the following

Simple	Architecture-neutral
Object-oriented	Portable

Distributed	High-performance
Interpreted	multithreaded
Robust	Dynamic
Secure	

Java is also unusual in that each Java program is both compiled and interpreted. With a compile you translate a Java program into an intermediate language called Java byte codes the platform-independent code instruction is passed and run on the computer.

Compilation happens just once; interpretation occurs each time the program is executed. The figure illustrates how this works.

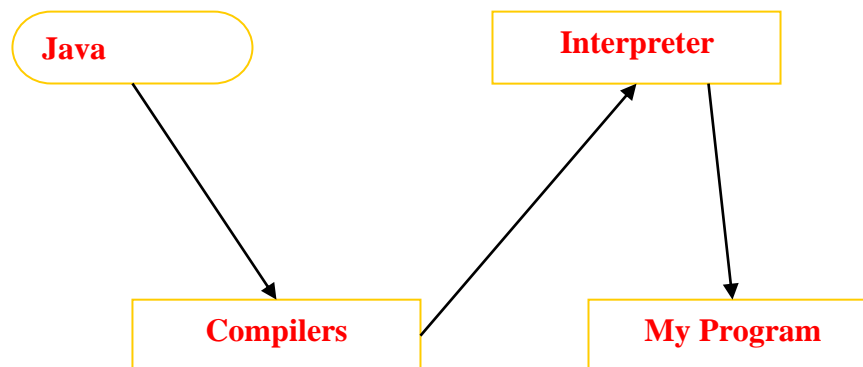


You can think of Java byte codes as the machine code instructions for the Java Virtual Machine (Java VM). Every Java interpreter, whether it's a Java development tool or a Web browser that can run Java applets, is an implementation of the Java VM. The Java VM can also be implemented in hardware.

Java byte codes help make “write once, run anywhere” possible. You can compile your Java program into byte codes on my platform that has a Java compiler. The byte codes can then be run any implementation of the Java VM. For example, the same Java program can run Windows NT, Solaris, and Macintosh.

Networking

TCP/IP stack

The TCP/IP stack is shorter than the OSI one:

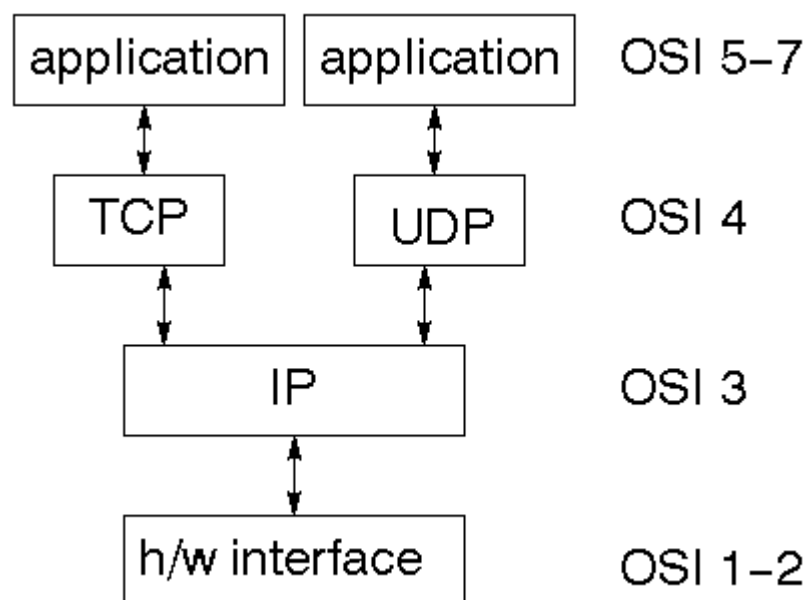

TCP is a connection-oriented protocol; UDP (User Datagram Protocol) is a connectionless protocol.

IP datagram's

The IP layer provides a connectionless and unreliable delivery system. It considers each datagram independently of the others. Any association between datagram must be supplied by the higher layers. The IP layer supplies a checksum that includes its own header. The header includes the source and destination addresses. The IP layer handles routing through an Internet. It is also responsible for breaking up large datagram into smaller ones for transmission and reassembling them at the other end.

UDP

UDP is also connectionless and unreliable. What it adds to IP is a checksum for the contents of the datagram and port numbers. These are used to give a client/server model - see later.

TCP

TCP supplies logic to give a reliable connection-oriented protocol above IP. It provides a virtual circuit that two processes can use to communicate.

Internet addresses

In order to use a service, you must be able to find it. The Internet uses an address scheme for machines so that they can be located. The address is a 32 bit integer which gives the IP address. This encodes a network ID and more addressing. The network ID falls into various classes according to the size of the network address.

Network address

Class A uses 8 bits for the network address with 24 bits left over for other addressing. Class B uses 16 bit network addressing. Class C uses 24 bit network addressing and class D uses all 32.


Subnet address

Internally, the UNIX network is divided into sub networks. Building 11 is currently on one sub network and uses 10-bit addressing, allowing 1024 different hosts.

Host address

8 bits are finally used for host addresses within our subnet. This places a limit of 256 machines that can be on the subnet.

Total address

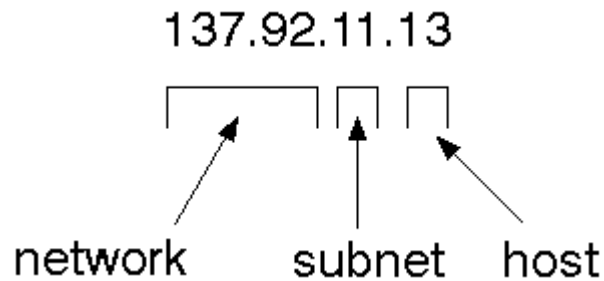

The 32 bit address is usually written as 4 integers separated by dots.

Port addresses

A service exists on a host, and is identified by its port. This is a 16 bit number. To send a message to a server, you send it to the port for that service of the host that it is running on. This is not location transparency! Certain of these ports are "well known".

Sockets

A socket is a data structure maintained by the system to handle network connections. A socket is created using the call `socket`. It returns an integer that is like a file descriptor. In fact,

under Windows, this handle can be used with Read File and Write File functions.

```
#include <sys/types.h>
#include <sys/socket.h>
int socket(int family, int type, int protocol);
```

Here "family" will be AF_INET for IP communications, protocol will be zero, and type will depend on whether TCP or UDP is used. Two processes wishing to communicate over a network create a socket each. These are similar to two ends of a pipe - but the actual pipe does not yet exist.

JFree Chart

JFreeChart is a free 100% Java chart library that makes it easy for developers to display professional quality charts in their applications. JFreeChart's extensive feature set includes:

- A consistent and well-documented API, supporting a wide range of chart types;

- A flexible design that is easy to extend, and targets both server-side and client-side applications;

- Support for many output types, including Swing components, image files (including PNG and JPEG), and vector graphics file formats (including PDF, EPS and SVG);

JFreeChart is "open source" or, more specifically, [free software](#). It is distributed under the terms of the [GNU Lesser General Public Licence](#) (LGPL), which permits use in proprietary applications.

1. Map Visualizations

Charts showing values that relate to geographical areas. Some examples include: (a) population density in each state of the United States, (b) income per capita for each country in Europe, (c) life expectancy in each country of the world. The tasks in this project include:

Sourcing freely redistributable vector outlines for the countries of the world, states/provinces in particular countries (USA in particular, but also other areas);

Creating an appropriate dataset interface (plus default implementation), a rendered, and integrating this with the existing XYPlot class in JFreeChart;

Testing, documenting, testing some more, documenting some more.

2. Time Series Chart Interactivity

Implement a new (to JFreeChart) feature for interactive time series charts --- to display a separate control that shows a small version of ALL the time series data, with a sliding

"view" rectangle that allows you to select the subset of the time series data to display in the main chart.

3. *Dashboards*

There is currently a lot of interest in dashboard displays. Create a flexible dashboard mechanism that supports a subset of JFreeChart chart types (dials, pies, thermometers, bars, and lines/time series) that can be delivered easily via both Java Web Start and an applet.


4. *Property Editors*

The property editor mechanism in JFreeChart only handles a small subset of the properties that can be set for charts. Extend (or reimplement) this mechanism to provide greater end-user control over the appearance of the charts.

J2ME (Java 2 Micro edition):-

Sun Microsystems defines J2ME as "a highly optimized Java run-time environment targeting a wide range of consumer products, including pagers, cellular phones, screen-phones, digital set-top boxes and car navigation systems." Announced in June 1999 at the JavaOne Developer Conference, J2ME brings the cross-platform functionality of the Java language to smaller devices, allowing mobile wireless devices to share applications. With J2ME, Sun has adapted the Java platform for consumer products that incorporate or are based on small computing devices.

1. General J2ME architecture

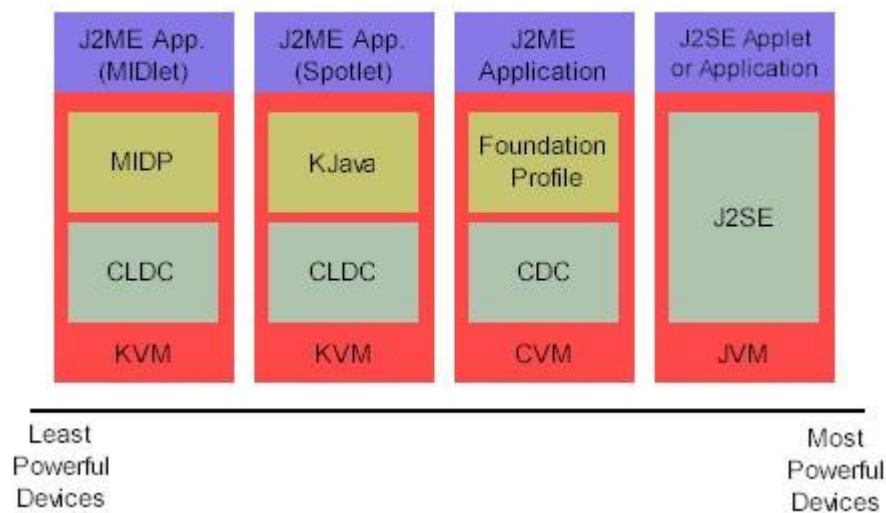

J2ME uses configurations and profiles to customize the Java Runtime Environment (JRE). As a complete JRE, J2ME is comprised of a configuration, which determines the JVM used, and a profile, which defines the application by adding domain-specific classes. The configuration defines the basic run-time environment as a set of core classes and a specific JVM that run on specific types of devices. We'll discuss configurations in detail in the The profile defines the application; specifically, it adds domain-specific classes to the J2ME configuration to define certain uses for devices. We'll cover profiles in depth in the The following graphic depicts the relationship between the different virtual machines, configurations, and profiles. It also draws a parallel with the J2SE API and its Java virtual machine. While the J2SE virtual machine is

generally referred to as a JVM, the J2ME virtual machines, KVM and CVM, are subsets of JVM. Both KVM and CVM can be thought of as a kind of Java virtual machine -- it's just that they are shrunken versions of the J2SE JVM and are specific to J2ME.

2.Developing J2ME applications

Introduction In this section, we will go over some considerations you need to keep in mind when developing applications for smaller devices. We'll take a look at the way the compiler is invoked when using J2SE to compile J2ME applications. Finally, we'll explore packaging and deployment and the role preverification plays in this process.

3.Design considerations for small devices

Developing applications for small devices requires you to keep certain strategies in mind during the design phase. It is best to strategically design an application for a small device before you begin coding. Correcting the code because you failed to consider all of the "gotchas" before developing the application can be a painful process. Here are some design strategies to consider:

- * Keep it simple. Remove unnecessary features, possibly making those features a separate, secondary application.
- * Smaller is better. This consideration should be a "no brainer" for all developers. Smaller applications use less memory on the device and require shorter installation times. Consider packaging your Java applications as compressed Java Archive (jar) files.
- * Minimize run-time memory use. To minimize the amount of memory used at run time, use scalar types in place of object types. Also, do not depend on the garbage collector. You should manage the memory efficiently yourself by setting object references to null when you are finished with them. Another way to reduce run-time memory is to use lazy instantiation, only allocating objects on an as-needed basis. Other ways of reducing overall and peak memory use on small devices are to release resources quickly, reuse objects, and avoid exceptions.

4.Configurations overview

The configuration defines the basic run-time environment as a set of core classes and a specific JVM that run on specific types of devices. Currently, two configurations exist for J2ME, though others may be defined in the future:

* **Connected Limited Device Configuration (CLDC)** is used specifically with the KVM for 16-bit or 32-bit devices with limited amounts of memory. This is the configuration (and the virtual machine) used for developing small J2ME applications. Its size limitations make CLDC more interesting and challenging (from a development point of view) than CDC. CLDC is also the configuration that we will use for developing our drawing tool application. An example of a small wireless device running small applications is a Palm hand-held computer.

* **Connected Device Configuration (CDC)** is used with the C virtual machine (CVM) and is used for 32-bit architectures requiring more than 2 MB of memory. An example of such a device is a Net TV box.

5.J2ME profiles

What is a J2ME profile?

As we mentioned earlier in this tutorial, a profile defines the type of device supported. The Mobile Information Device Profile (MIDP), for example, defines classes for cellular phones. It adds domain-specific classes to the J2ME configuration to define uses for similar devices. Two profiles have been defined for J2ME and are built upon CLDC: KJava and MIDP. Both KJava and MIDP are associated with CLDC and smaller devices. Profiles are built on top of configurations. Because profiles are specific to the size of the device (amount of memory) on which an

application runs, certain profiles are associated with certain configurations.

A skeleton profile upon which you can create your own profile, the Foundation Profile, is available for CDC.

Profile 1: KJava

KJava is Sun's proprietary profile and contains the KJava API. The KJava profile is built on top of the CLDC configuration. The KJava virtual machine, KVM, accepts the same byte codes and class file format as the classic J2SE virtual machine. KJava contains a Sun-specific API that runs on the Palm OS. The KJava API has a great deal in common with the J2SE Abstract Windowing Toolkit (AWT). However, because it is not a standard J2ME package, its main package is `com.sun.kjava`. We'll learn more about the KJava API later in this tutorial when we develop some sample applications.

Profile 2: MIDP

MIDP is geared toward mobile devices such as cellular phones and pagers. The MIDP, like KJava, is built upon CLDC and provides a standard run-time environment that allows new applications and services to be deployed dynamically on end user devices. MIDP is a common, industry-standard profile for mobile devices that is not dependent on a specific vendor. It is a complete and supported foundation for mobile application

development. MIDP contains the following packages, the first three of which are core CLDC packages, plus three MIDP-specific packages.

7.MODULES

- 1. Company**
- 2. User**

MODULE DESCRIPTION

1. COMPANY

Here company should register with the application after that he can login with the application and then perform some operation such as postjob details and logout

2. USER

Here user should register with the application after that he can login with the application and then perform some operations such as search job details, view jobdetails and logout

8.INPUT DESIGN AND OUTPUT DESIGN

8.1 INPUT DESIGN

The input design is the link between the information system and the user. It comprises the developing specification and procedures for data preparation and those steps are necessary to put transaction data in to a usable form for processing can be achieved by inspecting the computer to read data from a written or printed document or it can occur by having people keying the data directly into the system. The design of input focuses on controlling the amount of input required, controlling the errors, avoiding delay, avoiding extra steps and keeping the process simple. The input is designed in such a way so that it provides security and ease of use with retaining the privacy. Input Design considered the following things:

- What data should be given as input?
- How the data should be arranged or coded?
- The dialog to guide the operating personnel in providing input.
- Methods for preparing input validations and steps to follow when error occur.

OBJECTIVES

1. Input Design is the process of converting a user-oriented description of the input into a computer-based system. This design is important to avoid

errors in the data input process and show the correct direction to the management for getting correct information from the computerized system.

2. It is achieved by creating user-friendly screens for the data entry to handle large volume of data. The goal of designing input is to make data entry easier and to be free from errors. The data entry screen is designed in such a way that all the data manipulates can be performed. It also provides record viewing facilities.

3. When the data is entered it will check for its validity. Data can be entered with the help of screens. Appropriate messages are provided as when needed so that the user will not be in maze of instant. Thus the objective of input design is to create an input layout that is easy to follow

8.2 OUTPUT DESIGN

A quality output is one, which meets the requirements of the end user and presents the information clearly. In any system results of processing are communicated to the users and to other system through outputs. In output design it is determined how the information is to be displaced for immediate need and also the hard copy output. It is the most important and direct source information to the user. Efficient and intelligent output design improves the system's relationship to help user decision-making.

1. Designing computer output should proceed in an organized, well thought out manner; the right output must be developed while ensuring that each output element is designed so that people will find the system can use easily

and effectively. When analyzing design computer output, they should identify the specific output that is needed to meet the requirements.

2. Select methods for presenting information.

3. Create document, report, or other formats that contain information produced by the system.

The output form of an information system should accomplish one or more of the following objectives.

- ❖ Convey information about past activities, current status or projections of the
- ❖ Future.
- ❖ Signal important events, opportunities, problems, or warnings.
- ❖ Trigger an action.
- ❖ Confirm an action.

9. Feasibility Study

Preliminary investigation examines project feasibility, the likelihood the system will be useful to the organization. The main objective of the feasibility study is to test the Technical, Operational and Economical feasibility for adding new modules and debugging old running system. All systems are feasible if they are given unlimited resources and infinite time. There are aspects in the feasibility study portion of the preliminary investigation:

- Technical Feasibility

- Operation Feasibility

Economical Feasibility

9.1 TECHNICAL FEASIBILITY

The technical issue usually raised during the feasibility stage of the investigation includes the following:

- Does the necessary technology exist to do what is suggested?

- Do the proposed equipments have the technical capacity to hold the data required to use the new system?

- Will the proposed system provide adequate response to inquiries, regardless of the number or location of users?

- Can the system be upgraded if developed?

Are there technical guarantees of accuracy, reliability, ease of access and data security?

9.2 OPERATIONAL FEASIBILITY

OPERATIONAL FEASIBILITY

User-friendly

JOB RECOMMENDER SYSTEM

SCREENSHOTS

Customer will use the forms for their various transactions i.e. for adding new routes, viewing the routes details. Also the Customer wants the reports to view the various transactions based on the constraints. These forms and reports are generated as user-friendly to the Client.

Reliability

The package will pick-up current transactions on line. Regarding the old transactions, User will enter them in to the system.

Security

The web server and database server should be protected from hacking, virus etc

Portability

The application will be developed using standard open source software (Except Oracle) like Java, tomcat web server, Internet Explorer Browser etc these software will work both on Windows and Linux o/s. Hence portability problems will not arise.

Availability

This software will be available always.

Maintainability

The system called the ewheelz uses the 2-tier architecture. The 1st tier is the GUI, which is said to be front-end and the 2nd tier is the database, which uses My-Sql, which is the back-end.

The front-end can be run on different systems (clients). The database will be running at the server. Users access these forms by using the user-ids and the passwords.


9.3 ECONOMIC FEASIBILITY


The computerized system takes care of the present existing system's data flow and procedures completely and should generate all the reports of the manual system besides a host of other management reports.

It should be built as a web based application with separate web server and database server. This is required as the activities are spread through out the organization customer wants a centralized database. Further some of the linked transactions take place in different locations. Open source software like TOMCAT, JAVA, Mysql and Linux is used to minimize the cost for the Customer.

10. SYSTEM DESIGN

10.1 USE CASE DIAGRAM

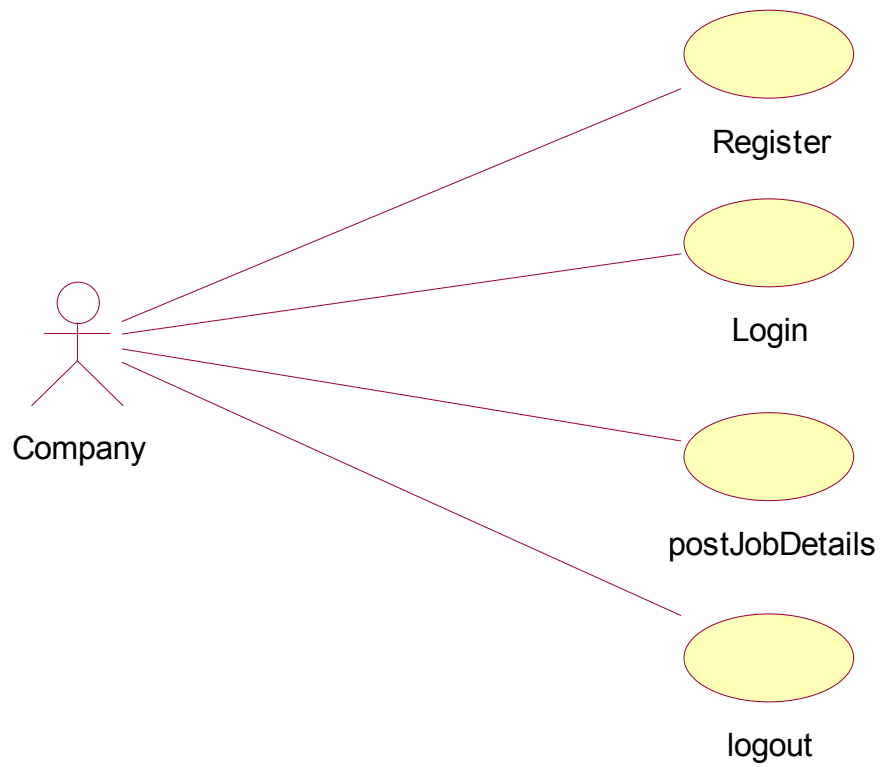


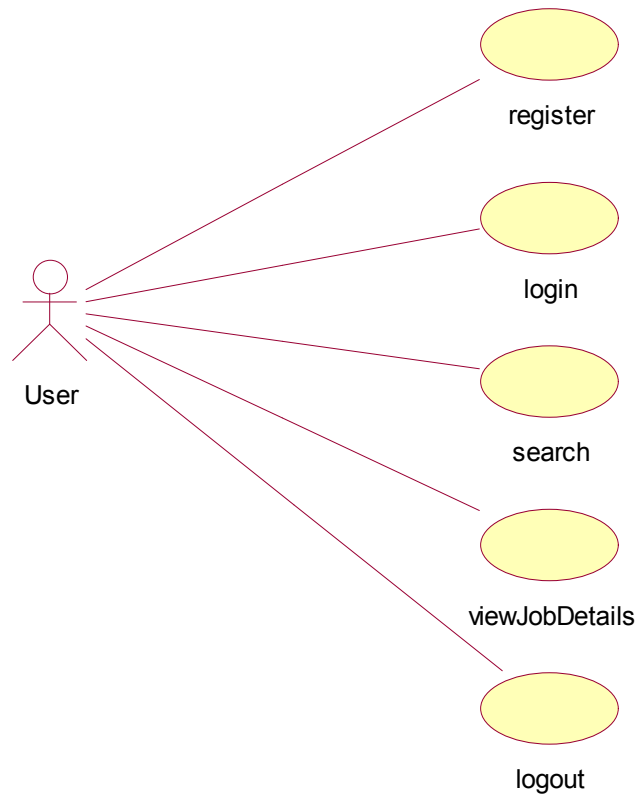


10.2 CLASS DIAGRAM

JOB RECOMMENDER SYSTEM


SCREENSHOTS

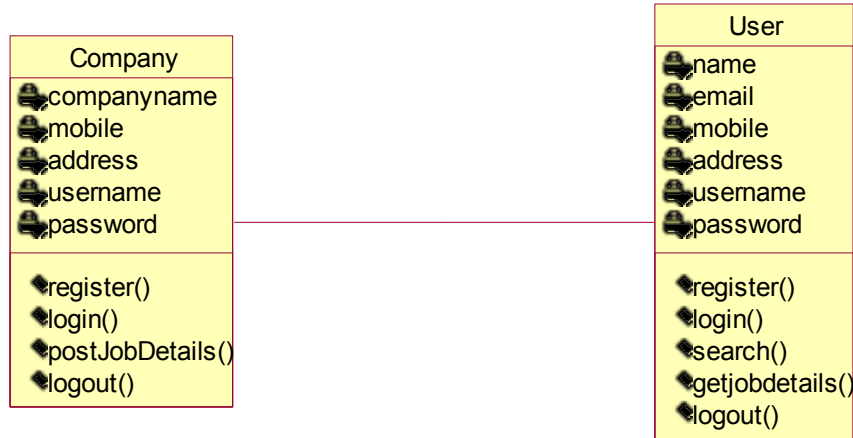

10.3 SEQUENCE DIAGRAM

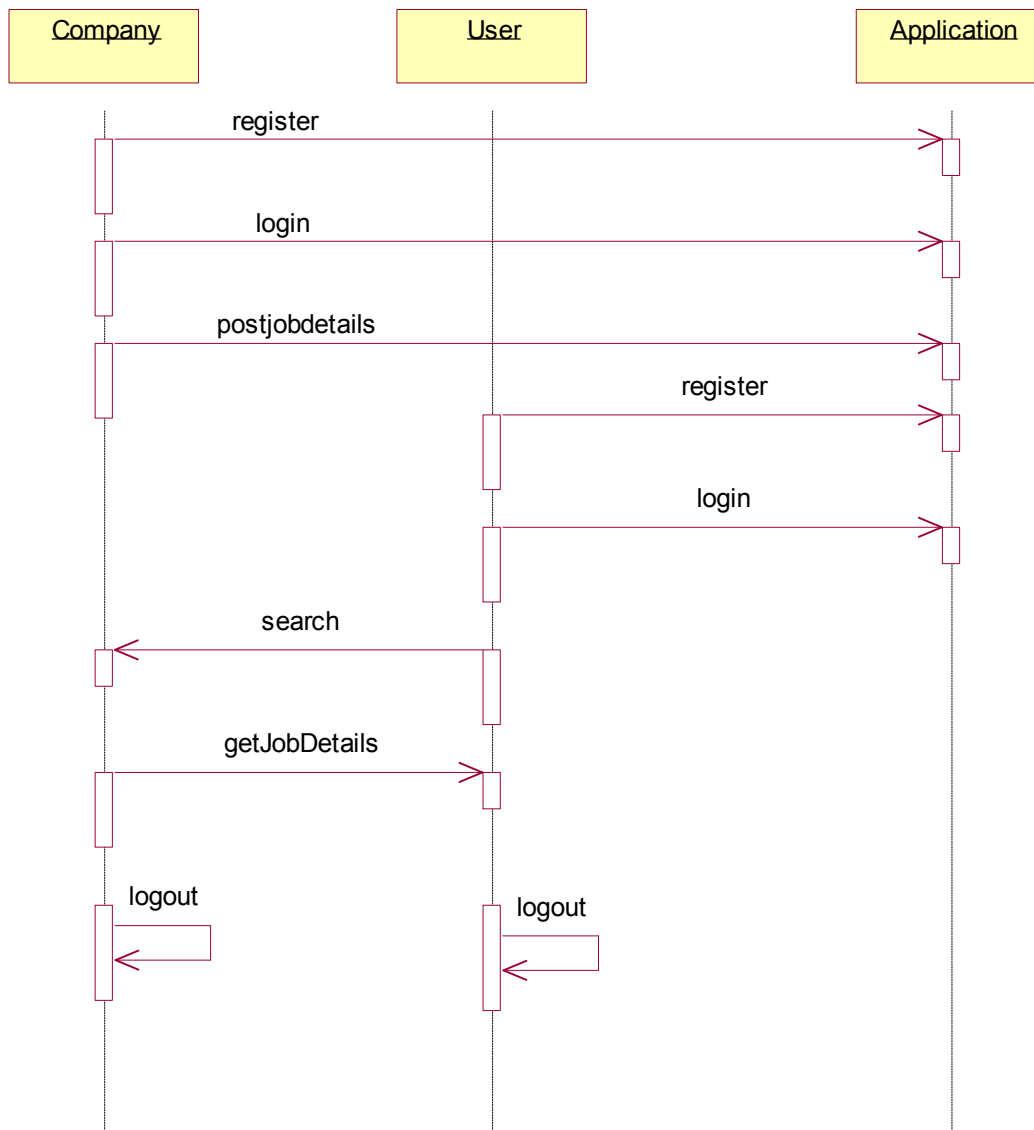


10.4 COLLABORTION DIAGRAM

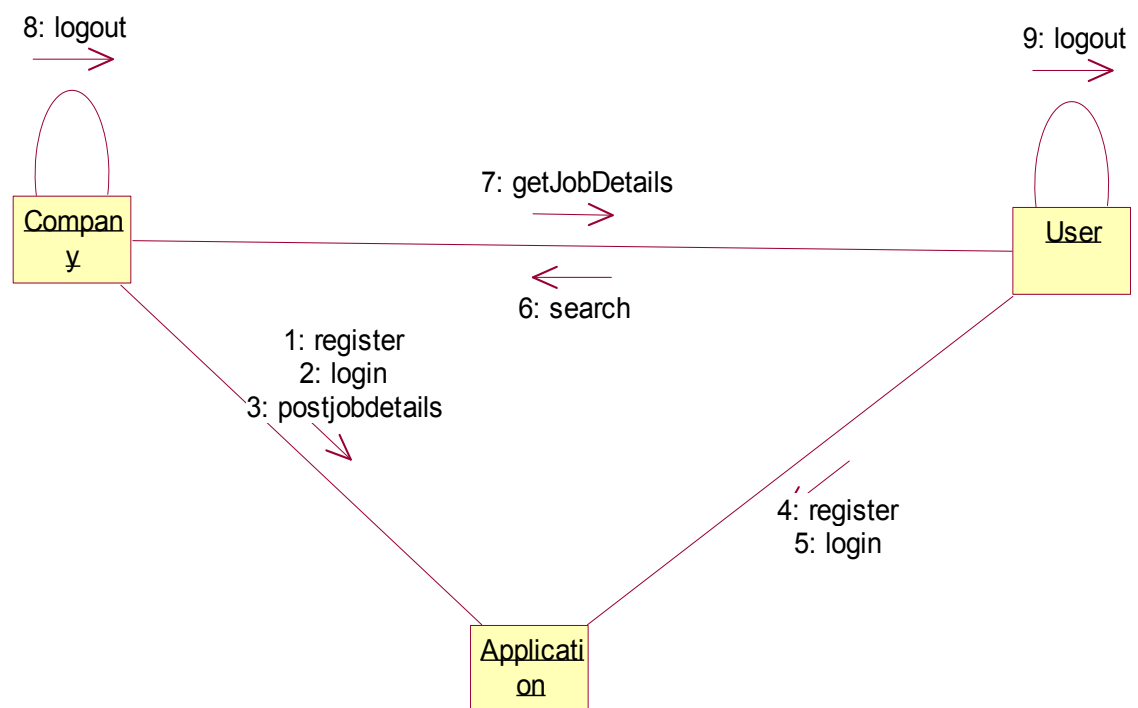

11. SCREENSHOTS


11.1.HOME

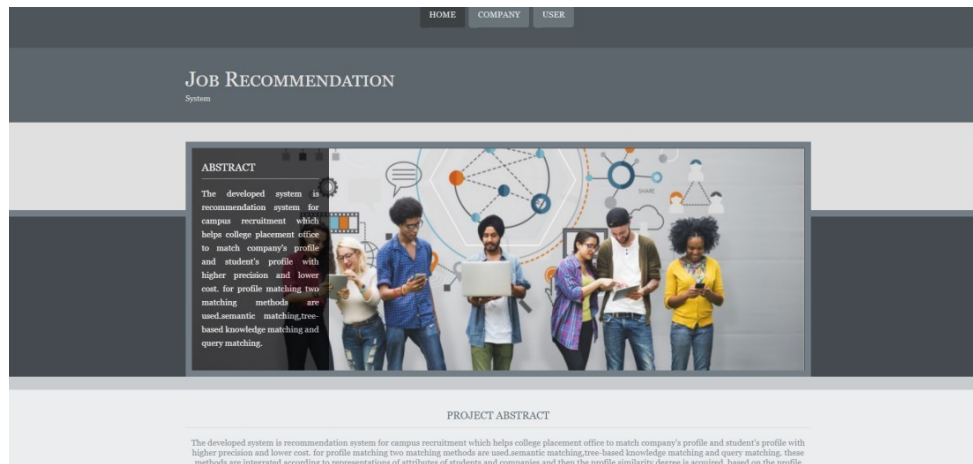

11.2 USER LOGIN



11.3 USER REGISTRATION




ABSTRACT

The developed system is recommendation system for campus recruitment which helps college placement office to match company's profile and student's profile with higher precision and lower cost. for profile matching two matching methods are used. semantic matching, tree-based knowledge matching and query matching.

USER REGISTRATION

Name	<input type="text"/>
Email	<input type="text"/>
Mobile	<input type="text"/>
Address	<input type="text"/>
UserName	<input type="text"/>
Password	<input type="password"/>
Profile Pic	<input type="button" value="Choose File"/> No file chosen
<input type="button" value="Register"/> Login	

11.4 COMPANY LOGIN



JOB RECOMMENDATION
System


ABSTRACT

The developed system is recommendation system for campus recruitment which helps college placement office to match company's profile and student's profile with higher precision and lower cost. for profile matching two matching methods are used. semantic matching, tree-based knowledge matching and query matching.

COMPANY LOGIN

UserName	<input type="text"/>
Password	<input type="password"/>
<input type="button" value="Login"/> Register	

11.5 COMPANY REGISTRATION

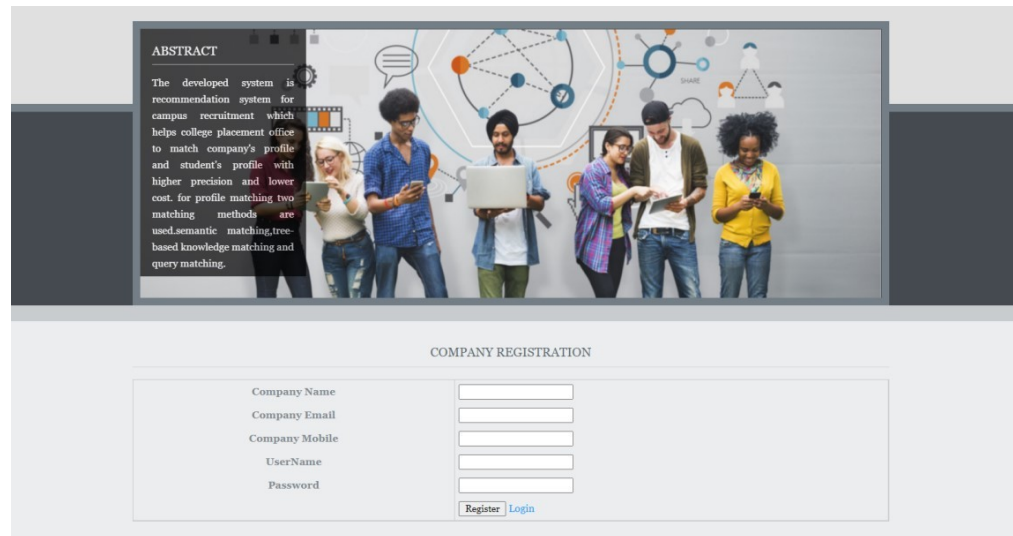

ABSTRACT

The developed system is recommendation system for campus recruitment which helps college placement office to match company's profile and student's profile with higher precision and lower cost. for profile matching two matching methods are used.semantic matching,tree-based knowledge matching and query matching.

COMPANY REGISTRATION

Company Name

Company Email


Company Mobile

UserName

Password

[Register](#) [Login](#)

11.6 JOB DETAILS

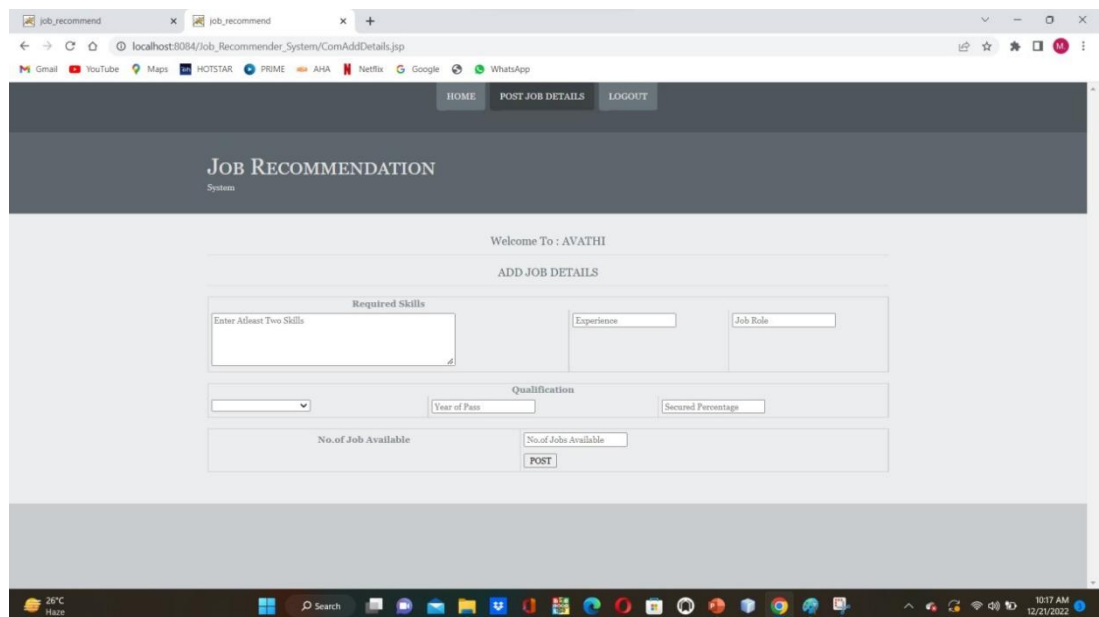

job_recommend x job_recommend x +

localhost:8084/Job_Recommender_System/ComAddDetails.jsp

Gmail YouTube Maps HOTSTAR PRIME AHA Netflix Google WhatsApp

HOME POST JOB DETAILS LOGOUT

JOB RECOMMENDATION
System

Welcome To : AVATHI

ADD JOB DETAILS

Required Skills

Enter Atleast Two Skills

Experience

Job Role

Qualification

Year of Pass Secured Percentage

No. of Job Available

20°C Haze 10:17 AM 12/21/2022

11.CONCLUSION

In this paper, we have introduced a new method for automatically creating datasets for the offline evaluation of job posting similarities. Using such a silver standard dataset, we have evaluated the performance of different dense vector representations of documents in order to

identify the most promising setup. Building dense representations based on full-text job descriptions yields the best results. However, computing representations for novel job postings becomes computational expensive, as the model has to be recomputed, as estimating representations for new documents results in much lower results. Building models from titles, the scores only slightly decrease, however, the computation of new models is much faster. In our experiments, we observe the best performance with a combined model, using the words within the title for weighting words in the description that allows to compute new representations in an online scenario. With this model, we yield a substantial 8% relative increase in CTR over the platform's previous system component. In future work, we want to extend the weighting scheme by integrating ontology and keyword information in order to improve the similarity search.

12.BIBLIOGRAPHY

REFERENCES

- [1] [https://ieeexplore.ieee.org/document/4359451/Android Design Patterns: Interaction Design Solutions for Developers](https://ieeexplore.ieee.org/document/4359451/Android%20Design%20Patterns%3A%20Interaction%20Design%20Solutions%20for%20Developers) by Greg Nudelman
- [2] <http://www.computer.org/csdl/trans/td/2008/06/ttd2008060837-abs.html>Android Recipes: A Problem-Solution Approach by Dave Smith & Jeff Friesen.
- [3] <http://doi.ieeeecomputersociety.org/10.1109/TPDS.2007.707711>IEEE SRS Format (Overall Description & Specific Requirements).
- [4] Y.H. Chu, S. Rao, S. Seshan, H. Zhang, "A Case for End System Multicast", *IEEE J. Selected Areas in Comm.*, vol. 20, no. 8, pp. 1456-1471, Oct. 2002.

- [5] S. Banerjee, B. Bhattacharjee, C. Kommareddy, "Scalable Application Layer Multicast", *Proc. ACM SIGCOMM '02*, pp. 205-217, 2002-Aug.
- [6] S. Rhea, B. Godfrey, B. Karp, J. Kubiatowicz, S. Ratnasamy, S. Shenker, I. Stoica, H. Yu, "OpenDHT: A Public DHT Service and Its Uses", *Proc. ACM SIGCOMM '05*, pp. 73-84, 2005-Aug.
- [7] D.G. Andersen, N. Feamster, S. Bauer, H. Balakrishnan, "Topology Inference from BGP Routing Dynamics", *Proc. ACM Internet Measurement Workshop (IMW '02)*, pp. 243-248, 2002-Nov.
- [8] M. Coates, R. Castro, R. Nowak, M. Gadhiok, R. King, Y. Tsang, "Maximum Likelihood Network Topology Identification from Edge-Based Unicast Measurements", *Proc. ACM SIGMETRICS '02*, pp. 11-20, 2002.
- [9] M. Kwon, S. Fahmy, "Topology-Aware Overlay Networks for Group Communication", *Proc. 12th ACM Int'l Workshop Network and Operating Systems Support for Digital Audio and Video (NOSSDAV '02)*, pp. 127-136, 2002-May.
- [10] J. Han, D. Watson, F. Jahanian, "Topology Aware Overlay Networks", *Proc. IEEE INFOCOM '05*, pp. 2554-2565, 2005-Mar.
- [11] S.Y. Shi, J.S. Turner, "Routing in Overlay Multicast Networks", *Proc. IEEE INFOCOM '02*, pp. 1200-1208, 2002-June.
- [12] B. Donnet, T. Friedman, M. Crovella, "Improved Algorithms for Network Topology Discovery", *Proc. Sixth Int'l Workshop Passive and Active Network Measurement (PAM '05)*, 2005-Mar.
- [13] <https://www.semanticscholar.org/paper/Scalable-and-Efficient-Endto-End-Network-Topology-Jin-Tu/7d5c087068e5eb316ec710284495d64ffe0c162>
- [14] Google for problem solving.
- [15] S. Savage, A. Collins, E. Hoffman, J. Snell, T. Anderson, "The end-to-end effects of Internet path selection", *Proc. ACM SIGCOMM*, 1999-Aug.
- [16] <https://doi.org/10.1145/2488222.2488262>.
- [17] <https://doi.org/10.1145%2F1030194.1015475>.

- [18] http://ftp.cse.ust.hk/~gchan/papers/JSAC06_Infer.pdf
- [19] <https://www.computer.org/csdl/trans/td/2008/06/ttd2008060837abs.html>
- [20] https://www.researchgate.net/publication/224719130_A_Distributed_Approach_to_End-to-End_Network_Topology_Inference
- [21] <http://doi.ieeecomputersociety.org/10.1109/TPDS.2007.70771>
- [22] <https://doi.org/10.1145%2F1030194.1015475>
- [23] <http://conferences.sigcomm.org/imc/2007/papers/imc179.pdf>
- [24] <https://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=1038577>