

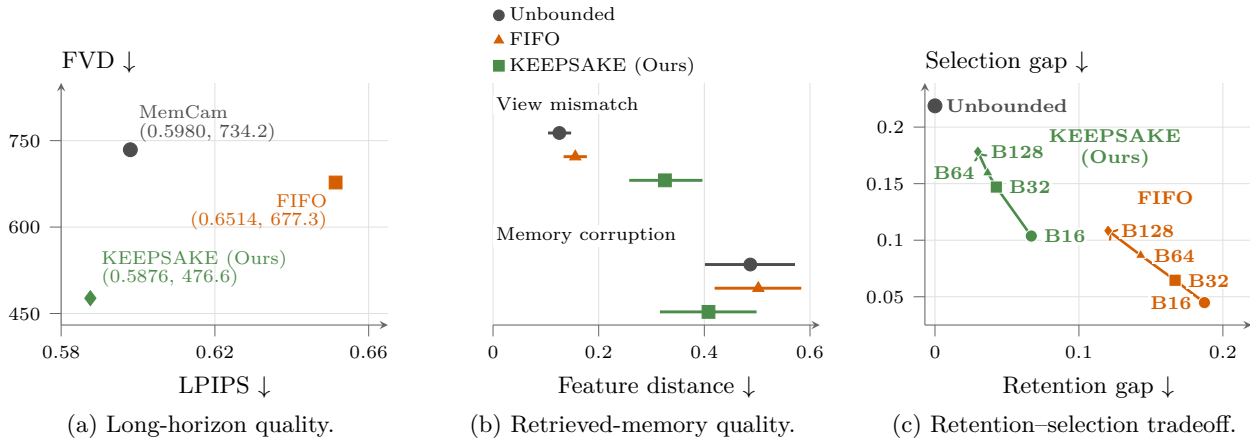


Figure 1: **Generation quality and memory diagnostics.** (a) Fifteen matched 180-second MemCam rollouts; bounded methods use $B = 32$. (b) Mean view mismatch and memory corruption on fifteen matched 60-second rollouts, using common baseline pixels and DINOv2 cosine distance; FIFO and KEEPSAKE use $B = 32$; whiskers show 95% trajectory-bootstrap intervals. (c) Original thirteen-trajectory, 180-second retention-selection analysis; labels denote memory budgets. Lower is better on both axes.