
Dokumentasi Konfigurasi Lab 3

1. Membuat rule input accept untuk ICMP

Langkah 1 — Simpan backup konfigurasi
Gunakan command berikut pada terminal winbox untuk melakukan backup sebelum konfigurasi dilakukan.


/system backup save name=sebelum-lab3

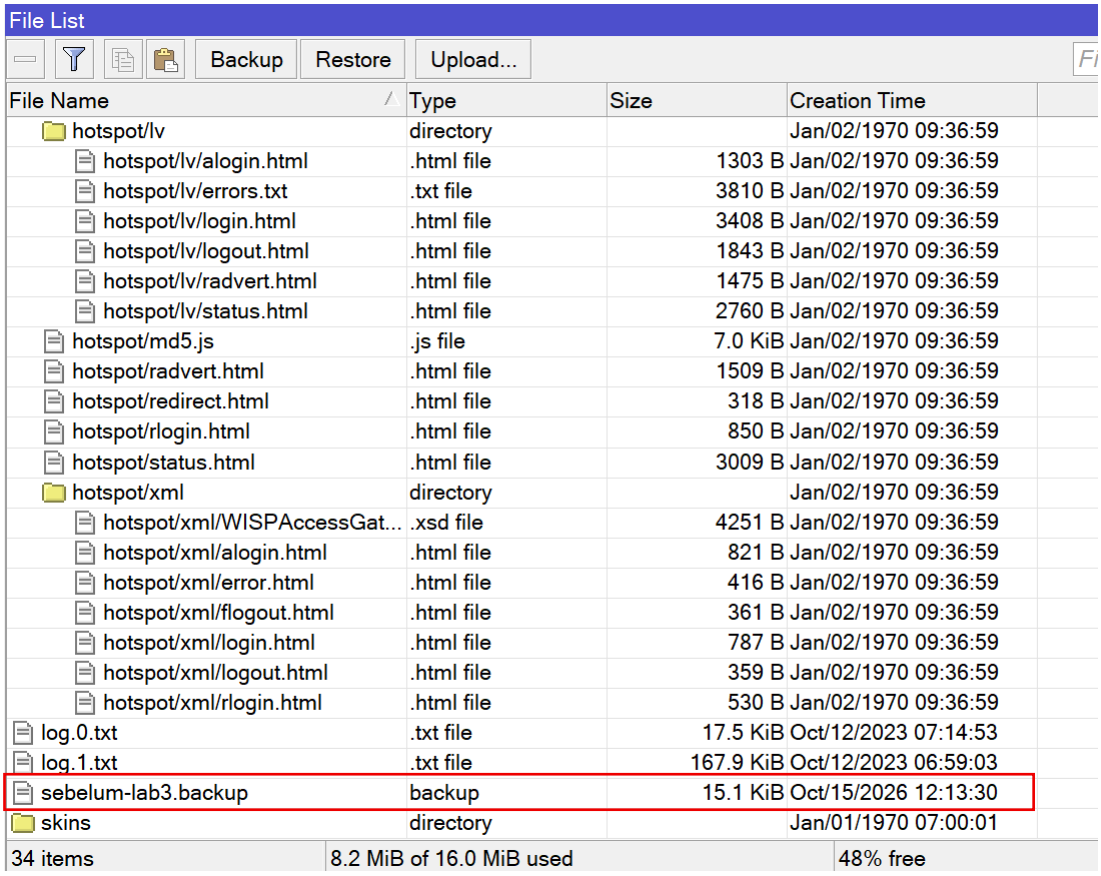

Gambar 1. File backup tersimpan pada files

Langkah 2 — Membuat rule untuk mengizinkan ping ke router dari LAN

Pilih IP > Firewall > Klik +

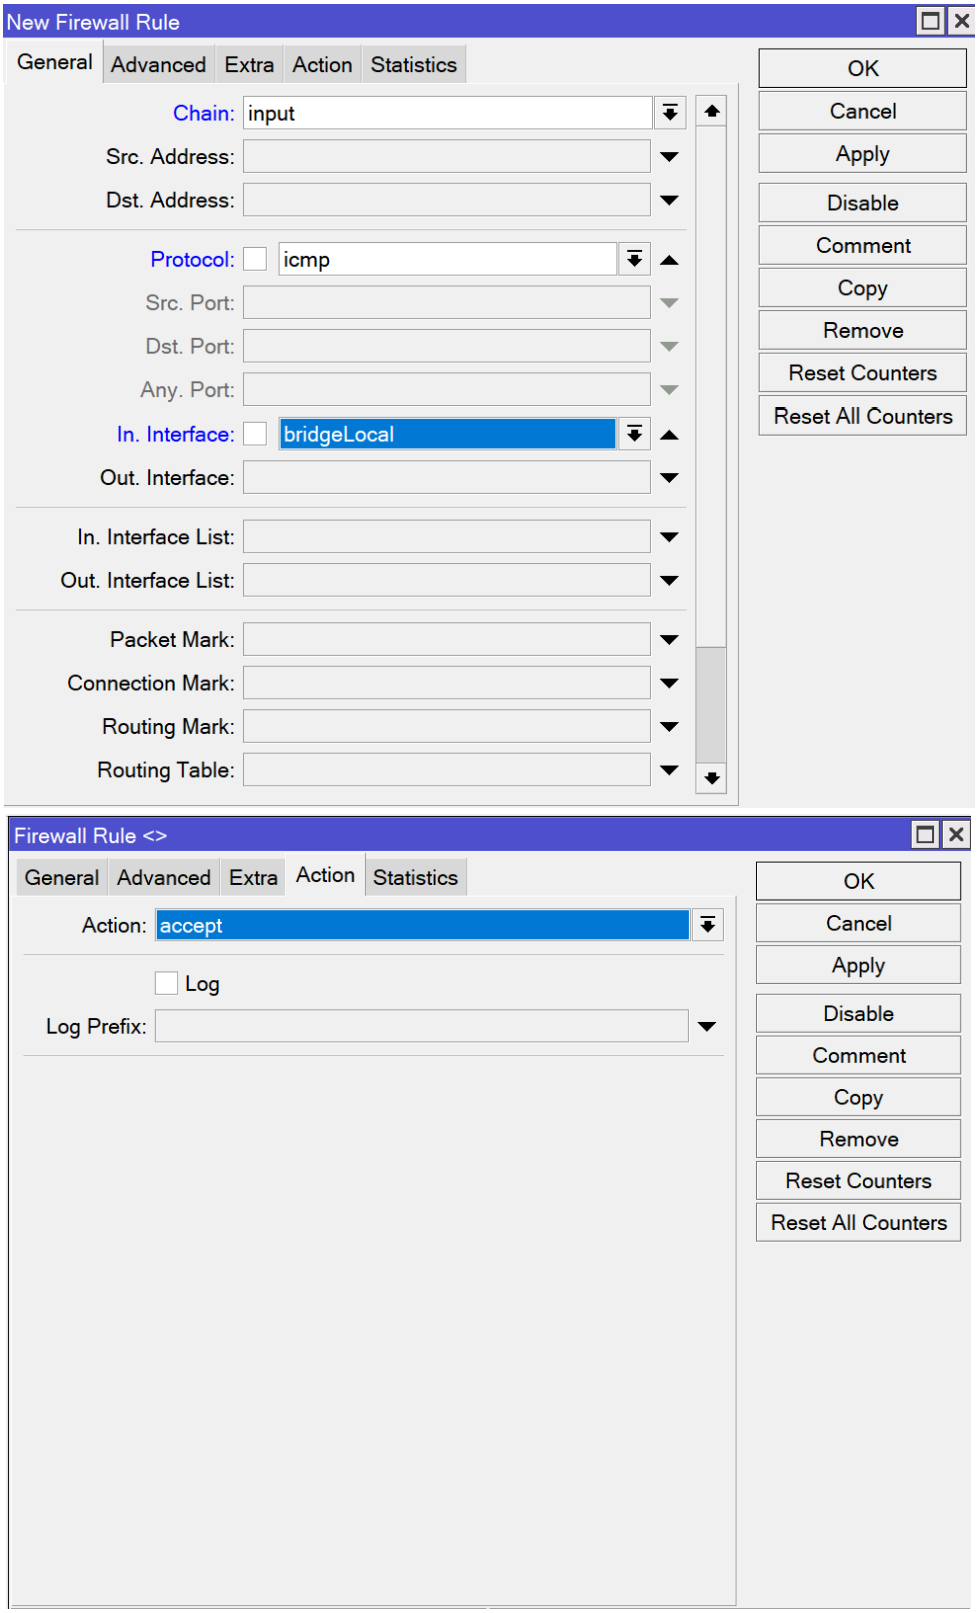

Gambar 2 & 3. Mengatur rule general dan action menjadi accept

```
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Users\Metta Ayodya>ping 192.168.88.1

Pinging 192.168.88.1 with 32 bytes of data:
Reply from 192.168.88.1: bytes=32 time=3ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 3ms, Average = 1ms

C:\Users\Metta Ayodya>ping 192.168.88.1

Pinging 192.168.88.1 with 32 bytes of data:
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time<1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64


Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms


C:\Users\Metta Ayodya>
```

Gambar 4. Ping ke router dari laptop berhasil dilakukan

2. Memblokir ping ke router


Langkah 1 — Menambahkan rule baru untuk drop ping ke router

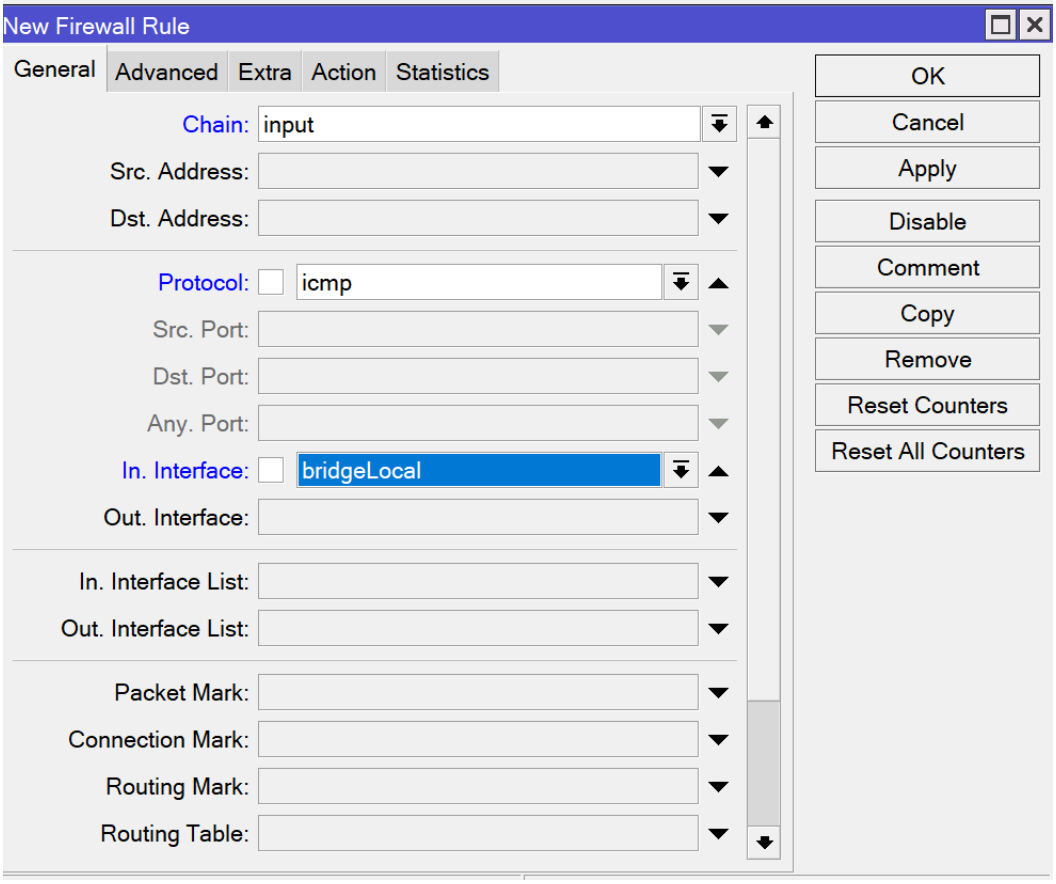

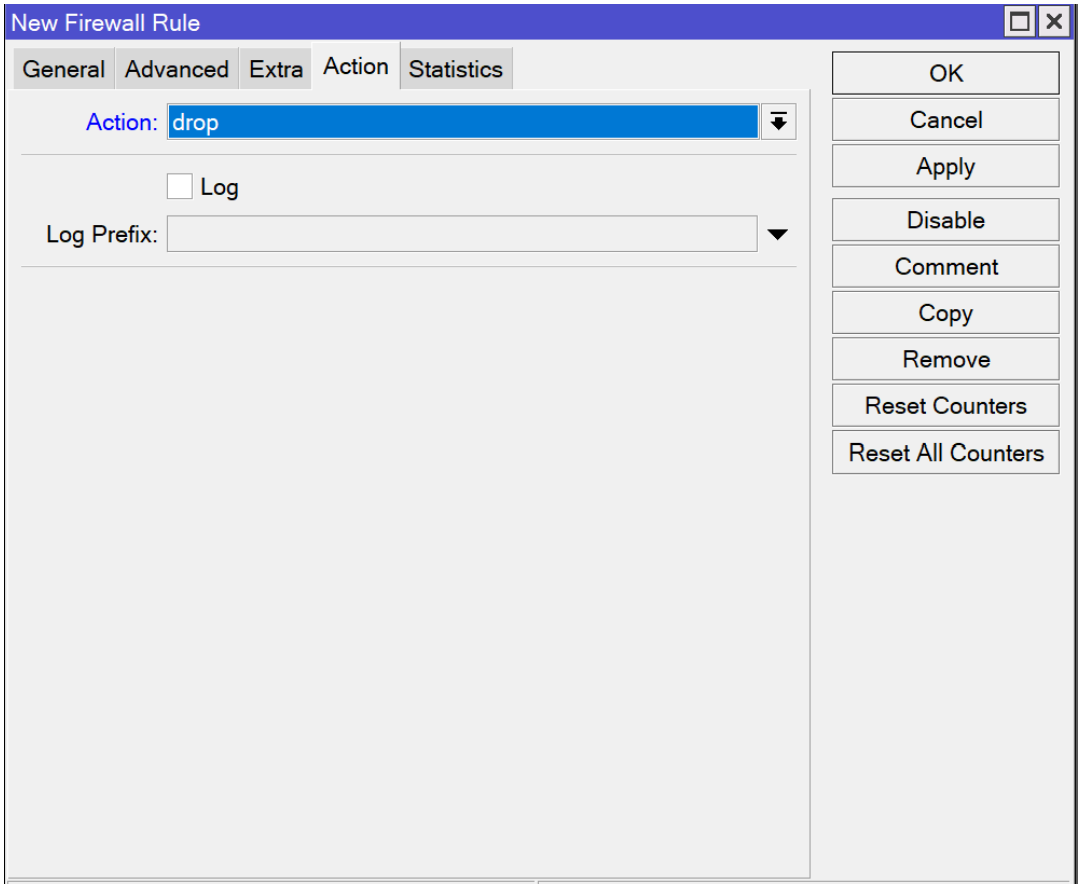

Gambar 5 & 6 Membuat rule drop ke router

Langkah 2 — Memindahkan rule drop menjadi paling atas

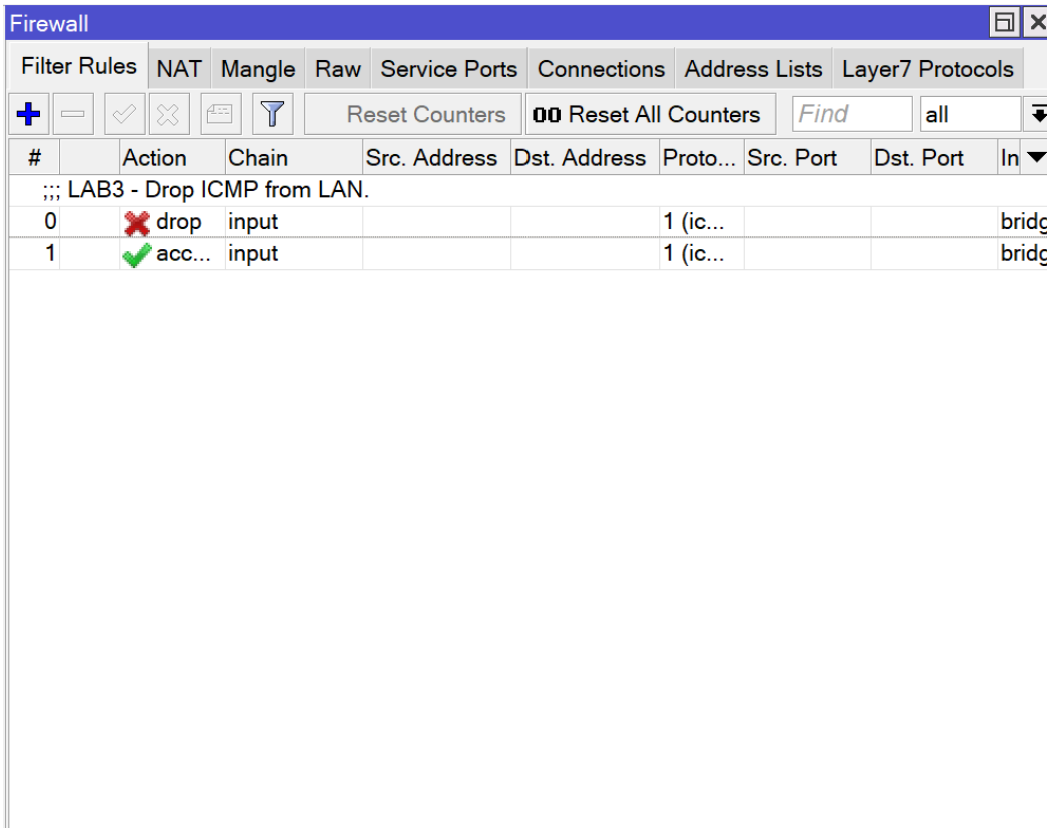

Gambar 7. Rule drop menjadi paling atas

```
Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 3ms, Average = 1ms

C:\Users\Metta Ayodya>ping 192.168.88.1

Pinging 192.168.88.1 with 32 bytes of data:
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time<1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\Metta Ayodya>ping 192.168.88.1


Pinging 192.168.88.1 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Users\Metta Ayodya>
```

Gambar 8. Tidak dapat melakukan ping ke router

Langkah 3 — Mengembalikan ke kondisi awal dengan mendisable rule drop

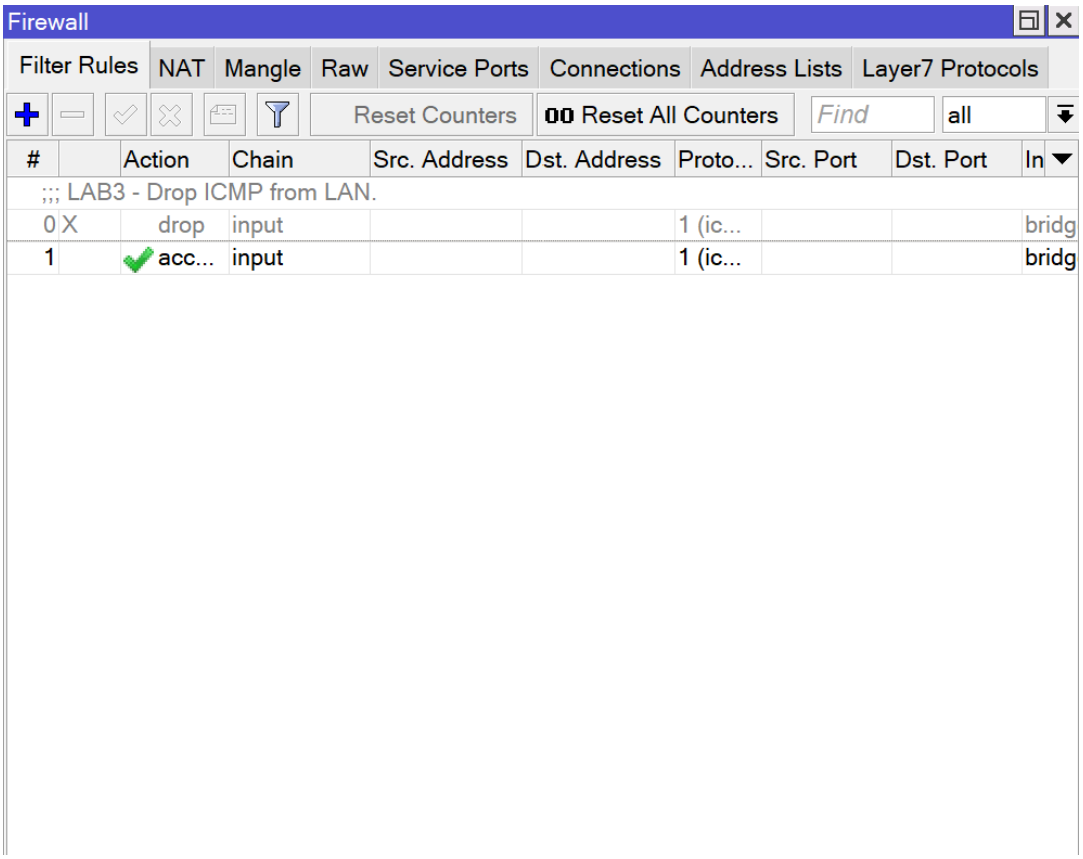

Gambar 9. Menonaktifkan action drop ke router

```
Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\Metta Ayodya>ping 192.168.88.1

Pinging 192.168.88.1 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Users\Metta Ayodya>ping 192.168.88.1

Pinging 192.168.88.1 with 32 bytes of data:
Reply from 192.168.88.1: bytes=32 time=2ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=2ms TTL=64


Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms


C:\Users\Metta Ayodya>
```

Gambar 10. Setelah di disable bisa melakukan ping Kembali ke router

3. Blokir ping dari laptop menuju internet

   Langkah 1 — Membuat rule forward baru

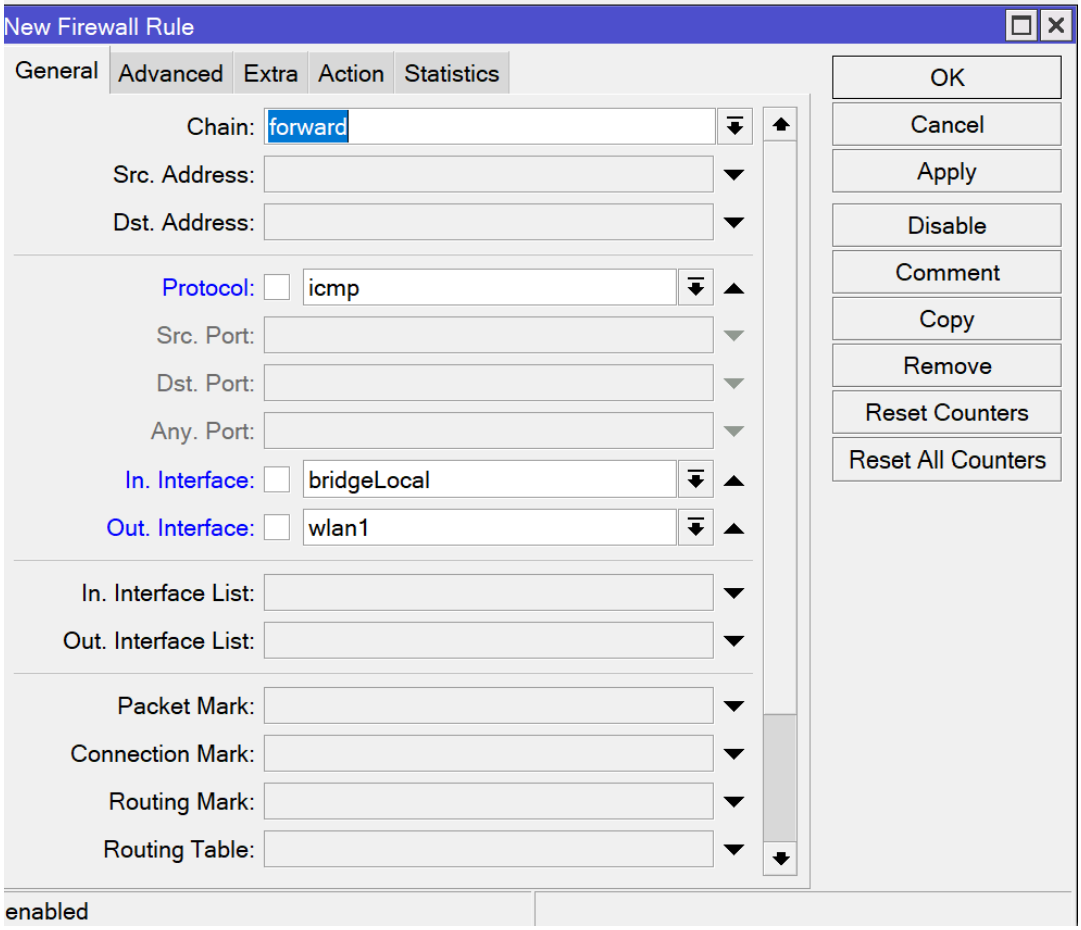

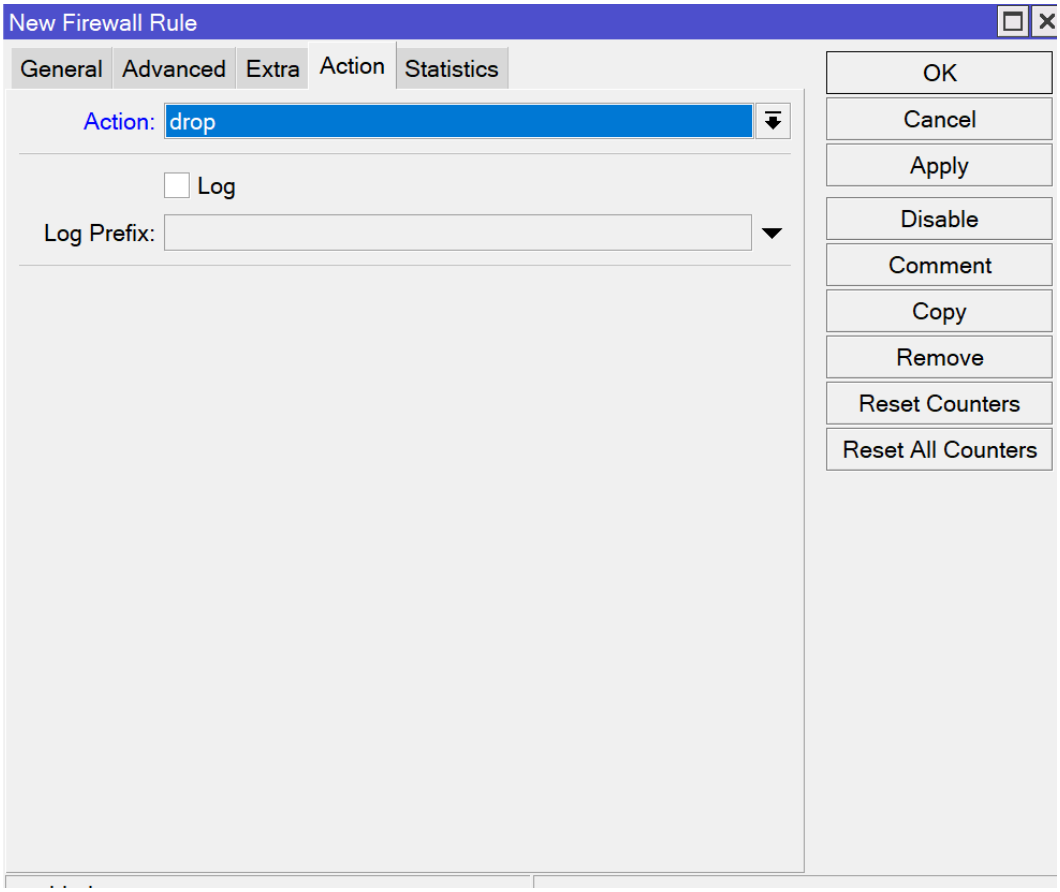

Gambar 11 & 12 Membuat rule drop untuk forward dari laptop ke internet

```
C:\Users\Metta Ayodya>ping 192.168.88.1

Pinging 192.168.88.1 with 32 bytes of data:
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64
Reply from 192.168.88.1: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\Metta Ayodya>ping 8.8.8.8


Pinging 8.8.8.8 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 8.8.8.8:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Users\Metta Ayodya>
```

Gambar 13. Ping ke WAN time out

Langkah 2 — Disable rule yang baru dibuat

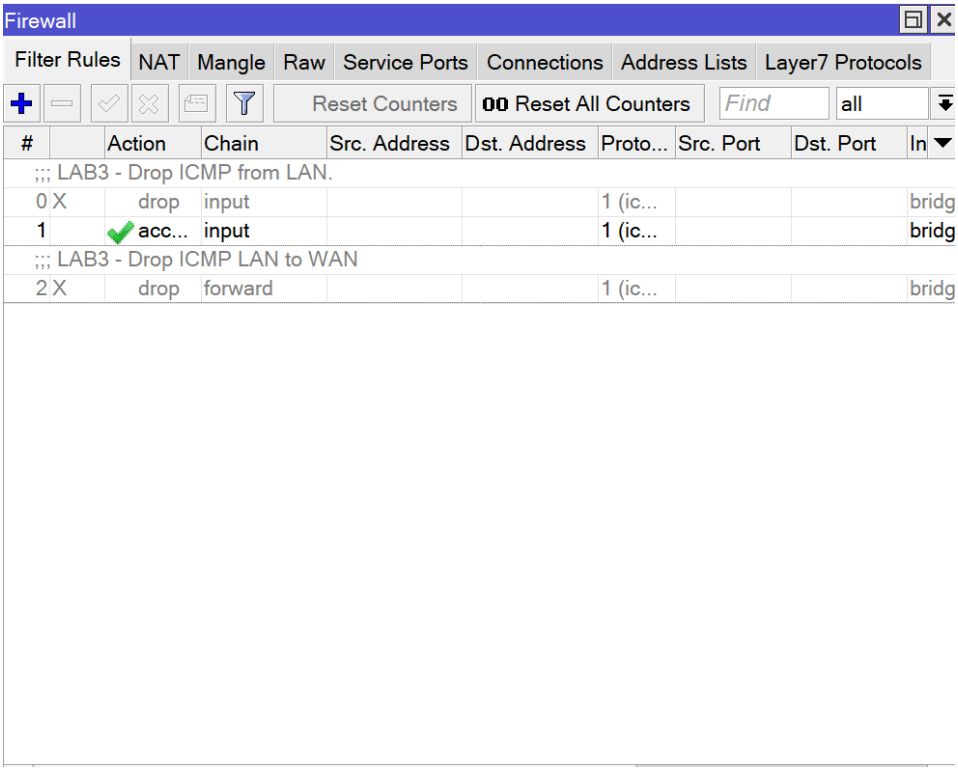

Gambar 14. Disable rule forward drop to WAN

```
Ping statistics for 192.168.88.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\Metta Ayodya>ping 8.8.8.8

Pinging 8.8.8.8 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 8.8.8.8:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Users\Metta Ayodya>ping 8.8.8.8

Pinging 8.8.8.8 with 32 bytes of data:
Reply from 8.8.8.8: bytes=32 time=50ms TTL=250
Reply from 8.8.8.8: bytes=32 time=36ms TTL=250
Reply from 8.8.8.8: bytes=32 time=37ms TTL=250
Reply from 8.8.8.8: bytes=32 time=41ms TTL=250


Ping statistics for 8.8.8.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 36ms, Maximum = 50ms, Average = 41ms

C:\Users\Metta Ayodya>
```

Gambar 15. Kembali bisa melakukan ping ke WAN


4. Membuat Chain Output


Langkah 1 — Uji ping langsung dari MikroTik ke 8.8.8.8

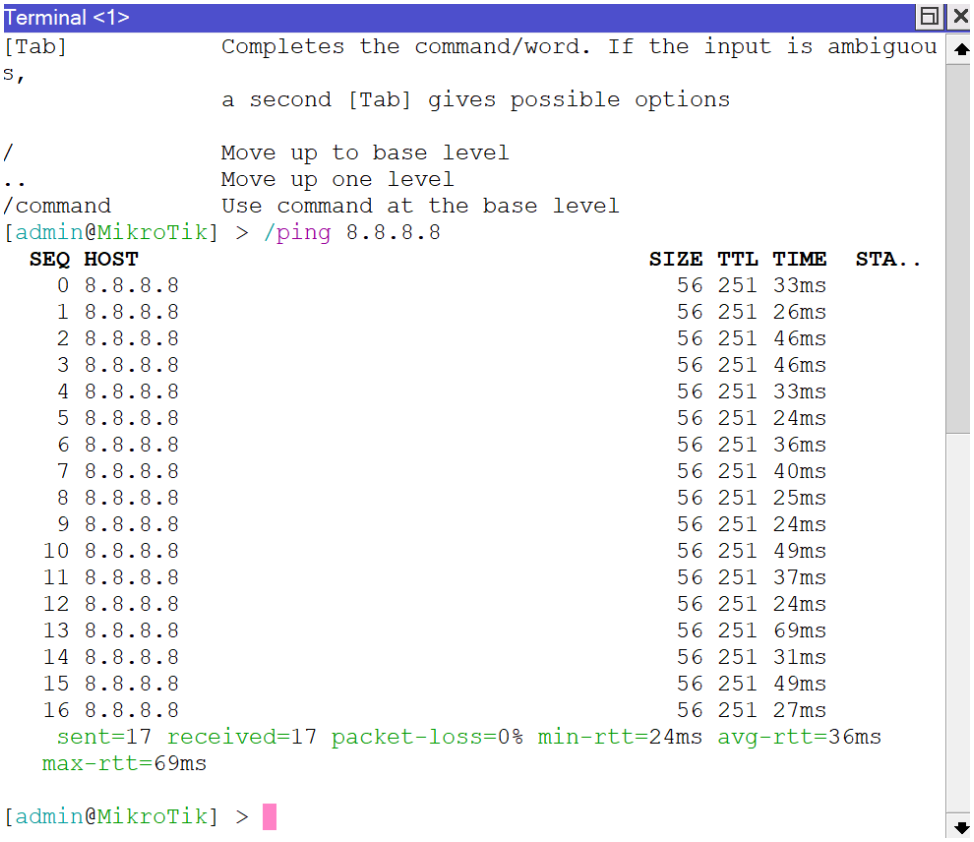


Gambar 16. Ping ke 8.8.8.8 berhasil dilakukan

Langkah 2 — Mencoba chain output tanpa mengganggu koneksi

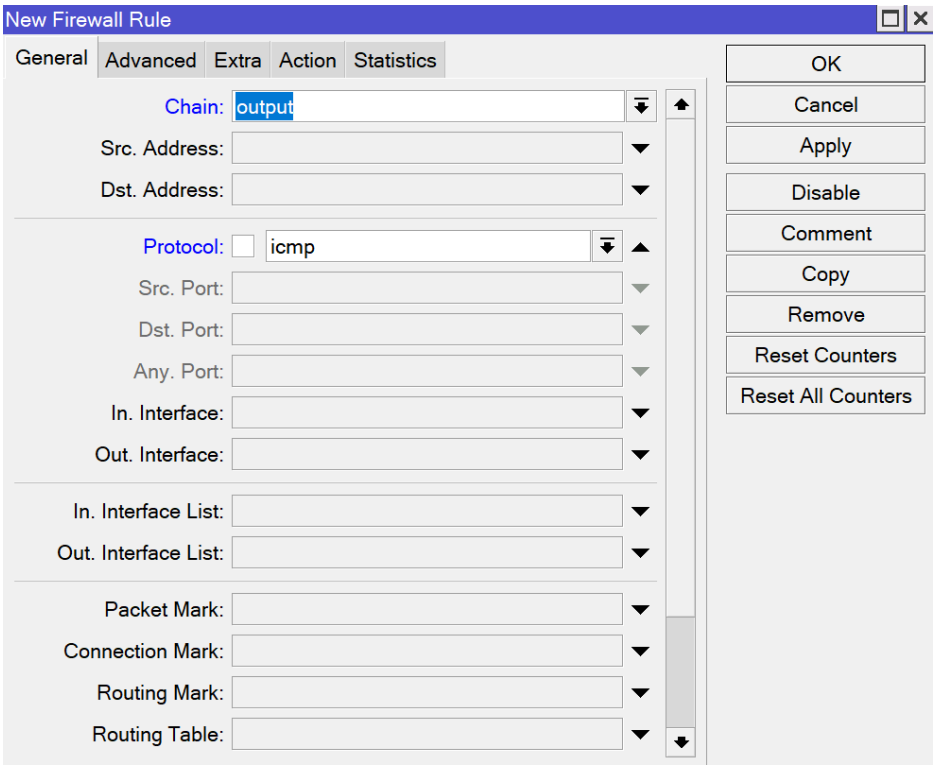


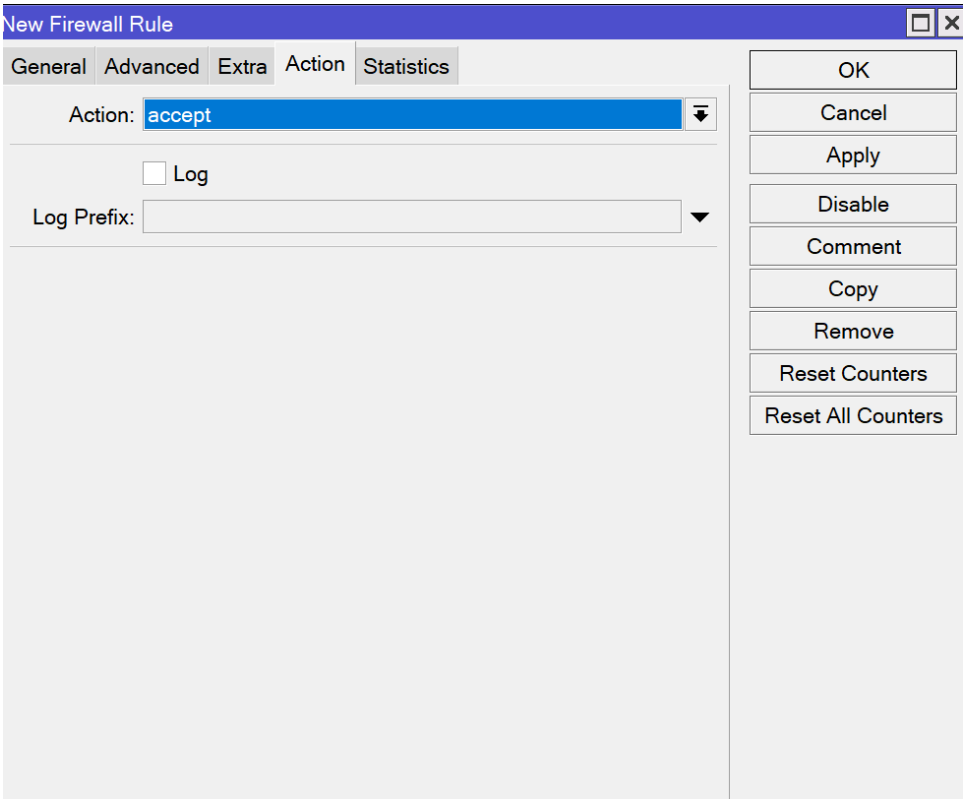

Gambar 17 & 18 Membuat rule output untuk ping ke 8.8.8.8

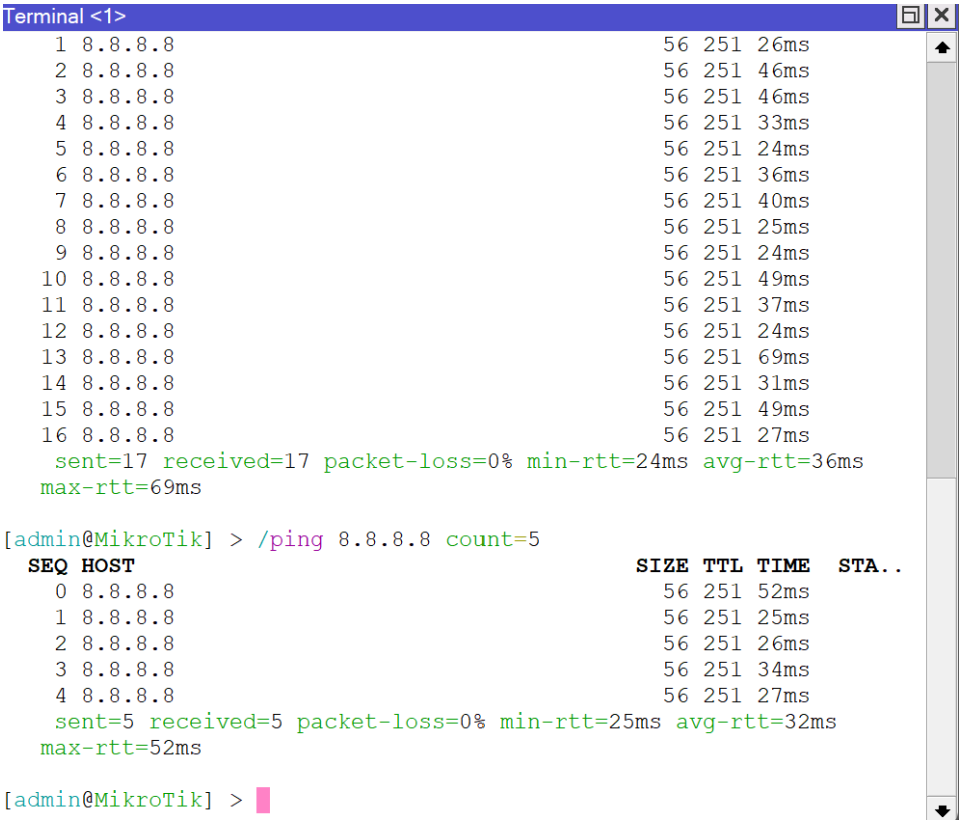

Gambar 19. Ping ke 8.8.8.8 dari terminal

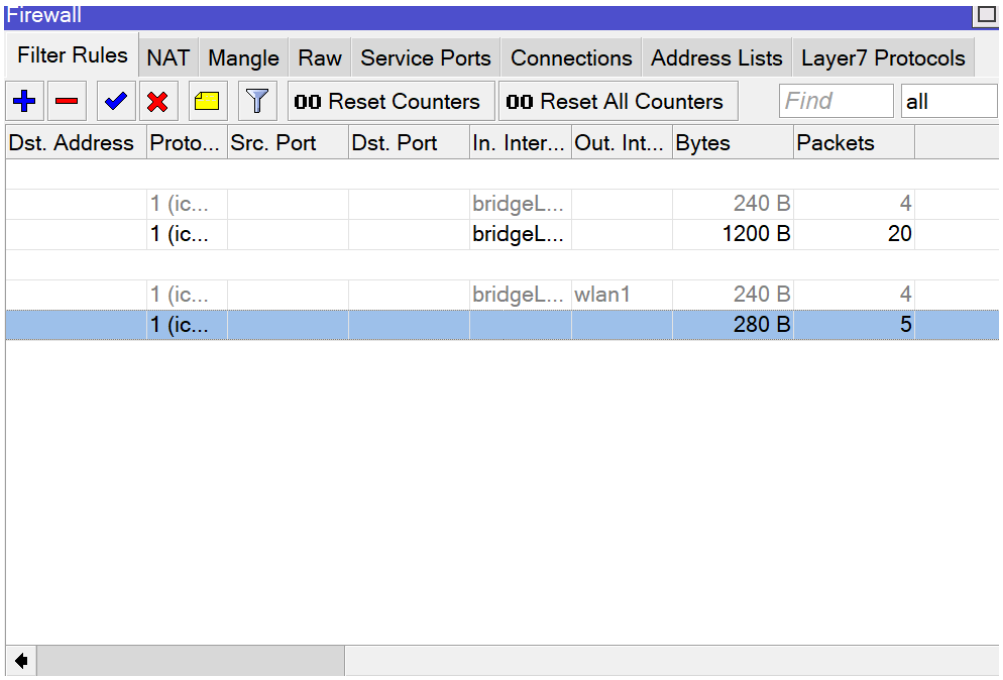

Gambar 20. Jumlah packet ping tercatat sesuai count yang ditentukan