

BioCAsE Monitor

2.1

Generated by Doxygen 1.8.11

Contents

1	BioCAsE Monitor 2.1	1
2	BMS Consistency Check - Todo List	5
3	Todo List	7
4	Namespace Index	9
4.1	Namespace List	9
5	Data Structure Index	11
5.1	Data Structures	11
6	File Index	13
6.1	File List	13
7	Namespace Documentation	17
7.1	Bms Namespace Reference	17
7.1.1	Detailed Description	18
7.1.2	Function Documentation	18
7.1.2.1	init()	18
7.1.3	Variable Documentation	18
7.1.3.1	\$db	18
7.1.3.2	\$route	18
7.1.3.3	CACHE_DIRECTORY	18
7.1.3.4	CACHING_INTERVAL	18
7.1.3.5	CUSTOM	19

7.1.3.6	DATACENTER_NAME	19
7.1.3.7	DB_DIR	19
7.1.3.8	DB_FILENAME	19
7.1.3.9	DEBUGMODE	19
7.1.3.10	DISTINCT	19
7.1.3.11	DROPPED	19
7.1.3.12	PROXY_WORKAROUND	19
7.1.3.13	PROXY_WORKAROUND_URL	20
7.1.3.14	SALT	20
7.1.3.15	TOTAL	20
7.1.3.16	VERBOSE	20
7.2	Consistency Namespace Reference	20
7.2.1	Detailed Description	21
7.2.2	Function Documentation	21
7.2.2.1	get_tag(\$tag, \$xml)	21
7.2.2.2	getMappedElements(\$mapping)	22
7.2.2.3	getMappedElementsWithoutRules(\$mapping)	22
7.2.2.4	getRuleInfo(\$concept, \$mapping)	23
7.2.2.5	getSchemaInfo(\$schema)	23
7.2.2.6	getSchemaMappingInfo(\$mapping)	24
7.2.2.7	getSchemaMappings(\$mapping)	24
7.2.2.8	getSchemas()	25
7.2.3	Variable Documentation	25
7.2.3.1	\$aconcept	25
7.2.3.2	\$concept_xpath	25
7.2.3.3	\$dsa	25
7.2.3.4	\$filter	25
7.2.3.5	\$idProvider	26
7.2.3.6	\$mapping	26
7.2.3.7	\$source_schema	26
7.2.3.8	\$target_schema	26
7.3	Webservices Namespace Reference	26
7.3.1	Detailed Description	26
7.3.2	Function Documentation	26
7.3.2.1	getCitations(\$idDSA)	26
7.3.2.2	getDataSources(\$idProvider)	27
7.3.2.3	getLandingpages(\$provider, \$dsa, \$filter, \$inst, \$col, \$cat)	27
7.3.2.4	getProviderInfo(\$idProvider)	28
7.3.2.5	getProviders(\$id, \$name)	28
7.3.2.6	getTotalRecords(\$idDSA)	29
7.3.2.7	getUsefullLinks(\$idDSA, \$idProvider)	29
7.3.2.8	getXmlArchives(\$idProvider, \$idDSA)	30

8	Data Structure Documentation	31
8.1	Bms Class Reference	31
8.1.1	Detailed Description	31
8.1.2	Member Function Documentation	31
8.1.2.1	frontController(\$route)	31
8.1.2.2	getCitation(\$providerId, \$url, \$filter, \$cached=1, \$concept=""/DataSets/Data← Set/Metadata/IPRStatements/Citations/Citation/Text"")	32
8.1.2.3	getConcepts(\$idProvider)	32
8.1.2.4	getCountConcepts(\$providerId, \$schema, \$url, \$concept, \$specifier, \$filter, \$no- cache)	33
8.1.2.5	getCurrentRecords(\$providerId, \$schema, \$url, \$filter, \$nocache)	33
8.1.2.6	getMessages()	34
8.1.2.7	getProviderMainData(\$idProvider)	34
8.1.2.8	getProviders()	34
8.1.2.9	getSchema(\$schema)	34
8.1.3	Field Documentation	35
8.1.3.1	\$custom_layout	35
8.1.3.2	\$debugmode	35
8.1.3.3	\$message	35
9	File Documentation	37
9.1	admin/addArchive.php File Reference	37
9.1.1	Detailed Description	37
9.2	admin/addCount.php File Reference	37
9.2.1	Detailed Description	38
9.3	admin/addDSA.php File Reference	38
9.3.1	Detailed Description	38
9.4	admin/addUsefulLink.php File Reference	39
9.4.1	Detailed Description	39
9.5	admin/getAllCountConcepts.php File Reference	39
9.5.1	Detailed Description	39
9.6	admin/getCountConcepts.php File Reference	40

9.6.1 Detailed Description	40
9.7 admin/getDataSetTitles.php File Reference	40
9.7.1 Detailed Description	40
9.8 admin/getDataSources.php File Reference	41
9.8.1 Detailed Description	41
9.9 admin/getDatasourceSchema.php File Reference	41
9.9.1 Detailed Description	42
9.10 admin/getLinkCategories.php File Reference	42
9.10.1 Detailed Description	42
9.11 admin/getProviderMainData.php File Reference	43
9.11.1 Detailed Description	43
9.12 admin/index.php File Reference	43
9.12.1 Detailed Description	43
9.13 consistency/index.php File Reference	44
9.13.1 Detailed Description	44
9.14 index.php File Reference	44
9.14.1 Detailed Description	45
9.15 services/capabilities/index.php File Reference	45
9.15.1 Detailed Description	45
9.16 services/citations/index.php File Reference	46
9.16.1 Detailed Description	46
9.17 services/data-sources/index.php File Reference	46
9.17.1 Detailed Description	47
9.18 services/index.php File Reference	47
9.18.1 Detailed Description	47
9.18.2 LICENSE	47
9.19 services/landingpages/index.php File Reference	48
9.19.1 Detailed Description	48
9.20 services/providers/add/index.php File Reference	48
9.20.1 Detailed Description	49

9.21	services/providers/index.php File Reference	49
9.21.1	Detailed Description	49
9.22	services/total-records/index.php File Reference	50
9.22.1	Detailed Description	50
9.23	services/useful-links/index.php File Reference	50
9.23.1	Detailed Description	51
9.24	services/xml-archives/index.php File Reference	51
9.24.1	Detailed Description	51
9.24.2	DESCRIPTION	52
9.25	admin/manageProvider.php File Reference	52
9.25.1	Detailed Description	52
9.25.2	Function Documentation	52
9.25.2.1	bin2crud(\$n)	52
9.26	admin/manageProviderForm.php File Reference	53
9.26.1	Detailed Description	53
9.27	admin/manageSuperuserForm.php File Reference	53
9.27.1	Detailed Description	53
9.28	admin/manageUser.php File Reference	54
9.28.1	Detailed Description	54
9.28.2	Function Documentation	54
9.28.2.1	bin2crud(\$n)	54
9.29	admin/manageUserForm.php File Reference	55
9.29.1	Detailed Description	55
9.30	admin/navbar.php File Reference	55
9.30.1	Detailed Description	56
9.31	consistency/navbar.php File Reference	56
9.31.1	Detailed Description	56
9.32	services/navbar.php File Reference	56
9.32.1	Detailed Description	57
9.33	admin/removeArchive.php File Reference	57

9.33.1 Detailed Description	57
9.34 admin/removeCount.php File Reference	58
9.34.1 Detailed Description	58
9.35 admin/removeDSA.php File Reference	58
9.35.1 Detailed Description	58
9.36 admin/removeUsefulLink.php File Reference	59
9.36.1 Detailed Description	59
9.37 admin/sortArchives.php File Reference	59
9.37.1 Detailed Description	59
9.38 admin/sortCountConcepts.php File Reference	60
9.38.1 Detailed Description	60
9.39 admin/sortUsefulLinks.php File Reference	60
9.39.1 Detailed Description	60
9.40 admin/updateArchive.php File Reference	61
9.40.1 Detailed Description	61
9.41 admin/updateCountConcept.php File Reference	61
9.41.1 Detailed Description	61
9.42 admin/updateDSA.php File Reference	62
9.42.1 Detailed Description	62
9.43 admin/updateMainMetadata.php File Reference	62
9.43.1 Detailed Description	62
9.44 admin/updateUsefulLink.php File Reference	63
9.44.1 Detailed Description	63
9.45 config/config.sample.php File Reference	63
9.45.1 Detailed Description	64
9.46 config/custom/customize.php File Reference	64
9.46.1 Detailed Description	65
9.47 consistency/cardinalConcept.php File Reference	65
9.47.1 Detailed Description	65
9.48 consistency/checkForErrors.php File Reference	66

9.48.1 Detailed Description	66
9.49 consistency/checkRules.php File Reference	66
9.49.1 Detailed Description	67
9.50 consistency/getExampleValues.php File Reference	67
9.50.1 Detailed Description	67
9.51 consistency/getSchemaMappings.php File Reference	68
9.51.1 Detailed Description	68
9.52 js/backend.js File Reference	68
9.52.1 Detailed Description	69
9.52.2 Function Documentation	69
9.52.2.1 addArchive(idDSA, idProvider)	69
9.52.2.2 addCount()	69
9.52.2.3 addDSA(idProvider)	70
9.52.2.4 addUsefulLink(idDSA, idProvider)	70
9.52.2.5 deleteOldValues()	71
9.52.2.6 getAllMetadata(idProvider)	71
9.52.2.7 getArchives(idProvider, idDSA)	72
9.52.2.8 getCapabilities(provider, idDSA, dsa)	73
9.52.2.9 getCountConcepts(idProvider)	73
9.52.2.10 getDataSetTitles(idDSA, url, dataset)	74
9.52.2.11 getDataSourceAccessPoints(idProvider, url, idDSA, selectedValue, dataSet)	75
9.52.2.12 getLinkCategories()	75
9.52.2.13 getProviders()	76
9.52.2.14 getSchemas(idProvider, idDSA, dsa, selectedValue)	77
9.52.2.15 getUsefulLinks(idProvider, idDSA)	77
9.52.2.16 hideArchive(idDSA, id, counter)	78
9.52.2.17 hideUsefulLink(idDSA, id)	78
9.52.2.18 removeArchive(idDSA, id)	79
9.52.2.19 removeCount(id)	79
9.52.2.20 removeDSA(id)	80

9.52.2.21	removeUsefulLink(idDSA, id)	80
9.52.2.22	saveArchive(idProvider, idDSA, id)	81
9.52.2.23	saveCount(id)	81
9.52.2.24	saveDSAPoint(dsa, reload)	82
9.52.2.25	saveMainMetadata()	83
9.52.2.26	saveUsefulLink(idProvider, idDSA, id)	83
9.52.2.27	showArchive(idDSA, id)	84
9.52.2.28	showUsefulLink(idDSA, id)	84
9.53	js/consistency.js File Reference	84
9.53.1	Detailed Description	85
9.53.2	Function Documentation	85
9.53.2.1	cardinalConcept(idProvider, schema, filter, concept, j)	85
9.53.2.2	checkForErrors(idProvider, filter, concept, schema, mapping, j, total)	86
9.53.2.3	checkRules(idProvider, dsa, filter, mapping)	87
9.53.2.4	extractExampleValues(event)	88
9.53.2.5	fire(idProvider, dsa, filter)	88
9.53.2.6	getExampleValues(provider, schema, url, filter, concept, j)	89
9.53.2.7	getUnique(inputArray)	90
9.53.2.8	isValidCitation(str)	90
9.53.2.9	matchRule(functionName, url)	91
9.54	js/custom.js File Reference	91
9.54.1	Detailed Description	92
9.54.2	Variable Documentation	92
9.54.2.1	spinner	92
9.55	js/dev.js File Reference	92
9.55.1	Detailed Description	92
9.55.2	Variable Documentation	93
9.55.2.1	debugmode	93
9.55.2.2	verbose	93
9.56	js/frontend.js File Reference	93

9.56.1 Detailed Description	93
9.56.2 Function Documentation	93
9.56.2.1 buildUI(data)	93
9.56.2.2 getArchives(idProvider, idDSA)	94
9.56.2.3 getCitation(idProvider, schema, dsa, url, filter, concept, j, cached)	94
9.56.2.4 getCountConcept(idProvider, idDSA, schema, queryUrl, concept, specifier, filter, nocache)	95
9.56.2.5 getCurrentRecords(idProvider, idDSA, schema, queryUrl, filter, nocache)	96
9.56.2.6 getSchema(schema)	97
9.56.2.7 getUsefulLinks(idProvider, idDSA)	98
9.56.2.8 populateUI()	99
9.56.2.9 showDate(utime)	100
9.56.2.10 showProgress(idProvider, dsa, action, startTime)	100
9.57 js/general.js File Reference	101
9.57.1 Detailed Description	102
9.57.2 Function Documentation	102
9.57.2.1 copyToClipboard(elem)	102
9.57.2.2 displayErrorMessage(elt, msg, mode)	103
9.57.2.3 displaySystemMessage(msg, alert, duration)	103
9.57.2.4 formatXml(xml)	104
9.57.2.5 getMessages(path)	104
9.57.2.6 hideSystemMessage()	105
9.57.2.7 logbook(idProvider, schema, dsa, concept, action, timeElapsed)	105
9.57.2.8 showConcurrentRequests()	106
9.57.3 Variable Documentation	106
9.57.3.1 biocaseLocalQueryToolUrl	106
9.57.3.2 biocaseQueryUrl	106
9.57.3.3 biocaseResponseUrl	106
9.57.3.4 debugmode	107
9.57.3.5 message	107
9.57.3.6 nbAjaxCalls	107
9.57.3.7 spinner	107
9.57.3.8 verbose	107
9.58 js/landingpage.js File Reference	107
9.58.1 Detailed Description	107
9.59 landingpage.php File Reference	108
9.59.1 Detailed Description	108
9.60 logbook.php File Reference	108
9.60.1 Detailed Description	108

Chapter 1

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.naturkundemuseum.berlin

Author

thomas.pfuhl@mfn-berlin.de

based on Version 1.4 written by falko.gloeckler@mfn-berlin.de

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Purpose

The BioCAsE Monitor Service (BMS) is a tool for coordinators of networks of biodiversity databases that are based on the BioCAsE Provider Software (BPS).

The backend part of the tool allows registration of BioCAsE providers and their data sources in a user-friendly UI.

In the frontend, all relevant information are displayed in an aggregated view, e.g.

- provider name (linking to the access point URL),
- list of data sources, total number of records and of unique values per concept (i.e. number of units, number of multimedia objects),
- link to the consistency checker tool
- link to archives

- other useful links.

In the EU funded project OpenUp! the BioCAsE Monitor Service is used to monitor the progress of the provision of multimedia objects to Europeana.

Furthermore, it is a useful tool for the coordinators of the content-providing work packages as a quality check of the mapping of the associated metadata in the ABCD or ABCDEFG schema and its required compliance with the Europeana Sematic Elements (ESE), the Europeana standard. The tool has been developed in close collaboration between the OpenUp! team (Work Package 4 & 7) and the GBIF-D team at the Museum für Naturkunde Berlin, Germany.

The version series 2.x code has been completely rewritten, and relies on a sqlite3 database.

A more detailed description has been published in the [Biodiversity Data Journal](#)

Webservices

As a complement of the GUI, the software offers [Webservices](#). The entry point is [services/](#)

Installation

Requirements

- Webserver, e.g. apache2
- Database engine, e.g. sqlite3
- PDO
- PHP 5.6
- php5-curl, php5-sqlite, php5-xsl

Installation steps

1. copy everything to a webfolder
2. edit configuration file `config/config.php`
3. set files permissions
 - all files must be readable by webuser
 - DB file `provider.sqlite` must be writable by webuser
 - Cache folder `data_cache` must be writable by webuser
4. create and populate database
 - run statements defined in `install/sampledatab.sql`

The following shell script `install/install.sh` does the job for an installation on linux. You might be required to have sudoer's rights:

```
#!/bin/bash
# please edit these settings
DBDIR=/my/db/folder/
WEBDIR=/var/www/bms
WEBUSER=www-data
# running the commands
mkdir $DBDIR
mkdir $WEBDIR
cd $WEBDIR
chgrp -R $WEBUSER .
chmod -R g+w $DBDIR
mkdir data_cache
chmod g+w data_cache
cd config
ln -s config.sample.php config.php
mv sampledata.sql $DBDIR
sqlite3 $DBDIR/provider.sqlite < $DBDIR/sampledata.sql
chgrp $WEBUSER $DBDIR/provider.sqlite
```

Backend

In the navigation bar, log in. Default administrator account: username=admin, password=admin.

API Documentation

Point your browser to `info/doc/api/html/index.html`

Typical Administrator's Workflow

1. Login

- Login via the navigation bar
- type in your credentials and validate
- select a provider in the dropdown list

2. Main Metadata

- edit the provider's Main Metadata

3. Count Concepts

- **example:** /DataSet/Units/Unit/MultiMediaObjects/MultiMediaObject/FileURI
- modify a concept: autocompletion from all concepts defined in ABCD2
- move a concept up and down, using the handle
- save the current concept count
- delete the current concept count
- add a new concept count

4. Data Source Access Points (DSAs)

- Data Sources
 - Data Sources are presented in tabs: a tab for each data set, one data source visible
 - operations: add, delete, save
 - edit required fields
 - * status: active/inactive

- data-source: select a specific Data Source in the dropdown list
- title: type a human readable full title
- data-set: select a specific Data Set in the dropdown list
- landing-page: select type of landingpage:
 - * automatically generated: this is the default landingpage, based on a scan request for the concept `/DataSets/DataSet/Units/Unit/MultiMediaObjects/MultiMediaObject/FileURI`.
 - * user-defined URL: enter an URL
- for advanced users only:
 - * filter: define a complex filter
 - * Beware ! The filter is applied **as is** (not validated) to the request sent to the pywrapper
- Archives
 - add an arbitrary list of archives
 - an archive is a URL pointing to a downloadable file
 - one archive must be marked as "latest"
- Useful Links
 - add an arbitrary list of links
 - a link is a URL pointing to a downloadable file and should be one of the following types:
 - * BioCAsE Query Tool
 - * GBIF
 - * Europaeana
 - * Deutsche Digitale Bibliothek
 - * GeoCAsE
 - * BiNHum
 - * Pangaea
 - * GFBio
 - example: <http://www.gbif.org/dataset/71f03224-f762-11e1-a439-00145eb45e9a> (GBIF)

5. Logout

- log out via the navigation bar

Issues

The BMS has been tested on Firefox and Chrome. It has been reported that Opera and IE do not display the data.

Chapter 2

BMS Consistency Check - Todo List

DwCore

- use recommended version
- take complete xpath
- reference: <http://rs.tdwg.org/dwc/terms/Occurrence>
- make decision which ABCD xpath to select:
{DataSets/DataSet/Units/Unit/RecordURI **or** Datasets/Dataset/Units/Unit/UnitReferences/UnitReferences **or** Datasets/Dataset/Units/Unit/SourceReference **or** Datasets/Dataset/Units/Unit/Identifications/Identification/↵
References/Reference **or** Datasets/Dataset/Units/Unit/SpecimenUnit/NomenclaturalTypeDesignations/↵
NomenclaturalTypeDesignation/NomenclaturalReference **or** MeasurementOrFact/MeasurementOrFact/↵
Atomised/MeasurementOrFactReference}
- how to process things like:
associatedSequences DataSets/DataSet/Units/Unit/Sequences/Sequence/ID-in-Database + constant
previousIdentifications DataSets/DataSet/Units/Unit/Identifications/Identification with PreferredFlag = false
continent DataSets/DataSet/Units/Unit/Gathering/NamedAreas/NamedArea/AreaName with NamedAreas/↵
NamedArea/AreaClass= Continent

Chapter 3

Todo List

Global `addCount ()`

: attach count concepts to each DSA, since dDSAs may have distinct schemas

File `checkForErrors.php`

classify rules depending on the weight

File `checkRules.php`

CURL request can be time consuming

Global `Consistency::$concept_xpath`

compute element xpath with correct prefix for given schema

Global `Consistency::getSchemaMappings ($mapping)`

add parameter dataset, and restrict result to supported Schemas

File `getAllCountConcepts.php`

filter through given schema

move it to services

File `getExampleValues.php`

compute element xpath with correct prefix for given schema

File `index.php`

call webservice via AJAX: "../services/providers/index.php"

Global `isValidCitation (str)`

adapt to consensus document

Global `matchRule (functionName, url)`

to be written

Chapter 4

Namespace Index

4.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

Bms	17
Consistency	20
Webservices	26

Chapter 5

Data Structure Index

5.1 Data Structures

Here are the data structures with brief descriptions:

Bms	31
---------------	----

Chapter 6

File Index

6.1 File List

Here is a list of all documented files with brief descriptions:

index.php	Entry point, using class definition of Bms	44
landingpage.php	Landing page for ABCD2.06 raw xml	108
logbook.php	Statistics to log resquests to the BPS installations	108
admin/addArchive.php	Backend: add an XML Archive	37
admin/addCount.php	Backend: add a Count Concept	37
admin/addDSA.php	Backend: add a DSA Point	38
admin/addUsefullLink.php	Backend: add a useful Link	39
admin/getAllCountConcepts.php	Backend: get all Count Concepts	39
admin/getCountConcepts.php	Backend: get CountConcepts	40
admin/getDataSetTitles.php	Backend: get Dataset Titles	40
admin/getDataSources.php	Backend: get Data Source Access Points	41
admin/getDatasourceSchema.php	Backend: get Source Schema for given DataSource	41
admin/getLinkCategories.php	Backend: get Link Categories	42
admin/getProviderMainData.php	Backend: get Main Data from given provider	43
admin/index.php	Backend entry point	43
admin/manageProvider.php	Backend: backend: manage Provider	52
admin/manageProviderForm.php	Backend: manage Provider (html form)	53
admin/manageSuperuserForm.php	Backend: manage Superuser (html form)	53

admin/ manageUser.php	
Backend: manage user	54
admin/ manageUserForm.php	
Backend: manage user (html form)	55
admin/ navbar.php	
Backend: display navigation bar	55
admin/ removeArchive.php	
Backend: remove an Archive	57
admin/ removeCount.php	
Backend: remove a Count Concept	58
admin/ removeDSA.php	
Backend: remove a Data Access Point	58
admin/ removeUsefulLink.php	
Backend: remove a useful Link	59
admin/ sortArchives.php	
Backend: sort BioCAsE XML Archives	59
admin/ sortCountConcepts.php	
Backend: sort Count Concepts	60
admin/ sortUsefulLinks.php	
Backend: sort Useful Links	60
admin/ updateArchive.php	
Backend: update XML Archive	61
admin/ updateCountConcept.php	
Backend: update Count Concept	61
admin/ updateDSA.php	
Backend: update Data Source Access Point	62
admin/ updateMainMetadata.php	
Backend: update main metadata for a given provider	62
admin/ updateUsefulLink.php	
Backend: update useful link	63
config/ config.sample.php	
Configuration: constants and DB settings	63
config/custom/ analyticstracking.php	??
config/custom/ customize.php	
Customization	64
consistency/ cardinalConcept.php	
Count the occurrences of given concept	65
consistency/ checkForErrors.php	
Checks errors for given concept in the consistency check output	66
consistency/ checkRules.php	
Get rules from DB table rule, get capabilities from BPS via CURL, check the rules	66
consistency/ getExampleValues.php	
Get example values for given concept in the consistency check output	67
consistency/ getSchemaMappings.php	
Get schema mappings from DB	68
consistency/ index.php	
Check consistency	44
consistency/ navbar.php	
Display bootstrap navigation bar	56
js/ backend.js	
Javascript functions used in the backend	68
js/ consistency.js	
Javascript functions used in the consistency checker	84
js/ custom.js	
Javascript for customizing	91
js/ dev.js	
Javascript loaded in development mode	92

js/ frontend.js	
Javascript functions used in the frontend	93
js/ general.js	
Javascript general settings functions	101
js/ landingpage.js	
Javascript statements for the landingpage	107
services/ index.php	
Webservices GUI entry point	47
services/ navbar.php	
Display navigation bar	56
services/capabilities/ index.php	
Webservices capabilities	45
services/citations/ index.php	
Webservices citations	46
services/data-sources/ index.php	
Webservices data sources	46
services/landingpages/ index.php	
Webservices landingpages (DataSet AND DataUnit)	48
services/providers/ index.php	
Webservices providers	49
services/providers/add/ index.php	
Webservices add provider (needed for automated population)	48
services/total-records/ index.php	
Webservices total-records	50
services/useful-links/ index.php	
Webservices useful links	50
services/xml-archives/ index.php	
Webservices xml-archives	51

Chapter 7

Namespace Documentation

7.1 Bms Namespace Reference

Data Structures

- class [Bms](#)

Functions

- [init](#) ()

Variables

- const [DATACENTER_NAME](#) "Data Center "
- const [SALT](#) "WE@leht=13"
- const [VERBOSE](#) 3
- const [DEBUGMODE](#) 1
- const [CUSTOM](#) 1
- const [CACHING_INTERVAL](#) 604800
- const [CACHE_DIRECTORY](#) "data_cache/"
- const [PROXY_WORKAROUND](#) false
- const [PROXY_WORKAROUND_URL](#) "http://192.168.101.160/biocasemonitor/gfbio"
- const [DB_DIR](#) "/path/to/db/folder"
- const [DB_FILENAME](#) "provider.sqlite"
- [\\$db](#) = null
- const [TOTAL](#) (defined("JSON_PRETTY_PRINT")) 1
- const [DISTINCT](#) 2
- const [DROPPED](#) 4
- [\\$route](#) = filter_input(INPUT_GET, 'action')

7.1.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

7.1.2 Function Documentation

7.1.2.1 Bms\init ()

establish database connection

Definition at line 100 of file config.sample.php.

7.1.3 Variable Documentation

7.1.3.1 \$db = null

database handler

Definition at line 95 of file config.sample.php.

7.1.3.2 \$route = filter_input(INPUT_GET, 'action')

GET parameter for static routing, passed to the frontController

Definition at line 874 of file index.php.

7.1.3.3 const CACHE_DIRECTORY "data_cache/"

set cache directory relative to root directory

Definition at line 66 of file config.sample.php.

7.1.3.4 const CACHING_INTERVAL 604800

set interval for renewing the cache [in seconds]: every 7 days

Definition at line 61 of file config.sample.php.

7.1.3.5 `const CUSTOM 1`

set customize (0 or 1)

Definition at line 56 of file config.sample.php.

7.1.3.6 `const DATACENTER_NAME "Data Center "`

set datacenter denomination

Definition at line 36 of file config.sample.php.

7.1.3.7 `const DB_DIR "/path/to/db/folder"`

sqlite3 set database folder

Definition at line 84 of file config.sample.php.

7.1.3.8 `const DB_FILENAME "provider.sqlite"`

sqlite3 set database filename

Definition at line 89 of file config.sample.php.

7.1.3.9 `const DEBUGMODE 1`

set debug level (0 or 1)

Definition at line 51 of file config.sample.php.

7.1.3.10 `const DISTINCT 2`

all distinct records

Definition at line 133 of file config.sample.php.

7.1.3.11 `const DROPPED 4`

all dropped records

Definition at line 138 of file config.sample.php.

7.1.3.12 `const PROXY_WORKAROUND false`

set flag for proxy workaround Url

Definition at line 71 of file config.sample.php.

7.1.3.13 `const PROXY_WORKAROUND_URL "http://192.168.101.160/biocasemonitor/gfbio"`

set fproxy workaround Url

Definition at line 76 of file config.sample.php.

7.1.3.14 `const SALT "WE@leht=13"`

set salt value for password encryption

Definition at line 41 of file config.sample.php.

7.1.3.15 `const TOTAL(!defined("JSON_PRETTY_PRINT")) 1`

all records

Definition at line 128 of file config.sample.php.

7.1.3.16 `const VERBOSE 3`

set verbose level

Definition at line 46 of file config.sample.php.

7.2 Consistency Namespace Reference

Functions

- [get_tag](#) (\$tag, \$xml)
- [getSchemaInfo](#) (\$schema)
- [getRuleInfo](#) (\$concept, \$mapping)
- [getSchemas](#) ()
- [getSchemaMappingInfo](#) (\$mapping)
- [getMappedElementsWithoutRules](#) (\$mapping)
- [getMappedElements](#) (\$mapping)
- [getSchemaMappings](#) (\$mapping)

Variables

- [\\$filter](#) = filter_input(INPUT_GET, 'filter')
- [\\$mapping](#) = \$_REQUEST["mapping"]
- [\\$dsa](#) = \$_REQUEST["dsa"]
- [\\$aconcept](#) = explode("/", \$concept)
- [\\$concept_xpath](#) = implode("/abcd:", \$aconcept)
- [\\$idProvider](#) = \$_GET["provider"]
- [\\$source_schema](#) = \$_GET["source_schema"]
- [\\$target_schema](#) = \$_GET["target_schema"]

7.2.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

BioCAsE Monitor 2.1

Copyright

(C) 2015 www.mfn-berlin.de

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin/**

based on Version 1.4 written by falko.gloeckler@mfn.berlin

7.2.2 Function Documentation

7.2.2.1 Consistency\get_tag (\$tag, \$xml)

Parameters

type	<i>\$tag</i>	
type	<i>\$xml</i>	

Returns

string

Definition at line 58 of file `cardinalConcept.php`.

7.2.2.2 Consistency\getMappedElements (*\$mapping*)

get element pairs, with associated rule

Parameters


string	<i>\$mapping</i>	
--------	------------------	--

Returns

array

Definition at line 142 of file checkRules.php.

Here is the call graph for this function:

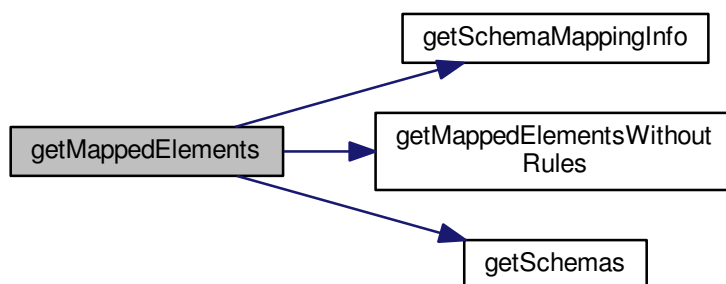

7.2.2.3 Consistency\getMappedElementsWithoutRules (*\$mapping*)

get elements, without associated rules

Parameters


string	<i>\$mapping</i>	
--------	------------------	--

Returns

array

Definition at line 102 of file checkRules.php.

Here is the caller graph for this function:



7.2.2.4 Consistency\getRuleInfo (*\$concept*, *\$mapping*)

get rule infos for given Concept and Schema mapping

Parameters

string	<i>\$concept</i>	source element
string	<i>\$mapping</i>	schema mapping

Returns

array

Definition at line 70 of file `checkForErrors.php`.

Here is the call graph for this function:



7.2.2.5 Consistency\getSchemaInfo (*\$schema*)

get schema infos for given Schema

Parameters

string	<i>\$schema</i>	
--------	-----------------	--

Returns

array

Definition at line 51 of file checkForErrors.php.

Here is the caller graph for this function:

**7.2.2.6 Consistency\getSchemaMappingInfo (*\$mapping*)**

get Schema Mapping Info

Parameters

string	<i>\$mapping</i>	
--------	------------------	--

Returns

array

Definition at line 68 of file checkRules.php.

Here is the caller graph for this function:

**7.2.2.7 Consistency\getSchemaMappings (*\$mapping*)**

get Schema Mappings

Todo add parameter dataset, and restrict result to supported Schemas

Parameters

string	<i>\$mapping</i>	
--------	------------------	--

Returns

string JSON object

Definition at line 40 of file getSchemaMappings.php.

7.2.2.8 Consistency\getSchemas ()

get Schemas

Returns

array

Definition at line 46 of file checkRules.php.

7.2.3 Variable Documentation

7.2.3.1 \$aconcept = explode("/", \$concept)

build array of parts of a concept, auxiliary step to add schema prefix to each part

Definition at line 54 of file getExampleValues.php.

7.2.3.2 \$concept_xpath = implode("/abcd:", \$aconcept)

Todo compute element xpath with correct prefix for given schema

Definition at line 58 of file getExampleValues.php.

7.2.3.3 \$dsa = \$_REQUEST["dsa"]

e.g. mfn_pal

Definition at line 36 of file checkRules.php.

7.2.3.4 \$filter = filter_input(INPUT_GET, 'filter')

e.g. <filter><like path="/DataSets/DataSet/Metadata/Description/Representation/Title">EDIT - ATBI in Spree-wald (Germany)</like></filter>

Definition at line 42 of file cardinalConcept.php.

7.2.3.5 \$idProvider = \$_GET["provider"]

e.g. MfN

Definition at line 43 of file index.php.

7.2.3.6 \$mapping = \$_REQUEST["mapping"]

e.g. abcd_pansimple

Definition at line 40 of file checkForErrors.php.

7.2.3.7 \$source_schema = \$_GET["source_schema"]

e.g. ABCD2.06

Definition at line 63 of file index.php.

7.2.3.8 \$target_schema = \$_GET["target_schema"]

e.g. pansimple

Definition at line 67 of file index.php.

7.3 Webservice Namespace Reference

Functions

- [getCitations](#) (\$idDSA)
- [getDataSources](#) (\$idProvider)
- [getProviderInfo](#) (\$idProvider)
- [getLandingpages](#) (\$provider, \$dsa, \$filter, \$inst, \$col, \$cat)
- [getProviders](#) (\$id, \$name)
- [getTotalRecords](#) (\$idDSA)
- [getUsefulLinks](#) (\$idDSA, \$idProvider)
- [getXmlArchives](#) (\$idProvider, \$idDSA)

7.3.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

7.3.2 Function Documentation

7.3.2.1 Webservice\getCitations (\$idDSA)

get Citation text of given Data Set, not yet implemented

Parameters

<i>\$idDSA</i>	
----------------	--

Returns

json

Definition at line 41 of file index.php.

7.3.2.2 Webservices\getDataSources (*\$idProvider*)

get Datasources

Parameters

<i>\$idProvider</i>	
---------------------	--

Returns

json

Definition at line 38 of file index.php.

7.3.2.3 Webservices\getLandingpages (*\$provider*, *\$dsa*, *\$filter*, *\$inst*, *\$col*, *\$cat*)

get URLs for landing pages

Parameters

array	<i>\$provider</i>	
int	<i>\$dsa</i>	
string	<i>\$filter</i>	
string	<i>\$inst</i>	
string	<i>\$col</i>	
string	<i>\$cat</i>	

Returns

json

Definition at line 81 of file index.php.

Here is the call graph for this function:



7.3.2.4 Webservices\getProviderInfo (*\$idProvider*)

get Infos about Data Provider

Parameters

<i>\$idProvider</i>	
---------------------	--

Returns

array

Definition at line 50 of file index.php.

Here is the caller graph for this function:



7.3.2.5 Webservices\getProviders (*\$id*, *\$name*)


get providers

Parameters

int	<i>\$id</i>	
string	<i>\$name</i>	

Definition at line 36 of file index.php.

Here is the call graph for this function:

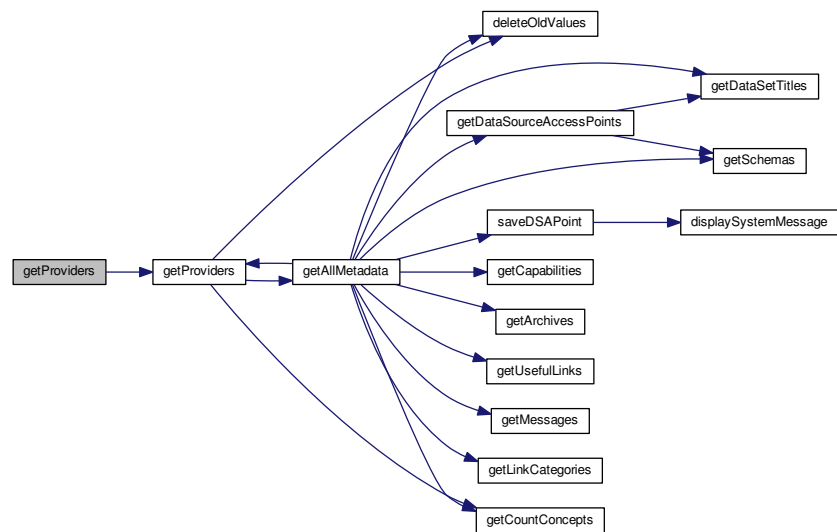

7.3.2.6 Webservices\getTotalRecords (\$idDSA)

get total records for given DSA not yet implemented

Parameters

<i>\$idDSA</i>	
----------------	--

Returns

json

Definition at line 38 of file index.php.

7.3.2.7 Webservices\getUsefulLinks (\$idDSA, \$idProvider)

webservice get useful links

Parameters

<i>\$idDSA</i>	
<i>\$idProvider</i>	

Returns

json

Definition at line 37 of file index.php.

7.3.2.8 Webservices\getXmlArchives (*\$idProvider*, *\$idDSA*)

get XML Archives

Parameters

int	<i>\$idProvider</i>	
int	<i>\$idDSA</i>	

Returns

json

Definition at line 31 of file index.php.

Chapter 8

Data Structure Documentation

8.1 Bms Class Reference

Public Member Functions

- [getSchema](#) (\$schema)
- [getConcepts](#) (\$idProvider)
- [getCurrentRecords](#) (\$providerId, \$schema, \$url, \$filter, \$nocache)
- [getCountConcepts](#) (\$providerId, \$schema, \$url, \$concept, \$specifier, \$filter, \$nocache)
- [getCitation](#) (\$providerId, \$url, \$filter, \$cached=1, \$concept="/DataSets/DataSet/Metadata/IPRStatements/Citations/Citation/Text")
- [getProviderMainData](#) (\$idProvider)
- [frontController](#) (\$route)
- [getProviders](#) ()
- [getMessages](#) ()

Data Fields

- [\\$debugmode](#) = [DEBUGMODE](#)
- [\\$custom_layout](#) = 0
- [\\$message](#) = ""

8.1.1 Detailed Description

class definition of the BioCAsE Monitor Service

Definition at line 43 of file index.php.

8.1.2 Member Function Documentation

8.1.2.1 frontController (*\$route*)

simple front controller with static routing

Parameters

int	<i>\$idProvider</i>	
-----	---------------------	--

Returns

string json Object

Definition at line 105 of file index.php.

8.1.2.4 getCountConcepts (*\$providerId*, *\$schema*, *\$url*, *\$concept*, *\$specifier*, *\$filter*, *\$nocache*)

get number of records satisfying a given concept via a BPS search or scan request

Parameters

string	<i>\$provider↔ Id</i>	
string	<i>\$schema</i>	
string	<i>\$url</i>	
string	<i>\$concept</i>	
int	<i>\$specifier</i>	bitmap TOTAL=1,DISTINCT=2,DROPPED=4
string	<i>\$filter</i>	complex filter
int	<i>\$nocache</i>	1 0

Returns

string json Object

Definition at line 291 of file index.php.

8.1.2.5 getCurrentRecords (*\$providerId*, *\$schema*, *\$url*, *\$filter*, *\$nocache*)

get Number of Current Records via a BPS search request

Parameters

int	<i>\$provider↔ Id</i>	ID of Data Center
string	<i>\$schema</i>	Schema
string	<i>\$url</i>	Query URL
string	<i>\$filter</i>	complex filter in XML-format
int	<i>\$nocache</i>	1 or 0

Returns

string json Object, e.g. { cardinal: 101, error: "", cacheinfo: "1467913058", debuginfo: "" }

Definition at line 141 of file index.php.

8.1.2.6 `getMessages ()`

get system messages

loads system messages into property "message"

Returns

string JSON object

Definition at line 849 of file index.php.

8.1.2.7 `getProviderMainData ($idProvider)`

get main data of given provider, via a DB query

Parameters

int	<i>\$idProvider</i>	
-----	---------------------	--

Returns

object JSON object

Definition at line 650 of file index.php.

8.1.2.8 `getProviders ()`

get IDs of providers

Returns

array

Definition at line 827 of file index.php.

8.1.2.9 `getSchema ($schema)`

get list of all schemas, via a DB query

Parameters

<i>string</i>	Schema URN
---------------	------------

Returns

string json Object

Definition at line 84 of file index.php.

8.1.3 Field Documentation

8.1.3.1 `$custom_layout = 0`

set custom layout mode, omay be overwritten by GET parameter

Definition at line 53 of file index.php.

8.1.3.2 `$debugmode = DEBUGMODE`

set debug mode, overwriting constant DEBUGMODE by GET parameter

Definition at line 48 of file index.php.

8.1.3.3 `$message = ""`

holds the system messages

Definition at line 58 of file index.php.

The documentation for this class was generated from the following file:

- [index.php](#)

Chapter 9

File Documentation

9.1 admin/addArchive.php File Reference

backend: add an XML Archive

9.1.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfng.berlin based on Version 1.4 written by falko.gloeckler@mfng.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.2 admin/addCount.php File Reference

backend: add a Count Concept

9.2.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.3 admin/addDSA.php File Reference

backend: add a DSA Point

9.3.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.4 admin/addUsefulLink.php File Reference

backend: add a useful Link

9.4.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

`thomas.pfuhl@mfn.berlin` based on Version 1.4 written by `falko.gloeckler@mfn.berlin`

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.5 admin/getAllCountConcepts.php File Reference

backend: get all Count Concepts

9.5.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

`thomas.pfuhl@mfn.berlin` based on Version 1.4 written by `falko.gloeckler@mfn.berlin`

Todo filter through given schema

move it to services

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.6 admin/getCountConcepts.php File Reference

backend: get CountConcepts

Namespaces

- [Bms](#)

9.6.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.7 admin/getDataSetTitles.php File Reference

backend: get Dataset Titles

9.7.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.8 admin/getDataSources.php File Reference

backend: get Data Source Access Points

Namespaces

- [Bms](#)

9.8.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.9 admin/getDatasourceSchema.php File Reference

backend: get Source Schema for given DataSource

Namespaces

- [Bms](#)

9.9.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.10 admin/getLinkCategories.php File Reference

backend: get Link Categories

9.10.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.11 admin/getProviderMainData.php File Reference

backend: get Main Data from given provider

9.11.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.12 admin/index.php File Reference

backend entry point

9.12.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.13 consistency/index.php File Reference

check consistency

Namespaces

- [Consistency](#)

Variables

- [\\$idProvider](#) = `$_GET["provider"]`
- [\\$source_schema](#) = `$_GET["source_schema"]`
- [\\$target_schema](#) = `$_GET["target_schema"]`

9.13.1 Detailed Description

Todo call webservice via AJAX: `"../services/providers/index.php"`

Note

all parameters are passed as GET key=value in the URL.

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.14 index.php File Reference

entry point, using class definition of [Bms](#)

Data Structures

- class [Bms](#)

Namespaces

- [Bms](#)

Variables

- `$route` = `filter_input(INPUT_GET, 'action')`

9.14.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.15 services/capabilities/index.php File Reference

webservices capabilities

Namespaces

- [Webservices](#)

9.15.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

example call: `/services/capabilities/?provider=bgbm&dsa=Herbar` `/services/capabilities/?provider=2&dsa=Herbar`

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.16 services/citations/index.php File Reference

webservices citations

Namespaces

- [Webservices](#)

Functions

- [getCitations](#) (\$idDSA)

9.16.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

not yet implemented as a Webservice. See [consistency/getExampleValues.php](#)

as in consistency check, but retrieve only the ABCD Field "/DataSets/DataSet/Metadata/IPRStatements/Citations/↔ Citation/Text

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see [http↔://www.gnu.org/licenses/](http://www.gnu.org/licenses/).

9.17 services/data-sources/index.php File Reference

webservices data sources

Namespaces

- [Webservices](#)

Functions

- [getDataSources](#) (\$idProvider)

9.17.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.18 services/index.php File Reference

webservices GUI entry point

Namespaces

- [Webservices](#)

9.18.1 Detailed Description

9.18.2 LICENSE

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.19 services/landingpages/index.php File Reference

webservices landingpages (DataSet AND DataUnit)

Namespaces

- [Webservices](#)

Functions

- [getProviderInfo](#) (\$idProvider)
- [getLandingpages](#) (\$provider, \$dsa, \$filter, \$inst, \$col, \$cat)

9.19.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

example call:

provider=MfN dsa=mfn_PAL

DATA SET filter=Fossil Invertebrates la

DATA UNIT inst=MfN col=MfN - Fossil invertebrates la cat=MB.Ga.3895

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.20 services/providers/add/index.php File Reference

[Webservices](#) add provider (needed for automated population)

Namespaces

- [Webservices](#)

9.20.1 Detailed Description

example call {id:"1",name:"Test-Provider",shortname:"TTT",url:"www.provider.org",datacenter:"Data Center TTT"}

```
http://bms.biocase.org/services/login/add/?authtoken=675577aa70cda36c556cd87169f962d5&js
:%20%22%22,name:%22Test-Provider%22,shortname:%22TTT%22,url:%22www.provider.↵
org%22,datacenter:%22Data%20Center%20TTT%22}
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see [http↵://www.gnu.org/licenses/](http://www.gnu.org/licenses/).

9.21 services/providers/index.php File Reference

webservices providers

Namespaces

- [Webservices](#)

Functions

- [getProviders](#) (\$id, \$name)

9.21.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see [http↵://www.gnu.org/licenses/](http://www.gnu.org/licenses/).

9.22 services/total-records/index.php File Reference

webservices total-records

Namespaces

- [Webservices](#)

Functions

- [getTotalRecords](#) (\$idDSA)

9.22.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.23 services/useful-links/index.php File Reference

webservices useful links

Namespaces

- [Webservices](#)

Functions

- [getUsefulLinks](#) (\$idDSA, \$idProvider)

9.23.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

`thomas.pfuhl@mfn.berlin` based on Version 1.4 written by `falko.gloeckler@mfn.berlin`

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.24 services/xml-archives/index.php File Reference

[Webservices](#) xml-archives.

Namespaces

- [Webservices](#)

Functions

- [getXmlArchives](#) (\$idProvider, \$idDSA)

9.24.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

`thomas.pfuhl@mfn.berlin` based on Version 1.4 written by `falko.gloeckler@mfn.berlin`

9.24.2 DESCRIPTION

This is a special case of the webservice get useful links having the title 'BioCAsE Archive'

9.25 admin/manageProvider.php File Reference

backend: backend: manage Provider

Functions

- [bin2crud](#) (\$n)

9.25.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.25.2 Function Documentation

9.25.2.1 bin2crud (\$n)

display a number as "CRUD"

Parameters

string	\$n	
--------	-----	--

Returns

string

Definition at line 39 of file manageProvider.php.

9.26 admin/manageProviderForm.php File Reference

backend: manage Provider (html form)

9.26.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

`thomas.pfuhl@mfn.berlin` based on Version 1.4 written by `falko.gloeckler@mfn.berlin`

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.27 admin/manageSuperuserForm.php File Reference

backend: manage Superuser (html form)

9.27.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

`thomas.pfuhl@mfn.berlin` based on Version 1.4 written by `falko.gloeckler@mfn.berlin`

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.28 admin/manageUser.php File Reference

backend: manage user

Functions

- [bin2crud](#) (\$n)

9.28.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.28.2 Function Documentation

9.28.2.1 bin2crud (\$n)

display a number as "CRUD"

Parameters

string	\$n	
--------	-----	--

Returns

string

Definition at line 39 of file manageUser.php.

Here is the call graph for this function:



9.29 admin/manageUserForm.php File Reference

backend: manage user (html form)

9.29.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.30 admin/navbar.php File Reference

backend: display navigation bar

Namespaces

- [Bms](#)

9.30.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.31 consistency/navbar.php File Reference

display bootstrap navigation bar

Namespaces

- [Consistency](#)

9.31.1 Detailed Description

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.32 services/navbar.php File Reference

display navigation bar

Namespaces

- [Bms](#)

9.32.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.33 admin/removeArchive.php File Reference

backend: remove an Archive

9.33.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.34 admin/removeCount.php File Reference

backend: remove a Count Concept

9.34.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.35 admin/removeDSA.php File Reference

backend: remove a Data Access Point

9.35.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.36 admin/removeUsefulLink.php File Reference

backend: remove a useful Link

9.36.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.37 admin/sortArchives.php File Reference

backend: sort BioCAsE XML Archives

9.37.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.38 admin/sortCountConcepts.php File Reference

backend: sort Count Concepts

9.38.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.39 admin/sortUsefulLinks.php File Reference

backend: sort Useful Links

9.39.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.40 admin/updateArchive.php File Reference

backend: update XML Archive

9.40.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.41 admin/updateCountConcept.php File Reference

backend: update Count Concept

9.41.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.42 admin/updateDSA.php File Reference

backend: update Data Source Access Point

9.42.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.43 admin/updateMainMetadata.php File Reference

backend: update main metadata for a given provider

9.43.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.44 admin/updateUsefulLink.php File Reference

backend: update useful link

9.44.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mf.n.berlin based on Version 1.4 written by falko.gloeckler@mf.n.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.45 config/config.sample.php File Reference

configuration: constants and DB settings

Namespaces

- [Bms](#)

Functions

- [init \(\)](#)

Variables

- const `DATACENTER_NAME` "Data Center "
- const `SALT` "WE@leht=13"
- const `VERBOSE` 3
- const `DEBUGMODE` 1
- const `CUSTOM` 1
- const `CACHING_INTERVAL` 604800
- const `CACHE_DIRECTORY` "data_cache/"
- const `PROXY_WORKAROUND` false
- const `PROXY_WORKAROUND_URL` "http://192.168.101.160/biocasemonitor/gfbio"
- const `DB_DIR` "/path/to/db/folder"
- const `DB_FILENAME` "provider.sqlite"
- `$db` = null
- const `TOTAL` (!defined("JSON_PRETTY_PRINT")) 1
- const `DISTINCT` 2
- const `DROPPED` 4

9.45.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.46 config/custom/customize.php File Reference

customization

Namespaces

- `Bms`

9.46.1 Detailed Description

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.47 consistency/cardinalConcept.php File Reference

count the occurrences of given concept

Namespaces

- [Consistency](#)

Functions

- [get_tag](#) (\$tag, \$xml)

Variables

- [\\$filter](#) = filter_input(INPUT_GET, 'filter')

9.47.1 Detailed Description

\$concept is dependant from provider \$specifier: TOTAL|DISTINCT|DROPPED = bitmap 1|2|4 \$filter is dependant from DSA, and dependant from \$specifier

returns JSON

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.48 consistency/checkForErrors.php File Reference

checks errors for given concept in the consistency check output

Namespaces

- [Consistency](#)

Functions

- [getSchemaInfo](#) (\$schema)
- [getRuleInfo](#) (\$concept, \$mapping)

Variables

- [\\$mapping](#) = \$_REQUEST["mapping"]

9.48.1 Detailed Description

Todo classify rules depending on the weight

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.49 consistency/checkRules.php File Reference

get rules from DB table rule, get capabilities from BPS via CURL, check the rules

Namespaces

- [Consistency](#)

Functions

- [getSchemas](#) ()
- [getSchemaMappingInfo](#) (\$mapping)
- [getMappedElementsWithoutRules](#) (\$mapping)
- [getMappedElements](#) (\$mapping)

Variables

- `$dsa = $_REQUEST["dsa"]`

9.49.1 Detailed Description

Todo CURL request can be time consuming

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.50 consistency/getExampleValues.php File Reference

get example values for given concept in the consistency check output

Namespaces

- [Consistency](#)

Variables

- `$aconcept = explode("/", $concept)`
- `$concept_xpath = implode("/abcd:", $aconcept)`

9.50.1 Detailed Description

Todo compute element xpath with correct prefix for given schema

Note

Example call: `./consistency/getExampleValues.php? url=http://biocase.naturkundemuseum-berlin.de/current/pywrapper.cgi?dsa=EDIT_ATBI &concept=/DataSets/DataSet/Units/Unit/MultiMediaObjects/MultiMediaObject/FileURI &filter=<like path="/DataSets/DataSet/Metadata/Description/Representation/Title">EDIT - ATBI in Spreewald (Germany)</like>`

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.51 consistency/getSchemaMappings.php File Reference

get schema mappings from DB

Namespaces

- [Consistency](#)

Functions

- [getSchemaMappings](#) (\$mapping)

9.51.1 Detailed Description

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.52 js/backend.js File Reference

javascript functions used in the backend

Namespaces

- [Bms](#)

Functions

- function [getProviders](#) ()
- function [saveMainMetadata](#) ()
- function [getSchemas](#) (idProvider, idDSA, dsa, selectedValue)
- function [getDataSourceAccessPoints](#) (idProvider, url, idDSA, selectedValue, dataSet)
- function [getDataSetTitles](#) (idDSA, url, dataset)
- function [addDSA](#) (idProvider)
- function [saveDSAPoint](#) (dsa, reload)
- function [removeDSA](#) (id)
- function [addCount](#) ()
- function [removeCount](#) (id)
- function [saveCount](#) (id)
- function [addArchive](#) (idDSA, idProvider)

- function [saveArchive](#) (idProvider, idDSA, id)
- function [hideArchive](#) (idDSA, id, counter)
- function [showArchive](#) (idDSA, id)
- function [removeArchive](#) (idDSA, id)
- function [addUsefulLink](#) (idDSA, idProvider)
- function [showUsefulLink](#) (idDSA, id)
- function [hideUsefulLink](#) (idDSA, id)
- function [removeUsefulLink](#) (idDSA, id)
- function [saveUsefulLink](#) (idProvider, idDSA, id)
- function [getLinkCategories](#) ()
- function [deleteOldValues](#) ()
- function [getCountConcepts](#) (idProvider)
- function [getCapabilities](#) (provider, idDSA, dsa)
- function [getArchives](#) (idProvider, idDSA)
- function [getUsefulLinks](#) (idProvider, idDSA)
- function [getAllMetadata](#) (idProvider)

9.52.1 Detailed Description

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.52.2 Function Documentation

9.52.2.1 function addArchive (*idDSA*, *idProvider*)

adds an Archive

Parameters

int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$idProvider</i>	ID of Data Center

Returns

void

Definition at line 809 of file backend.js.

9.52.2.2 function addCount ()

adds a Count Concept

Todo : attach count concepts to each DSA, since dDSAs may have distinct schemas

Returns

void

Definition at line 687 of file backend.js.

9.52.2.3 function addDSA (*idProvider*)

creates new DSA record

Parameters


int	<i>\$idProvider</i>	
-----	---------------------	--

Returns

boolean false

Definition at line 284 of file backend.js.

Here is the call graph for this function:

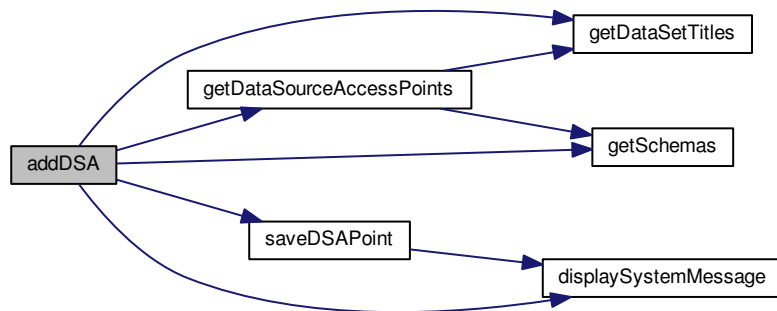

9.52.2.4 function addUsefulLink (*idDSA*, *idProvider*)

adds a Useful Link

Parameters

int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$idProvider</i>	ID of Data Center

Returns

void

Definition at line 957 of file backend.js.

9.52.2.5 function deleteOldValues ()


removes displayed infos from the form

Returns

boolean false

Definition at line 1145 of file backend.js.

Here is the caller graph for this function:

**9.52.2.6 function getAllMetadata (*idProvider*)**

main function: gets all metadata of given provider and populates the html form

Parameters


int	<i>\$idProvider</i>	
-----	---------------------	--

Returns


boolean false

Definition at line 1523 of file backend.js.

Here is the call graph for this function:

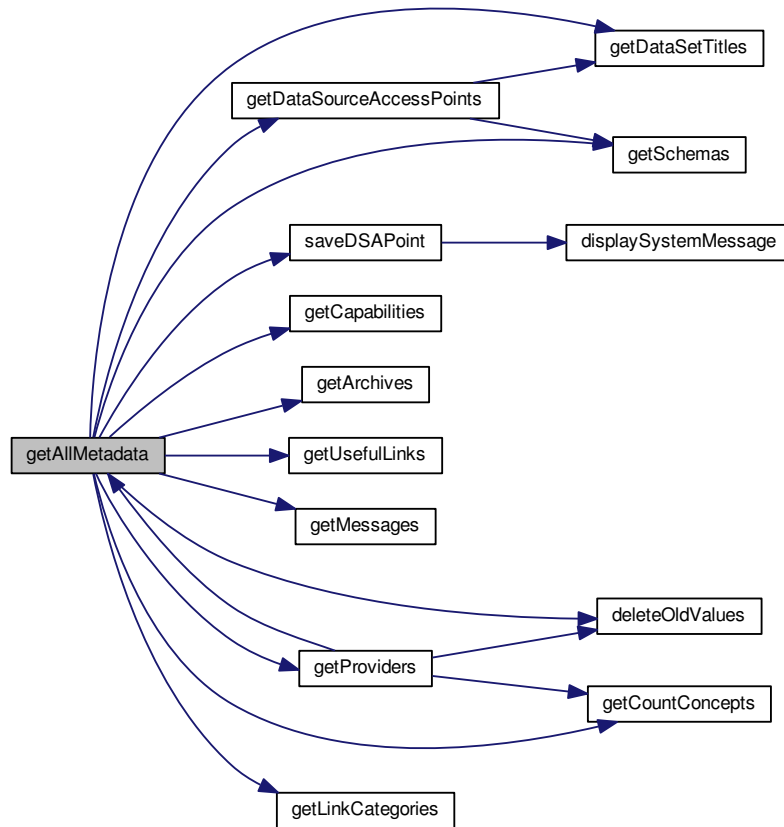

Here is the caller graph for this function:



9.52.2.7 function `getArchives (idProvider, idDSA)`

gets the XML archives for a given DSA

Parameters


int	<i>\$idProvider</i>	
int	<i>\$idDSA</i>	

Returns

boolean false

Definition at line 1323 of file backend.js.

Here is the caller graph for this function:



9.52.2.8 function getCapabilities (provider, idDSA, dsa)

gets the capabilities

Parameters

int	<i>\$provider</i>	
int	<i>\$idDSA</i>	
string	<i>\$dsa</i>	

Returns

boolean false

Definition at line 1266 of file backend.js.

Here is the caller graph for this function:



9.52.2.9 function getCountConcepts (idProvider)

get the number of CountConcepts for a given provider

Parameters


int	<i>\$idProvider</i>	
-----	---------------------	--

Returns

boolean false

Definition at line 1165 of file backend.js.

Here is the caller graph for this function:



9.52.2.10 function `getDataSetTitles (idDSA, url, dataset)`

get Dataset titles

Parameters

int	<i>\$idDSA</i>	
string	<i>\$url</i>	complete Query URL incl. ?dsa=xxx
int	<i>\$idDSA</i>	
string	<i>\$dataset</i>	

Returns

void

Definition at line 235 of file backend.js.

Here is the caller graph for this function:



9.52.2.11 function `getDataSourceAccessPoints (idProvider, url, idDSA, selectedValue, dataSet)`

get Data Source Access (DSA) Points and DataSet Titles

Parameters


int	<i>\$idProvider</i>	
string	<i>\$url</i>	complete Query URL incl. ?dsa=xxx
int	<i>\$idDSA</i>	
string	<i>\$selectedValue</i>	previously selected DataSet
string	<i>\$dataSet</i>	

Returns

void

Definition at line 180 of file backend.js.

Here is the call graph for this function:

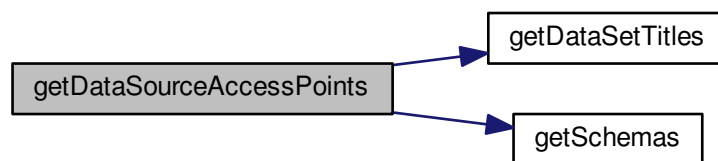

Here is the caller graph for this function:



9.52.2.12 function `getLinkCategories ()`

get all link categories

Returns

{void}

Definition at line 1102 of file backend.js.

Here is the caller graph for this function:

**9.52.2.13 function getProviders ()**


get list of providers

Returns


boolean false

Definition at line 35 of file backend.js.

Here is the call graph for this function:

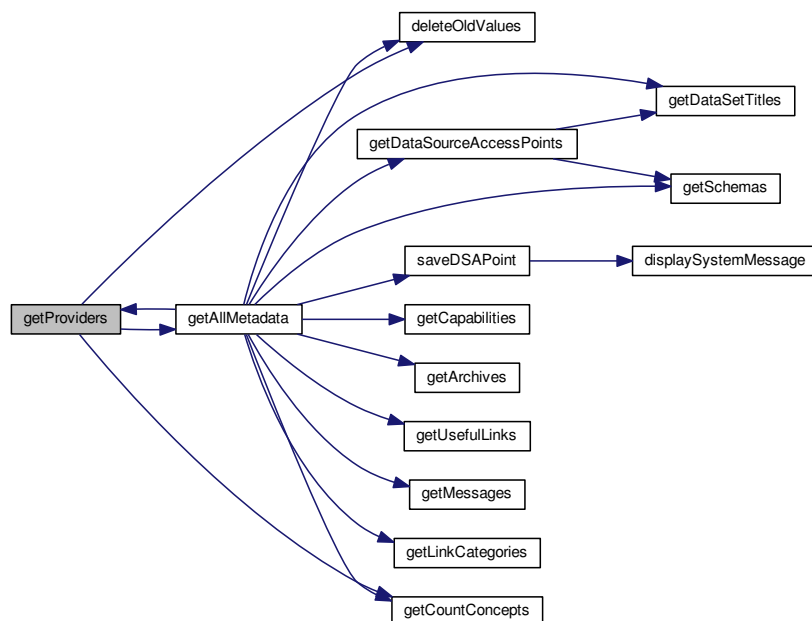

Here is the caller graph for this function:

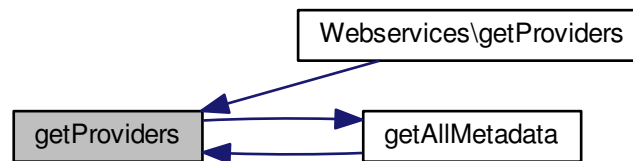

9.52.2.14 function getSchemas (idProvider, idDSA, dsa, selectedValue)

get schemas via capabilities request

Parameters


int	<i>\$idProvider</i>	
int	<i>\$idDSA</i>	
	<i>string</i>	<i>\$\$dsa</i>
	<i>string</i>	<i>\$\$selectedValue</i>

Returns

void

Definition at line 110 of file backend.js.

Here is the caller graph for this function:

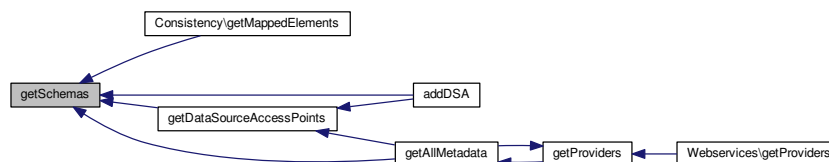

9.52.2.15 function getUsefulLinks (idProvider, idDSA)

gets the useful Links of a given DSA

Parameters

int	<i>\$idProvider</i>	
int	<i>\$idDSA</i>	

Returns

boolean false

Definition at line 1416 of file backend.js.

Here is the caller graph for this function:

**9.52.2.16 function hideArchive (*idDSA*, *id*, *counter*)**

hides an Archive

Parameters

int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$id</i>	ID of Archive
int	<i>\$counter</i>	list item counter

Returns

void

Definition at line 903 of file backend.js.

9.52.2.17 function hideUsefulLink (*idDSA*, *id*)

hides a Useful Link

Parameters

int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$id</i>	ID of Useful Link

Returns

void

Definition at line 1018 of file backend.js.

9.52.2.18 function removeArchive (*idDSA*, *id*)

removes an Archive

Parameters

int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$id</i>	ID of Archive

Returns

void

Definition at line 929 of file backend.js.

Here is the call graph for this function:

**9.52.2.19 function removeCount (*id*)**

removes a Count Concept

Parameters


int	<i>\$id</i>	a Count Concept
-----	-------------	-----------------

Returns

void

Definition at line 746 of file backend.js.

Here is the call graph for this function:



9.52.2.20 function removeDSA (*id*)

removes a given DSA

Parameters

int	<i>\$id</i>	idDSA
-----	-------------	-------

Returns

void

Definition at line 660 of file backend.js.

Here is the call graph for this function:



9.52.2.21 function removeUsefulLink (*idDSA*, *id*)

removes a Useful Link

Parameters

int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$id</i>	ID of Useful Link

Returns

void

Definition at line 1032 of file backend.js.

Here is the call graph for this function:

**9.52.2.22 function saveArchive (*idProvider*, *idDSA*, *id*)**

saves an Archive

Parameters

int	<i>\$idProvider</i>	ID of Provider
int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$id</i>	ID of Archive

Returns

void

Definition at line 858 of file backend.js.

Here is the call graph for this function:

**9.52.2.23 function saveCount (*id*)**

saves a Count Concept

Parameters

int	<i>\$id</i>	a Count Concept
-----	-------------	-----------------

Returns

void

Definition at line 773 of file backend.js.

Here is the call graph for this function:

**9.52.2.24 function saveDSAPoint (*dsa*, *reload*)**

stores a given DSA in the database

Parameters

<i>{object}</i>	dsa object holding all fields
<i>{boolean}</i>	reload page?

Returns


void

Definition at line 578 of file backend.js.

Here is the call graph for this function:



Here is the caller graph for this function:



9.52.2.25 function saveMainMetadata ()

save Main Data of Provider

Returns

void

Definition at line 81 of file backend.js.

Here is the call graph for this function:



9.52.2.26 function saveUsefulLink (idProvider, idDSA, id)

saves a Useful Link

Parameters


int	<i>\$idProvider</i>	ID of Provider
int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$id</i>	ID of Useful Link

Returns

void

Definition at line 1061 of file backend.js.

Here is the call graph for this function:



9.52.2.27 function showArchive (*idDSA*, *id*)

shows an Archive

Parameters

int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$id</i>	ID of Archive

Returns

void

Definition at line 917 of file backend.js.

9.52.2.28 function showUsefulLink (*idDSA*, *id*)

shows a Useful Link

Parameters

int	<i>\$idDSA</i>	ID of Data Source Access Point
int	<i>\$id</i>	ID of Useful Link

Returns

void

Definition at line 1006 of file backend.js.

9.53 js/consistency.js File Reference

javascript functions used in the consistency checker.

Namespaces

- [Consistency](#)

Functions

- function [getUnique](#) (inputArray)
- function [matchRule](#) (functionName, url)
- function [isValidCitation](#) (str)
- function [checkRules](#) (idProvider, dsa, filter, mapping)
- function [cardinalConcept](#) (idProvider, schema, filter, concept, j)
- function [checkForErrors](#) (idProvider, filter, concept, schema, mapping, j, total)
- function [getExampleValues](#) (provider, schema, url, filter, concept, j)
- function [extractExampleValues](#) (event)
- function [fire](#) (idProvider, dsa, filter)

9.53.1 Detailed Description

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

The variables biocaseUrl and filter are defined in calling script [biocasemonitor/consistency/index.php](#)

9.53.2 Function Documentation

9.53.2.1 function cardinalConcept (*idProvider*, *schema*, *filter*, *concept*, *j*)

counts the number of entries satisfying a given concept

Parameters


int	<i>\$idProvider</i>	
string	<i>\$schema</i>	
string	<i>\$filter</i>	a complex filter: <like>....</like>
string	<i>\$concept</i>	a capability. e.g.: /DataSets/DataSet/Units/Unit/UnitID
int	<i>\$j</i>	row number

Returns

boolean false

Definition at line 314 of file consistency.js.

Here is the caller graph for this function:



9.53.2.2 function checkForErrors (*idProvider*, *filter*, *concept*, *schema*, *mapping*, *j*, *total*)

check concept entry for consistency

Parameters


int	<i>\$idProvider</i>	
string	<i>\$filter</i>	a complex filter: <like>....</like>
string	<i>\$concept</i>	a capability. e.g.: /DataSets/DataSet/Units/Unit/UnitID
string	<i>\$schema</i>	
string	<i>\$mapping</i>	
int	<i>\$j</i>	number of displayed row
int	<i>\$total</i>	total number

Returns


boolean false

Definition at line 368 of file consistency.js.

Here is the call graph for this function:

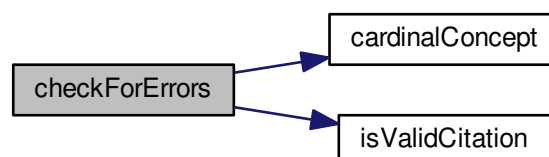

Here is the caller graph for this function:



9.53.2.3 function checkRules (*idProvider*, *dsa*, *filter*, *mapping*)

check rules

Parameters


int	<i>\$idProvider</i>	
string	<i>\$dsa</i>	
string	<i>\$filter</i>	
string	<i>\$mapping</i>	

Returns

object

Definition at line 116 of file consistency.js.

Here is the call graph for this function:

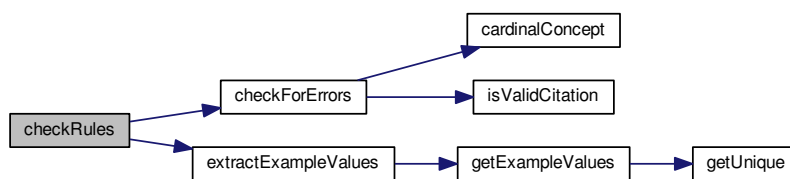

Here is the caller graph for this function:



9.53.2.4 function extractExampleValues (*event*)

gets some example values of entries , called onClick.

Parameters


<i>{object}</i>	event
-----------------	-------

Returns

boolean false

Definition at line 588 of file consistency.js.

Here is the call graph for this function:



Here is the caller graph for this function:



9.53.2.5 function fire (*idProvider*, *dsa*, *filter*)

gets all capabilities, checks against mandatory concepts, and populates the data table

1. gets schema mappings from DB
2. gets capabilities
3. extracts schemas from capabilities

Parameters


int	<i>\$idProvider</i>	
string	<i>\$dsa</i>	
string	<i>\$filter</i>	

Returns

boolean false

Definition at line 610 of file consistency.js.

Here is the call graph for this function:

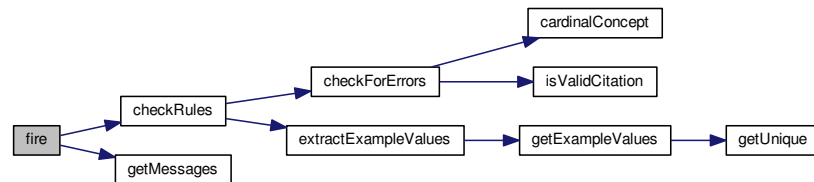

9.53.2.6 function `getExampleValues (provider, schema, url, filter, concept, j)`

gets example values of entries satisfying a given concept

Parameters

int	<i>\$provider</i>	idProvider
string	<i>\$schema</i>	data schema
string	<i>\$url</i>	queryURL
string	<i>\$filter</i>	a complex filter: <like>....</like>
string	<i>\$concept</i>	a capability. e.g.: /DataSets/DataSet/Units/Unit/UnitID
int	<i>\$j</i>	row number

Returns


boolean false

Definition at line 513 of file consistency.js.

Here is the call graph for this function:



Here is the caller graph for this function:



9.53.2.7 function `getUnique (inputArray)`

removes redundant elements in an array

Parameters


array	<i>\$inputArray</i>	
-------	---------------------	--

Returns

Array

Definition at line 36 of file `consistency.js`.

Here is the caller graph for this function:



9.53.2.8 function `isValidCitation (str)`

validates Citation <Authors>. (<Publication_year>). <Title>. [Dataset]. <VersionNr>. Data Publisher: <Data↔_center_name>. <URI>.

Todo adapt to consensus document

Parameters


string	<i>\$str</i>	
--------	--------------	--

Returns

boolean

Definition at line 72 of file consistency.js.

Here is the caller graph for this function:



9.53.2.9 function matchRule (*functionName*, *url*)

match a given rule, passed by name

Todo to be written

Parameters

string	<i>\$functionName</i>	
string	<i>\$url</i>	

Returns

boolean

Definition at line 55 of file consistency.js.

9.54 js/custom.js File Reference

javascript for customizing

Namespaces

- Bms

Variables

- `spinner` = `'<div class="cssload-container"><div class="cssload-circle-1"><div class="cssload-circle-2"><div class="cssload-circle-3"><div class="cssload-circle-4"><div class="cssload-circle-5"><div class="cssload-circle-6"><div class="cssload-circle-7"></div></div></div></div></div></div>'`

9.55.2 Variable Documentation

9.55.2.1 debugmode = true

in development mode: debugmode is set to true

Boolean

Definition at line 32 of file dev.js.

9.55.2.2 verbose = 3

in development mode: verbose is set to a positive value

Number

Definition at line 39 of file dev.js.

9.56 js/frontend.js File Reference

javascript functions used in the frontend

Namespaces

- [Bms](#)

Functions

- function [showDate](#) (utime)
- function [buildUI](#) (data)
- function [getSchema](#) (schema)
- function [getCurrentRecords](#) (idProvider, idDSA, schema, queryUrl, filter, nocache)
- function [getCountConcept](#) (idProvider, idDSA, schema, queryUrl, concept, specifier, filter, nocache)
- function [getCitation](#) (idProvider, schema, dsa, url, filter, concept, j, cached)
- function [getUsefulLinks](#) (idProvider, idDSA)
- function [getArchives](#) (idProvider, idDSA)
- function [populateUI](#) ()
- function [showProgress](#) (idProvider, dsa, action, startTime)

9.56.1 Detailed Description

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.56.2 Function Documentation

9.56.2.1 function buildUI (data)

build general User Interface

Parameters


array	<i>\$data</i>	The Data Provider list
-------	---------------	------------------------

Returns

{string}

Definition at line 54 of file frontend.js.

Here is the caller graph for this function:

**9.56.2.2 function getArchives (*idProvider*, *idDSA*)**

get xml archives of given Data Set

Parameters


int	<i>\$idProvider</i>	
int	<i>\$idDSA</i>	

Returns

boolean false

Definition at line 421 of file frontend.js.

Here is the caller graph for this function:

**9.56.2.3 function getCitation (*idProvider*, *schema*, *dsa*, *url*, *filter*, *concept*, *j*, *cached*)**

get Citation Text of given Data Set

Parameters


int	<i>\$idProvider</i>	
string	<i>\$schema</i>	
int	<i>\$dsa</i>	
string	<i>\$url</i>	
string	<i>\$filter</i>	
string	<i>\$concept</i>	
int	<i>\$j</i>	index for row in UI
int	<i>\$cached</i>	1 0

Returns


boolean false

Definition at line 287 of file frontend.js.

Here is the call graph for this function:

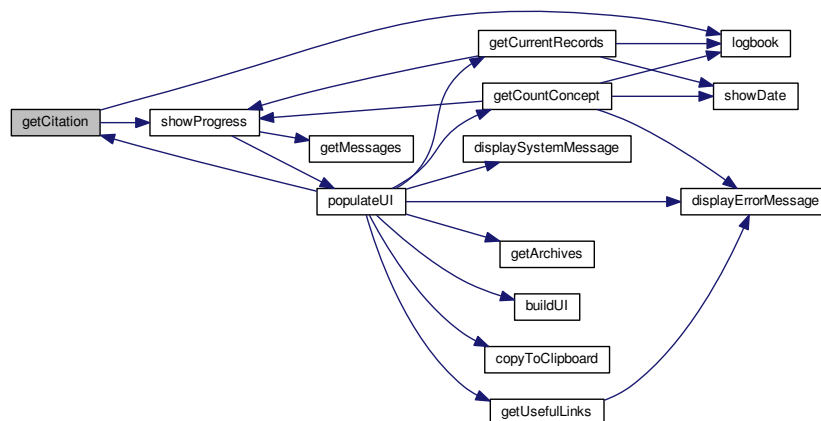

Here is the caller graph for this function:



9.56.2.4 function getCountConcept (idProvider, idDSA, schema, queryUrl, concept, specifier, filter, nocache)

count the occurrences of a given concept

Parameters


int	<i>\$idProvider</i>	
int	<i>\$idDSA</i>	
string	<i>\$schema</i>	
string	<i>\$queryUrl</i>	
string	<i>\$concept</i>	a capability, like /DataSets/DataSet/Units/Unit/UnitID
int	<i>\$specifier</i>	a bitmap of TOTAL, DISTINCT, DROPPED
string	<i>\$filter</i>	complex filter: <like>....</like>
int	<i>\$nocache</i>	1 0

Returns


boolean false

Definition at line 202 of file frontend.js.

Here is the call graph for this function:

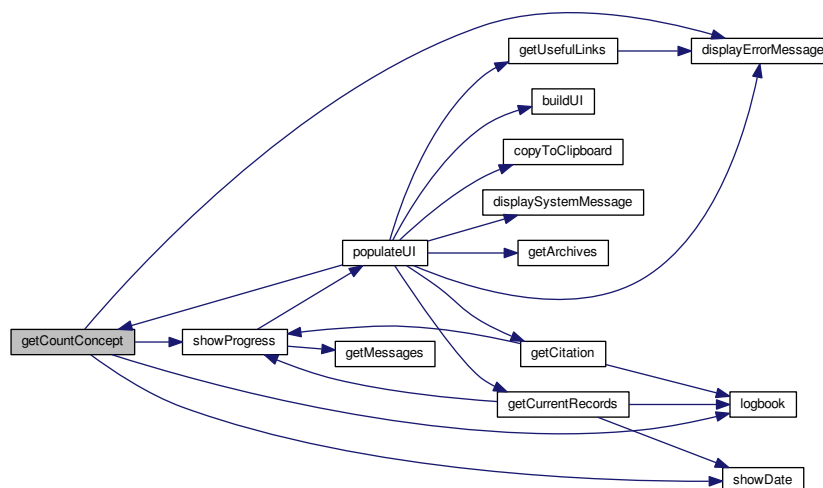

Here is the caller graph for this function:



9.56.2.5 function getCurrentRecords (idProvider, idDSA, schema, queryUrl, filter, nocache)

get Number of Current Records

Parameters


int	<i>\$idProvider</i>	
int	<i>\$idDSA</i>	
string	<i>\$schema</i>	
string	<i>\$queryUrl</i>	
string	<i>\$filter</i>	complex filter <like>...</like>
int	<i>\$nocache</i>	0 or 1

Returns


boolean false

Definition at line 119 of file frontend.js.

Here is the call graph for this function:

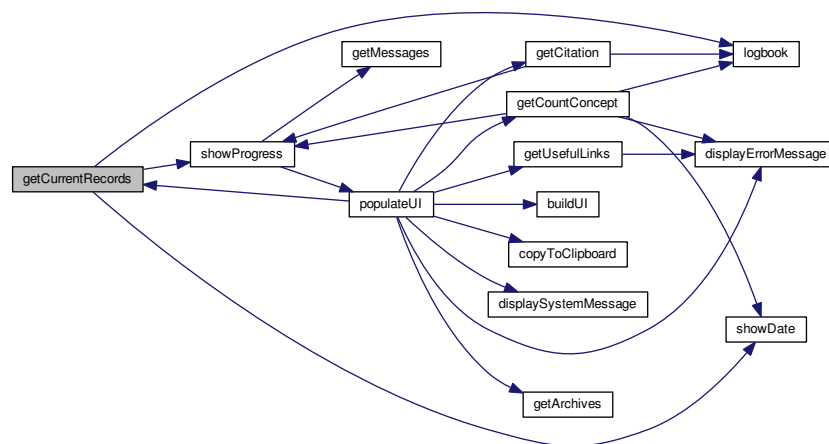

Here is the caller graph for this function:



9.56.2.6 function getSchema (schema)

get Schema shortname

Parameters


string	<i>\$schema</i>	
--------	-----------------	--

Returns

string

Definition at line 86 of file frontend.js.

Here is the caller graph for this function:

**9.56.2.7 function getUsefulLinks (*idProvider*, *idDSA*)**

get useful Links of given Data Set

Parameters

int	<i>\$idProvider</i>	
int	<i>\$idDSA</i>	

Returns


boolean false

Definition at line 353 of file frontend.js.

Here is the call graph for this function:



Here is the caller graph for this function:



9.56.2.8 function populateUI ()


Main function: populates the UI

Returns


boolean false

Definition at line 482 of file frontend.js.

Here is the call graph for this function:

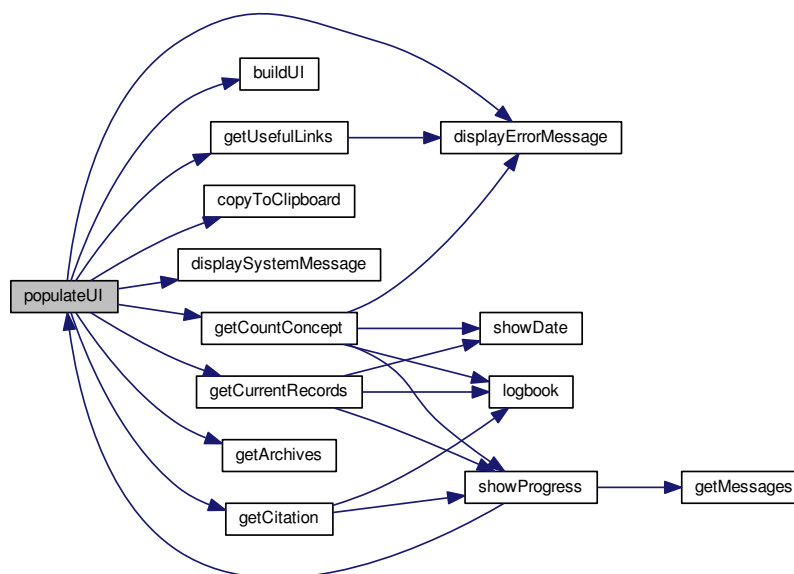

Here is the caller graph for this function:

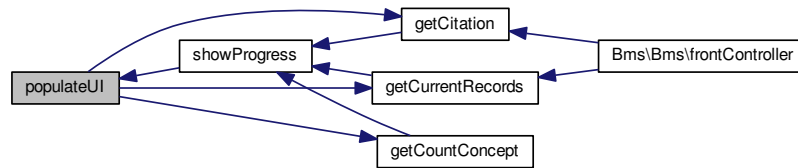

9.56.2.9 function showDate (*utime*)

display a date-time string

Parameters


int	<i>\$utime</i>	
-----	----------------	--

Returns

string

Definition at line 40 of file frontend.js.

Here is the caller graph for this function:



9.56.2.10 function showProgress (*idProvider*, *dsa*, *action*, *startTime*)

shows waiting time for http requests to BPS

Parameters


int	<i>\$idProvider</i>	
string	<i>\$dsa</i>	
string	<i>\$action</i>	
float	<i>\$startTime</i>	

Returns


boolean false

Definition at line 773 of file frontend.js.

Here is the call graph for this function:

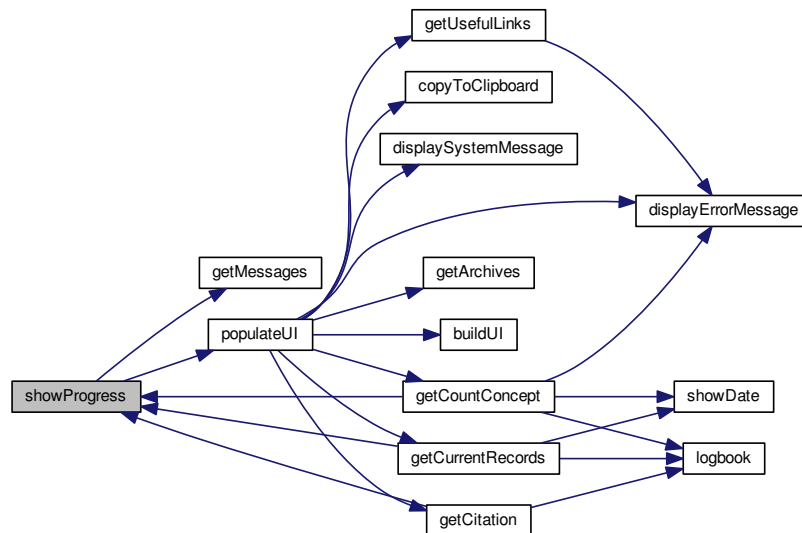

Here is the caller graph for this function:

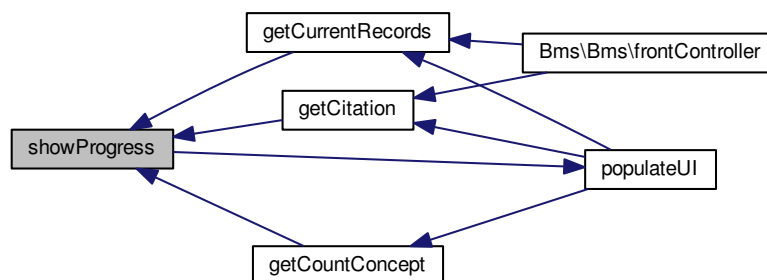

9.57 js/general.js File Reference

javascript general settings functions

Namespaces

- [Bms](#)

Functions

- function `getMessages` (path)
- function `displaySystemMessage` (msg, alert, duration)
- function `hideSystemMessage` ()
- function `displayErrorMessage` (elt, msg, mode)
- function `showConcurrentRequests` ()
- function `logbook` (idProvider, schema, dsa, concept, action, timeElapsed)
- function `copyToClipboard` (elem)
- function `formatXml` (xml)

Variables

- `biocaseResponseUrl` = "/pywrapper.cgi?dsa="
- `biocaseQueryUrl` = "utilities/queryforms/qf_manual.cgi?dsa="
- `biocaseLocalQueryToolUrl` = "querytool/main.cgi?dsa="
- `message` = {}
- `debugmode` = false
- `verbose` = 0
- `spinner` = ""
- `nbAjaxCalls` = 0

9.57.1 Detailed Description

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.57.2 Function Documentation

9.57.2.1 function `copyToClipboard` (*elem*)

copy selected text portion to Clipboard

Parameters


object	<i>\$elem</i>	jQuery object
--------	---------------	---------------

Returns

bool

Definition at line 224 of file `general.js`.

Here is the caller graph for this function:



9.57.2.2 function displayErrorMessage (elt, msg, mode)

displays a system error message as an answer of an operation

Parameters


string	<i>\$elt</i>	the jQuery Element where the message is displayed
string	<i>\$msg</i>	the message text
string	<i>\$mode</i>	replace or add at end of the jQuery element elt

Returns

void

Definition at line 144 of file general.js.

Here is the caller graph for this function:



9.57.2.3 function displaySystemMessage (msg, alert, duration)

displays a system message as an answer of an operation

Parameters


string	<i>\$msg</i>	the message text
string	<i>\$alert</i>	info,warning,success,danger
int	<i>\$duration</i>	

Returns

void

Definition at line 114 of file general.js.

Here is the caller graph for this function:

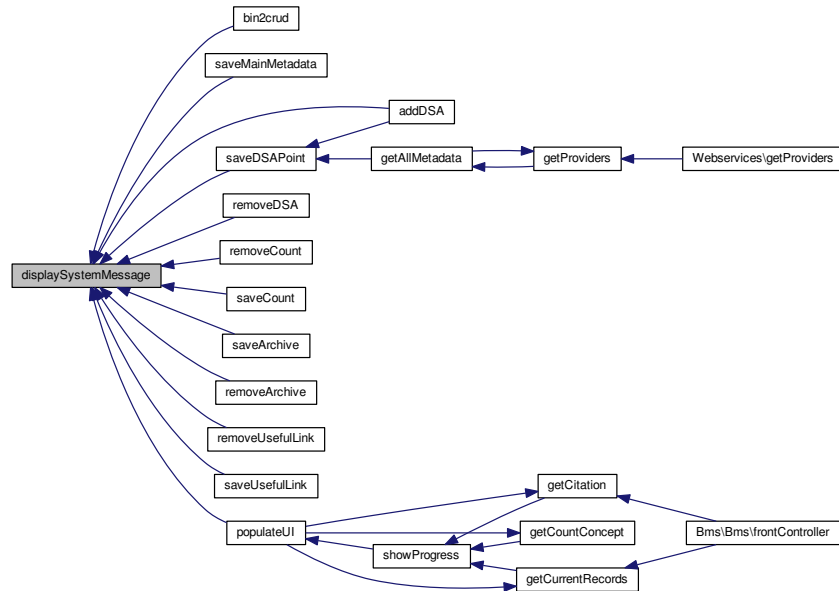**9.57.2.4 function formatXml (xml)**

pretty prints a XML string

Parameters

string	<i>\$xml</i>	a raw XML string
--------	--------------	------------------

Returns

{String}

Definition at line 264 of file general.js.

9.57.2.5 function getMessages (path)

loads system messages into global variable "message"

Parameters


string	<i>\$path</i>	
--------	---------------	--

Returns

boolean false

Definition at line 85 of file general.js.

Here is the caller graph for this function:

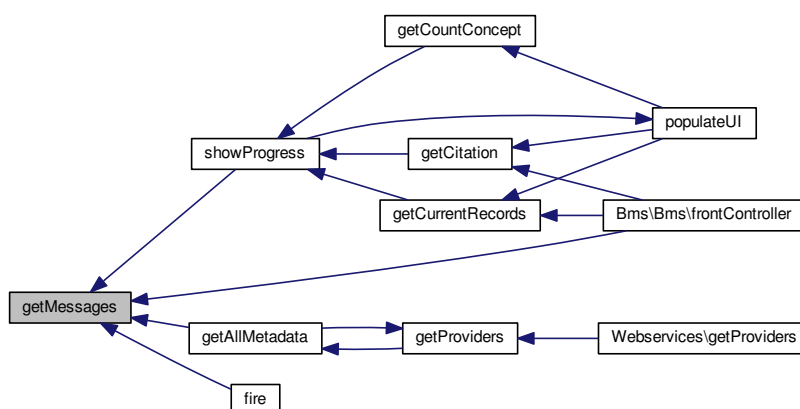

9.57.2.6 function hideSystemMessage ()

hides a system message

Returns

void

Definition at line 132 of file general.js.

9.57.2.7 function logbook (idProvider, schema, dsa, concept, action, timeElapsed)

writes selected infos to logbook

Parameters


int	<i>\$idProvider</i>	
string	<i>\$schema</i>	
int	<i>\$dsa</i>	
string	<i>\$concept</i>	
string	<i>\$action</i>	
float	<i>\$timeElapsed</i>	

Returns

boolean false

Definition at line 201 of file general.js.

Here is the caller graph for this function:

**9.57.2.8 function showConcurrentRequests ()**

shows number of concurrent requests

Returns

void

Definition at line 159 of file general.js.

9.57.3 Variable Documentation**9.57.3.1 biocaseLocalQueryToolUrl = "querytool/main.cgi?dsa="**

defines the biocase software endpoint Local Query GUI

Definition at line 46 of file general.js.

9.57.3.2 biocaseQueryUrl = "utilities/queryforms/qf_manual.cgi?dsa="

defines the biocase software endpoint GUI

Definition at line 40 of file general.js.

9.57.3.3 biocaseResponseUrl = "/pywrapper.cgi?dsa="

defines the biocase software URL response for a given data source

Definition at line 34 of file general.js.

9.57.3.4 debugmode = false

may be overwritten by scripts or GET-parameters

Definition at line 58 of file general.js.

9.57.3.5 message = {}

defines the system messages

Definition at line 52 of file general.js.

9.57.3.6 nbAjaxCalls = 0

number of pending calls to the BPS is overwritten dynamically

Definition at line 77 of file general.js.

9.57.3.7 spinner = ""

may be overwritten by [js/custom.js](#)

Definition at line 70 of file general.js.

9.57.3.8 verbose = 0

may be overwritten by scripts or GET-parameters

Definition at line 64 of file general.js.

9.58 js/landingpage.js File Reference

javascript statements for the landingpage

Namespaces

- [Bms](#)

9.58.1 Detailed Description

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.59 landingpage.php File Reference

landing page for ABCD2.06 raw xml

Namespaces

- [Bms](#)

9.59.1 Detailed Description

BioCAsE Monitor 2.1

Copyright

(C) 2013-2018 www.museumfuernaturkunde.berlin

Author

thomas.pfuhl@mfn.berlin based on Version 1.4 written by falko.gloeckler@mfn.berlin

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

9.60 logbook.php File Reference

statistics to log resquests to the BPS installations

Namespaces

- [Consistency](#)
- [Bms](#)

9.60.1 Detailed Description

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.