AGENTEX · V0.28.1

Mobile Testing User Guide


Test native Android and iOS apps with an AI agent and Appium. The essentials, step by step.

Android | iOS | Appium | Claude Code

Source: github.com/MhmdElGazzar/agentex · For AgenTeX v0.28.1 (commit a6bb627) · November 2026

It's 5 PM. The release ships tomorrow. 40 screens are still waiting for your thumb.

Same build, same taps, second device. Screenshots if you remember. `logcat` open in another window, hoping you catch the crash that hides behind a screen that looks fine.

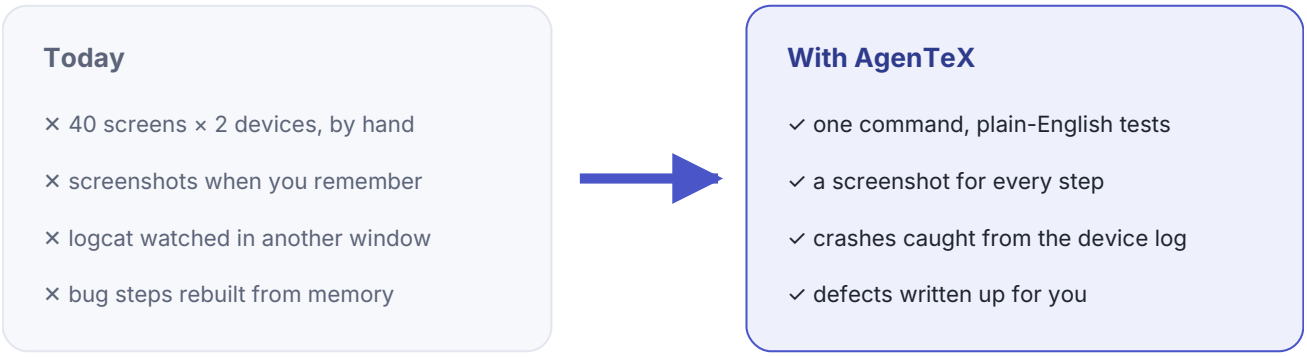


> **You describe the test. An agent taps through it on a real device. You review the proof.**

About fifteen minutes to read. Your first run right after.

Your path

Six stops from zero to a full mobile regression. Click any box to jump there.

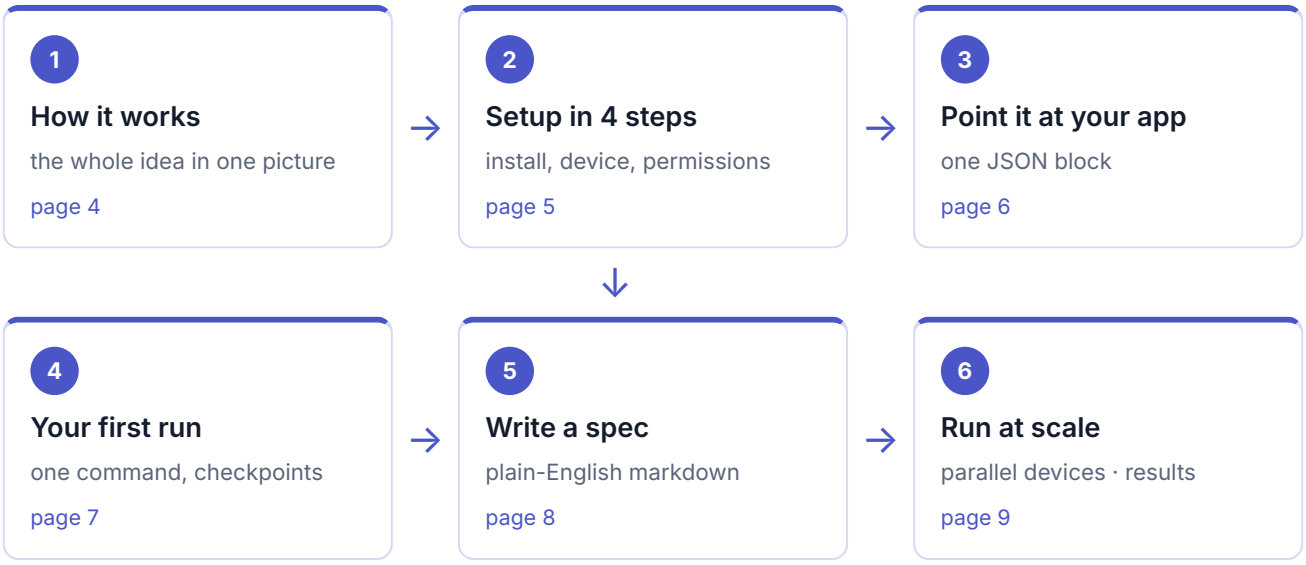

7 · If something breaks + cheat sheet

fixes for common errors and every command on one page

page 10


NAVIGATION

Every page has a "Back to your path" link at the top right, and the PDF bookmarks panel lists every section.

1 How it works

↑ Back to your path

You describe the test. Claude drives the app through Appium. You get proof for every step.

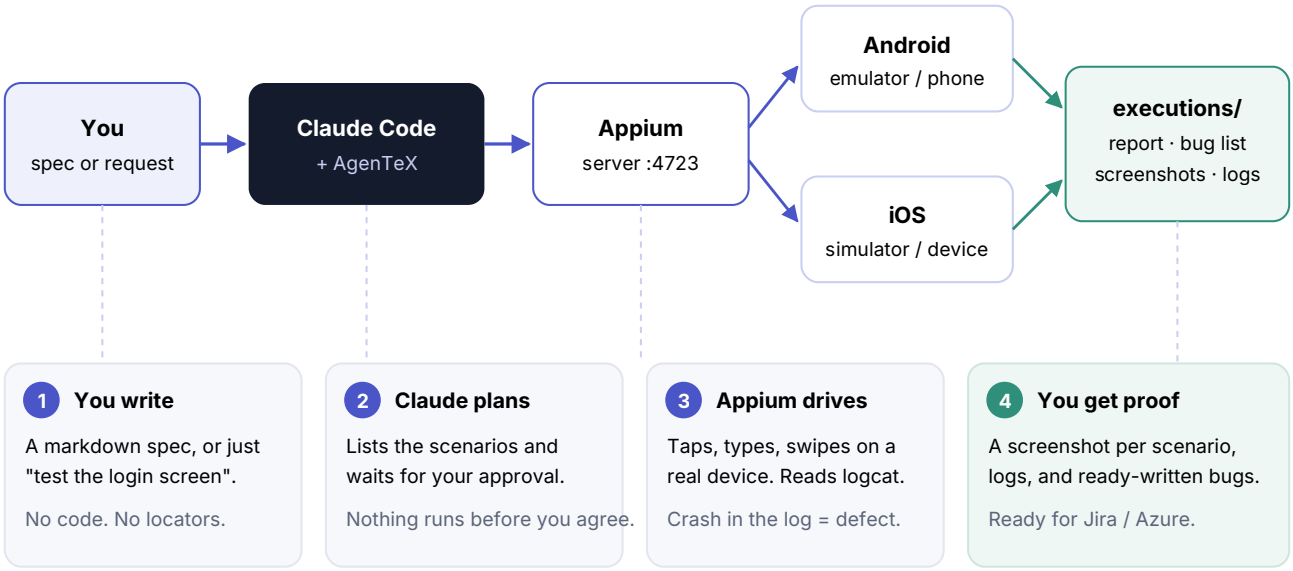

TWO MODES

Sequential (default): you approve each step.
Parallel: one spec file per device, no pauses.
See Run at scale.


YOUR DATA IS SAFE

App data is never reset without your OK. Destructive device commands (uninstall, clear, reboot) always ask first.

2 Setup in 4 steps

↑ Back to your path

Once per machine and project. Android works on Windows, macOS and Linux; iOS needs a Mac with Xcode.

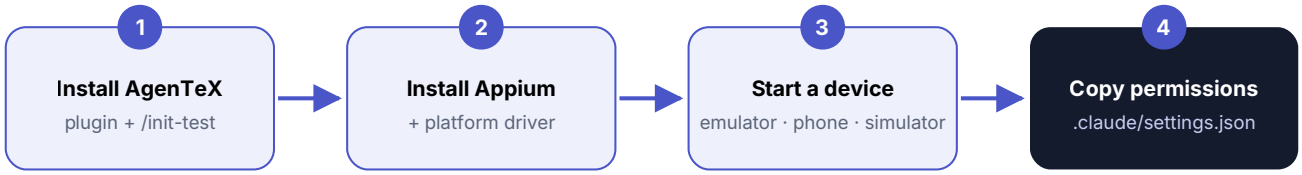

1 Install AgenTeX

```
/plugin marketplace add MhmdElGazzar/elgazzar-plugins
/plugin install agentex@elgazzar-plugins
/init-test
```

2 Install Appium + driver

```
npm install -D appium
npx appium driver install uiautomator2   # Android
npx appium driver install xcuitest       # iOS
```

3 Start a device and check it

```
emulator -avd <name>          # or Android Studio
adb devices                   # → emulator-5554
xcrun simctl boot "iPhone 15" # iOS
```

4 Copy permissions

Copy the `permissions` block from the repo's `settings.example.json` into `.claude/settings.json`. Read-only device commands run freely; uninstall, clear data and reboot always ask.

> **YOU DON'T NEED TO START APPIUM YOURSELF**
>
> Claude starts `npx appium server` when a run needs it. To check it by hand: `curl -s http://127.0.0.1:4723/status` .

3 Point it at your app

↑ Back to your path

Add a `mobile` block to `environments/qc.json`. That's the whole configuration.

```
"mobile": {
"platformName": "Android",
"automationName": "UiAutomator2",
"app": "/path/to/app.apk",
"deviceName": "emulator-5554"
}
```

Platform
Android or iOS

Driver
UiAutomator2 (Android) · XCUITest (iOS)

The app
.apk / .app path, or an installed app id

The device
from adb devices · add "udid" if several

AgenTeX always adds "appium:noReset": true
Your app's data is never wiped unless you approve it.

Test users live here too

```
"users": {
  "valid_user": { "phone": "0550000001" }
},
"defaults": {
  "password": { "envSecret":
"DEFAULT_PASSWORD" }
}
```

A spec says "log in as valid_user". The real password stays in `.env` and is typed for you, never shown.

iOS instead


```
"mobile": {
  "platformName": "iOS",
  "automationName": "XCUITest",
  "app": "/path/to/app.app",
  "deviceName": "iPhone 15",
  "platformVersion": "17.5"
}
```

More environments: copy `qc.json` to `uat.json` and run "... on uat".

4 Your first run

↑ Back to your path

One command. Claude stops at every checkpoint, so you stay in control.

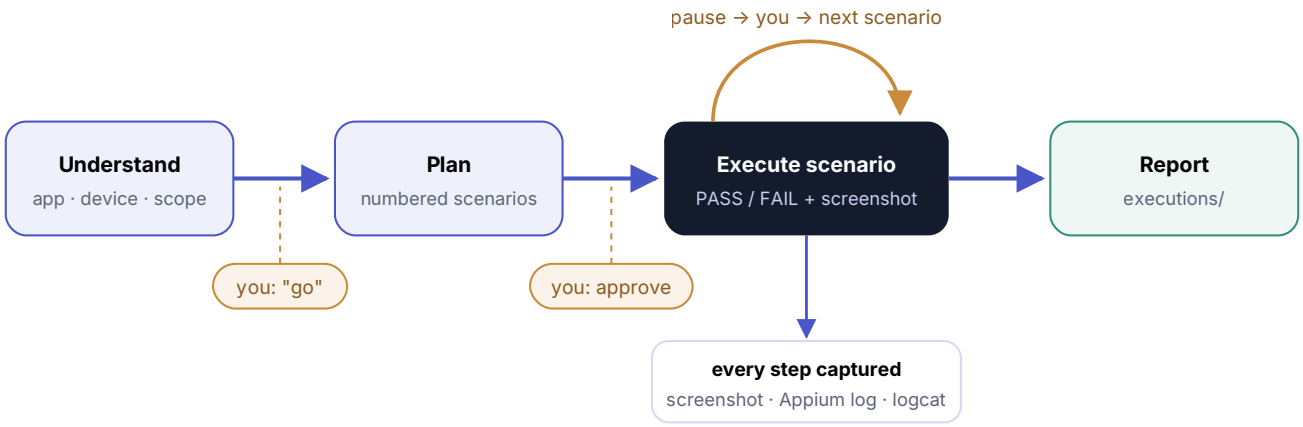


```
/execute-mobile-test suite1
# or plain English:
Test the login screen of our Android app — happy path plus wrong password and empty fields.
```


NO APP YET? USE APIDEMOS

The official Appium sample app (`io.appium.android.apis` , `ApiDemos-debug.apk` from the `appium/android-apidemos` repo). AgenTeX ships a ready spec for it, `apidemos-navigation.md` : open Views → back → open Graphics → back, and fail on any crash. Put the .apk path in your `mobile` block, run the command, and say *"run only apidemos-navigation.md"*. If it passes, your whole setup works.

5 Write a spec

↑ Back to your path

A spec is a short markdown file. This is the real `login.md` that ships with AgenTeX (shortened).

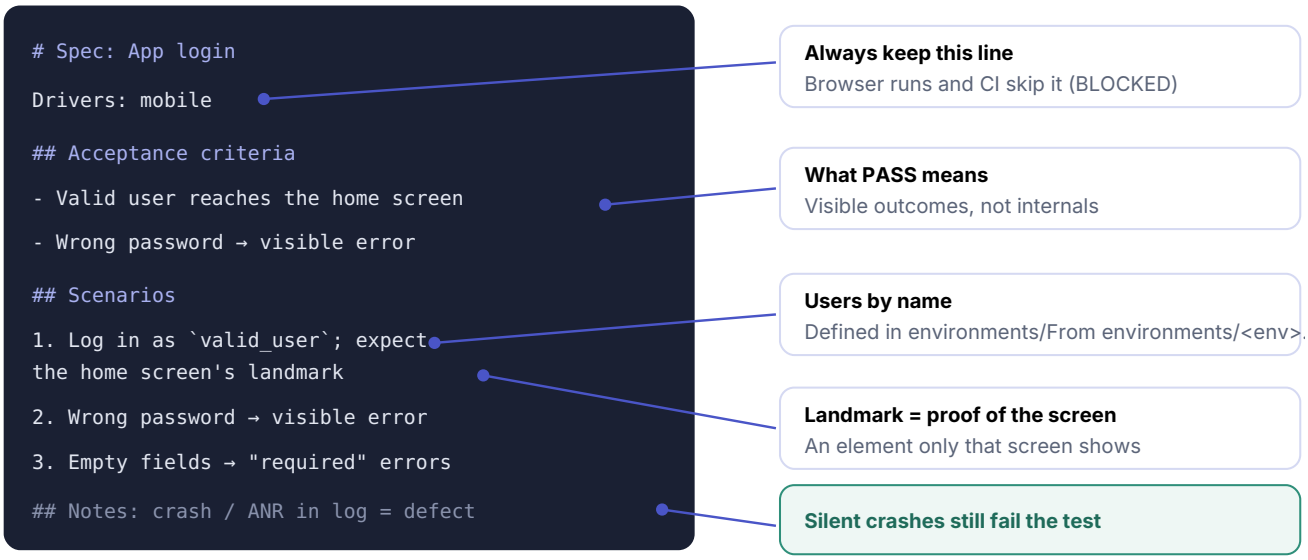

MAKE IT RELIABLE

Ask developers for **accessibility ids** (Android `content-desc` / `resource-id`, iOS `accessibilityIdentifier`). Claude prefers them over text or XPath.

ONE FILE = ONE DEVICE SESSION


Keep steps that depend on each other (login → action → check) in one file, marked "stateful — run in order".

Bonus: a mobile spec can also check the backend with `api:` and `db:` lines, using only requests and queries defined in your `integration/` catalog.


6 Run at scale and read the results

↑ Back to your path

Sequential (default) /execute-mobile-test suite1 — one device, you approve each step



Parallel "Run a parallel regression ... from the specs in test/mobile-suite1/" — no pauses

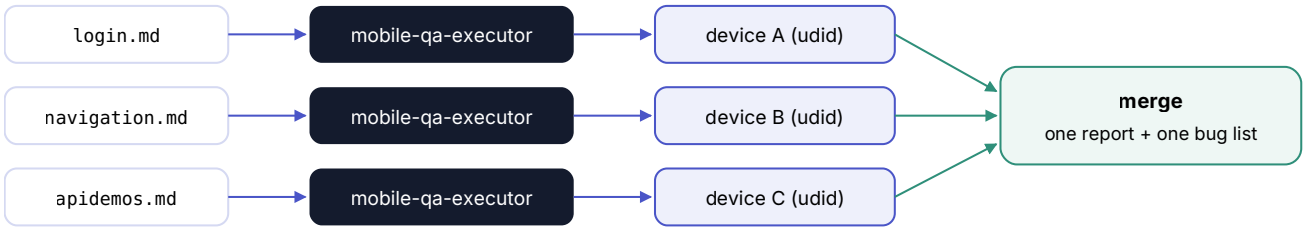

> **ONE DEVICE PER SESSION**
> Parallel needs a separate emulator, simulator or phone for each spec file. You probably have 1–2, not 8.

Where the results land

```
executions/execu_<timestamp>/
├── report.md           # tally + defects
├── extent-report.html # dashboard
├── mobile-sessions/run/
│   ├── logs/           # Appium + logcat
│   └── screenshots/
└── bugs/bug-list.md
```

A defect, already written (example)

```
Title: App crashes on empty login
Steps: 1. Launch app  2. Leave fields
       empty  3. Tap "Login"
Expected: "required" errors
Actual: app closes; logcat shows
        FATAL EXCEPTION
Severity: Critical
Evidence: s3-empty-fields.png
```

Then say *"File the defects from the last run as bugs under story 12345"*. AgenTeX validates every field against Jira or Azure DevOps and writes nothing until you approve.

7 If something breaks + cheat sheet

↑ Back to your path

You see	Do this
`adb devices` is empty / `unauthorized`	Start the emulator, or reconnect the phone and accept "Allow USB debugging".
Session won't start	Server up? (`curl -s http://127.0.0.1:4723/status`) Driver installed? (`npx appium driver list --installed`) Does `deviceName` match?
Claude asks for app and device	The environment has no `mobile` block. Add one (Point it at your app).
BLOCKED: reset requested / user not defined	Remove `fullReset` from the caps / add the user under `users`.
Spec BLOCKED in `/execute-test` or CI	Expected. Mobile specs run only with `/execute-mobile-test`.
Parallel sessions collide · iOS fails on Windows	Give each session its own `udid` · iOS needs macOS + Xcode.

```
# setup
/plugin install agentex@elgazzar-plugins  ·  /init-test
npm install -D appium  ·  npx appium driver install uiautomator2
# check
npx --no-install appium --version  ·  adb devices  ·  xcrun simctl list devices booted
# environments/qc.json
"mobile": { "platformName": "Android", "automationName": "UiAutomator2",
            "app": "/abs/path/app.apk", "deviceName": "emulator-5554" }
# run
/execute-mobile-test suite1            /execute-mobile-test suite1 on uat
Run a parallel regression against our Android app from the specs in test/mobile-suite1/.
# results
executions/execu_<timestamp>/report.md  ·  bugs/bug-list.md
```

Based on AgenTeX v0.28.1 (commit a6bb627) · github.com/MhmdElGazzar/agentex · Full details: the complete AgenTeX User Guide.