

# Ball Kicking for Reinforcement Learning on Poppy Humanoid

Initial Presentation of Applied Reinforcement Learning

Yinan Shi, Fengze Han, Hao Xu, Jiaojiao Ye

Institute for Data Processing, Technical University of Munich


May 2, 2018


Motivation

Problem Description


Goals and Steps

Time Plan

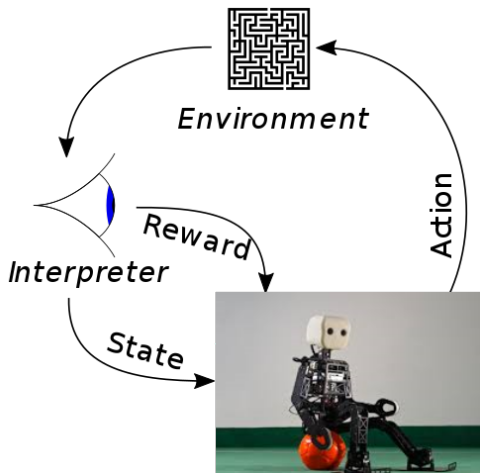


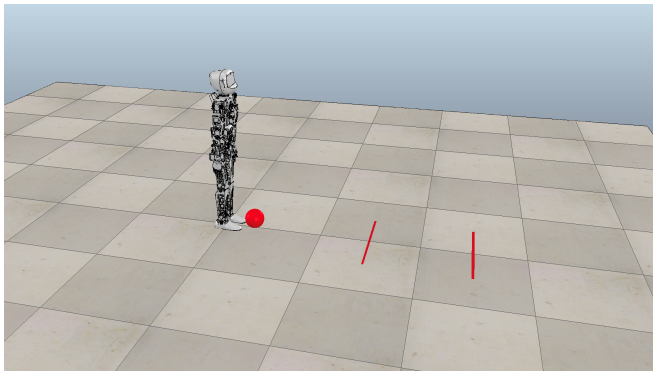

The goal is to train a poppy humanoid that sits on a chair to kick the ball into the target region.

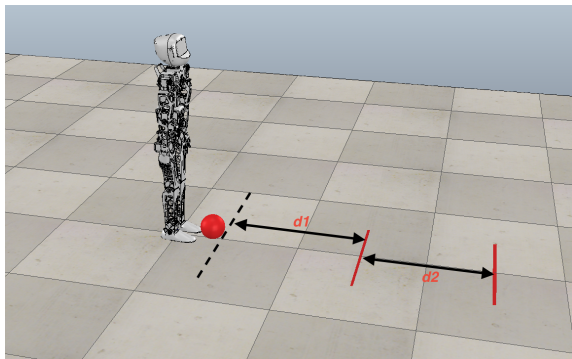


- ▶ Ball and lines detection using real-time images
- ▶ States are constructed by Pixel distance  $d_1$  and  $d_2$  in form  $(d_1, d_2)$
- ▶ Goal state is kicking the ball into the region between two red lines

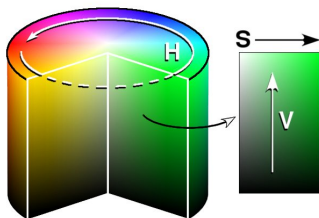

- ▶ H – Hue( Dominant Wavelength )
- ▶ S – Saturation ( Purity / shades of the color )
- ▶ V – Value( Intensity )

After get the pixels of red in the HSV color space, use Hough Transform to detect lines and circle(ball).

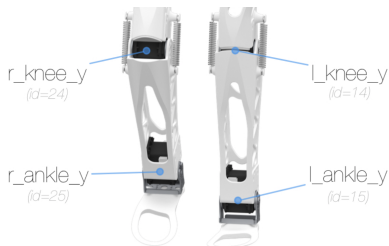

- ▶ Motor angle in knee starting from an initial value  $\theta_0$
- ▶ Angular velocity control, e.g. a 2-dimensional vector of goal position and time duration:  $[\theta_t, t]^T$
- ▶ Constraints on values and sensitivity need to be studied
- ▶ After test on real robot, action space and how to do discretization will be determined

- ▶ Most critical part of a reinforcement learning scenario
- ▶ Assign '-10' when the episode terminates outside the desired region; assign '+10' otherwise
- ▶ Both values will be tuned in practice to find out the best choice



## TD Learning in Q function

### SARSA

$$Q(s, a) \leftarrow Q(s, a) + \alpha(r(s, a, s') + \gamma Q(s', \pi(s')) - Q(s, a))$$

### Q-Learning

$$Q(s, a) \leftarrow Q(s, a) + \alpha(r(s, a, s') + \gamma \min_{a' \in A(s')} Q(s', a') - Q(s, a))$$

# Time Plan

