

SMM kernel method and posterior distribution

Chanwoo Lee, April 06, 2020

1 Strong duality condition

Consider a convex optimization problem

$$p^* = \min_{x \in \mathcal{D}} f_0(x) : f_i(x) \geq 0, \quad i = 1, \dots, m,$$
$$h_i(x) = 0, \quad i = 1, \dots, p,$$

where the functions f_0, f_1, \dots, f_m are convex and h_1, \dots, h_p are affine. We can have strong duality condition through Slater's condition.

Definition 1 (Slater's condition). We say that the problem satisfies Slater's condition if it is strictly feasible, that is:

$$\exists x_0 \in \mathcal{D} : f_i(x_0) < 0, i = 1, \dots, m \quad h_i(x_0) = 0, i = 1, \dots, p$$

We can replace the above by a weak form of Slater's condition, where strict feasibility is not required whenever the function f_i is affine. We then have the

Theorem 1.1 (Slater condition Duality). *If the primal problem is convex, and satisfies the weak Slater's condition, the the strong duality holds.*

There are another sufficient condition for strong duality.

Theorem 1.2 (Quadratic convex optimization duality). *If f_0 is quadratic convex, and the functions $f_1, \dots, f_m, h_1, \dots, h_p$ are all affine, then the strong duality holds, provided one of the primal or dual problems is feasible.*

We can apply the second theorem to ensure the strong duality holds in our case.

2 Instability issue of the SMM algorithm

Multiple initialization can solve unstable issue of the SMM algorithm in the last meeting note. In the modified algorithm, we can set multiple initialization method. In this option, the algorithm choose the best output among multiple outputs in respect to loss function value. Figure 1 shows consistent outputs from repetitions.

3 Kernel functions for matrices

We fit the SM classifier using input feature $h(X_i), i = 1, \dots, N$. From this feature, we have the Lagrange dual problem

$$L_D = \sum_{i=1}^N -\frac{1}{2} \sum_{i=1}^N \sum_{j=1}^N \alpha_i \alpha_j y_i y_j \langle h(X_i), h(X_j) \rangle. \quad (1)$$

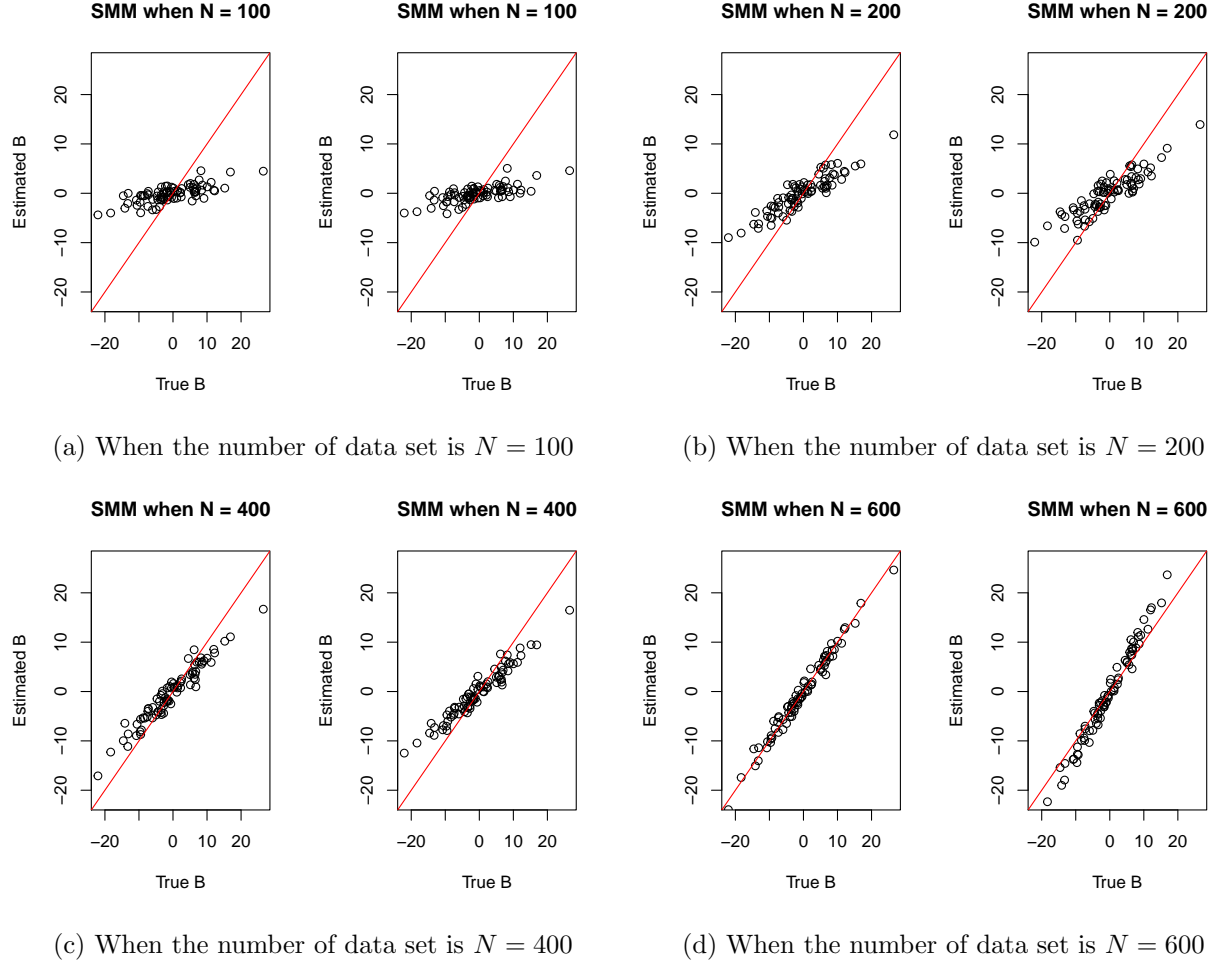


Figure 1: True parameter B is compared with multiple initialized SMM result \hat{B} under the several number of data sets $N \in \{100, 200, 400, 600\}$. The horizontal axis is entries of B and the vertical axis is entries of \hat{B} . The number of initialization is 10. For each sub figure, we can check that the outputs are pretty much the same.

By solving (1), we obtain the nonlinear function $\hat{f}(X) = \sum_{i=1}^N \alpha_i y_i \langle h(X), h(X_i) \rangle$. Since all related equations require only knowledge of the kernel function,

$$K(X, X') = \langle h(X), h(X') \rangle.$$

Our goal is to define the kernel function which catches matrix structure well. In SVM case, three popular choices for K are

$$\begin{aligned} \text{dth-Degree polynomial : } K(\mathbf{x}, \mathbf{x}') &= (1 + \langle \mathbf{x}, \mathbf{x}' \rangle)^d, \\ \text{Radial basis : } K(\mathbf{x}, \mathbf{x}') &= \exp(-\gamma \|\mathbf{x} - \mathbf{x}'\|^2), \\ \text{Sigmoid : } K(\mathbf{x}, \mathbf{x}') &= \tanh(\gamma_1 \langle \mathbf{x}, \mathbf{x}' \rangle + \gamma_2). \end{aligned}$$

I define two measures to generalize $\langle \mathbf{x}, \mathbf{x}' \rangle$ and $\|\mathbf{x} - \mathbf{x}'\|^2$ into matrices case not vectorizing matrices. For two matrices $X, X' \in \mathbb{R}^{m \times n}$, we have singular value decomposition of two matrices.

$$X = \sum_{k=1}^{m \vee n} \sigma_k u_k v_k^T \quad \text{and} \quad X' = \sum_{k=1}^{m \vee n} \sigma'_k u'_k (v'_k)^T.$$

From this notation, I define weighted inner product between two matrices.

$$\langle X, X' \rangle_M = \sum_{k=1}^{m \vee n} \sigma_k \sigma'_k \langle u_k, u'_k \rangle \langle v_k, v'_k \rangle. \quad (2)$$

In (2), $\sigma \sigma'$ works as weight on principal inner products of subspace and $\langle u, u' \rangle, \langle v, v' \rangle$ represent principal inner product in column space and row space respectively. From this new definition, we can generalize d-th degree polynomial kernel and sigmoid kernel into matrices case.

$$\begin{aligned} \text{dth-Degree polynomial : } K(X, X') &= (1 + \langle X, X' \rangle_M)^d, \\ \text{Sigmoid: } K(X, X') &= \tanh(\gamma_1 \langle X, X' \rangle_M + \gamma_2). \end{aligned}$$

In addition to inner product, we can define weighted matrices distance as

$$\|X - X'\|_M^2 = \sum_{k=1}^{m \vee n} \sigma_k \sigma'_k (\|u_k - u'_k\|^2 + \|v_k - v'_k\|^2). \quad (3)$$

In (3), $\sigma \sigma'$ works as weight on principal row and column distances. $\|u_k - u'_k\|^2$ and $\|v_k - v'_k\|^2$ are column-wise and row-wise distances between principal vectors. With this definition we define generalized Radial basis kernel as

$$\text{Radial basis : } K(X, X') = \exp(-\gamma \|X - X'\|_M^2).$$

If two vectors \mathbf{x}, \mathbf{x}' are expressed as

$$\mathbf{x} = \frac{\mathbf{x}}{\|\mathbf{x}\|} \|\mathbf{x}\| \cdot 1 \quad \text{and} \quad \mathbf{x}' = \frac{\mathbf{x}'}{\|\mathbf{x}'\|} \|\mathbf{x}'\| \cdot 1$$

We can check those definitions are consistent to vector case as follows

$$\begin{aligned} \langle \mathbf{x}, \mathbf{x}' \rangle_M &= \|\mathbf{x}\| \|\mathbf{x}'\| \left\langle \frac{\mathbf{x}}{\|\mathbf{x}\|}, \frac{\mathbf{x}'}{\|\mathbf{x}'\|} \right\rangle \langle 1, 1 \rangle = \langle \mathbf{x}, \mathbf{x}' \rangle, \\ \|\mathbf{x} - \mathbf{x}'\|_M &= \|\mathbf{x}\| \|\mathbf{x}'\| \left(\left\| \frac{\mathbf{x}}{\|\mathbf{x}\|} - \frac{\mathbf{x}'}{\|\mathbf{x}'\|} \right\|_2^2 + \|1 - 1\|^2 \right) = \|\mathbf{x} - \mathbf{x}'\|^2 \end{aligned}$$

4 Weighted binary classification

To obtain posterior distribution given feature data, we solve the regularization problem based on the weighted hinge loss.

$$\begin{aligned} \min_{\beta, \xi} \frac{1}{2} \|\beta\|^2 + C \left[(1 - \pi) \sum_{y_i=1} \xi_i + \pi \sum_{y_i=-1} \xi_i \right] \\ \text{subject to } y_i (\langle x_i, \beta \rangle + b) \geq 1 - \xi_i, \end{aligned} \quad (4)$$

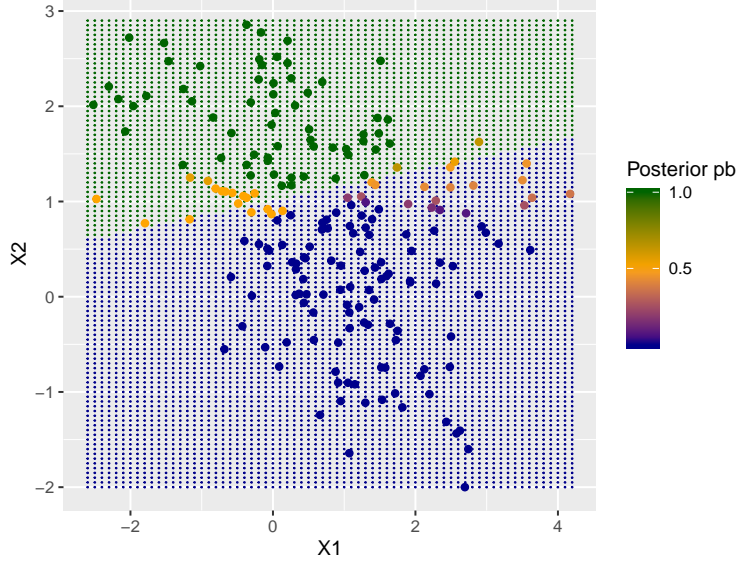


Figure 2: The green area is labeled as 1 with the SVM and blue area is -1. We can obtain non trivial posterior probability around the classification boundary.

$$\xi_i \geq 0.$$

The related dual problem for (4) is

$$\begin{aligned} \max_{\alpha} \quad & \sum_{i=1}^N \alpha_i - \frac{1}{2} \sum_{i=1}^N \sum_{j=1}^N \alpha_i \alpha_j y_i y_j \langle \mathbf{x}_i, \mathbf{x}_j \rangle, \\ \text{subject to} \quad & 0 \leq \alpha_i \leq C(1 - \pi) \text{ for } y_i = 1, \\ & 0 \leq \alpha_i \leq C\pi \text{ for } y_i = -1, \\ & \sum_{i=1}^N \alpha_i y_i = 0. \end{aligned} \quad (5)$$

From the solution of (5), we can find the primal solution as $\beta = \sum_{i=1}^N y_i \alpha_i \mathbf{x}_i$. With this relation, `smm` in R-codes section solves the equation (4). Figure 3 shows the weighted hinge loss SVM classifier with $\pi \in \{0.001, 0.5, 0.999\}$. It is known that the minimizer $\text{sign}(f_{\pi}(x))$ to Equation (4) is a consistent estimate of $\text{sign}(\mathbb{P}(y = 1|x) - \pi)$. Therefore solving Equation (4) using different π values such that $\pi_1 < \dots < \pi_m$, we can estimate

$$\hat{\mathbb{P}}(y = 1|x) = \frac{1}{2} \left(\arg \max_{\pi_j} \{\text{sign}(f_{\pi_j}(x)) = 1\} + \arg \max_{\pi_j} \{\text{sign}(f_{\pi_j}(x)) = -1\} \right). \quad (6)$$

Figure 2 shows the posterior probability estimation with the rule of (6).

5 One issue for posterior estimation

I found one issue to estimate posterior probability $\mathbb{P}(y = 1|x)$. There are some points \mathbf{x}_i 's such that $\text{sign}(\mathbb{P}(y|\mathbf{x}_i) - \pi)$ is not decreasing in respect to π . We can check that the red point in Figure 3

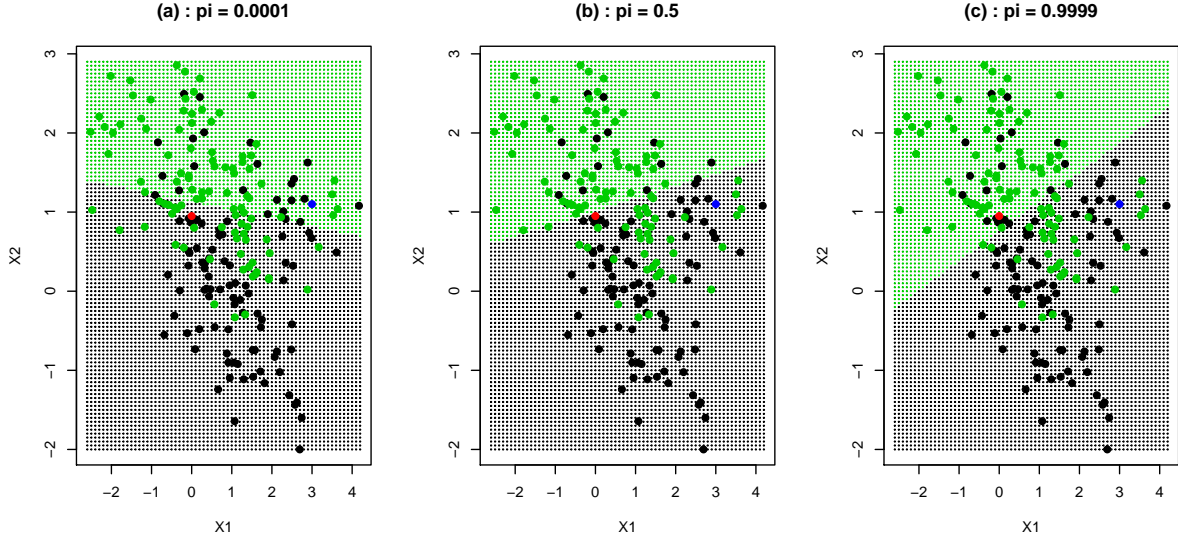


Figure 3: The sub figures show weighted hinge loss SVM classifier when $\pi = 0.001, 0.5, 0.999$. Green points represent for $y = 1$ and black for $y = -1$. The middle sub figure ($\pi = 0.5$) is the regular SVM. The red point changes its label from -1 to 1 as π increases. The blue point shows vice versa.

has $\text{sign}(\mathbb{P}(y = 1|\mathbf{x}) - 0.0001) = -1$ but $\text{sign}(\mathbb{P}(y = 1|\mathbf{x}) - 0.9999) = 1$ which does not make sense. This phenomenon happens in all points located below classification boundary when $\pi = 0.0001$ and above the boundary when $\pi = 0.9999$ at the same time. In addition, this area is inevitable unless two classification boundaries are parallel which is hard to be satisfied. If I stick to the rule in (6), all points in the area has 0.5 as posterior probability.

6 R-codes

6.1 Updated functions

```

1 library(pracma)
2 library(quadprog)
3
4 eps = 10^-5
5
6
7
8 objv = function(B,b0,X,y,cost = 10,prob = F){
9   if (prob == F) {
10    value = sum(B*B)/2+cost*sum(pmax(1-y*unlist(lapply(X,function(x) sum(B*x)+b0)),0))
11  }else{
12    ind = which(y==1)
13    value = sum(B*B)/2 +
14      (1-prob)*cost*sum(pmax(1-y[ind]*unlist(lapply(X[ind],function(x) sum(B*x)+b0)),0)) +
15      prob*cost*sum(pmax(1-y[-ind]*unlist(lapply(X[-ind],function(x) sum(B*x)+b0)),0))
16  }
17  return(value)
18 }

```

```

19 }
20
21 # Generating dataset
22 gendat = function(m,n,r,N,b0){
23   result = list()
24   # simulation
25   # Weight
26   rU = matrix(runif(m*r,-1,1),nrow = m)
27   rV = matrix(runif(n*r,-1,1),nrow = n)
28   B = rU%*%t(rV)
29
30   # predictor matrix
31   X = list()
32   for (i in 1:N) {
33     X[[i]] <- matrix(runif(m*n,-1,1),nrow = m,ncol=n)
34   }
35
36   # classification
37   y = list()
38   for (i in 1:N) {
39     y[[i]] = sign(sum(B*X[[i]])+b0)
40   }
41   y = unlist(y)
42
43   # predictor vector
44   x = matrix(nrow =N,ncol = m*n)
45   for(i in 1:N){
46     x[i,] = as.vector(X[[i]])
47   }
48   dat = data.frame(y = factor(y), x)
49
50   result$B = B
51   result$X = X; result$y = y; result$dat = dat
52   return(result)
53 }
54
55
56 kernelm = function(X,H,y,type = c("u","v")){
57   n = length(X)
58   x = matrix(unlist(X),nrow = length(X),byrow = T)
59   if (type == "u") {
60     hx = matrix(unlist(lapply(X,function(x) x%*%H)),nrow = length(X),byrow = T)
61   } else {
62     hx = matrix(unlist(lapply(X,function(x) H%*%x)),nrow = length(X),byrow = T)
63   }
64   Q = matrix(nrow = n,ncol = n)
65   for (i in 1:n) {
66     for(j in i:n){
67       Q[i,j] = sum(x[i,]*hx[j,])*y[i]*y[j]
68       Q[j,i] = Q[i,j]
69     }
70   }
71   h = eigen(Q)
72   Q = (h$vectors)%*%diag(pmax(h$values,eps))%*%t(h$vectors)
73   return(Q)
74 }
75
76
77

```

```

78
79 ## SMM with multiple initialization
80 smm = function(X,y,r,cost = 10,rep = 10){
81   result = list()
82
83   # SMM
84   m= nrow(X[[1]]); n = ncol(X[[1]]); N = length(X)
85
86   compareobj = 10^100
87   for (i in 1:rep) {
88     error = 10
89     iter = 0
90     #initialization
91     U = randortho(m)[,1:r]
92     # U = matrix(runif(m*r,-1,1),nrow = m)
93     V = randortho(n)[,1:r]
94     # V = matrix(runif(n*r,-1,1),nrow = n)
95     obj = objv(U%*%t(V),0,X,y,cost);obj
96
97     while((iter <20)&(error>10^-3)){
98       # update U fixing V
99       Vs = V%*%solve(t(V)%*%V)
100       H = Vs%*%t(V)
101       dvec = rep(1,length(X))
102       Dmat = kernelm(X,H,y,"u")
103       Amat = cbind(y,diag(1,N),-diag(1,N))
104       bvec = c(rep(0,1+N),rep(-cost,N))
105       alpha = solve.QP(Dmat,dvec,Amat,bvec,meq = 1)
106       Bpart=matrix(t(y*alpha$solution)%*%matrix(unlist(X),nrow = length(X),byrow =
107       T),nrow = m)
108       U = Bpart%*%Vs
109
110       # update V fixing U
111       Us = U%*%solve(t(U)%*%U)
112       H = Us%*%t(U)
113       Dmat = kernelm(X,H,y,"v")
114       alpha = solve.QP(Dmat,dvec,Amat,bvec,meq = 1)
115       Bpart=matrix(t(y*alpha$solution)%*%matrix(unlist(X),nrow = length(X),byrow =
116       T),nrow = m)
117       V = t(Bpart)%*%Us
118
119       ## intercept estimation
120       Bhat = U%*%t(V);Bhat
121       positiv = min(unlist(lapply(X,function(x) sum(Bhat*x)))[which(y==1)])
122       negativ = max(unlist(lapply(X,function(x) sum(Bhat*x)))[which(y==1)])
123       if ((1-positiv)<(-1-negativ)) {
124         b0hat = -(positiv+negativ)/2
125       }else{
126         gridb0 = seq(from = -1-negativ,to = 1-positiv,length = 100)
127         b0hat = gridb0[which.min(sapply(gridb0,function(b) objv(Bhat,b,X,y)))]
128       }
129       obj = c(obj,objv(Bhat,b0hat,X,y,cost));obj
130       iter = iter+1
131       error = abs(-obj[iter+1]+obj[iter])/obj[iter];error
132
133     }
134     if (compareobj>obj[iter+1]) {

```

```

135     compareobj = obj[iter+1]
136     predictor = function(x) sign(sum(Bhat*x)+b0hat)
137     result$B = Bhat; result$b0 = b0hat; result$obj = obj; result$iter = iter
138     result$error = error; result$predict = predictor
139 }
140
141 }
142 return(result)
143 }
144
145
146 kernelmat = function(x,y,kernels = function(x1,x2) sum(x1*x2)){
147     N = length(y)
148     Q = matrix(nrow = N,ncol = N)
149     for (i in 1:N) {
150         for(j in i:N){
151             Q[i,j] =kernels(x[i,],x[j,])*y[i]*y[j]
152             Q[j,i] = Q[i,j]
153         }
154     }
155     h = eigen(Q)
156     Q = (h$vectors)%*%diag(pmax(h$values,eps))%*%t(h$vectors)
157     return(Q)
158 }
159
160
161 # SVM with kernel functions and weighted cost function
162 svm = function(X,y,cost = 10, kernels = function(x1,x2) sum(x1*x2), p = .5){
163     if (p==.5) {
164         cost = 2*cost
165     }
166     result = list()
167     error = 10
168     iter = 0
169     # SVM
170     m= nrow(X[[1]]); n = ncol(X[[1]]); N = length(X)
171
172     x = matrix(unlist(X),nrow = N,byrow = T)
173     dvec = rep(1,length(X))
174     Dmat = kernelmat(x,y,kernels)
175     Amat = cbind(y,diag(1,N),-diag(1,N))
176     bvec = c(rep(0,1+N),ifelse(y==1,-cost*(1-p),-cost*p))
177     alpha = solve.QP(Dmat,dvec,Amat,bvec,meq =1)
178
179     Bhat=matrix(t(y*alpha$solution)%*%x,nrow = m)
180     b0hat = -(min(unlist(lapply(X,function(x) sum(Bhat*x)))[which(y==1)]))+
181             max(unlist(lapply(X,function(x) sum(Bhat*x)))[which(y==-1)]))/2
182     obj = objv(Bhat,b0hat,X,y,cost,prob = p)
183
184     predictor = function(x) sign(sum(Bhat*x)+b0hat)
185     result$B = Bhat; result$b0 = b0hat; result$obj = obj;
186     result$predict = predictor
187     return(result)
188 }
189
190
191
192
193 posterior = function(X,y,cost = 10,test,kernels = function(x1,x2) sum(x1*x2)){

```



```

194 a = 1:99
195 for(i in 1:99){
196   fit = svm(X,y,cost, kernels, p = i*0.01)$predict
197   a[i] = fit(test)
198 }
199 if (all(a==1)) {
200   return(1)
201 }else if(all(a== -1)){
202   return(0)
203 }else{
204   return((max(which(a==1))+min(which(a== -1)))/200)
205 }
206 }

```

6.2 Simulations

```

1 load(file = "ESL.mixture.rda")
2 names(ESL.mixture)
3 rm(x,y)
4 attach(ESL.mixture)
5 y = ifelse(y==1,1,-1)
6 X = lapply(seq_len(nrow(x)),function(i) x[i,,drop = F])
7 par(mfrow = c(1,1))
8 plot(x, col = y + 3)
9 dat = data.frame(y = factor(y), x)
10
11
12
13 a1 = matrix(nrow = 2, ncol = 99)
14 a1[1,] = (1:99)*0.01
15 for(i in 1:99){
16   fit = svm(X,y,cost, kernels, p = i*0.01)$predict
17   a1[2,i] = fit(test)
18 }
19
20 a2 = matrix(nrow = 2, ncol = 99)
21 a2[1,] = (1:99)*0.01
22 for(i in 1:99){
23   fit = svm(X,y,cost, kernels, p = i*0.01)$predict
24   a2[2,i] = fit(test2)
25 }
26
27 a1
28
29
30
31 ### Changing svm according to weight
32 par(mfrow = c(1,3))
33
34 fit = svm(X,y,cost = 10,p=0.0001)$predict
35 xgrid = expand.grid(X1 = px1, X2 = px2)
36 ygrid = apply(xgrid,1,fit)
37 plot(xgrid, col = as.numeric(ygrid+2), pch = 20, cex = .2,main = "(a) : pi =
    0.0001")
38 points(x, col = y + 2, pch = 19)
39 points(test,col = 'red',pch = 19)
40 points(test2,col = 'blue',pch = 19)
41
42 fit = svm(X,y,cost = 10,p=0.5)$predict

```

```

43 xgrid = expand.grid(X1 = px1, X2 = px2)
44 ygrid = apply(xgrid,1,fit)
45 plot(xgrid, col = as.numeric(ygrid+2), pch = 20, cex = .2,main = "(b) : pi = 0.5")
46 points(x, col = y + 2, pch = 19)
47 points(test,col = 'red',pch = 19)
48 points(test2,col = 'blue',pch = 19)
49
50
51 fit = svm(X,y,cost = 10,p=0.9999)$predict
52 xgrid = expand.grid(X1 = px1, X2 = px2)
53 ygrid = apply(xgrid,1,fit)
54 plot(xgrid, col = as.numeric(ygrid+2), pch = 20, cex = .2,main = "(c) : pi =
    0.9999")
55 points(x, col = y + 2, pch = 19);
56 points(test,col = "red",pch = 19)
57 points(test2,col = "blue",pch = 19)
58
59
60
61 ### posterior
62 posterior(X,y,cost = 10,test)
63 posterior(X,y,cost = 10,test2)
64 yposterior = vector(length = 200)
65 for(i in 1:200){
66   yposterior[i] = posterior(X,y,cost = 10,x[i,])
67   print(paste(i,"th point is done lol"))
68 }
69 ypost = ifelse(yposterior== -1,0,yposterior)
70
71
72 par(mfrow = c(1,1))
73 xgrid = expand.grid(X1 = px1, X2 = px2)
74 ygrid = apply(xgrid,1,fit)
75 datgrid = cbind(ygrid,xgrid)
76
77 colnames(x) = c("X1","X2 ")
78 realdat =as.data.frame(cbind(ypost,x))
79 breaks <- c(0.5,1,3.2)
80 ggplot(data = datgrid,aes(x = X1,y= X2,colour = ifelse(ygrid== -1,0,ygrid)))+geom_
    point(size = 0.001)+
81   geom_point(data = realdat,aes(x = realdat[,2],y = realdat[,3],colour = ypost))+
82   labs(colour = "Posterior pb")+
83   scale_colour_gradientn(colours = c("darkblue","orange","darkgreen"),
84                           breaks = breaks, labels =
    format(breaks))

```