


NUID 2nd Last Digit ending in 3 or 5:


Mibin Zhu. 001424937

Question1:

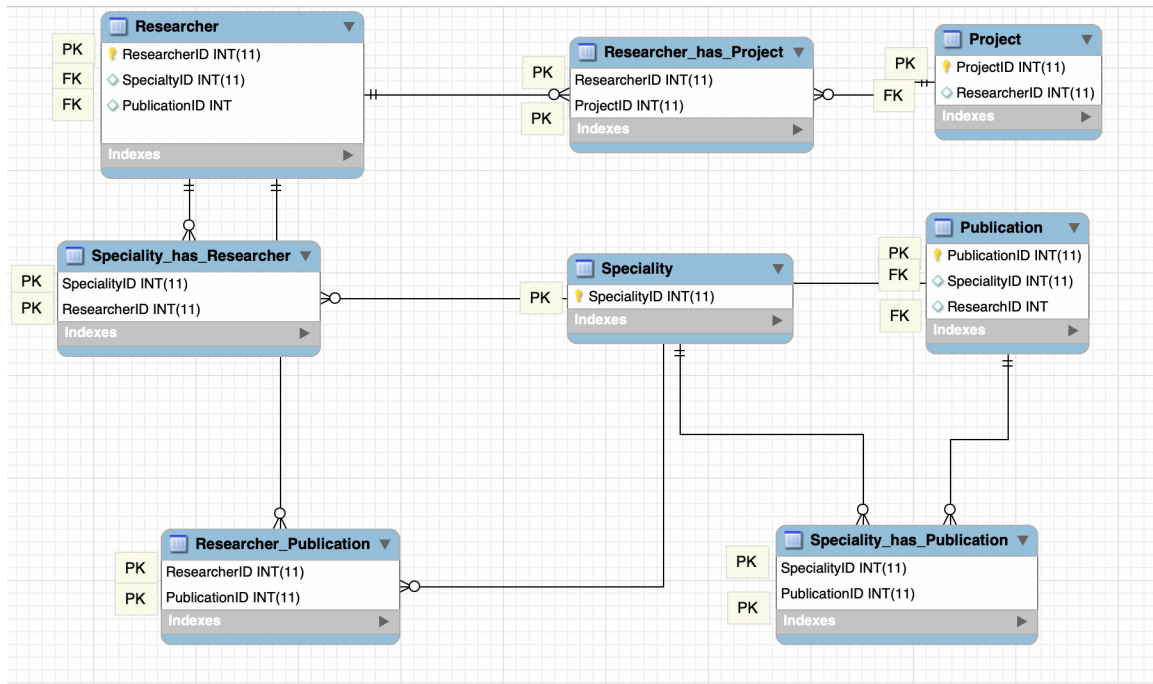

Question2:


JSON FILE:

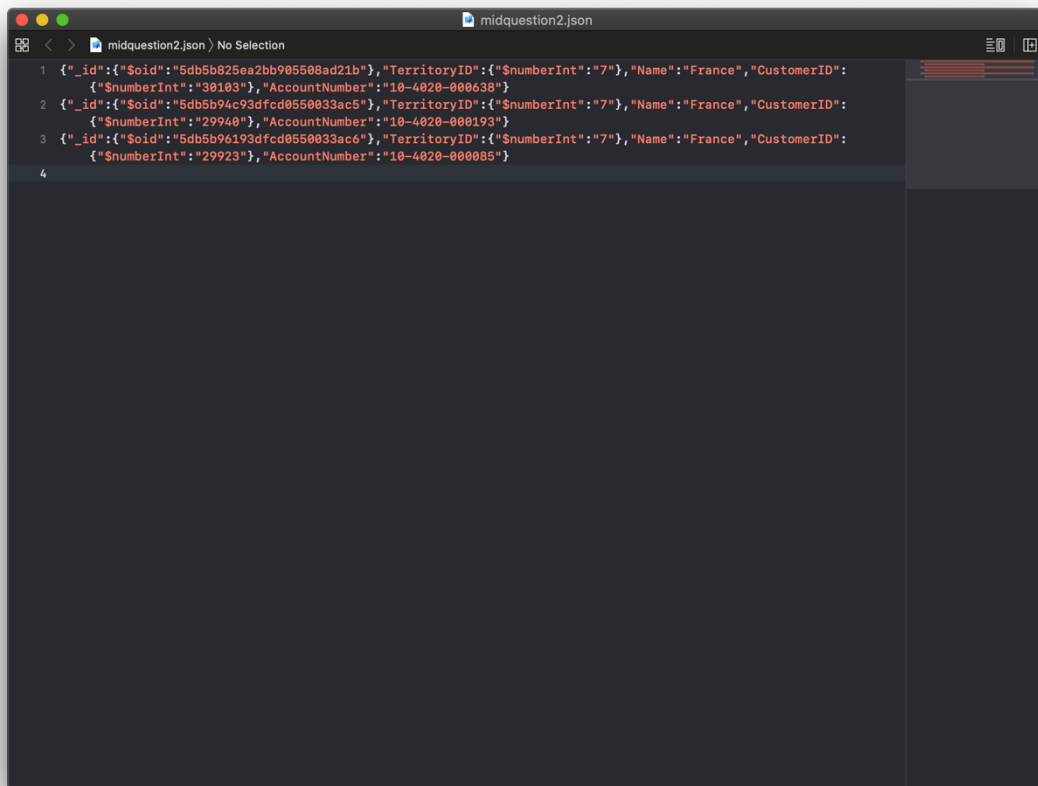

The screenshot shows a MongoDB Compass window with a file named 'midquestion2.json' open. The file contains three JSON documents, each representing a record with fields for '_id', '\$oid', 'TerritoryID', 'Name', 'CustomerID', '\$numberInt', 'AccountNumber', and 'TerritoryID'. The documents are numbered 1, 2, and 3 in the left margin. The first document has a 'Name' of 'France' and a 'CustomerID' of '30103'. The second document has a 'Name' of 'France' and a 'CustomerID' of '29940'. The third document has a 'Name' of 'France' and a 'CustomerID' of '29923'. The window title bar shows 'midquestion2.json' and 'No Selection'.

```
1 {"_id":{"$oid":"5db5b825ea2bb905508ad21b"},"TerritoryID":{"$numberInt":"7"},"Name":"France","CustomerID":{"$numberInt":"30103"},"AccountNumber":"10-4020-000638"}
2 {"_id":{"$oid":"5db5b94c93dfcd0550033ac5"},"TerritoryID":{"$numberInt":"7"},"Name":"France","CustomerID":{"$numberInt":"29940"},"AccountNumber":"10-4020-000193"}
3 {"_id":{"$oid":"5db5b96193dfcd0550033ac6"},"TerritoryID":{"$numberInt":"7"},"Name":"France","CustomerID":{"$numberInt":"29923"},"AccountNumber":"10-4020-000085"}
4
```

JSON data in MongoDB Compass:

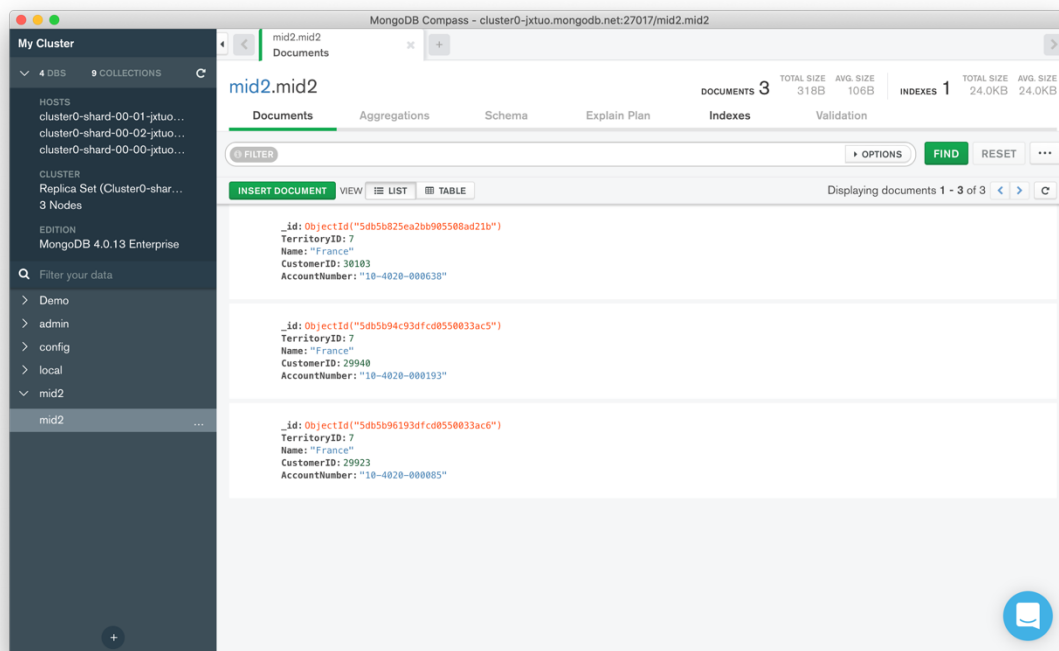

JSON DATA:

```
"_id" "$oid" "5db5b825ea2bb905508ad21b" "TerritoryID" "$numberInt" "7" "Name" "France" "CustomerID" "$numberInt" "30103" "AccountNumber" "10-4020-000638"
"_id" "$oid" "5db5b94c93dfcd0550033ac5" "TerritoryID" "$numberInt" "7" "Name" "France" "CustomerID" "$numberInt" "29940" "AccountNumber" "10-4020-000193"
"_id" "$oid" "5db5b96193dfcd0550033ac6" "TerritoryID" "$numberInt" "7" "Name" "France" "CustomerID" "$numberInt" "29923" "AccountNumber" "10-4020-000085"
```