

Postman API exploration

1. Record the request URL, method, and headers

Method: Get

URL:

https://api.weatherstack.com/current?access_key={{access_key}}&query=Peshawar&units=m

Headers:

Headers			
Hide auto-generated headers			
Key	Value	Description	Bulk Edit Presets ...
✓ Cache-Control	no-cache		
✓ Postman-Token	<calculated when request is sent>		
✓ Host	<calculated when request is sent>		
✓ User-Agent	PostmanRuntime/7.55.1		
✓ Accept	*/*		
✓ Accept-Encoding	gzip, deflate, br		
✓ Connection	keep-alive		
Key	Value	Description	

These headers are automatically generated by Postman to tell the servers what kind of client is making a request. For example, the user-agent is a text string send to the servers by the client to identify its application type, OS etc.

2. Capture the full JSON response and describing its structure.

Body Cookies Headers 17 Test Results 200 OK · 1.11 s · 1.79 KB Save Response

JSON Preview Visualize

```
1 {
2   "request": {
3     "type": "City",
4     "query": "Peshawar, Pakistan",
5     "language": "en",
6     "unit": "m"
7   },
8   "location": {
9     "name": "Peshawar",
10    "country": "Pakistan",
11    "region": "North-West Frontier",
12    "lat": "34.008",
13    "lon": "71.573",
14    "timezone_id": "Asia/Karachi",
15    "localtime": "2026-07-20 15:09",
16    "localtime_epoch": 1785251340,
17    "utc_offset": "5.0"
18  },
19  "current": {
20    "observation_time": "10:09 AM",
21    "temperature": 36,
22    "weather_code": 116,
23    "weather_icons": [
24      "https://cdn.worldweatheronline.com/images/wsymbols01_png_64/wsymb01_0002_sunny_intervals.png"
25    ]
26  }
27 }
```

Cloud Agent Globals Vault Tools

Here is the complete JSON response.

```
{
  "request": {
    "type": "City",
    "query": "Peshawar, Pakistan",
    "language": "en",
    "unit": "m"
  },
  "location": {
    "name": "Peshawar",
    "country": "Pakistan",
    "region": "North-West Frontier",
    "lat": "34.008",
    "lon": "71.573",
    "timezone_id": "Asia/Karachi",
    "localtime": "2026-07-28 15:09",
    "localtime_epoch": 1785251340,
    "utc_offset": "5.0"
  },
  "current": {
    "observation_time": "10:09 AM",
    "temperature": 36,
    "weather_code": 116,
    "weather_icons": [
      "https://cdn.worldweatheronline.com/images/wsymbols01_png_64/wsymbol_0002_sunny_intervals.png"
    ],
    "weather_descriptions": [
      "Partly cloudy"
    ],
    "astro": {
      "sunrise": "05:22 AM",
      "sunset": "07:18 PM",
      "moonrise": "06:46 PM",
      "moonset": "03:47 AM",
      "moon_phase": "Waxing Gibbous",
      "moon_illumination": 97
    },
    "air_quality": {
      "co": "536",
      "no2": "2.2",


```

```
    "o3": "196",
    "so2": "4.9",
    "pm2_5": "19.8",
    "pm10": "22.2",
    "us-epa-index": "2",
    "gb-defra-index": "2"
  },
  "wind_speed": 4,
  "wind_degree": 50,
  "wind_dir": "NE",
  "pressure": 960,
  "precip": 0,
  "humidity": 53,
  "cloudcover": 50,
  "feelslike": 35,
  "uv_index": 5,
  "visibility": 6,
  "is_day": "yes"
}
```

This response is composed of

1. Request: it is basically the metadata about my specific request that I made.
2. Location: It has my location information.
3. Current: The information that i got from the servers via the API request that is important for me.

3. The request with an error.

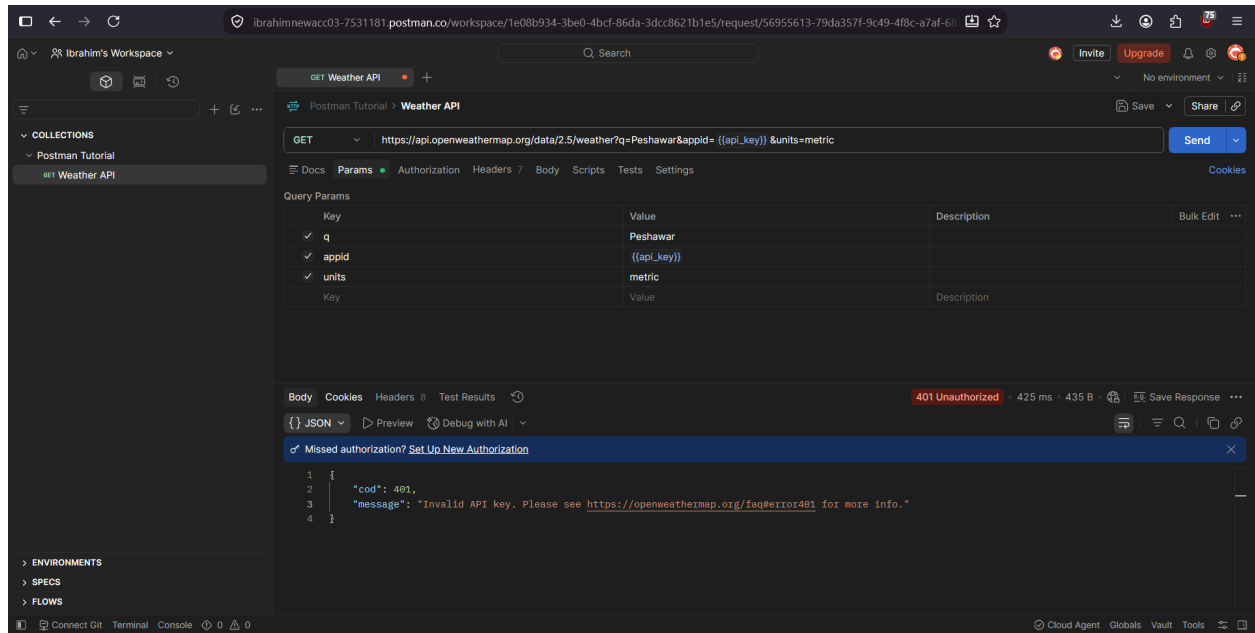

This is because I have used the end point from a different api provider and uses the api key of a different provider.