

# Playwright Automation Report

Executed 2/8/2026, 7:06:30 AM

Duration 31s

Authored by Automation Bot • Build local • Environment local

## Test Scope & Objectives

### Objectives

- Validate end-to-end user journeys
- Ensure regression stability for critical flows

### Data Sets

- Synthetic test data
- Seeded accounts

## Pass / Fail Criteria

- All P0/P1 cases pass
- No critical regressions filed

## Risks & Alignment

Supports release readiness and CI quality gates

- Flaky network environments
- 3rd party dependencies

## Execution Summary

Total Tests

**4**

Passed

**4**

100%

Failed

**0**

0%

Skipped


**0**

0%

Flaky

0

0%



#### Build / Environment Details

**Build:** local

**Release:** rolling

**Project:** default

## Automation Metrics

Coverage


Reliability

**100%**

**100%**

Maintainability

**100%**

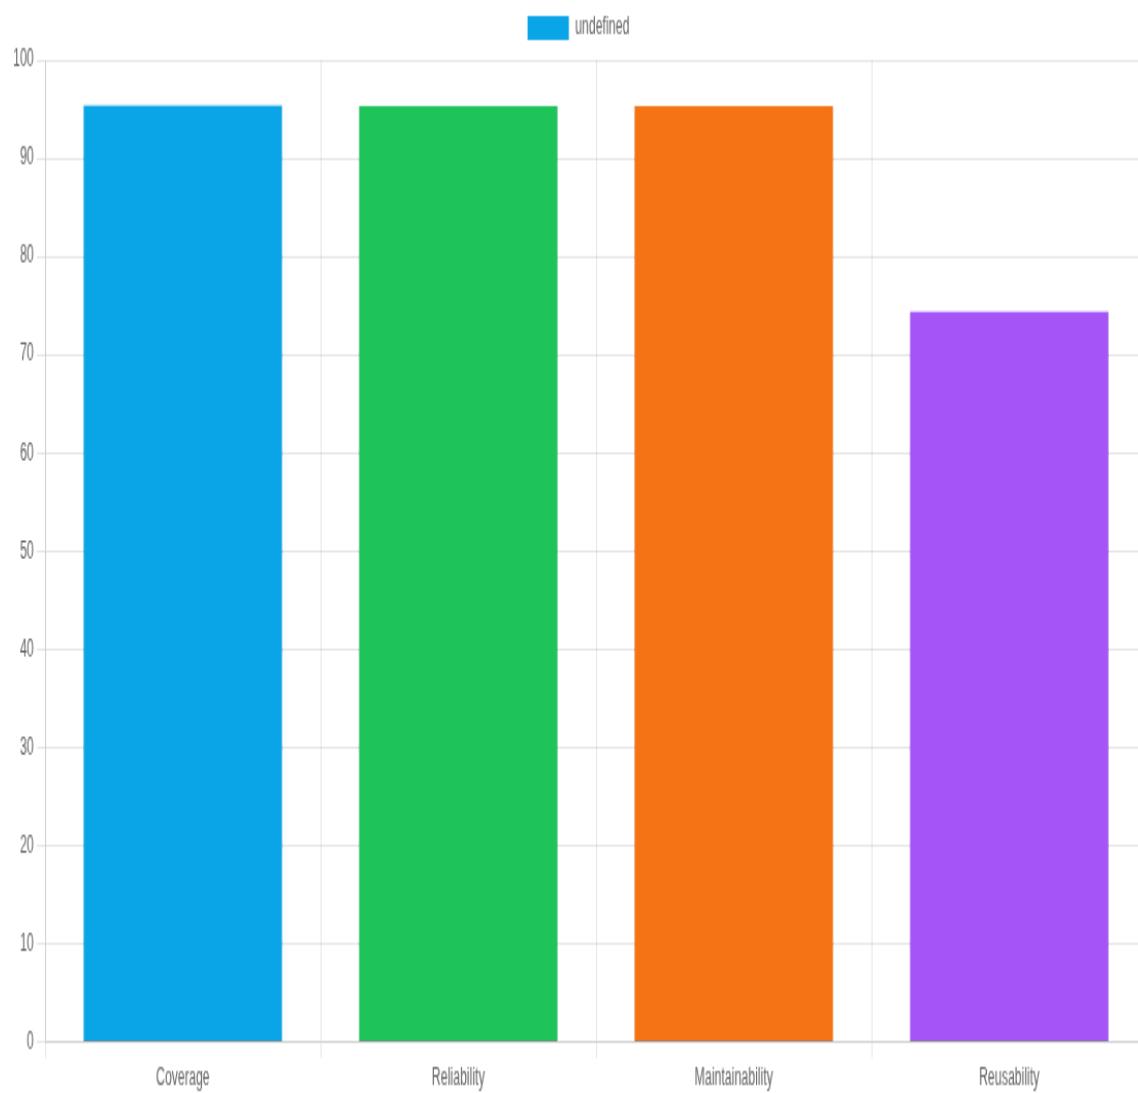

## Test Case Details

TEST

STATUS

DURATION

### Escenario: Credenciales inválidas

- > Chromium-Desktop > login-errors.spec.ts > Ingresar credenciales incorrectas @login > Escenario: Credenciales inválidas

Passed

9s

▼ Steps

**TEST****STATUS****DURATION**

- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 3s
  - ↳ Navigate to "/" (pw:api) 1s
  - ↳ Wait for load state "networkidle" (pw:api) 1s
  - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
  - ↳ Wait for load state "networkidle" (pw:api)
  - ↳ Wait for timeout (pw:api) 0s
  - ↳ Screenshot (pw:api) 0s
- Intentar login con: UserNameErroneo12345 / PwdErroneo12345 (test.step) 1s
  - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
  - ↳ Fill "UserNameErroneo12345" locator('input[name="username"]') (pw:api) 0s
  - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
  - ↳ Fill "PwdErroneo12345" locator('input[name="password"]') (pw:api) 0s
  - ↳ Wait for selector getByRole('button', { name: '/Login/i' }) (pw:api) 0s
  - ↳ Click getByRole('button', { name: '/Login/i' }) (pw:api) 0s
  - ↳ Wait for load state "networkidle" (pw:api) 0s
  - ↳ Wait for timeout (pw:api) 0s
  - ↳ Screenshot (pw:api) 1s
- Validar respuesta del sistema y bloqueo de acceso (test.step) 1s
  - ↳ Wait for selector locator('.oxd-alert-content-text') (pw:api) 0s
  - ↳ Expect "toBe" (expect)
  - ↳ Expect "toBe" (expect)
  - ↳ Expect "not toContain" (expect)
  - ↳ Wait for load state "networkidle" (pw:api) 0s
  - ↳ Wait for timeout (pw:api) 0s
  - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

**Escenario: Usuario requerido**

> Chromium-Desktop > login-errors.spec.ts > Ingresar credenciales incorrectas @login > Escenario: Usuario requerido

**Passed**

7s

**▼ Steps**

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 3s
  - ↳ Navigate to "/" (pw:api) 1s
  - ↳ Wait for load state "networkidle" (pw:api) 0s
  - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
  - ↳ Wait for load state "networkidle" (pw:api) 0s
  - ↳ Wait for timeout (pw:api) 0s

TEST	STATUS	DURATION
↳ Screenshot (pw:api) 0s		
● Intentar login con: vacío / admin123 (test.step) 0s		
↳ Wait for selector locator('input[name="password"]') (pw:api) 0s		
↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s		
↳ Wait for selector getByRole('button', { name: '/Login/i' }) (pw:api) 0s		
↳ Click getByRole('button', { name: '/Login/i' }) (pw:api) 0s		
↳ Wait for load state "networkidle" (pw:api) 0s		
↳ Wait for timeout (pw:api) 0s		
↳ Screenshot (pw:api) 0s		
● Validar respuesta del sistema y bloqueo de acceso (test.step) 0s		
↳ Wait for selector locator('div.oxd-input-group').filter({ has: locator('input[name="username"]' ) }).locator('.oxd-input-field-error-message') (pw:api) 0s	(pw:api) 0s	
↳ Expect "toBe" (expect)		
↳ Expect "toBe" (expect)		
↳ Expect "not toContain" (expect)		
↳ Wait for load state "networkidle" (pw:api) 0s		
↳ Wait for timeout (pw:api) 0s		
↳ Screenshot (pw:api) 0s		
● Launch browser (pw:api) 0s		
● Create context (pw:api) 0s		
● Create page (pw:api) 0s		
● Set content (pw:api) 0s		
● PDF (pw:api) 0s		
● Close browser (pw:api) 0s		
● Close context (pw:api) 0s		

## Escenario: Password requerido

› Chromium-Desktop › login-errors.spec.ts › Ingresar credenciales incorrectas @login › Escenario: Password requerido

Passed

7s

### ▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 3s
  - ↳ Navigate to "/" (pw:api) 1s
  - ↳ Wait for load state "networkidle" (pw:api) 1s
  - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
  - ↳ Wait for load state "networkidle" (pw:api)
  - ↳ Wait for timeout (pw:api) 0s
  - ↳ Screenshot (pw:api) 0s
- Intentar login con: Admin / vacío (test.step) 0s
  - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
  - ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s
  - ↳ Wait for selector getByRole('button', { name: '/Login/i' }) (pw:api) 0s
  - ↳ Click getByRole('button', { name: '/Login/i' }) (pw:api) 0s
  - ↳ Wait for load state "networkidle" (pw:api) 0s
  - ↳ Wait for timeout (pw:api) 0s
  - ↳ Screenshot (pw:api) 0s
- Validar respuesta del sistema y bloqueo de acceso (test.step) 0s

TEST	STATUS	DURATION
<ul style="list-style-type: none"> <li>↳ Wait for selector locator('div.oxd-input-group').filter({ has: locator('input[name="password"]') }).locator('.oxd-input-field-error-message')</li> <li>↳ Expect "toBe" (expect) 0s</li> <li>↳ Expect "toBe" (expect) 0s</li> <li>↳ Expect "not toContain" (expect)</li> <li>↳ Wait for load state "networkidle" (pw:api)</li> <li>↳ Wait for timeout (pw:api) 0s</li> <li>↳ Screenshot (pw:api) 0s</li> <li>● Launch browser (pw:api) 0s</li> <li>● Create context (pw:api) 0s</li> <li>● Create page (pw:api) 0s</li> <li>● Set content (pw:api) 0s</li> <li>● PDF (pw:api) 0s</li> <li>● Close browser (pw:api) 0s</li> <li>● Close context (pw:api) 0s</li> </ul>		(pw:api) 0s

## Escenario: Campos vacíos

› Chromium-Desktop › login-errors.spec.ts › Ingresar credenciales incorrectas @login › Escenario: Campos vacíos

Passed

7s

### ▼ Steps

<ul style="list-style-type: none"> <li>● Create context (pw:api) 0s</li> <li>● Create page (pw:api) 0s</li> <li>● Navegar a la página de login (test.step) 2s           <ul style="list-style-type: none"> <li>↳ Navigate to "/" (pw:api) 1s</li> <li>↳ Wait for load state "networkidle" (pw:api) 0s</li> <li>↳ Wait for selector locator('input[name="username"]') (pw:api) 0s</li> <li>↳ Wait for load state "networkidle" (pw:api)</li> <li>↳ Wait for timeout (pw:api) 0s</li> <li>↳ Screenshot (pw:api) 0s</li> </ul> </li> <li>● Intentar login con: vacío / vacío (test.step) 0s           <ul style="list-style-type: none"> <li>↳ Wait for selector getByRole('button', { name: '/Login/i' }) (pw:api) 0s</li> <li>↳ Click getByRole('button', { name: '/Login/i' }) (pw:api) 0s</li> <li>↳ Wait for load state "networkidle" (pw:api)</li> <li>↳ Wait for timeout (pw:api) 0s</li> <li>↳ Screenshot (pw:api) 0s</li> </ul> </li> <li>● Validar respuesta del sistema y bloqueo de acceso (test.step) 0s           <ul style="list-style-type: none"> <li>↳ Wait for selector locator('div.oxd-input-group').filter({ has: locator('input[name="username"]') }).locator('.oxd-input-field-error-message')</li> <li>↳ Expect "toBe" (expect)</li> <li>↳ Wait for selector locator('div.oxd-input-group').filter({ has: locator('input[name="password"]') }).locator('.oxd-input-field-error-message')</li> <li>↳ Expect "toBe" (expect)</li> <li>↳ Expect "toBe" (expect)</li> <li>↳ Expect "not toContain" (expect) 0s</li> <li>↳ Wait for load state "networkidle" (pw:api) 0s</li> <li>↳ Wait for timeout (pw:api) 0s</li> <li>↳ Screenshot (pw:api) 0s</li> </ul> </li> <li>● Launch browser (pw:api) 0s</li> <li>● Create context (pw:api) 0s</li> <li>● Create page (pw:api) 0s</li> <li>● Set content (pw:api) 0s</li> </ul>	(pw:api) 0s	(pw:api) 0s
--	-------------	-------------

TEST	STATUS	DURATION
● PDF (pw:api) 0s		
● Close browser (pw:api) 0s		
● Close context (pw:api) 0s		

## Environment & Configuration

### Browsers

### Devices

#### Operating Systems

linux

PROJECT	VIEWPORT	HEADLESS
Chromium-Desktop	1280x720	true

## Trends & Historical Data

Historical data not available. Provide historicalDataPath to enable trends.

## Challenges & Lessons Learned

### Challenges

- Intermittent latency from downstream APIs
- Maintenance of shared fixtures across suites

### Lessons Learned

- Parallelizing specs reduced suite time by 30%
- Centralized test data catalog improved reusability

### Recommendations

- Stabilize flaky selectors using resilient locating strategies
- Automate build health checks with PDF summaries in CI

## Summary & Conclusion

Suite executed **4** cases across **0** browsers with **100%** reliability. Attach this PDF to release readiness reviews, share with stakeholders, or archive as part of CI artifacts.