

Playwright Automation Report

Executed 2/9/2026, 11:27:32 PM

Duration 2m 45s

Authored by **Automation Bot** • Build local • Environment local

Test Scope & Objectives

Objectives

- Validate end-to-end user journeys
- Ensure regression stability for critical flows

Data Sets

- Synthetic test data
- Seeded accounts

Pass / Fail Criteria

- All P0/P1 cases pass
- No critical regressions filed

Risks & Alignment

Supports release readiness and CI quality gates

- Flaky network environments
- 3rd party dependencies

Execution Summary

Total Tests

15

Passed

15

100%

Failed

0

0%

Skipped


0

0%

Flaky

1

6.67%

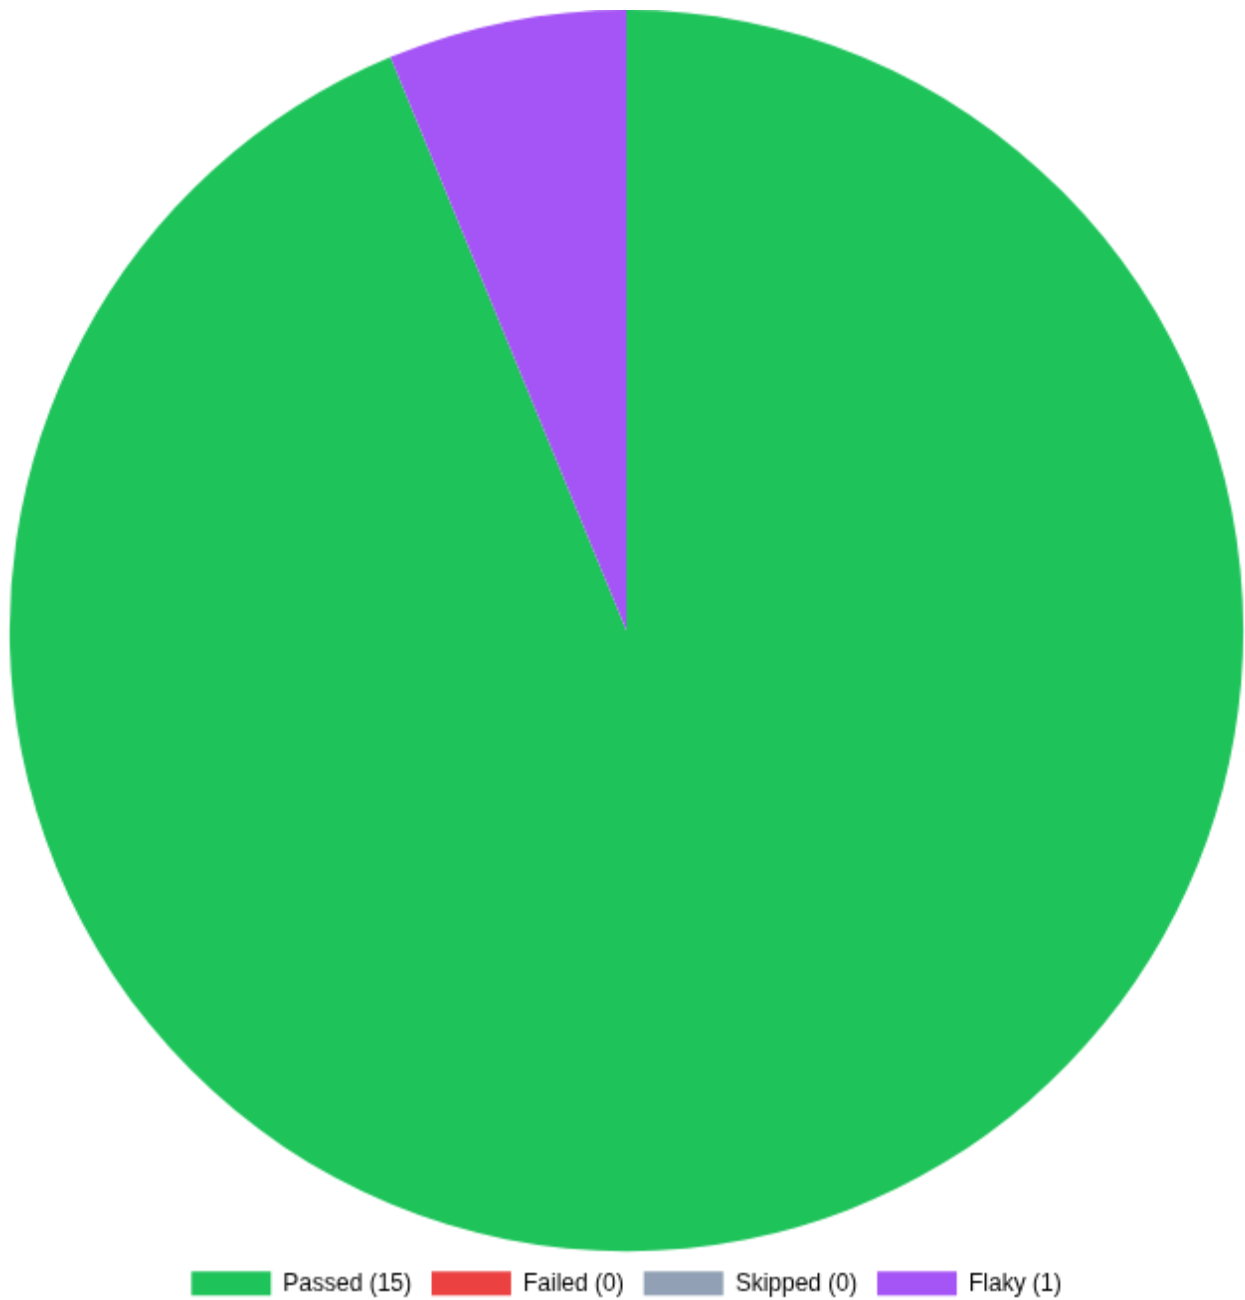

Build / Environment Details

Build: local

Release: rolling

Project: default

Automation Metrics

Coverage


Reliability

100%

100%

Maintainability

100%

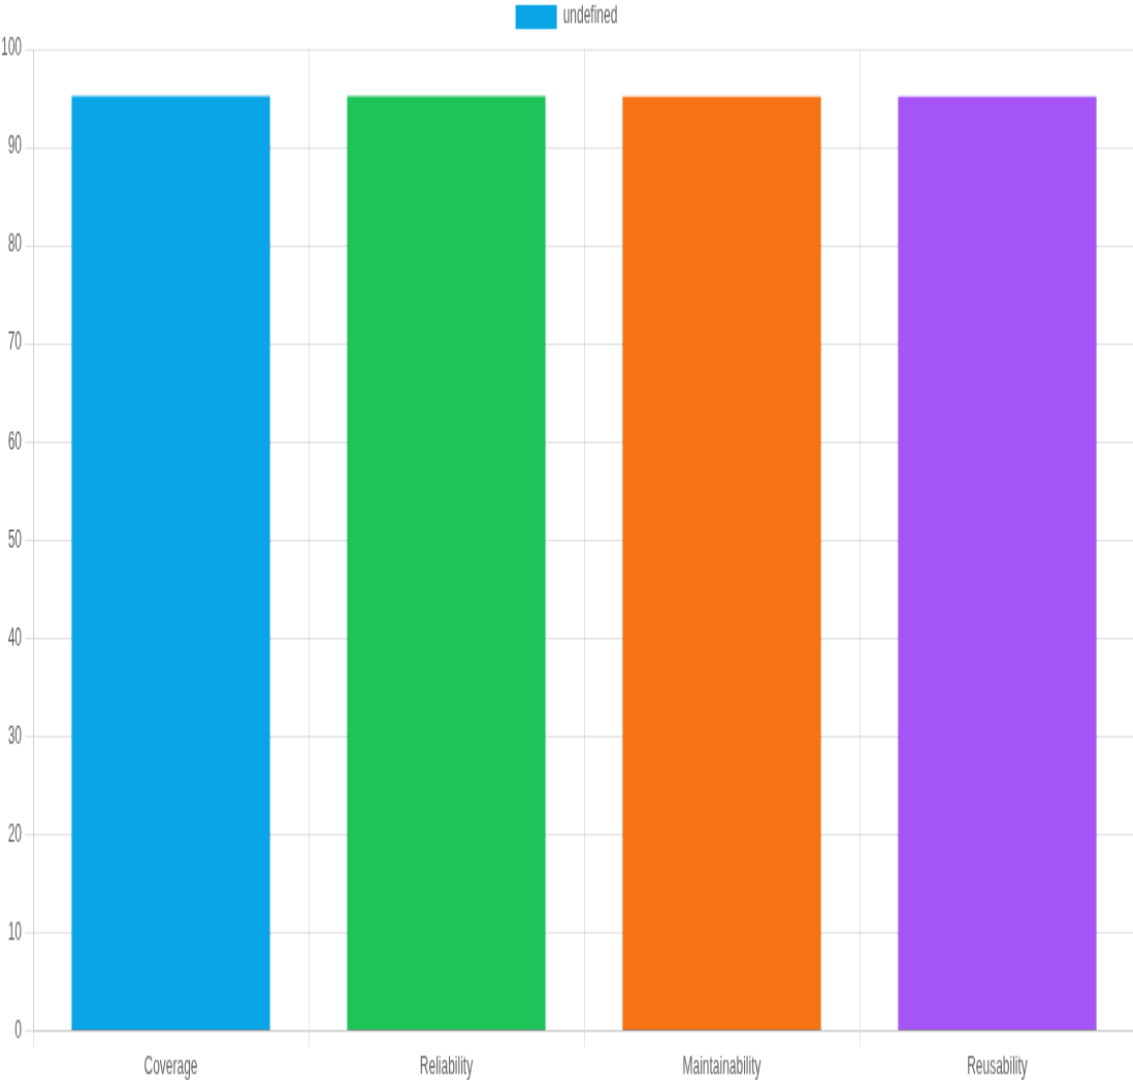

Test Case Details

TEST	STATUS	DURATION
Acceder a la URL		
› Chromium-Desktop › chatBot.spec.ts › Validar ChatBot presente en sitio web › Acceder a la URL	Passed	6s
▼ Steps		

- Launch browser (pw:api) 1s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de documentación de Botpress (test.step) 1s
 - ↳ Navigate to "/docs" (pw:api) 1s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Validar que la URL inicial y el título sean correctos (test.step) 0s
 - ↳ Expect "toContain" (expect) 0s
 - ↳ Expect "toHaveTitle" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Dirigirse a la pagina del ChaBot (test.step) 0s
 - ↳ Wait for selector locator('[id="/get-started/quick-start"]').locator("text="Quickstart") (pw:api) 0s
 - ↳ Click locator('[id="/get-started/quick-start"]').locator("text="Quickstart") (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Validar que la URL y el título sean los correctos (test.step) 0s
 - ↳ Expect "toHaveTitle" (expect) 0s
 - ↳ Expect "toHaveURL" (expect) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Encontrar el componente del bot

› Chromium-Desktop › chatBot.spec.ts › Interacciones con el ChatBot › Encontrar el componente del bot

Passed

6s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de documentación de Botpress (test.step) 1s
 - ↳ Navigate to "/docs" (pw:api) 1s
 - ↳ Expect "toContain" (expect) 0s
 - ↳ Expect "toHaveTitle" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Dirigirse a la pagina del ChaBot (test.step) 1s
 - ↳ Wait for selector locator('[id="/get-started/quick-start"]').locator("text="Quickstart") (pw:api) 0s
 - ↳ Click locator('[id="/get-started/quick-start"]').locator("text="Quickstart") (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Abrir el chat bot (test.step) 0s

- ↳ Wait for selector getByRole('button', { name: 'Open bot' }) (pw:api) 0s
- ↳ Wait for selector getByRole('button', { name: 'Open bot' }) (pw:api) 0s
- ↳ Click getByRole('button', { name: 'Open bot' }) (pw:api) 0s
- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Validar que la URL y el título sean los correctos (test.step) 0s
 - ↳ Expect "toHaveTitle" (expect) 0s
 - ↳ Expect "toHaveURL" (expect) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Verificar que el Iframe del Chatbot sea visible (test.step) 0s
 - ↳ Expect "toBeVisible" locator('iframe[title="Botpress"]') (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Interactuar con el iframe y obtener identificador del bot

› Chromium-Desktop › chatBot.spec.ts › Interacciones con el ChatBot › Interactuar con el iframe y obtener identificador del bot

Passed

7s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de documentación de Botpress (test.step) 1s
 - ↳ Navigate to "/docs" (pw:api) 1s
 - ↳ Expect "toContain" (expect) 0s
 - ↳ Expect "toHaveTitle" (expect) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Dirigirse a la pagina del ChaBot (test.step) 0s
 - ↳ Wait for selector locator('[id="/get-started/quick-start"]').locator('text="Quickstart"') (pw:api) 0s
 - ↳ Click locator('[id="/get-started/quick-start"]').locator('text="Quickstart"') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Abrir el chat bot (test.step) 0s
 - ↳ Wait for selector getByRole('button', { name: 'Open bot' }) (pw:api) 0s
 - ↳ Wait for selector getByRole('button', { name: 'Open bot' }) (pw:api) 0s
 - ↳ Click getByRole('button', { name: 'Open bot' }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Verificar que el Iframe del Chatbot sea visible (test.step) 0s
 - ↳ Expect "toBeVisible" locator('iframe[title="Botpress"]') (expect) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s

- Obtener el nombre del modelo de IA desde el chatbot (test.step) 0s
 - ↳ Click locator('iframe[title="Botpress"]').contentFrame().getByRole('button', { name: 'Select model' }) (pw:api) 0s
 - ↳ Wait for selector locator('iframe[title="Botpress"]').contentFrame().locator('span.model-option-name').first() (pw:api) 0s
 - ↳ Click locator('iframe[title="Botpress"]').contentFrame().locator('span.model-option-name').first() (pw:api) 0s
 - ↳ Expect "not toBeNull" (expect) 0s
 - ↳ Expect "toBeGreaterThan" (expect) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Ingresar y mandar un texto

› Chromium-Desktop › chatBot.spec.ts › Interacciones con el ChatBot › Ingresar y mandar un texto

Passed

8s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de documentación de Botpress (test.step) 1s
 - ↳ Navigate to "/docs" (pw:api) 1s
 - ↳ Expect "toContain" (expect)
 - ↳ Expect "toHaveTitle" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Dirigirse a la pagina del ChaBot (test.step) 1s
 - ↳ Wait for selector locator('[id="/get-started/quick-start"]').locator('text="Quickstart"') (pw:api) 0s
 - ↳ Click locator('[id="/get-started/quick-start"]').locator('text="Quickstart"') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Abrir el chat bot (test.step) 0s
 - ↳ Wait for selector getByRole('button', { name: 'Open bot' }) (pw:api) 0s
 - ↳ Wait for selector getByRole('button', { name: 'Open bot' }) (pw:api) 0s
 - ↳ Click getByRole('button', { name: 'Open bot' }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Escribir la palabra "Hola" (test.step) 0s
 - ↳ Wait for selector locator('iframe[title="Botpress"]').contentFrame().getByRole('textbox', { name: 'Message Input' }) (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('iframe[title="Botpress"]').contentFrame().getByRole('textbox', { name: 'Message Input' }) (expect) 0s
 - ↳ Fill "Hola" locator('iframe[title="Botpress"]').contentFrame().getByRole('textbox', { name: 'Message Input' }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)

- ↳ Screenshot (pw:api) 0s
- Enviar el mensaje escrito (test.step) 1s
 - ↳ Wait for timeout (pw:api) 1s
 - ↳ Press "Enter" locator('iframe[title="Botpress"]').contentFrame().getByRole('textbox', { name: 'Message Input' }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Validar que el mensaje fue enviado (test.step) 0s
 - ↳ Wait for selector locator('iframe[title="Botpress"]').contentFrame().locator('p.bpMessageBlocksTextText').filter({ hasText: 'Hola' }) (pw:api) 0s
 - ↳ Expect "toBe" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Recibir respuesta

› Chromium-Desktop › chatBot.spec.ts › Interacciones con el ChatBot › Recibir respuesta

Passed

11s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de documentación de Botpress (test.step) 1s
 - ↳ Navigate to "/docs" (pw:api) 1s
 - ↳ Expect "toContain" (expect) 0s
 - ↳ Expect "toHaveTitle" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Dirigirse a la pagina del ChaBot (test.step) 1s
 - ↳ Wait for selector locator('[id="/get-started/quick-start"]').locator("text="Quickstart") (pw:api) 0s
 - ↳ Click locator('[id="/get-started/quick-start"]').locator("text="Quickstart") (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Abrir el chat bot (test.step) 0s
 - ↳ Wait for selector getByRole('button', { name: 'Open bot' }) (pw:api) 0s
 - ↳ Wait for selector getByRole('button', { name: 'Open bot' }) (pw:api) 0s
 - ↳ Click getByRole('button', { name: 'Open bot' }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Escribir y enviar mensaje (test.step) 1s
 - ↳ Wait for selector locator('iframe[title="Botpress"]').contentFrame().getByRole('textbox', { name: 'Message Input' }) (pw:api) 0s

- ↳ Expect "toBeEditable" locator('iframe[title="Botpress"]').contentFrame().getByRole('textbox', { name: 'Message Input' }) (expect) 0s
- ↳ Fill "Hola" locator('iframe[title="Botpress"]').contentFrame().getByRole('textbox', { name: 'Message Input' }) (pw:api) 0s
- ↳ Wait for timeout (pw:api) 1s
- ↳ Press "Enter" locator('iframe[title="Botpress"]').contentFrame().getByRole('textbox', { name: 'Message Input' }) (pw:api) 0s
- ↳ Wait for selector locator('iframe[title="Botpress"]').contentFrame().locator('p.bpMessageBlocksTextText').filter({ hasText: 'Hola' }) (pw:api) 0s
- ↳ Expect "toBe" (expect)
- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Recibir respuesta y validar contenido (test.step) 3s
 - ↳ Wait for selector locator('iframe[title="Botpress"]').contentFrame().locator('.bpMessageBlocksBubble p, .bpMessageBlocksBubble code').filter({ hasNotText: /thinking/i }).last() (pw:api) 0s
 - ↳ Expect "toPass" (expect) 2s
 - ! Expect "toBeGreaterThan" (expect) 0s
 - ! Expect "toBeGreaterThan" (expect)
 - ! Expect "toBeGreaterThan" (expect)
 - ! Expect "toBeGreaterThan" (expect) 0s
 - ! Expect "toBeGreaterThan" (expect)
 - Expect "toBeGreaterThan" (expect)
 - ↳ Expect "toBeGreaterThan" (expect)
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Ingresa usuario válido

> Chromium-Desktop > login.spec.ts > Login exitoso @login >
Ingresa usuario válido

Passed

6s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 1s
 - ↳ Navigate to "/" (pw:api) 0s
 - ↳ Wait for load state "networkidle" (pw:api) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Ingresar usuario válido (test.step) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
 - ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s

- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Ingresar contraseña válida (test.step) 0s
 - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
 - ↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Hacer click en Login (test.step) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Validar que se redirige al Dashboard (test.step) 1s
 - ↳ Wait for selector locator('.oxd-topbar-header-title h6') (pw:api) 0s
 - ↳ Expect "toBe" (expect)
 - ↳ Expect "toContain" (expect)
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Validar que el usuario pueda salir del dashboard

› Chromium-Desktop › login.spec.ts › Logout de inicio de sesión
@login › Validar que el usuario pueda salir del dashboard

Passed**8s**

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 1s
 - ↳ Navigate to "/" (pw:api) 0s
 - ↳ Wait for load state "networkidle" (pw:api) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Ingresar usuario válido (test.step) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
 - ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Ingresar contraseña válida (test.step) 0s
 - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
 - ↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s

- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Hacer click en Login (test.step) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Validar que se redirige al Dashboard (test.step) 1s
 - ↳ Wait for selector locator('.oxd-topbar-header-title h6') (pw:api) 0s
 - ↳ Expect "toBe" (expect) 0s
 - ↳ Expect "toContain" (expect)
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Hacer click en el menú de usuario (test.step) 0s
 - ↳ Click locator('.oxd-userdropdown-tab') (pw:api) 0s
 - ↳ Wait for selector getByRole('menuitem', { name: 'Logout' }) (pw:api) 0s
 - ↳ Wait for timeout (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Seleccionar la opción Logout (test.step) 1s
 - ↳ Wait for selector getByRole('menuitem', { name: 'Logout' }) (pw:api) 0s
 - ↳ Click getByRole('menuitem', { name: 'Logout' }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Validar redirección a Login y título de la página (test.step) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Wait for selector locator('.orangehrm-login-title') (pw:api) 0s
 - ↳ Expect "toBe" (expect)
 - ↳ Expect "toContain" (expect)
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Escenario: Credenciales inválidas

› Chromium-Desktop › login.spec.ts › Ingresar credenciales incorrectas @login › Escenario: Credenciales inválidas

Passed

7s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 1s
 - ↳ Navigate to "/" (pw:api) 0s
 - ↳ Wait for load state "networkidle" (pw:api) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s

- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Intentar login con: UserNameErroneo12345 / PwdErroneo12345 (test.step) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
 - ↳ Fill "UserNameErroneo12345" locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
 - ↳ Fill "PwdErroneo12345" locator('input[name="password"]') (pw:api) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Validar respuesta del sistema y bloqueo de acceso (test.step) 3s
 - ↳ Wait for selector locator('.oxd-alert-content-text') (pw:api) 1s
 - ↳ Expect "toBe" (expect)
 - ↳ Validar que el sistema deniega el acceso (test.step) 1s
 - ! Wait for selector locator('.oxd-topbar-header-title h6') (pw:api) 1s
 - Expect "toBe" (expect)
 - Wait for load state "load" (pw:api)
 - Screenshot (pw:api) 0s
 - ↳ Expect "not toContain" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Escenario: Usuario requerido

› Chromium-Desktop › login.spec.ts › Ingresar credenciales incorrectas @login › Escenario: Usuario requerido

Passed**9s**

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 4s
 - ↳ Navigate to "/" (pw:api) 2s
 - ↳ Wait for load state "networkidle" (pw:api) 2s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Intentar login con: vacío / admin123 (test.step) 0s
 - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
 - ↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s

- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Validar respuesta del sistema y bloqueo de acceso (test.step) 1s
 - ↳ Wait for selector locator('div.oxd-input-group').filter({ has: locator('input[name="username"]') }).locator('.oxd-input-field-error-message') (pw:api) 0s
 - ↳ Expect "toBe" (expect)
 - ↳ Validar que el sistema deniega el acceso (test.step) 1s
 - ! Wait for selector locator('.oxd-topbar-header-title h6') (pw:api) 1s
 - Expect "toBe" (expect)
 - Wait for load state "load" (pw:api)
 - Screenshot (pw:api) 0s
 - ↳ Expect "not toContain" (expect)
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Escenario: Password requerido

› Chromium-Desktop › login.spec.ts › Ingresar credenciales incorrectas @login › Escenario: Password requerido

Passed

7s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 2s
 - ↳ Navigate to "/" (pw:api) 1s
 - ↳ Wait for load state "networkidle" (pw:api) 1s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Intentar login con: Admin / vacío (test.step) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
 - ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Validar respuesta del sistema y bloqueo de acceso (test.step) 1s
 - ↳ Wait for selector locator('div.oxd-input-group').filter({ has: locator('input[name="password"]') }).locator('.oxd-input-field-error-message') (pw:api) 0s
 - ↳ Expect "toBe" (expect)
 - ↳ Validar que el sistema deniega el acceso (test.step) 1s
 - ! Wait for selector locator('.oxd-topbar-header-title h6') (pw:api) 1s
 - Expect "toBe" (expect)
 - Wait for load state "load" (pw:api)

- Screenshot (pw:api) 0s
- ↳ Expect "not toContain" (expect)
- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Escenario: Campos vacíos

> Chromium-Desktop > login.spec.ts > Ingresar credenciales incorrectas @login > Escenario: Campos vacíos

Passed

8s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 3s
 - ↳ Navigate to "/" (pw:api) 1s
 - ↳ Wait for load state "networkidle" (pw:api) 2s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Intentar login con: vacío / vacío (test.step) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Validar respuesta del sistema y bloqueo de acceso (test.step) 1s
 - ↳ Wait for selector locator('div.oxd-input-group').filter({ has: locator('input[name="username"]') }).locator('.oxd-input-field-error-message') (pw:api) 0s
 - ↳ Expect "toBe" (expect)
 - ↳ Wait for selector locator('div.oxd-input-group').filter({ has: locator('input[name="password"]') }).locator('.oxd-input-field-error-message') (pw:api) 0s
 - ↳ Expect "toBe" (expect)
 - ↳ Validar que el sistema deniega el acceso (test.step) 1s
 - ! Wait for selector locator('.oxd-topbar-header-title h6') (pw:api) 1s
 - Expect "toBe" (expect)
 - Wait for load state "load" (pw:api)
 - Screenshot (pw:api) 0s
 - ↳ Expect "not toContain" (expect)
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s

● Close context (pw:api) 0s

Accede a My Info y valida el encabezado Personal Details

› Chromium-Desktop › My-Info.spec.ts › Acceso a My Info
@myinfo › Accede a My Info y valida el encabezado Personal Details

Passed

27s

▼ Steps

- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 4s
 - ↳ Navigate to "/" (pw:api) 2s
 - ↳ Wait for load state "networkidle" (pw:api) 2s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Iniciar sesión con credenciales válidas (test.step) 3s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
 - ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
 - ↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 2s
- Valida que el menú lateral esté completo (test.step) 1s
 - ↳ Wait for selector locator('.oxd-sidepanel-body') (pw:api) 0s
 - ↳ Expect "toBe" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Filtrar el menú lateral buscando "My Info" (test.step) 0s
 - ↳ Wait for selector locator('.oxd-main-menu-search input') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('.oxd-main-menu-search input') (expect) 0s
 - ↳ Fill "My Info" locator('.oxd-main-menu-search input') (pw:api) 0s
 - ↳ Wait for timeout (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Hacer clic en la opción filtrada de My Info (test.step) 2s
 - ↳ Wait for selector locator('a[href*="pim/viewMyDetails"]') (pw:api) 0s
 - ↳ Click locator('a[href*="pim/viewMyDetails"]') (pw:api) 2s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Validar que se muestra el encabezado Personal Details (test.step) 0s
 - ↳ Wait for selector getByRole('heading', { name: 'Personal Details' }) (pw:api) 0s
 - ↳ Expect "toBe" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s

- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Agregar y guardar la información de Personal Details

› Chromium-Desktop › My-Info.spec.ts › Llenado de información de Personal Details @myinfo › Agregar y guardar la información de Personal Details

Passed

12s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 1s
 - ↳ Navigate to "/" (pw:api) 0s
 - ↳ Wait for load state "networkidle" (pw:api) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Iniciar sesión con credenciales válidas (test.step) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
 - ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
 - ↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Navegar a la sección My Info (test.step) 4s
 - ↳ Wait for selector locator('a[href*="pim/viewMyDetails"]') (pw:api) 1s
 - ↳ Click locator('a[href*="pim/viewMyDetails"]') (pw:api) 1s
 - ↳ Wait for selector getByRole('heading', { name: 'Personal Details' }) (pw:api) 0s
 - ↳ Expect "toBe" (expect) 0s
 - ↳ Wait for selector locator('.oxd-loading-spinner').first() (pw:api) 0s
 - ↳ Wait for selector locator('.oxd-loading-spinner').first() (pw:api) 1s
 - ↳ Expect "toBeVisible" getByPlaceholder('First Name') (expect) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Llenar el apartado Employee Full Name (test.step) 0s
 - ↳ Wait for selector getByPlaceholder('First Name') (pw:api) 0s
 - ↳ Expect "toBeEditable" getByPlaceholder('First Name') (expect) 0s
 - ↳ Wait for selector getByPlaceholder('First Name') (pw:api) 0s
 - ↳ Expect "toBeEditable" getByPlaceholder('First Name') (expect) 0s
 - ↳ Fill "Michelle" getByPlaceholder('First Name') (pw:api) 0s
 - ↳ Wait for selector getByPlaceholder('Middle Name') (pw:api) 0s
 - ↳ Expect "toBeEditable" getByPlaceholder('Middle Name') (expect) 0s

- ↳ Fill "QA" getByPlaceholder('Middle Name') (pw:api) 0s
- ↳ Wait for selector getByPlaceholder('Last Name') (pw:api) 0s
- ↳ Expect "toBeEditable" getByPlaceholder('Last Name') (expect) 0s
- ↳ Fill "Automat" getByPlaceholder('Last Name') (pw:api) 0s
- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Llenar el apartado Employee Id (test.step) 0s
 - ↳ Wait for selector locator('div.oxd-input-group:has-text("Employee Id") input') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('div.oxd-input-group:has-text("Employee Id") input') (expect) 0s
 - ↳ Fill "998877" locator('div.oxd-input-group:has-text("Employee Id") input') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Llenar el apartado Other Id (test.step) 0s
 - ↳ Wait for selector locator('div.oxd-input-group:has-text("Other Id") input') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('div.oxd-input-group:has-text("Other Id") input') (expect) 0s
 - ↳ Fill "ID-001" locator('div.oxd-input-group:has-text("Other Id") input') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Llenar el apartado Drivers License Number (test.step) 0s
 - ↳ Wait for selector locator('div.oxd-input-group:has-text("Driver's License Number") input') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('div.oxd-input-group:has-text("Driver's License Number") input') (expect) 0s
 - ↳ Fill "DL-2026-XYZ" locator('div.oxd-input-group:has-text("Driver's License Number") input') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Llenar el apartado License Expiry Date (test.step) 0s
 - ↳ Wait for selector locator('div.oxd-input-group:has-text("License Expiry Date") input') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('div.oxd-input-group:has-text("License Expiry Date") input') (expect) 0s
 - ↳ Fill "2028-12-31" locator('div.oxd-input-group:has-text("License Expiry Date") input') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Seleccionar Nacionalidad (test.step) 0s
 - ↳ Wait for selector locator('div.oxd-input-group:has-text("Nationality") .oxd-select-text') (pw:api) 0s
 - ↳ Click locator('div.oxd-input-group:has-text("Nationality") .oxd-select-text') (pw:api) 0s
 - ↳ Click getByRole('option', { name: 'Mexican' }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Seleccionar Estado Civil (test.step) 0s
 - ↳ Wait for selector locator('div.oxd-input-group:has-text("Marital Status") .oxd-select-text') (pw:api) 0s
 - ↳ Click locator('div.oxd-input-group:has-text("Marital Status") .oxd-select-text') (pw:api) 0s
 - ↳ Click getByRole('option', { name: 'Single' }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Escribir Fecha de Nacimiento (test.step) 0s
 - ↳ Wait for selector locator('div.oxd-input-group:has-text("Date of Birth") input') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('div.oxd-input-group:has-text("Date of Birth") input') (expect) 0s
 - ↳ Fill "1995-05-15" locator('div.oxd-input-group:has-text("Date of Birth") input') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Seleccionar Género (test.step) 0s
 - ↳ Check getByRole('radio', { name: 'Male', exact: true }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s

- Hacer clic en el botón Guardar (test.step) 0s
 - ↳ Wait for selector locator('button[type="submit"]').first() (pw:api) 0s
 - ↳ Click locator('button[type="submit"]').first() (pw:api) 0s
 - ↳ Wait for load state "networkidle" (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Validar que se muestra un mensaje de éxito (test.step) 0s
 - ↳ Expect "toBeVisible" locator('.oxd-toast') (expect) 0s
 - ↳ Expect "toContainText" locator('.oxd-toast') (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Agregar y guardar la información de Custom Fields

› Chromium-Desktop › My-Info.spec.ts › Llenado de información de Personal Details @myinfo › Agregar y guardar la información de Custom Fields

Passed

12s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 1s
 - ↳ Navigate to "/" (pw:api) 0s
 - ↳ Wait for load state "networkidle" (pw:api) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Iniciar sesión con credenciales válidas (test.step) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
 - ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
 - ↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Navegar a la sección My Info (test.step) 5s
 - ↳ Wait for selector locator('a[href*="pim/viewMyDetails"]') (pw:api) 2s
 - ↳ Click locator('a[href*="pim/viewMyDetails"]') (pw:api) 2s
 - ↳ Wait for selector getByRole('heading', { name: 'Personal Details' }) (pw:api) 0s
 - ↳ Expect "toBe" (expect)
 - ↳ Wait for selector locator('.oxd-loading-spinner').first() (pw:api) 0s
 - ↳ Wait for selector locator('.oxd-loading-spinner').first() (pw:api) 1s

- ↳ Expect "toBeVisible" getByPlaceholder('First Name') (expect) 0s
- ↳ Wait for load state "load" (pw:api) 0s
- ↳ Screenshot (pw:api) 0s
- Llenar el campo de Blood Type (test.step) 0s
 - ↳ Wait for selector locator('div.orangehrm-custom-fields').locator('.oxd-select-wrapper') (pw:api) 0s
 - ↳ Click locator('div.orangehrm-custom-fields').locator('.oxd-select-wrapper') (pw:api) 0s
 - ↳ Click getByRole('option', { name: 'O+' }) (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Llenar campo de Test Field (test.step) 0s
 - ↳ Wait for selector locator('div.orangehrm-custom-fields').locator('input').last() (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('div.orangehrm-custom-fields').locator('input').last() (expect) 0s
 - ↳ Fill "687" locator('div.orangehrm-custom-fields').locator('input').last() (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Hacer clic en el botón Guardar (test.step) 0s
 - ↳ Wait for selector locator('div.orangehrm-custom-fields').locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('div.orangehrm-custom-fields').locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "networkidle" (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Validar que se muestra un mensaje de éxito (test.step) 0s
 - ↳ Expect "toBeVisible" locator('.oxd-toast') (expect) 0s
 - ↳ Expect "toContainText" locator('.oxd-toast') (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Acciones en la sección de Attachments

› Chromium-Desktop › My-Info.spec.ts › Llenado de información de Personal Details @myinfo › Acciones en la sección de Attachments

Passed

24s

▼ Steps

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 1s
 - ↳ Navigate to "/" (pw:api) 0s
 - ↳ Wait for load state "networkidle" (pw:api) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Iniciar sesión con credenciales válidas (test.step) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s

- ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
- ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s
- ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
- ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
- ↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s
- ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
- ↳ Click locator('button[type="submit"]') (pw:api) 0s
- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Navegar a la sección My Info (test.step) 5s
 - ↳ Wait for selector locator('a[href*="pim/viewMyDetails"]') (pw:api) 1s
 - ↳ Click locator('a[href*="pim/viewMyDetails"]') (pw:api) 1s
 - ↳ Wait for selector getByRole('heading', { name: 'Personal Details' }) (pw:api) 0s
 - ↳ Expect "toBe" (expect)
 - ↳ Wait for selector locator('.oxd-loading-spinner').first() (pw:api) 0s
 - ↳ Wait for selector locator('.oxd-loading-spinner').first() (pw:api) 1s
 - ↳ Expect "toBeVisible" getByPlaceholder('First Name') (expect) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Cargar un archivo adjunto (test.step) 3s
 - ↳ Scroll into view locator('div.orangehrm-attachment') (pw:api) 0s
 - ↳ Wait for selector locator('div.orangehrm-attachment').getByRole('button', { name: 'Add' }) (pw:api) 0s
 - ↳ Click locator('div.orangehrm-attachment').getByRole('button', { name: 'Add' }) (pw:api) 0s
 - ↳ Set input files locator('input[type="file"]') (pw:api) 0s
 - ↳ Wait for selector locator('div.orangehrm-attachment').locator('textarea') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('div.orangehrm-attachment').locator('textarea') (expect) 0s
 - ↳ Fill "Imagen para prueba de adjuntos" locator('div.orangehrm-attachment').locator('textarea') (pw:api) 0s
 - ↳ Expect "toBeEnabled" locator('div.orangehrm-attachment').locator('button[type="submit"]') (expect) 0s
 - ↳ Wait for selector locator('div.orangehrm-attachment').locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('div.orangehrm-attachment').locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for selector locator('div.orangehrm-attachment').getByRole('button', { name: 'Add' }) (pw:api) 3s
 - ↳ Wait for load state "networkidle" (pw:api)
 - ↳ Expect "toBeVisible" locator('.oxd-toast') (expect) 0s
 - ↳ Expect "toContainText" locator('.oxd-toast') (expect) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Editar el comentario de un archivo adjunto (test.step) 1s
 - ↳ Scroll into view locator('div.orangehrm-attachment') (pw:api) 0s
 - ↳ Wait for selector locator('div.orangehrm-attachment').locator('.bi-pencil-fill').first() (pw:api) 0s
 - ↳ Click locator('div.orangehrm-attachment').locator('.bi-pencil-fill').first() (pw:api) 0s
 - ↳ Wait for selector locator('div.orangehrm-attachment').locator('textarea') (pw:api) 0s
 - ↳ Wait for selector locator('div.orangehrm-attachment').locator('textarea') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('div.orangehrm-attachment').locator('textarea') (expect) 0s
 - ↳ Fill "Imagen actualizada para prueba de adjuntos" locator('div.orangehrm-attachment').locator('textarea') (pw:api) 0s
 - ↳ Wait for selector locator('div.orangehrm-attachment').locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('div.orangehrm-attachment').locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "networkidle" (pw:api) 0s
 - ↳ Expect "toBeVisible" locator('.oxd-toast') (expect) 0s
 - ↳ Expect "toContainText" locator('.oxd-toast') (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Descargar el archivo adjunto (test.step) 2s
 - ↳ Scroll into view locator('div.orangehrm-attachment') (pw:api) 0s
 - ↳ Wait for event "download" (pw:api) 2s

- ↳ Wait for selector locator('div.orangehrm-attachment').locator('.bi-download').first() (pw:api) 2s
- ↳ Click locator('div.orangehrm-attachment').locator('.bi-download').first() (pw:api) 0s
- ↳ Wait for load state "load" (pw:api)
- ↳ Screenshot (pw:api) 0s
- Eliminar el archivo adjunto (test.step) 0s
 - ↳ Scroll into view locator('div.orangehrm-attachment') (pw:api) 0s
 - ↳ Wait for selector locator('div.orangehrm-attachment').locator('.bi-trash').first() (pw:api) 0s
 - ↳ Click locator('div.orangehrm-attachment').locator('.bi-trash').first() (pw:api) 0s
 - ↳ Wait for selector getByRole('button', { name: 'Yes, Delete' }) (pw:api) 0s
 - ↳ Click getByRole('button', { name: 'Yes, Delete' }) (pw:api) 0s
 - ↳ Expect "toBeVisible" locator('.oxd-toast') (expect) 0s
 - ↳ Expect "toContainText" locator('.oxd-toast') (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

Retries & Attempt Timeline

Accede a My Info y valida el encabezado Personal Details

› Chromium-Desktop › My-Info.spec.ts › Acceso a My Info @myinfo ›
Accede a My Info y valida el encabezado Personal Details

2
attempt(s)

Attempt 1: **Failed** Duration: 10s

- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 2s
 - ↳ Navigate to "/" (pw:api) 1s
 - ↳ Wait for load state "networkidle" (pw:api) 1s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Iniciar sesión con credenciales válidas (test.step) 0s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
 - ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
 - ↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s

- ↳ Screenshot (pw:api) 0s
- ✖ Valida que el menú lateral esté completo (test.step) 5s
 - ⚠ Wait for selector locator('.oxd-sidepanel-body') (pw:api) 5s
 - ⚠ Expect "toBe" (expect) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s


screenshot

Attempt 2: **Passed** Duration: 16s

- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Navegar a la página de login (test.step) 4s
 - ↳ Navigate to "/" (pw:api) 2s
 - ↳ Wait for load state "networkidle" (pw:api) 2s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api)
 - ↳ Screenshot (pw:api) 0s
- Iniciar sesión con credenciales válidas (test.step) 3s
 - ↳ Wait for selector locator('input[name="username"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="username"]') (expect) 0s
 - ↳ Fill "Admin" locator('input[name="username"]') (pw:api) 0s
 - ↳ Wait for selector locator('input[name="password"]') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('input[name="password"]') (expect) 0s
 - ↳ Fill "admin123" locator('input[name="password"]') (pw:api) 0s
 - ↳ Wait for selector locator('button[type="submit"]') (pw:api) 0s
 - ↳ Click locator('button[type="submit"]') (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s

- ↳ Screenshot (pw:api) 2s
- Valida que el menú lateral esté completo (test.step) 1s
 - ↳ Wait for selector locator('.oxd-sidepanel-body') (pw:api) 0s
 - ↳ Expect "toBe" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Filtrar el menú lateral buscando "My Info" (test.step) 0s
 - ↳ Wait for selector locator('.oxd-main-menu-search input') (pw:api) 0s
 - ↳ Expect "toBeEditable" locator('.oxd-main-menu-search input') (expect) 0s
 - ↳ Fill "My Info" locator('.oxd-main-menu-search input') (pw:api) 0s
 - ↳ Wait for timeout (pw:api) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Hacer clic en la opción filtrada de My Info (test.step) 2s
 - ↳ Wait for selector locator('a[href*="pim/viewMyDetails"]') (pw:api) 0s
 - ↳ Click locator('a[href*="pim/viewMyDetails"]') (pw:api) 2s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Validar que se muestra el encabezado Personal Details (test.step) 0s
 - ↳ Wait for selector getByRole('heading', { name: 'Personal Details' }) (pw:api) 0s
 - ↳ Expect "toBe" (expect) 0s
 - ↳ Wait for load state "load" (pw:api) 0s
 - ↳ Screenshot (pw:api) 0s
- Launch browser (pw:api) 0s
- Create context (pw:api) 0s
- Create page (pw:api) 0s
- Set content (pw:api) 0s
- PDF (pw:api) 0s
- Close browser (pw:api) 0s
- Close context (pw:api) 0s

screenshot

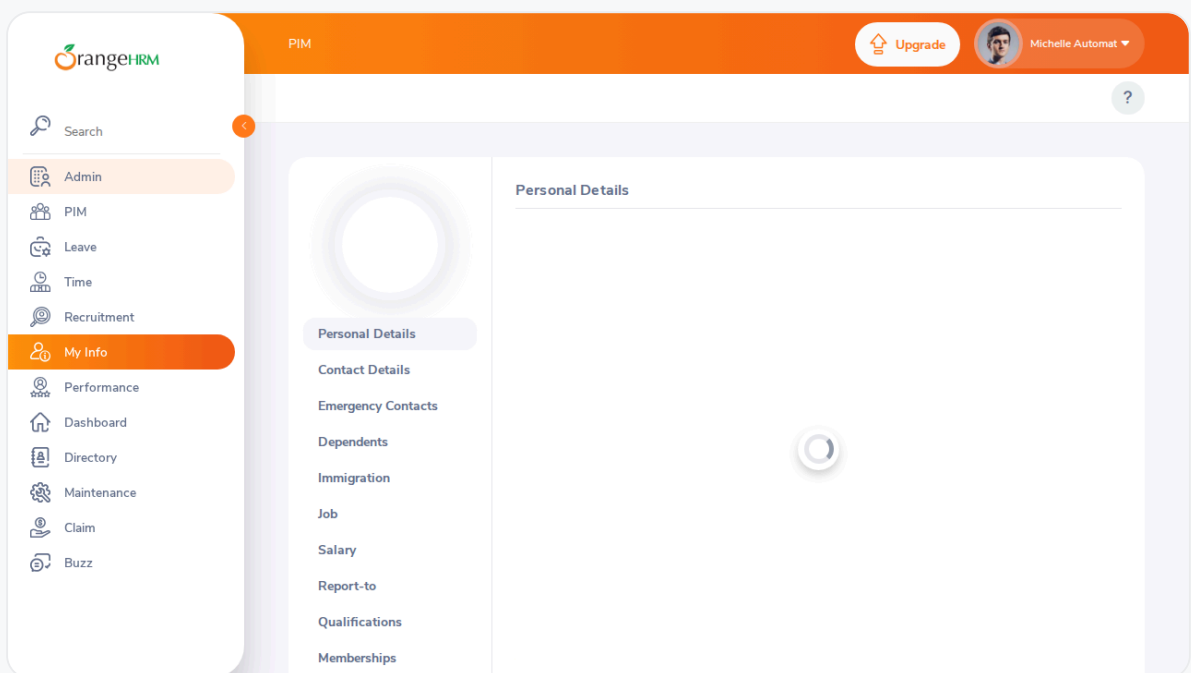

Environment & Configuration

Browsers

Devices

Operating Systems

linux

PROJECT	VIEWPORT	HEADLESS
Chromium-Desktop	1280x720	true

Trends & Historical Data

Historical data not available. Provide historicalDataPath to enable trends.

Challenges & Lessons Learned

Challenges

- Intermittent latency from downstream APIs
- Maintenance of shared fixtures across suites

Lessons Learned

- Parallelizing specs reduced suite time by 30%
- Centralized test data catalog improved reusability

Recommendations

- Stabilize flaky selectors using resilient locating strategies
- Automate build health checks with PDF summaries in CI

Summary & Conclusion

Suite executed **15** cases across **0** browsers with **100%** reliability. Attach this PDF to release readiness reviews, share with stakeholders, or archive as part of CI artifacts.