

TOPOLOGIA 2

El proposito de esta topologia es poder establecer una conexión vpn entre 2 dispositivos de red de diferentes proveedores (en este caso un Router Cisco y un firewall fortigate).

Matrícula: 2025-1410

La ip base se basara en los últimos 4 digitos de la matricula

Red base: 14.10.0.0/16

Subred	Dirección de Red	Máscara	Prefijo	Hosts Usables	Rango de Host Útil	Broadcast	Uso / Asignación
1	14.10.1.0	255.255.255.252	/30	2	14.10.1.1 – 14.10.1.2	14.10.1.3	ISP ↔ R1 (.1 = eth0, .2 = ISP)
2	14.10.2.0	255.255.255.252	/30	2	14.10.2.1 – 14.10.2.2	14.10.2.3	ISP ↔ FortiGate (.1 = FGT, .2 = ISP)
3	14.10.10.0	255.255.255.128	/25	126	14.10.10.1 – 14.10.10.126	14.10.10.127	LAN Usuarios / VLAN10 (.1 = Gateway R1)
4	14.10.20.0	255.255.255.240	/28	14	14.10.20.1 – 14.10.20.14	14.10.20.15	LAN Servidor Web (.1 = Gateway FGT, .2 = Server)

FortiGate - FortiGate-VM: x +

Not secure 192.168.189.155/ng/interface

FortiGate-VM64-KVM

Dashboard

Network

Interfaces

DNS

Packet Capture

SD-WAN

Static Routes

Policy Routes

RIP

OSPF

BGP

Routing Objects

Multicast

Policy & Objects

Security Profiles

VPN

User & Authentication

System

Security Fabric

Log & Report

FortiGate VM64-KVM

1 3 5 7 9 11 13 15 17 19 21 23

2 4 6 8 10 12 14 16 18 20 22 24

Create New Edit Delete Integrate Interface Search

Group By Type

Name	Type	Members	IP/Netmask	Administrative Access	DHCP Clients	DHCP Ranges	Ref.
802.3ad Aggregate							
fortilink	802.3ad Aggregate		Dedicated to FortiSwitch	PING Security Fabric Connection		10.255.1.2-10.255.1.254	2
Physical Interface							
fortigate 2 (port1)	Physical Interface		14.10.2.2/255.255.255.252	PING HTTPS SSH HTTP FMG-Access			6
port3	Physical Interface		0.0.0.0/0.0.0.0				0
port4	Physical Interface		192.168.189.155/255.255.255.0	PING HTTPS SSH HTTP			0
Servers (port2)	Physical Interface		14.10.20.1/255.255.255.240	PING			5
Tunnel Interface							
NAT interface (nafrout)	Tunnel Interface		0.0.0.0/0.0.0.0				0

Security Rating Issues

Updated: 18:30:45

FortiGate - FortiGate-VM: x +

Not secure 192.168.189.155/ng/routing/static

FortiGate-VM64-KVM

Dashboard

Network

Interfaces

DNS

Packet Capture

SD-WAN

Static Routes

Policy Routes

RIP

OSPF

BGP

Routing Objects

Multicast

Policy & Objects

Security Profiles

VPN

User & Authentication

System

Security Fabric

Log & Report

Create New Edit Clone Delete Search

Destination	Gateway IP	Interface	Status	Comments
0.0.0.0/0	14.10.2.1	fortigate 2 (port1)	Enabled	
VPN_FTG2_a_1_remote	14.10.1.1	VPN_FTG2_a_1	Enabled	VPN: VPN_FTG2_a_1 (Created by VPN wizard)
VPN_FTG2_a_1_remote		Blackhole	Enabled	VPN: VPN_FTG2_a_1 (Created by VPN wizard)
A_routerCisco_remote	14.10.1.2	A_routerCisco	Enabled	VPN: A_routerCisco (Created by VPN wizard)
A_routerCisco_remote		Blackhole	Enabled	VPN: A_routerCisco (Created by VPN wizard)

FortiGate-VM64-KVM

Dashboard

Network

Interfaces

DNS

Packet Capture

SD-WAN

Static Routes

Policy Routes

RIP

OSPF

BGP

Routing Objects

Multicast

Policy & Objects

Security Profiles

VPN

User & Authentication

System

Security Fabric

Log & Report

FortiGate-VM64-KVM

Dashboard

Network

Interfaces

DNS

Packet Capture

SD-WAN

Static Routes

Policy Routes

RIP

OSPF

BGP

Routing Objects

Multicast

Policy & Objects

Security Profiles



VPN

User & Authentication

System

Security Fabric

Log & Report

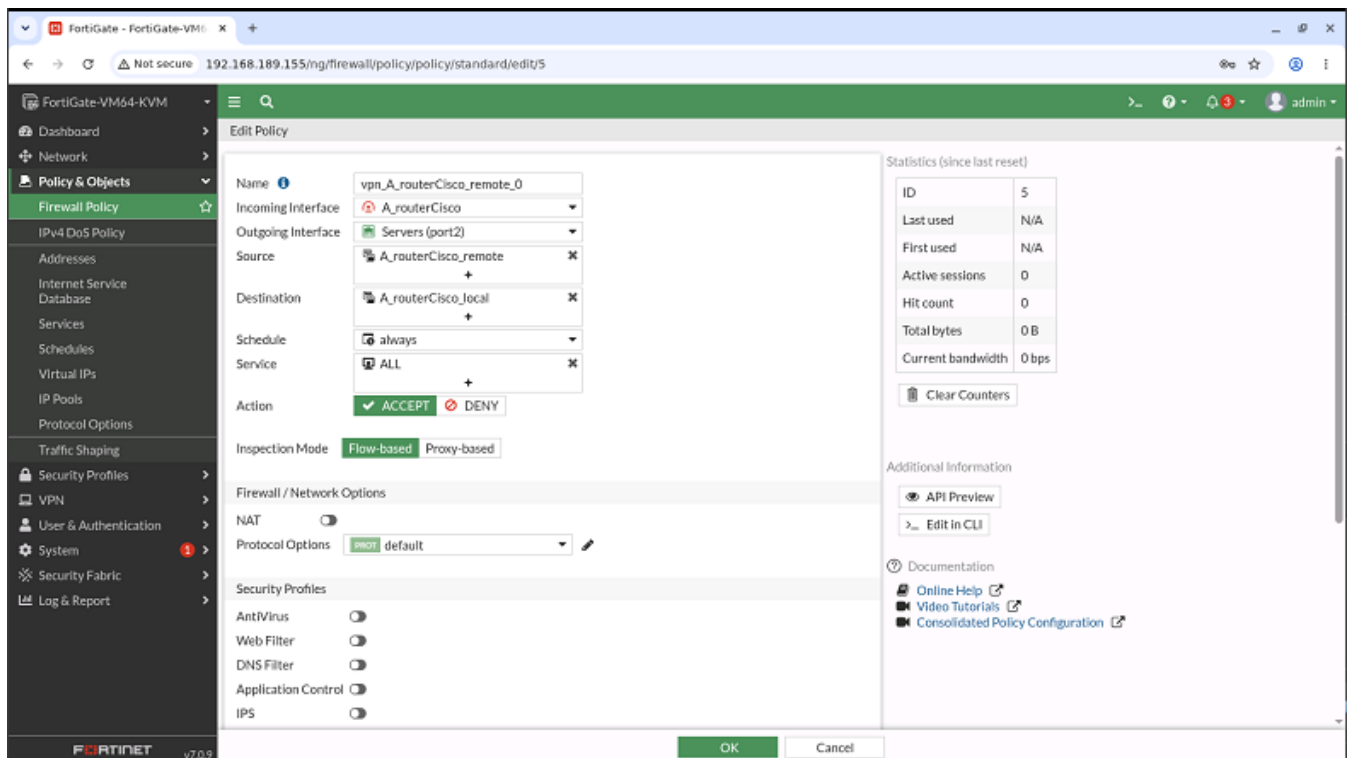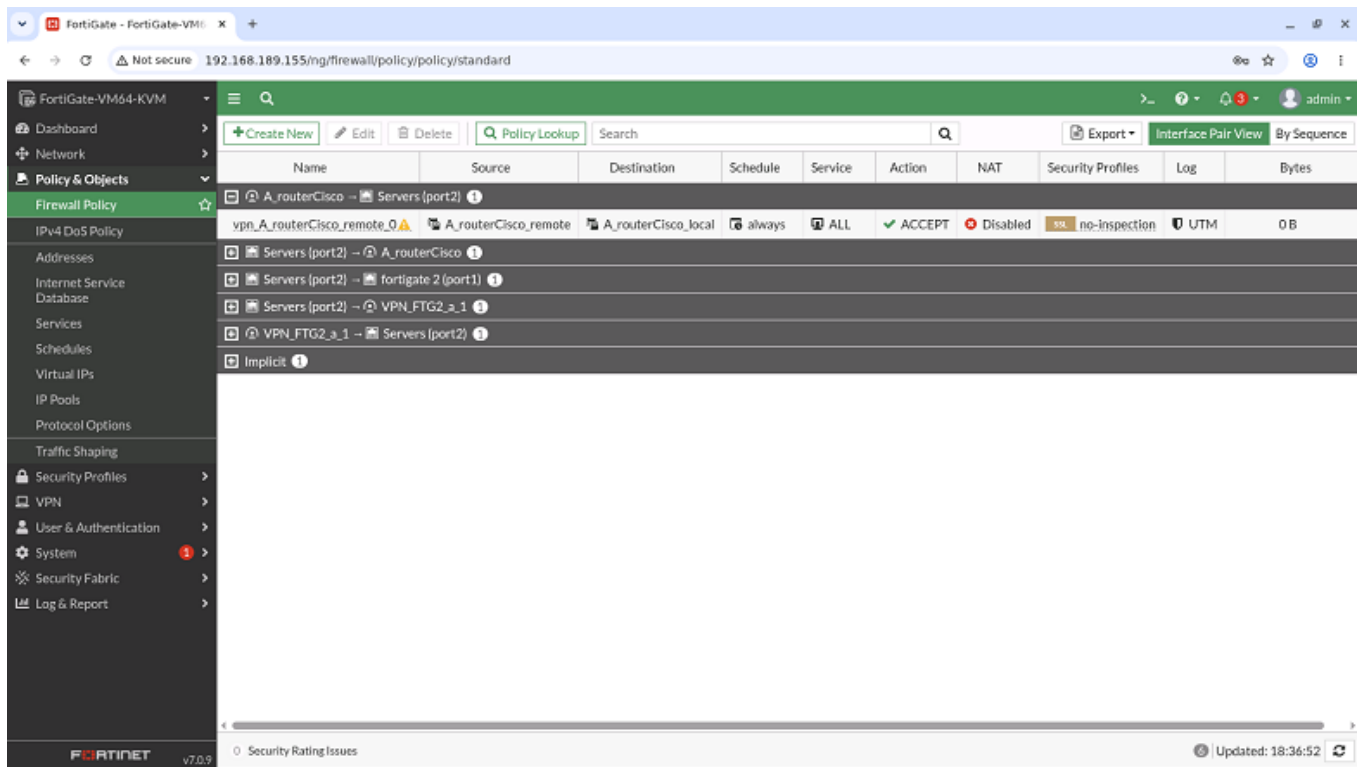


```
root@Docker:/home# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
385: eth0@if386: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether 02:42:0a:b1:00:03 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 10.177.0.3/16 brd 10.177.255.255 scope global eth0
        valid_lft forever preferred_lft forever
388: docker26_0@if387: <BROADCAST,MULTICAST> mtu 1500 qdisc noop state DOWN group default qlen 1000
    link/ether 50:00:00:1a:00:00 brd ff:ff:ff:ff:ff:ff link-netnsid 0
390: eth1@if389: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default qlen 1000
    link/ether 50:00:00:1a:00:01 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 14.10.20.2/28 brd 14.10.20.15 scope global eth1
        valid_lft forever preferred_lft forever
392: eth2@if391: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default qlen 1000
    link/ether 50:00:00:1a:00:02 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 192.168.189.135/24 brd 192.168.189.255 scope global eth2
        valid_lft forever preferred_lft forever
root@Docker:/home#
```

```
root@Docker:/home# curl -k https://14.10.20.2
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
  <!--
    Modified from the Debian original for Ubuntu
    Last updated: 2016-11-16
    See: https://launchpad.net/bugs/1288690
  -->
<head>
```



VPC



For more information, please visit wiki.freecode.com.cn.
Modified version supporting unetlab by unetlab team

Press '?' to get help.

VPCS>

VPCS> ip dhcp

DDORA IP 14.10.10.2/25 GW 14.10.10.1

VPCS> ping 14.10.20.2

14.10.20.2 icmp_seq=1 timeout

84 bytes from 14.10.20.2 icmp_seq=2 ttl=62 time=2.777 ms

84 bytes from 14.10.20.2 icmp_seq=3 ttl=62 time=1.105 ms

84 bytes from 14.10.20.2 icmp_seq=4 ttl=62 time=1.340 ms

84 bytes from 14.10.20.2 icmp_seq=5 ttl=62 time=1.138 ms

VPCS> trace 14.10.20.2

trace to 14.10.20.2, 8 hops max, press Ctrl+C to stop

1 14.10.10.1 0.292 ms 0.128 ms 0.140 ms

2 14.10.2.2 0.735 ms 0.564 ms 0.437 ms

3 *14.10.20.2 0.768 ms (ICMP type:3, code:3, Destination port unreachable)

VPCS> █