




rmse

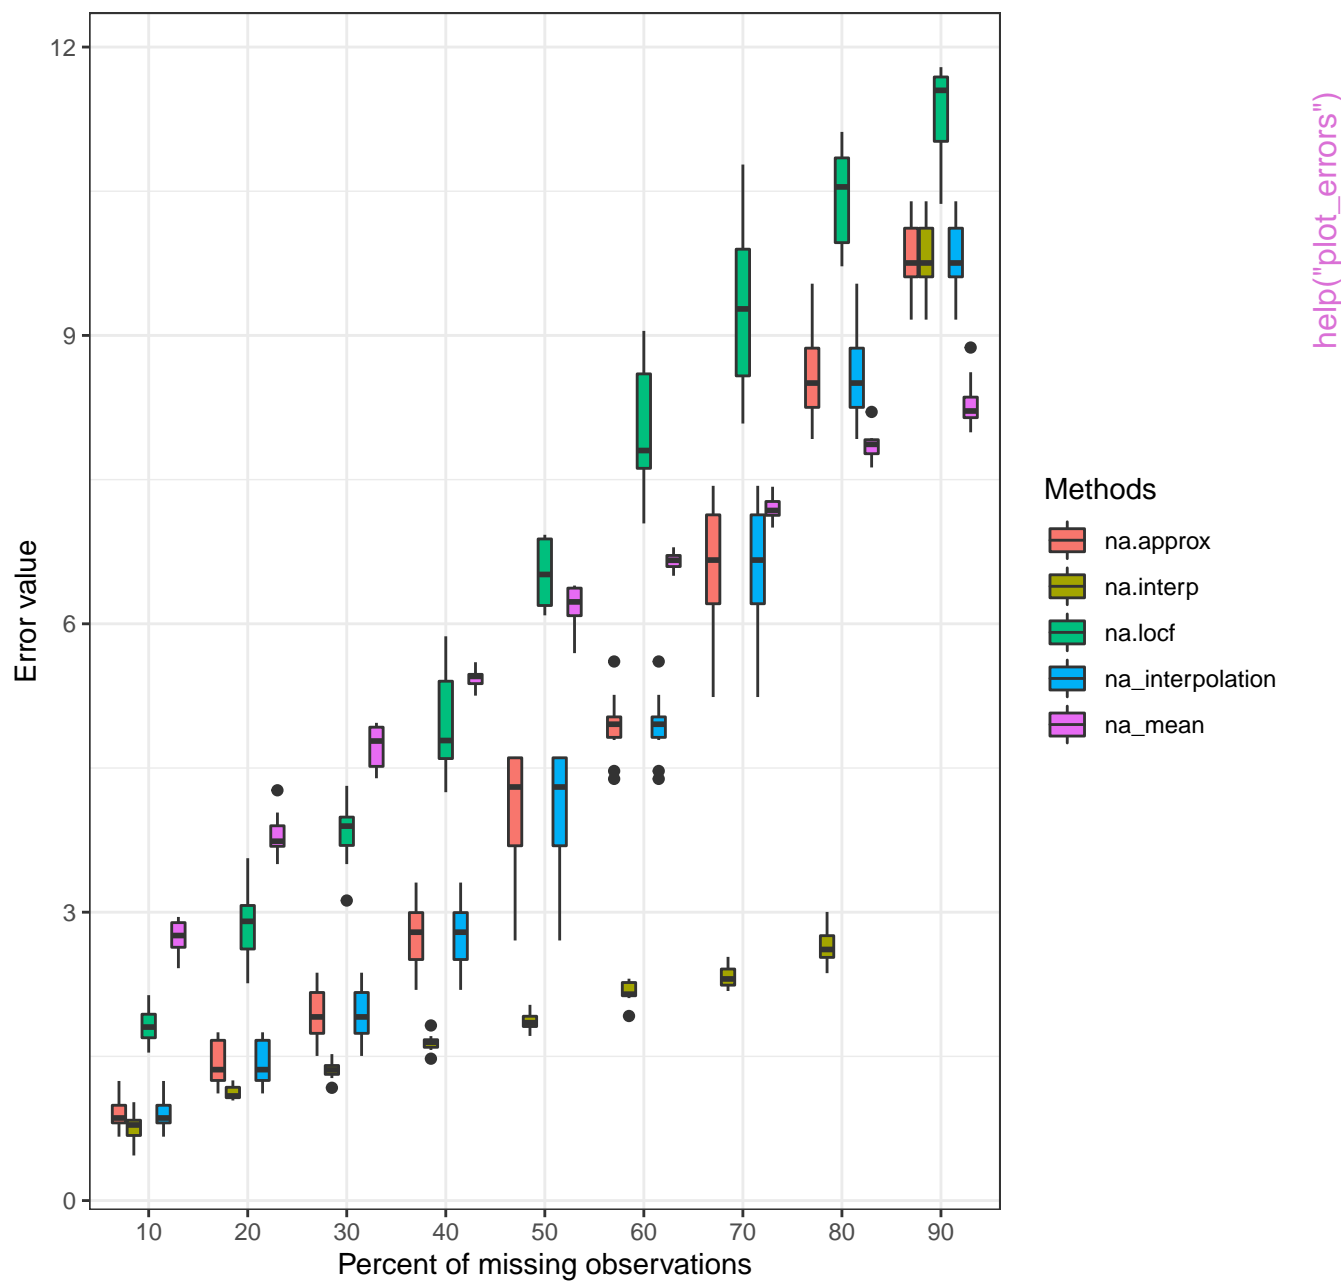

Imputed Retained

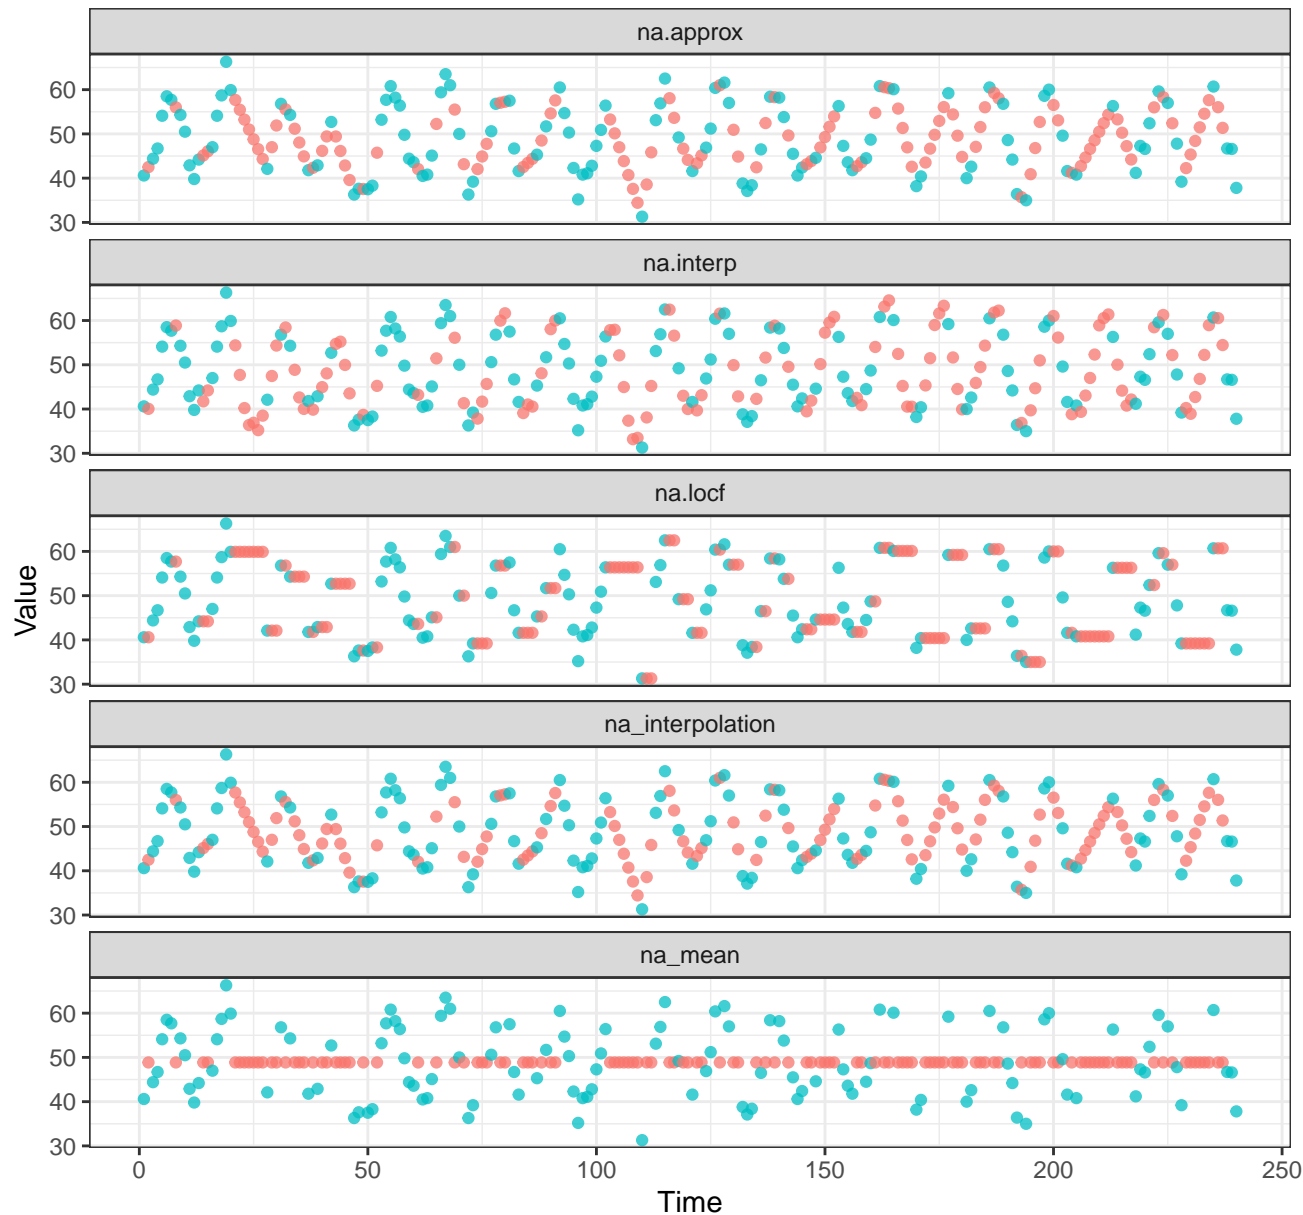


Imputed Retained

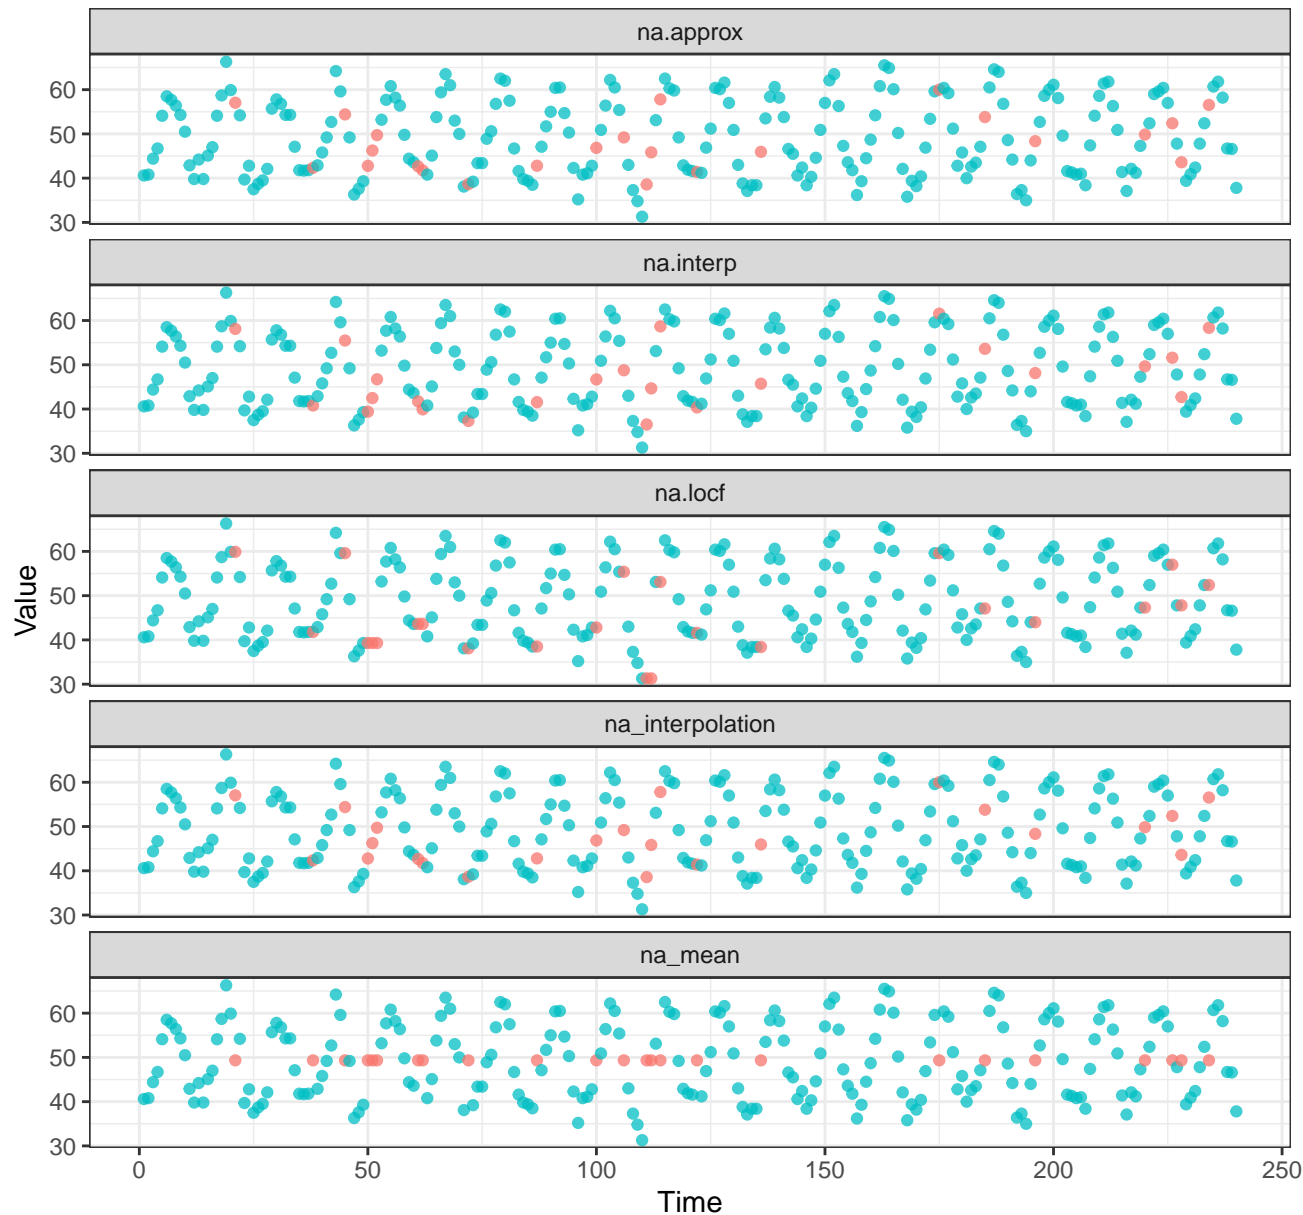


help("plot\_impute")

Imputed Retained Removed

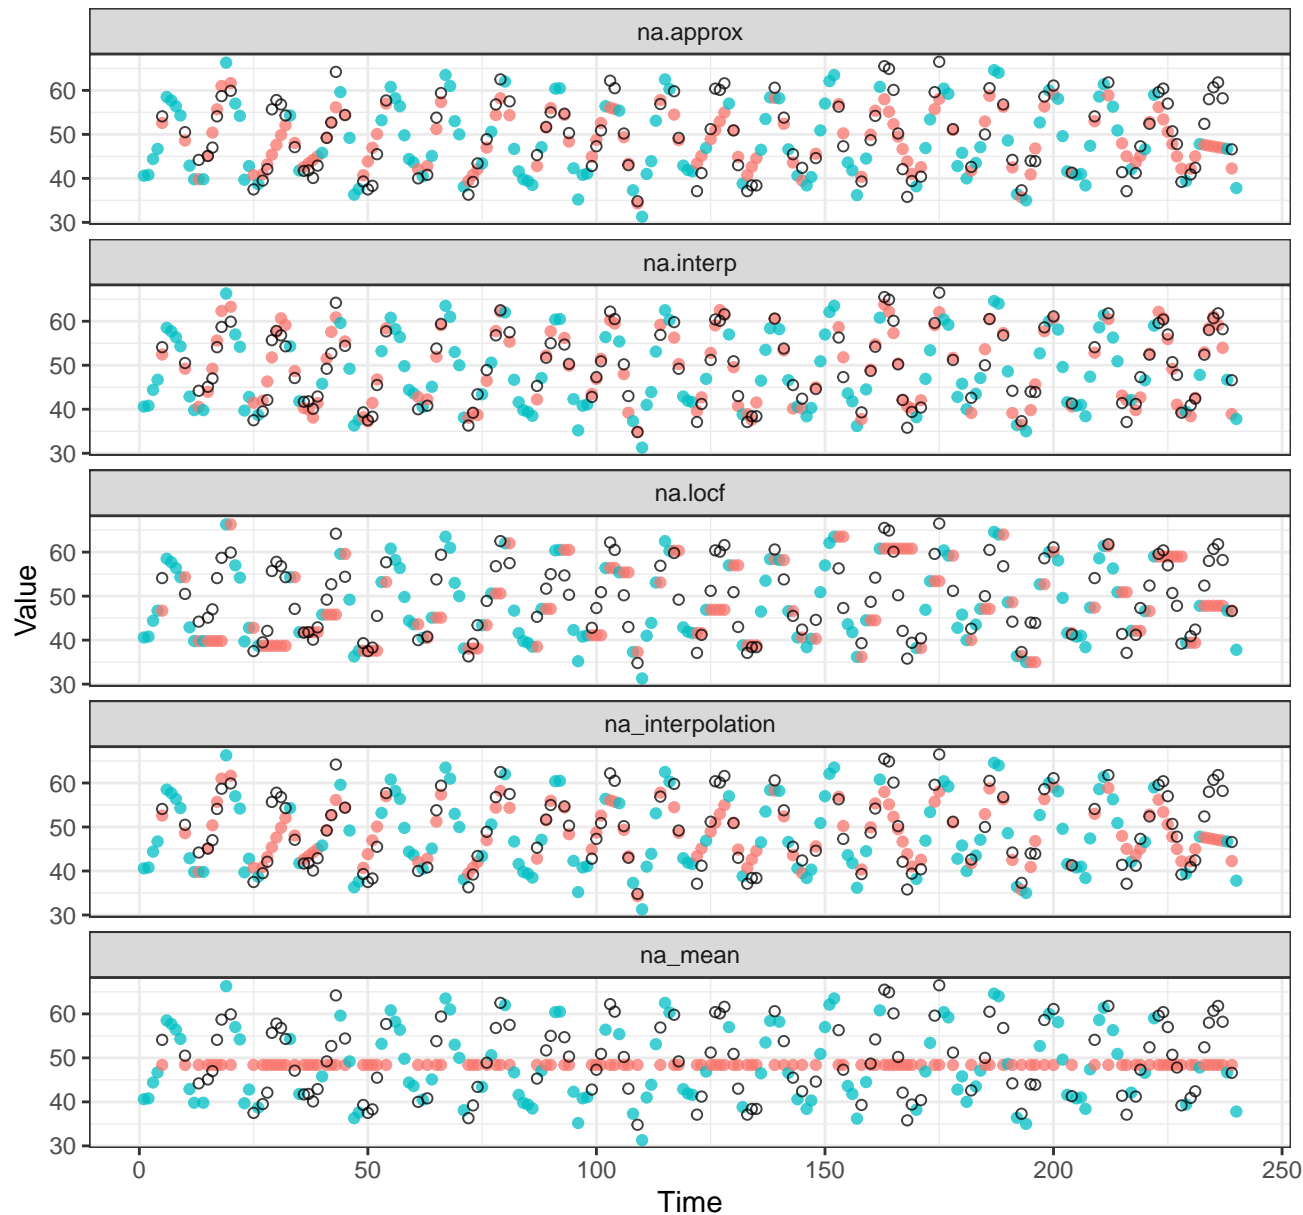


Imputed Retained

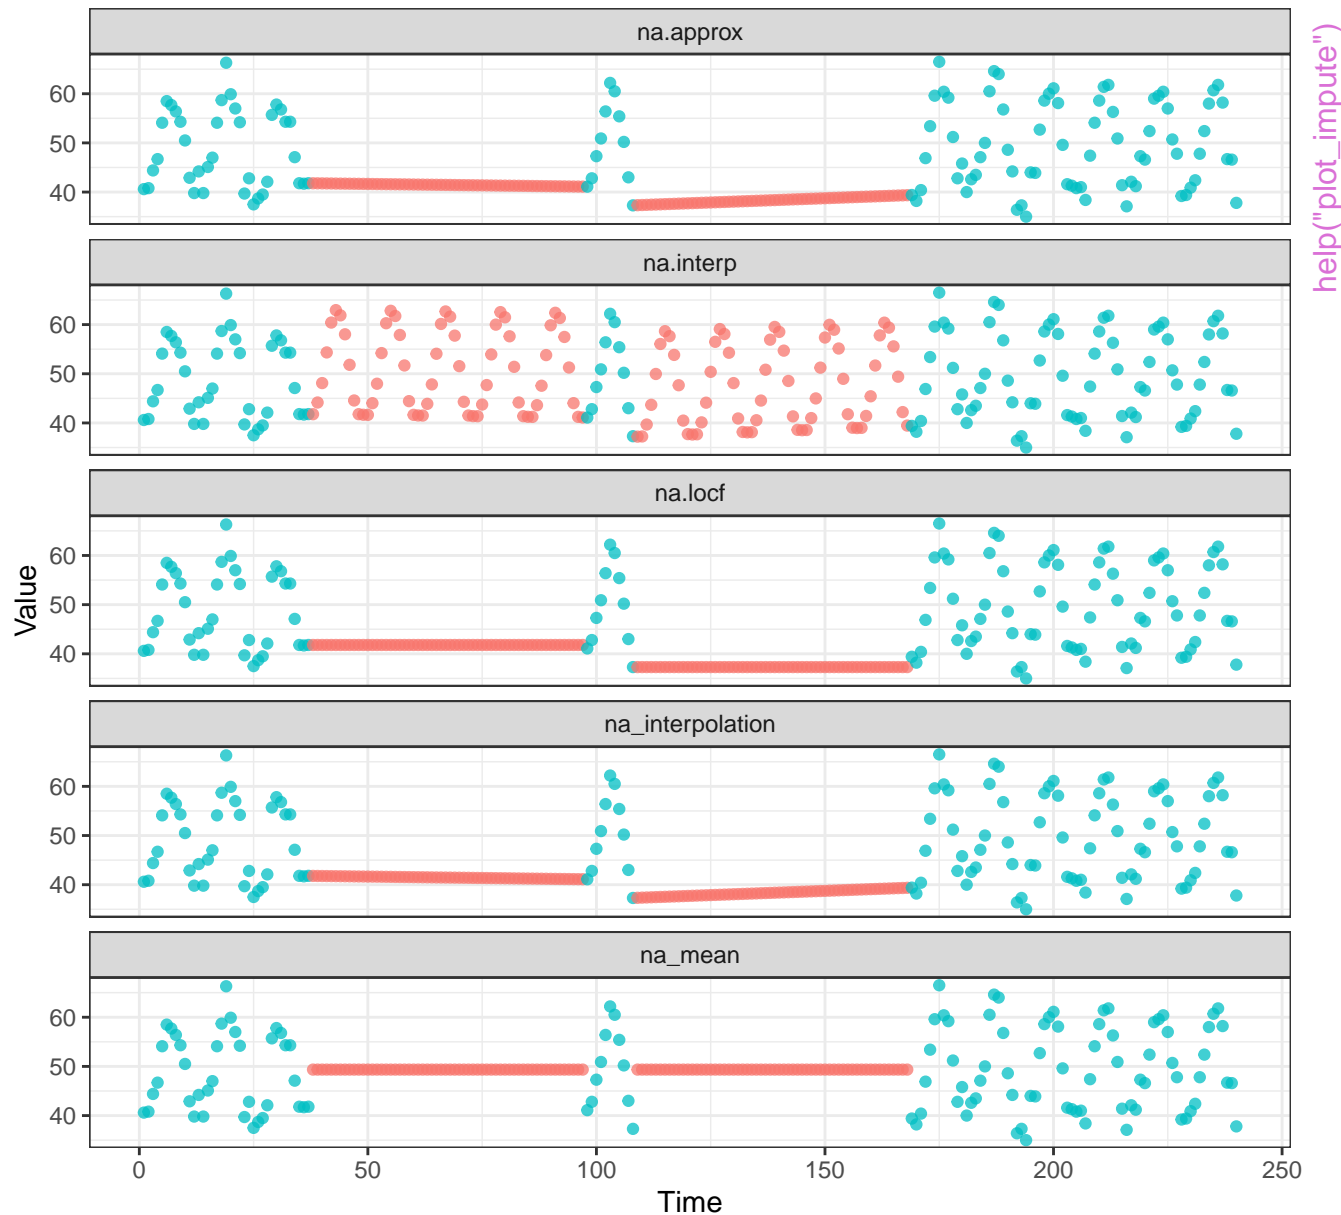

$b = 10$ , `smpls = "mcar"`


○ Removed    ● Retained

`help("sample_dat")`

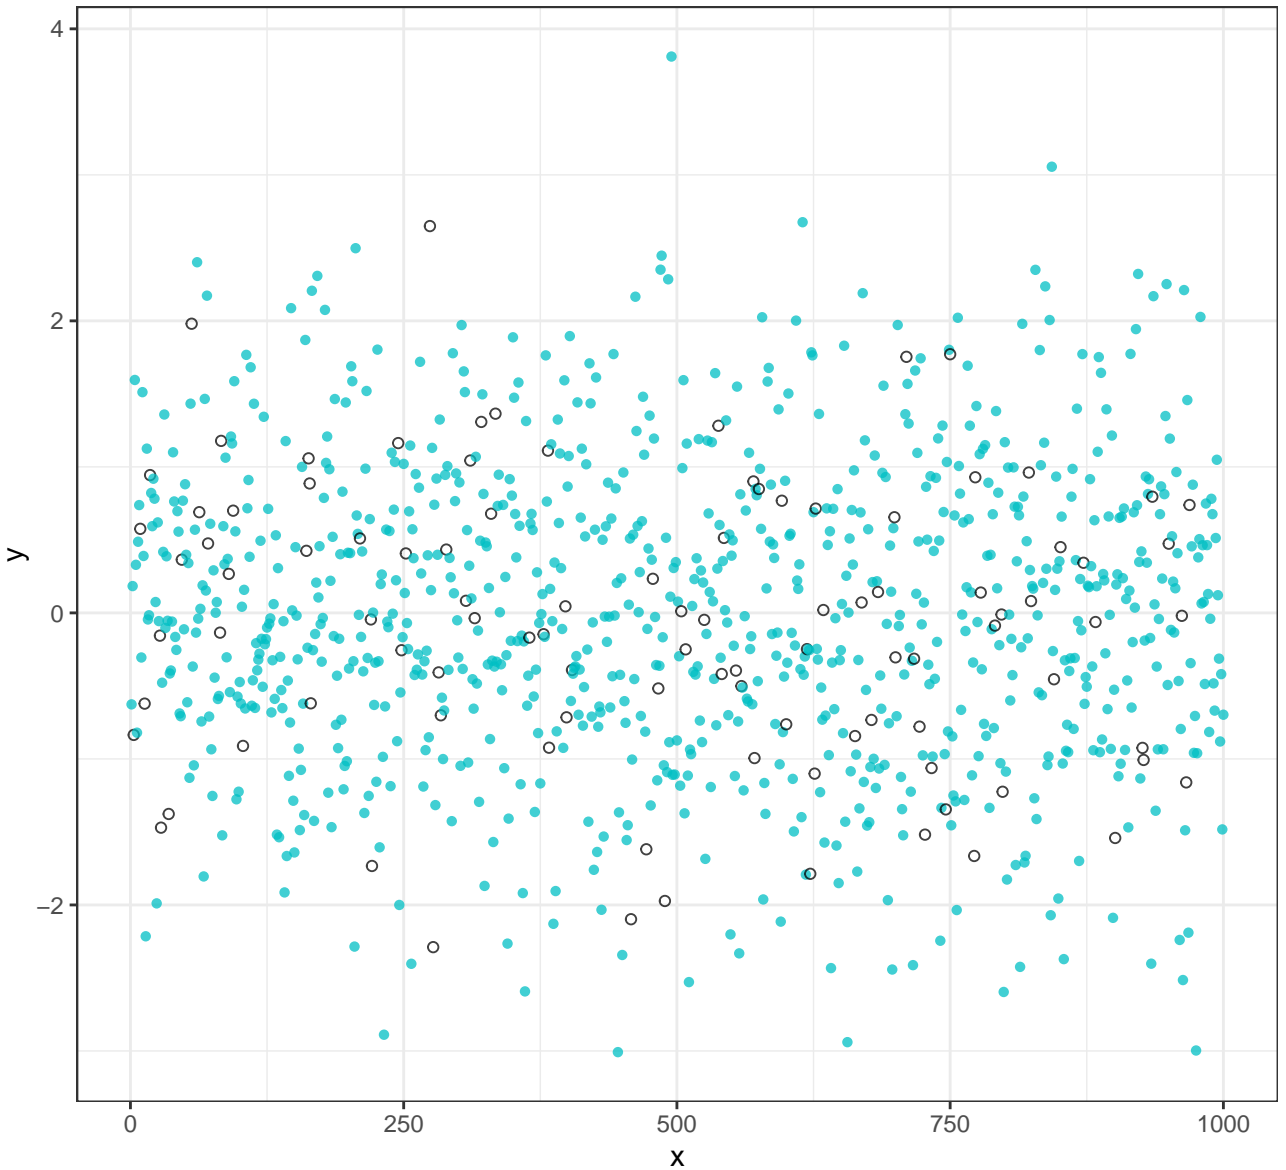

b = 10, smps = "mar", blk = 50, blkper = TRUE


○ Removed    ● Retained

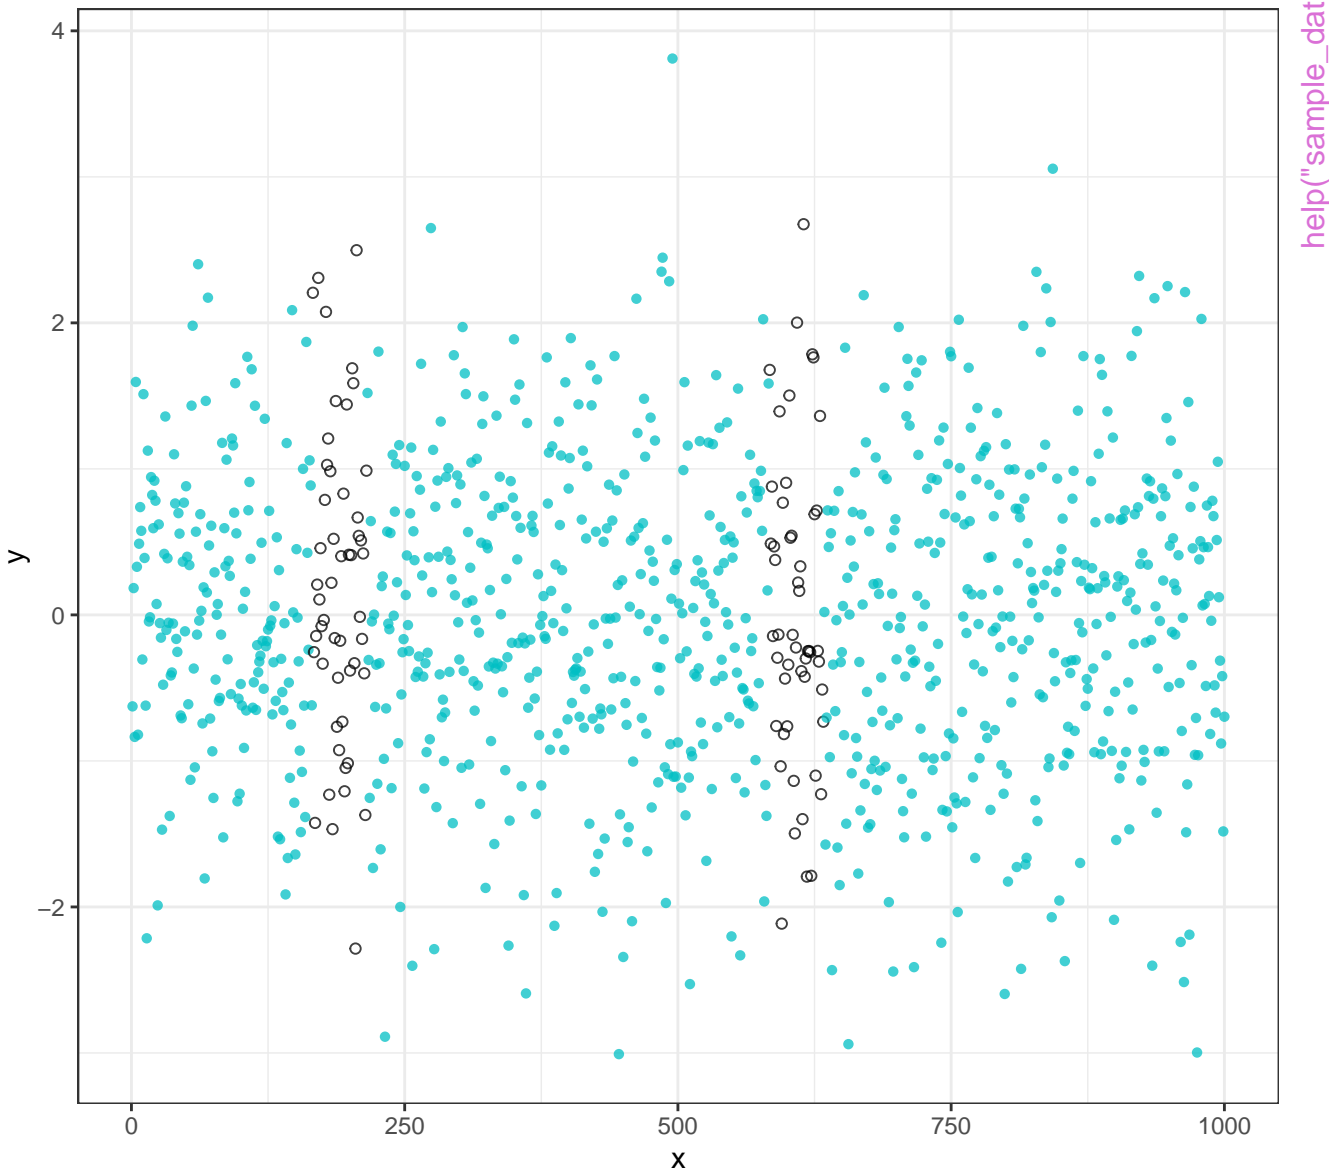

b = 10, smps = "mcar"


○ Removed    ● Retained

help("sample\_dat")

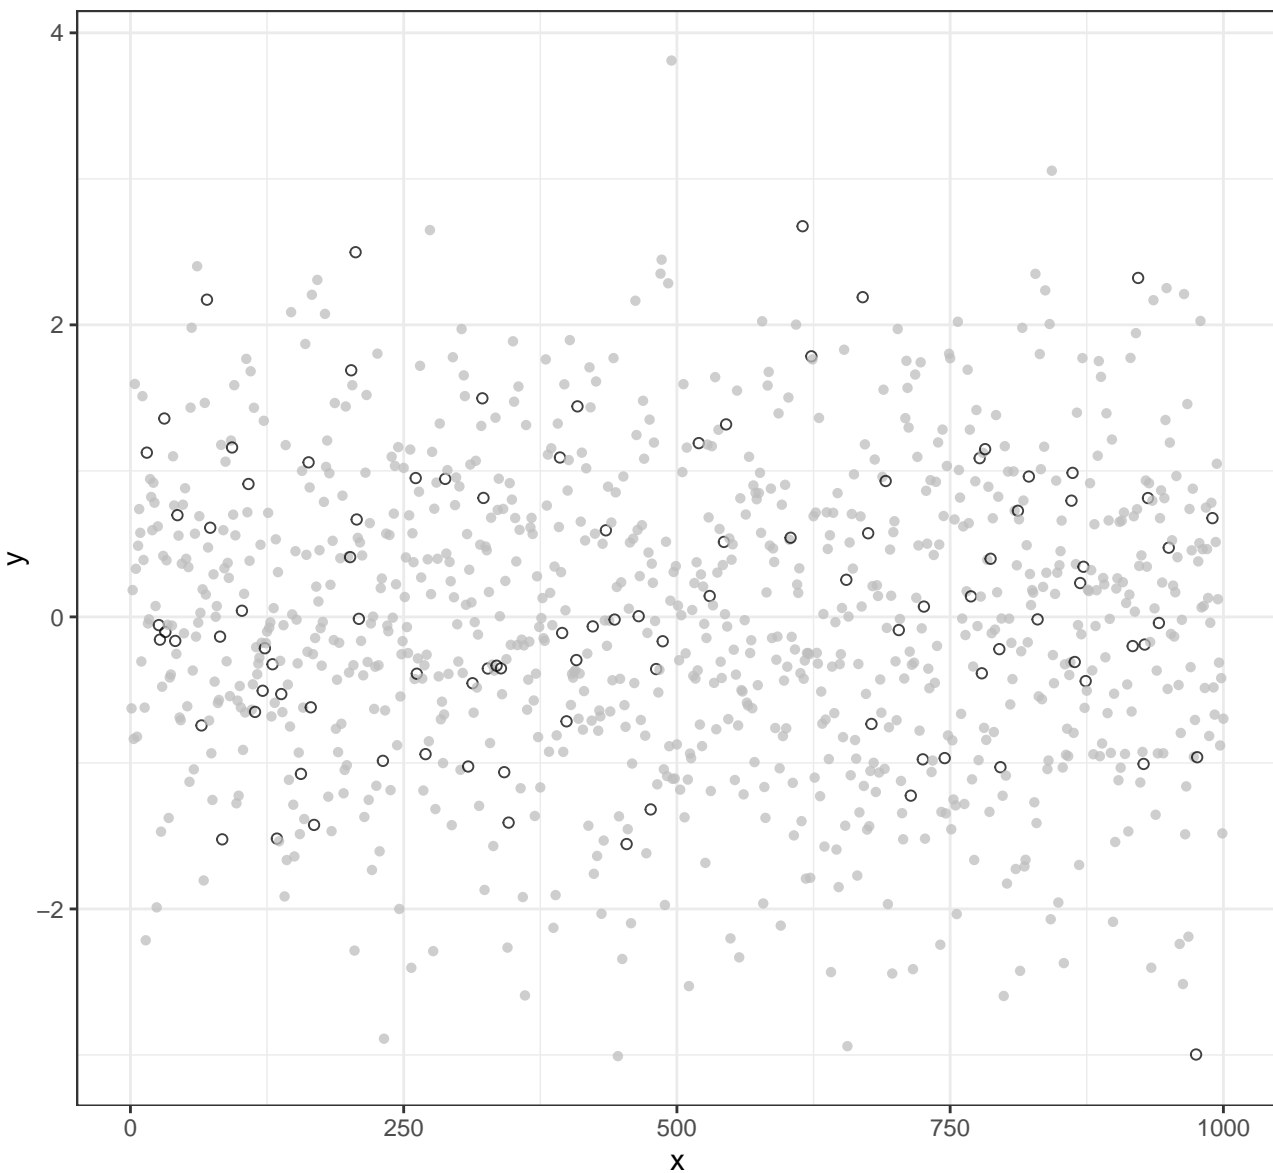



b = 10, smps = "mcar"

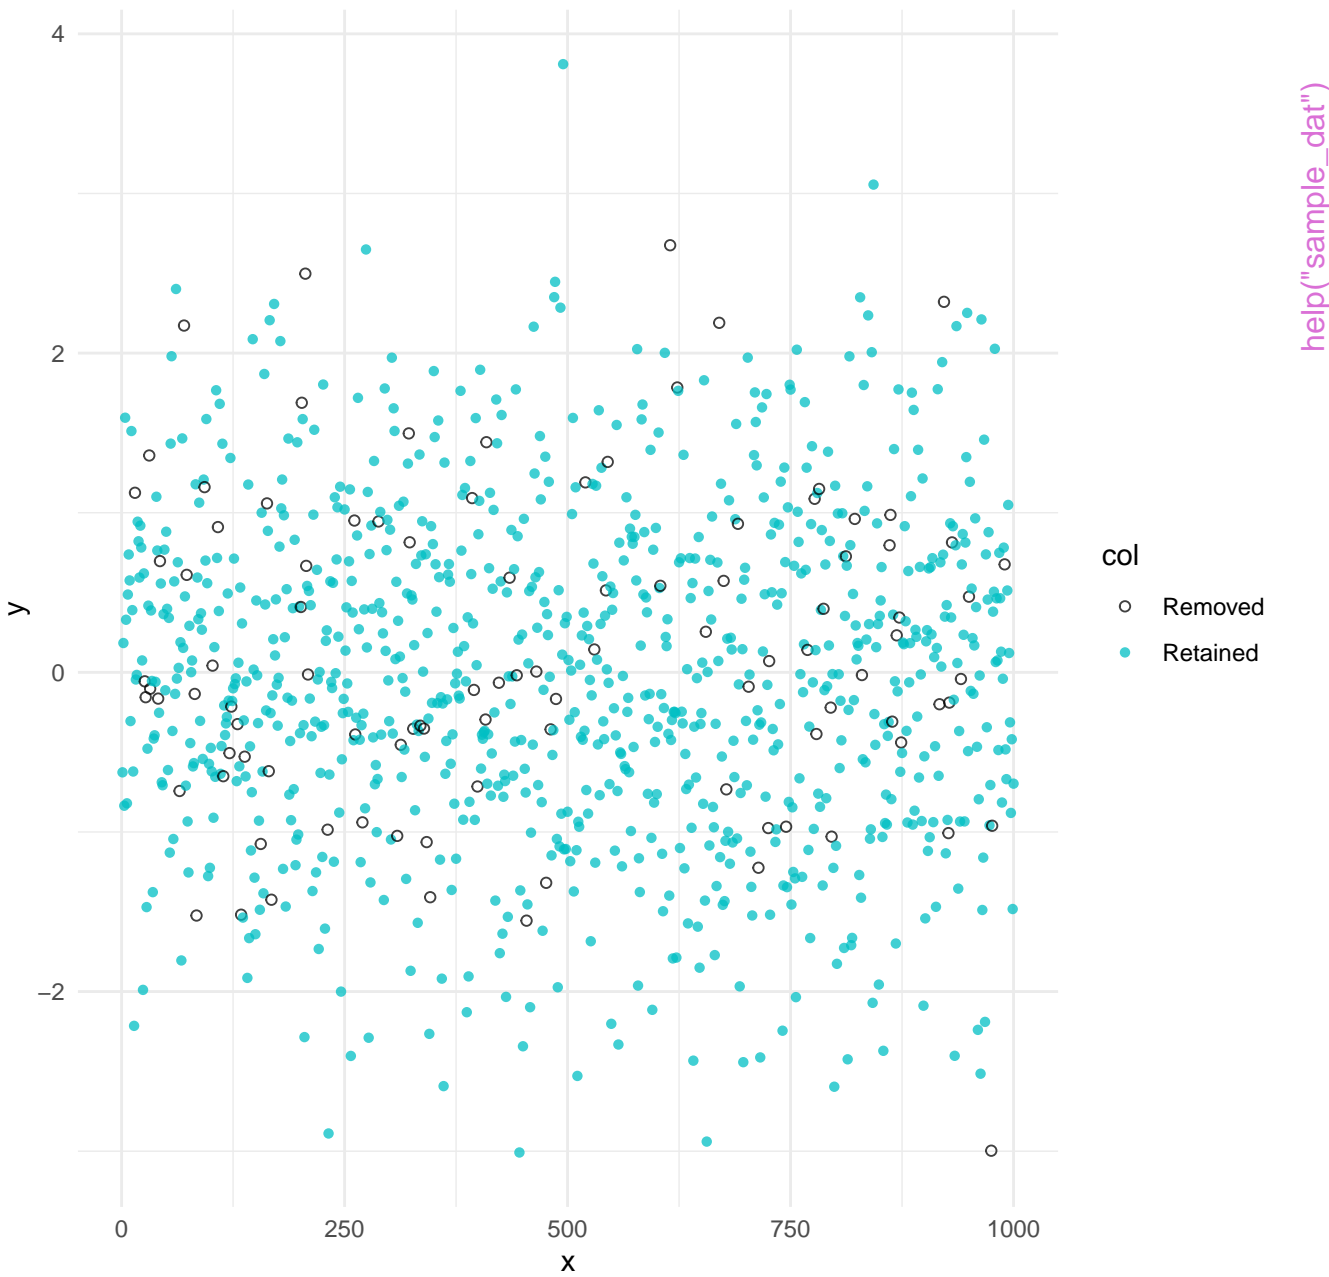

## Example of simulating missing data

○ Removed    ● Retained

