



rmse

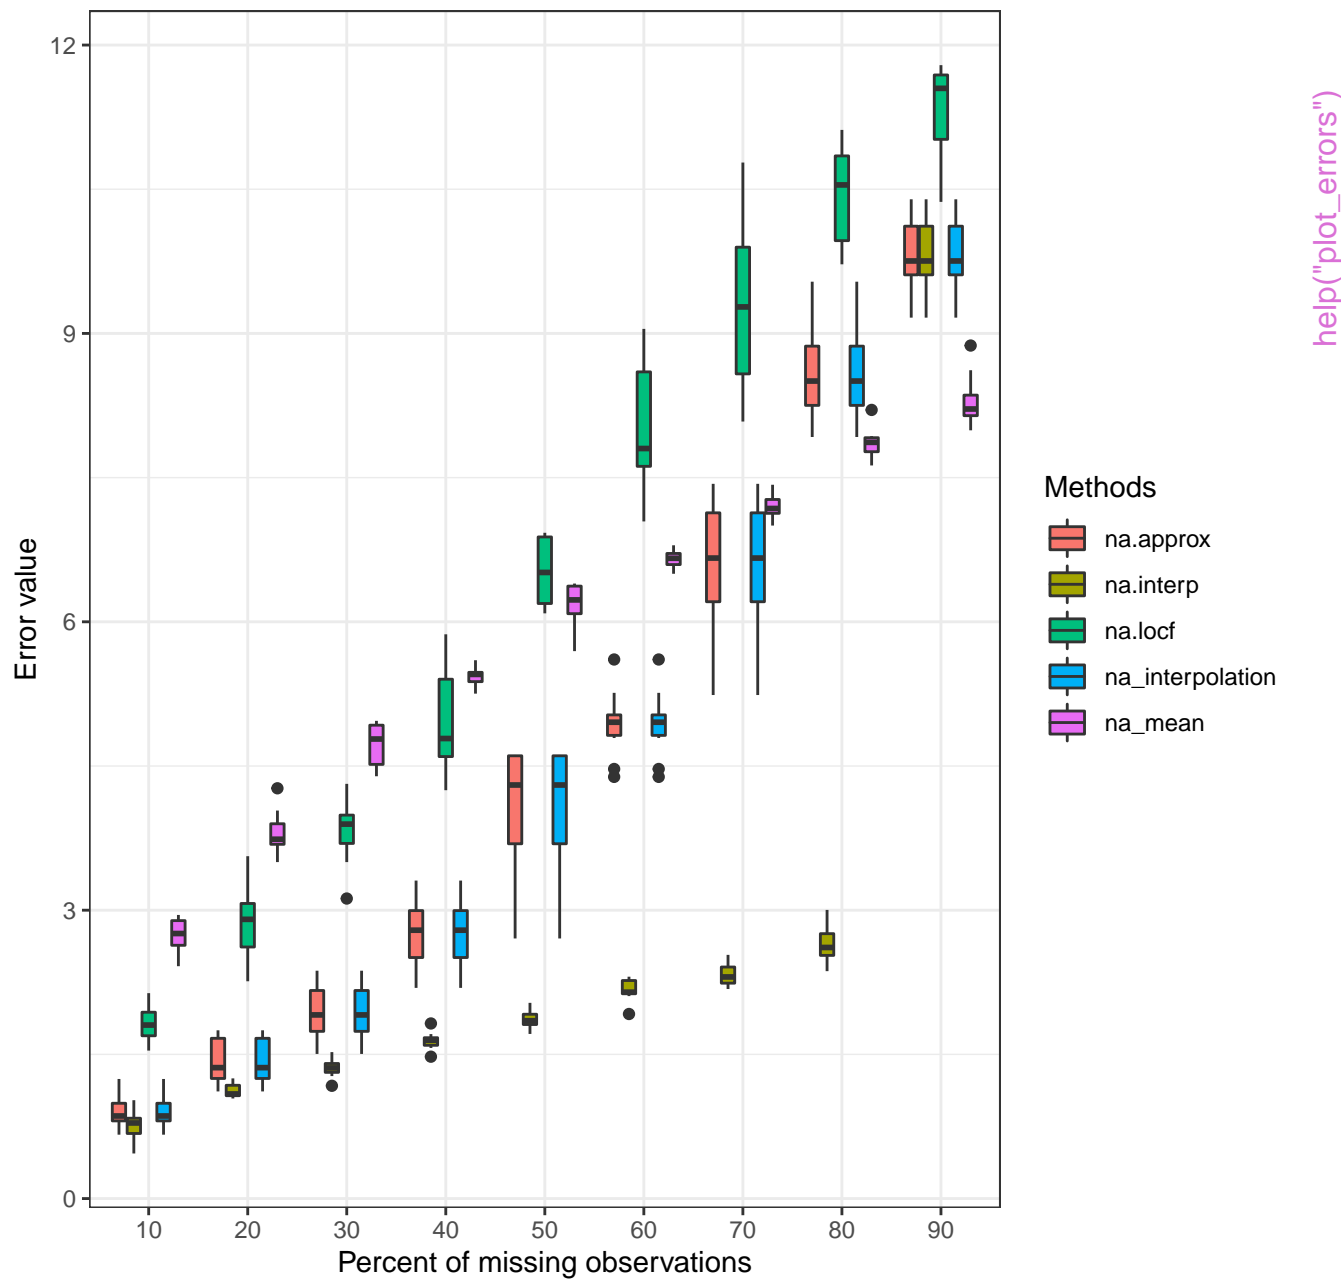


Imputed Retained

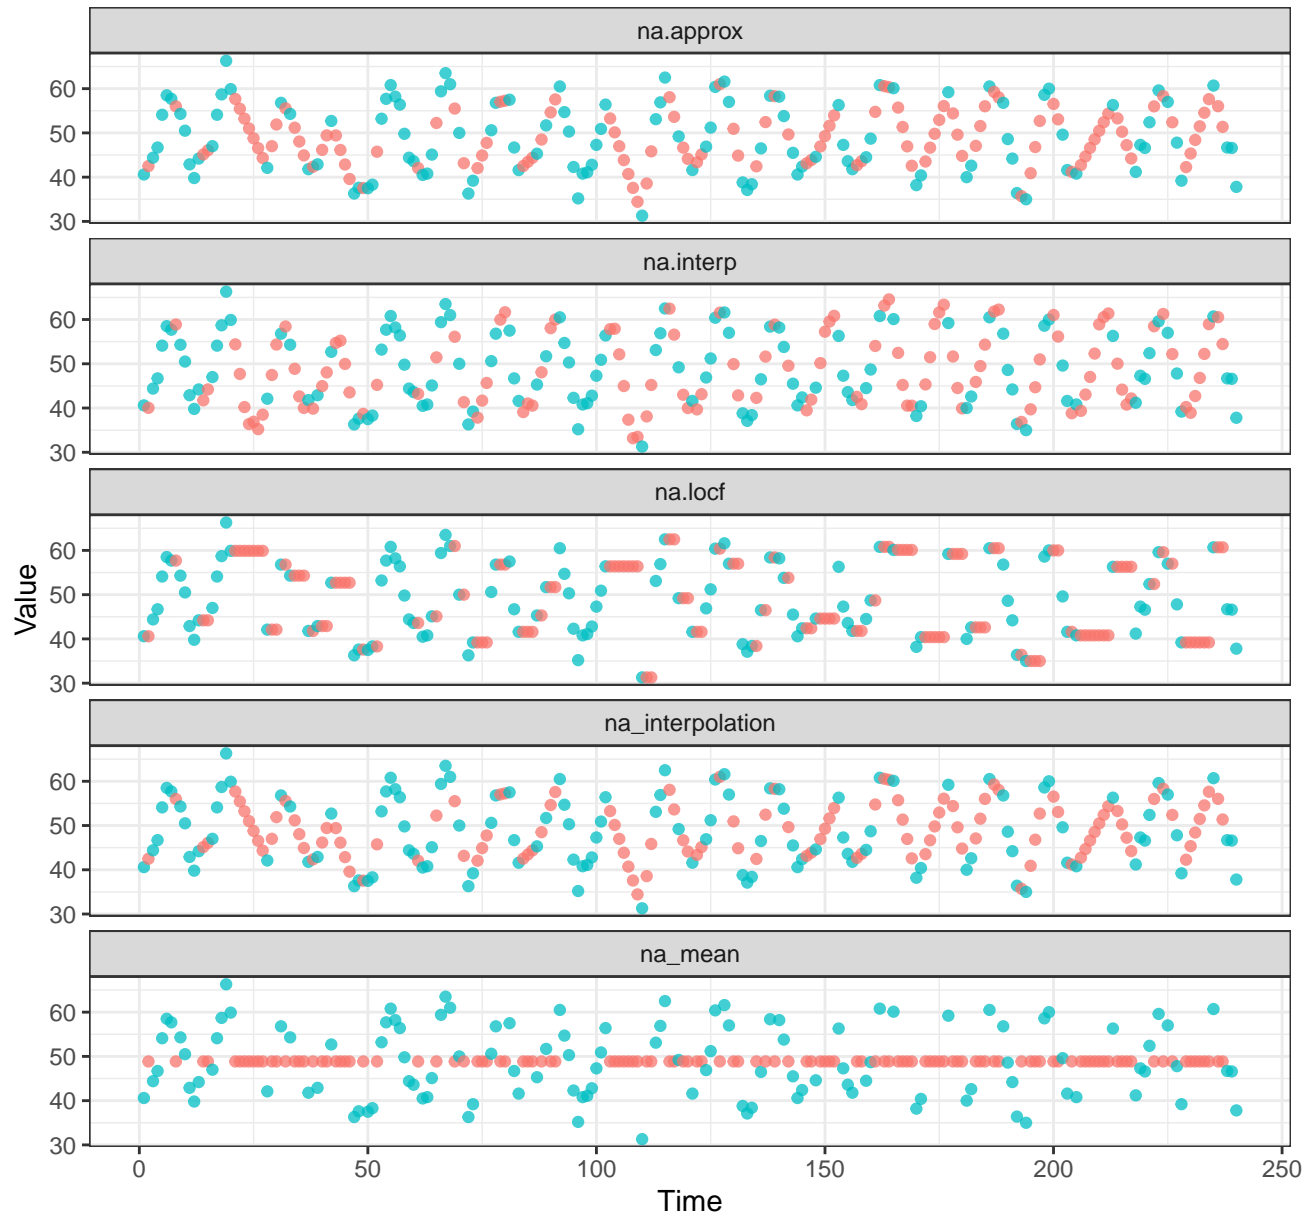


help("plot_impute")

Imputed Retained

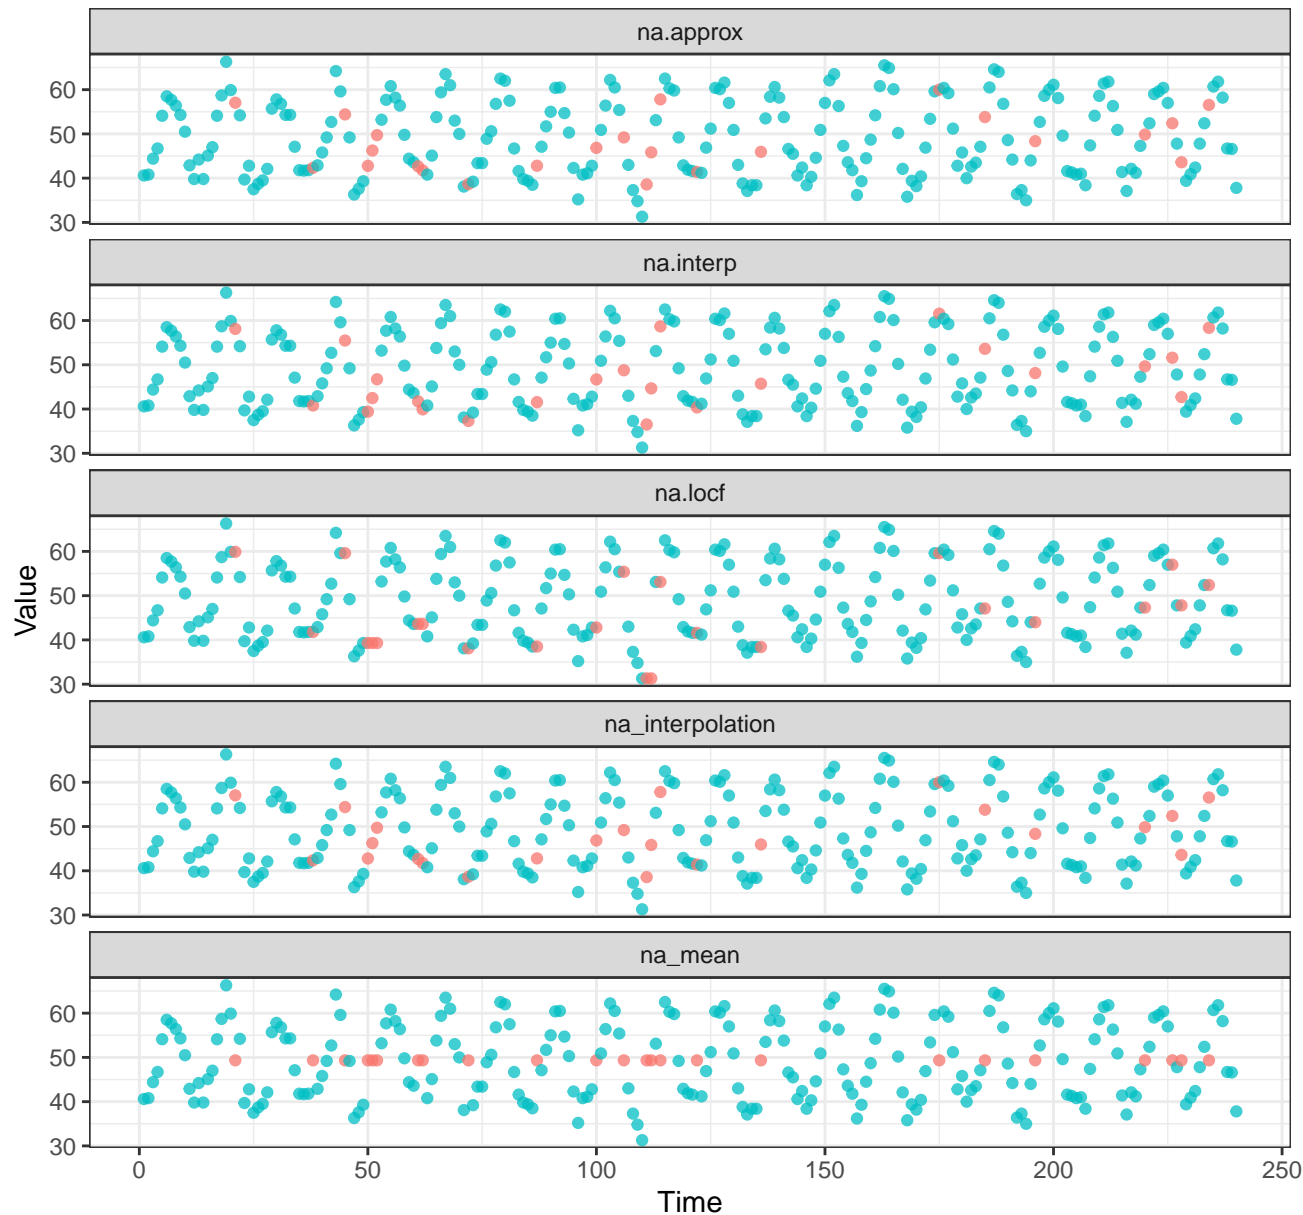


help("plot_impute")

Imputed Retained Removed

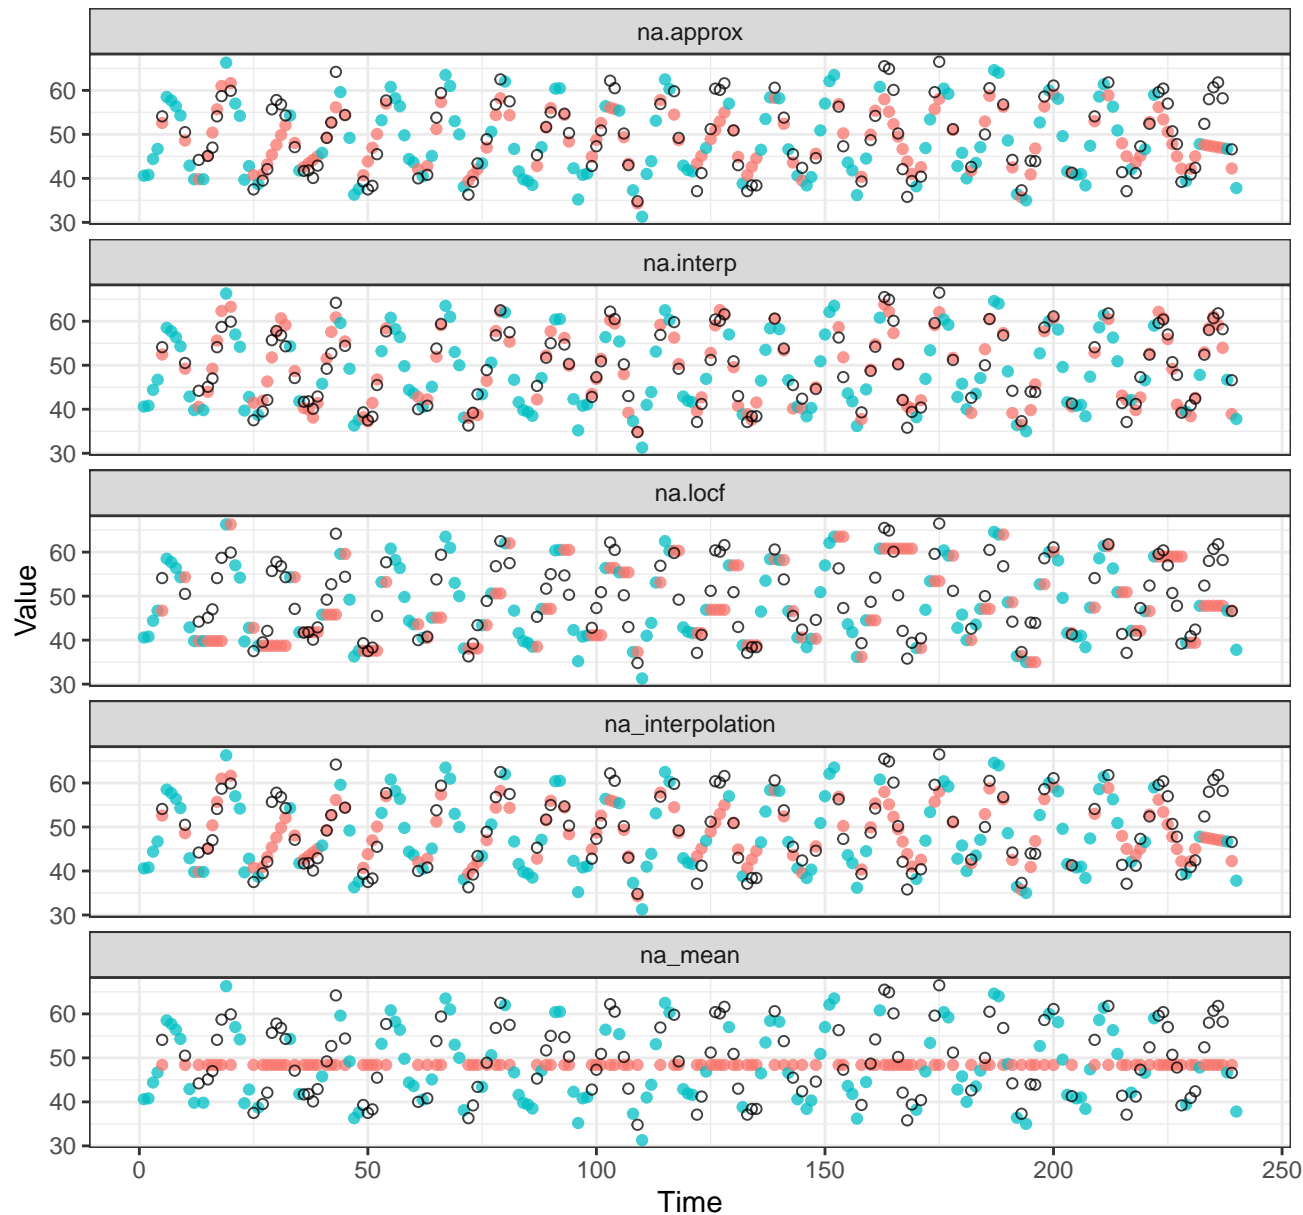


Imputed Retained

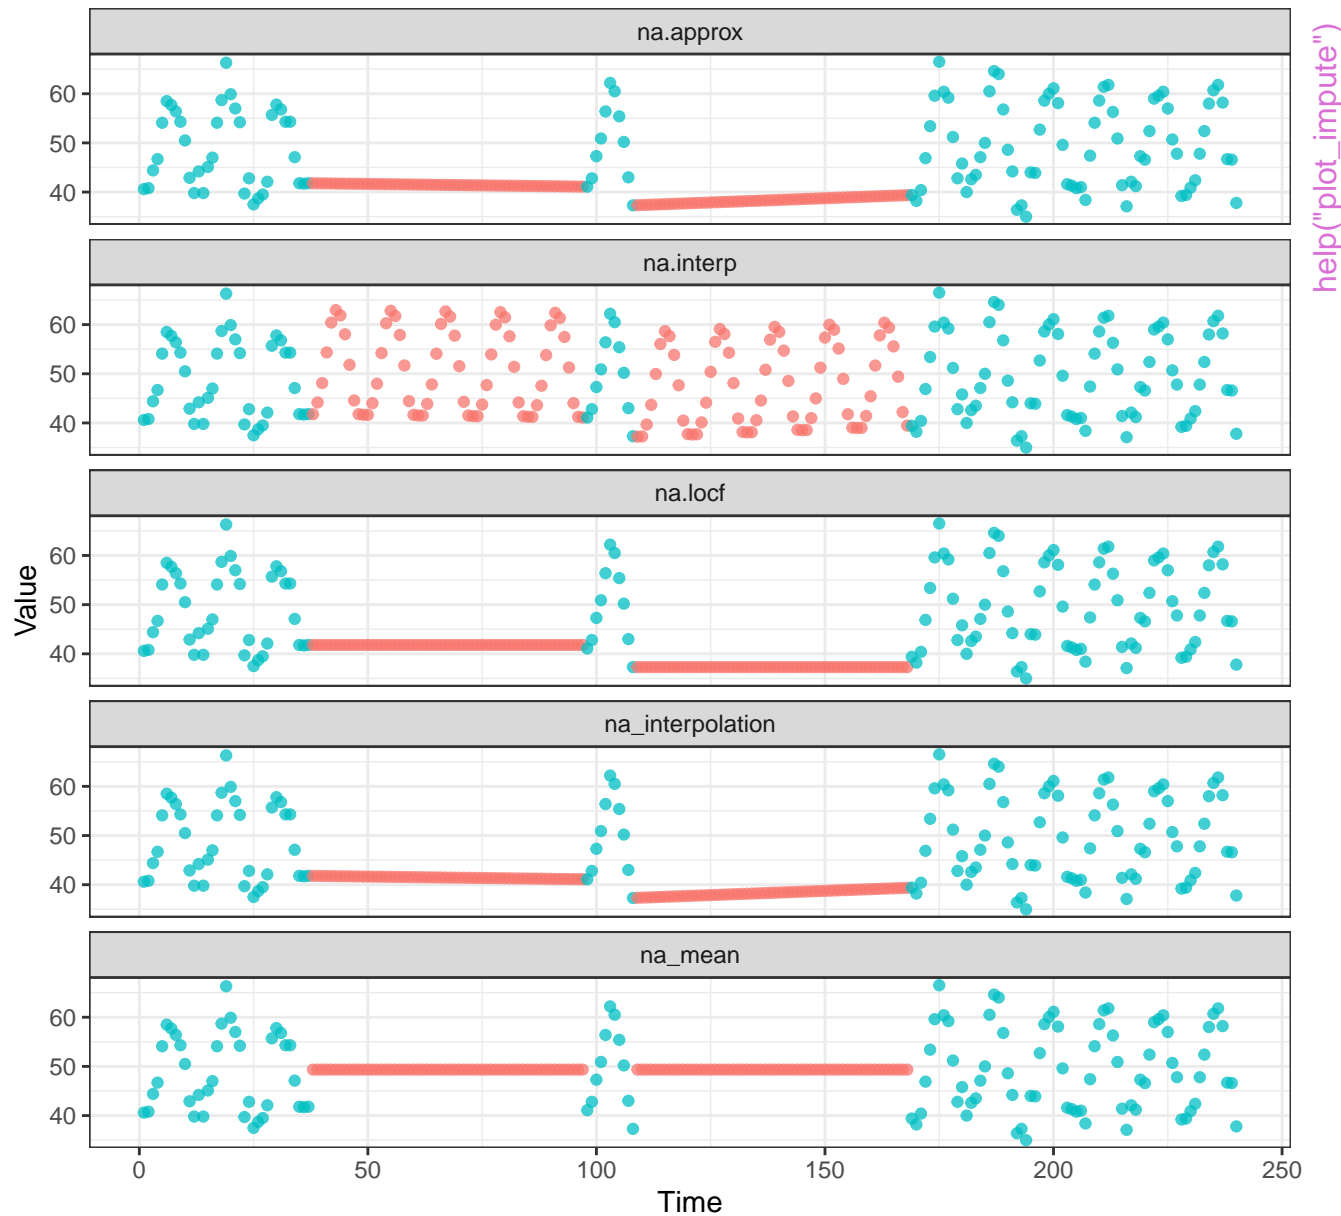

b = 10, smps = "mcar"


○ Removed ● Retained

help("sample_dat")

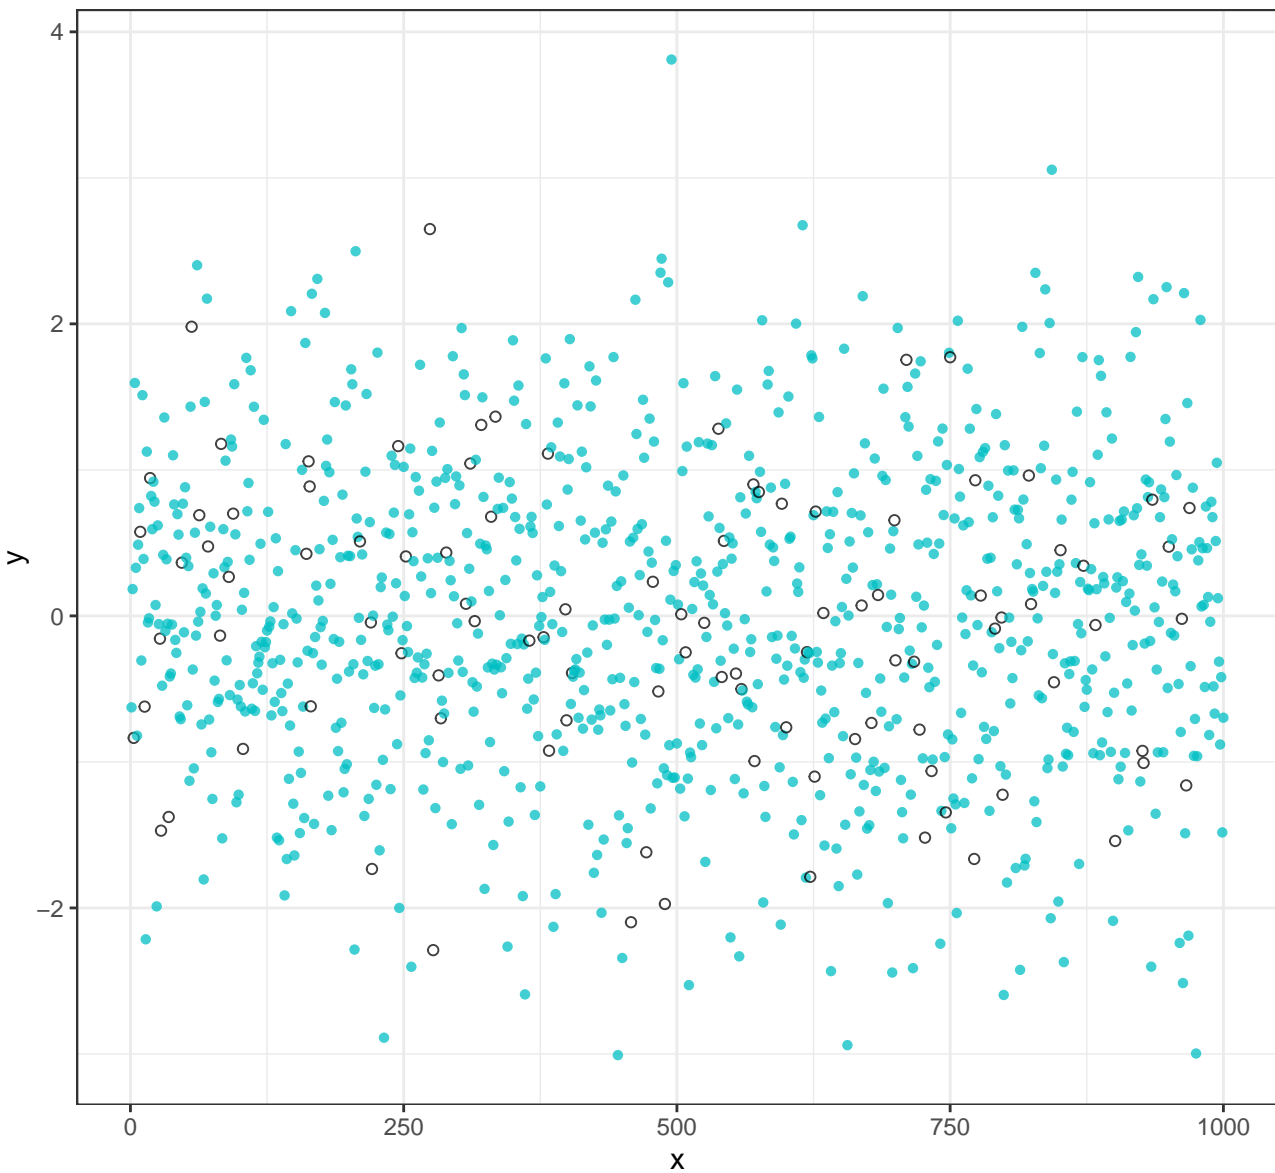

b = 10, smps = "mar", blk = 50, blkper = TRUE


○ Removed ● Retained

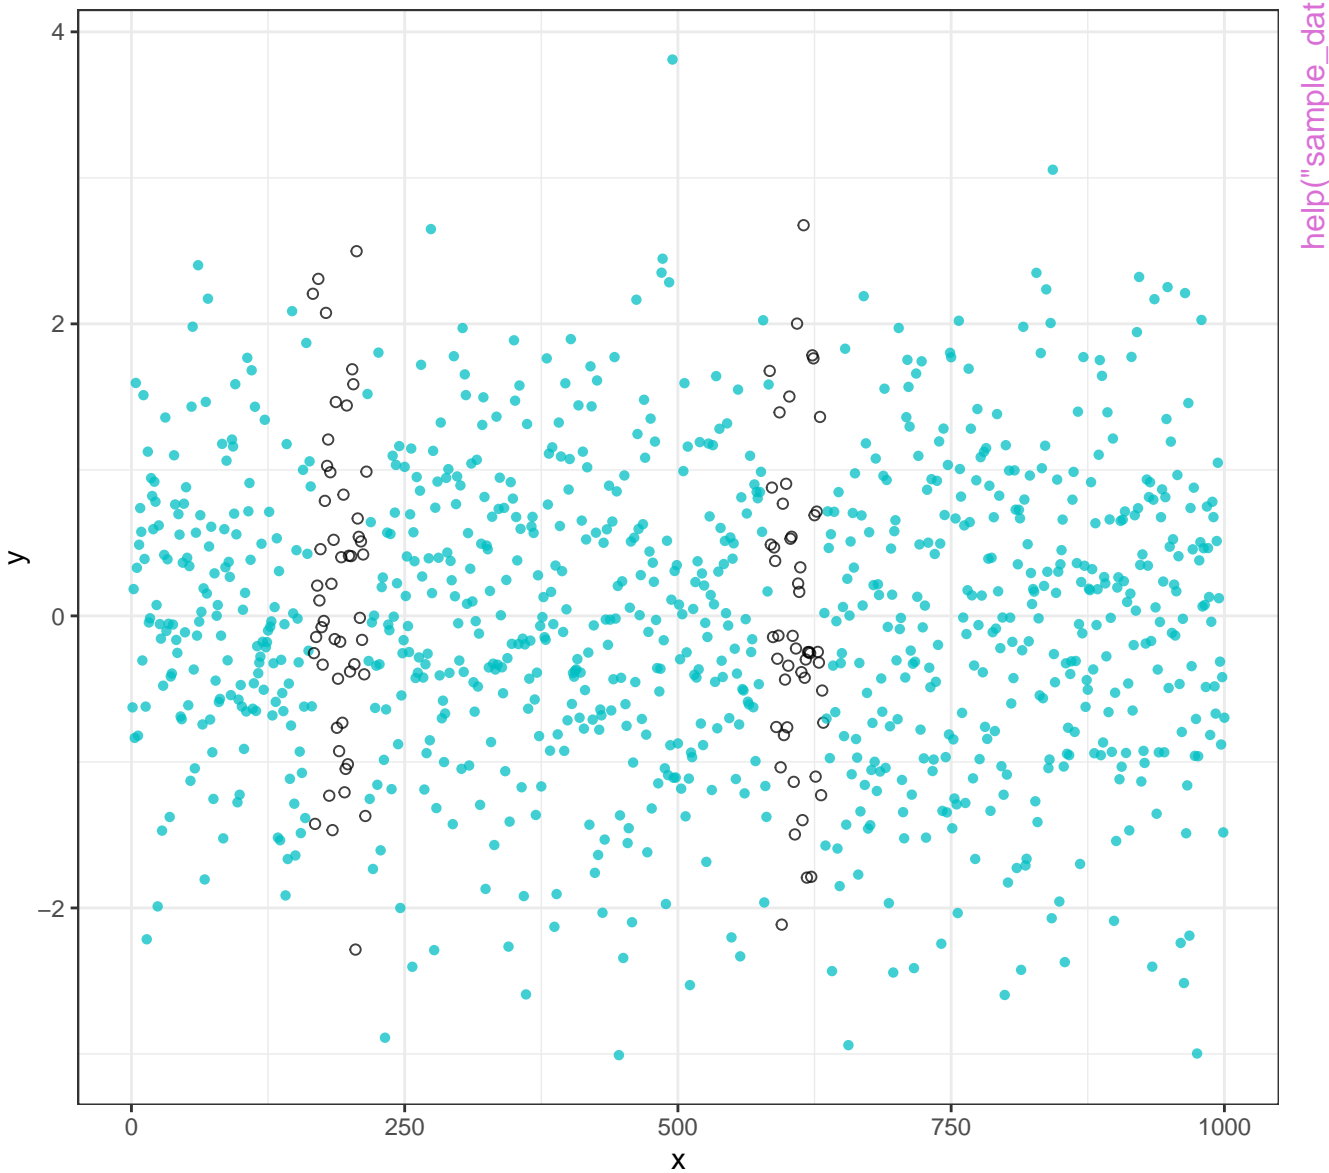


$b = 10$, `smps = "mcar"`

○ Removed ● Retained

`help("sample_dat")`

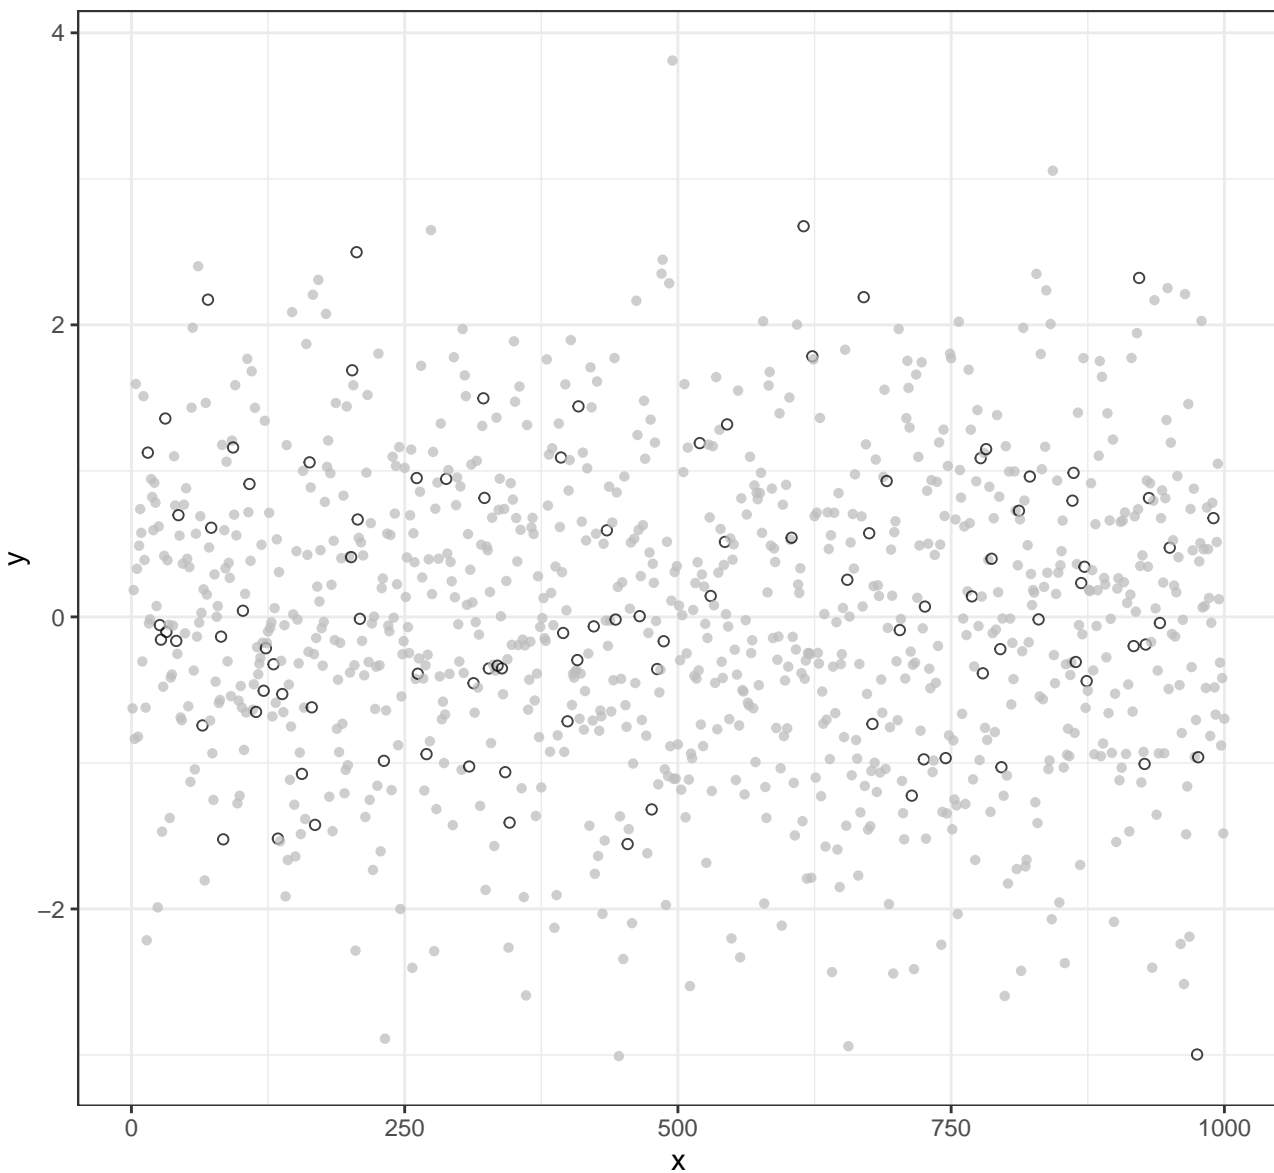

b = 10, smps = "mcar"

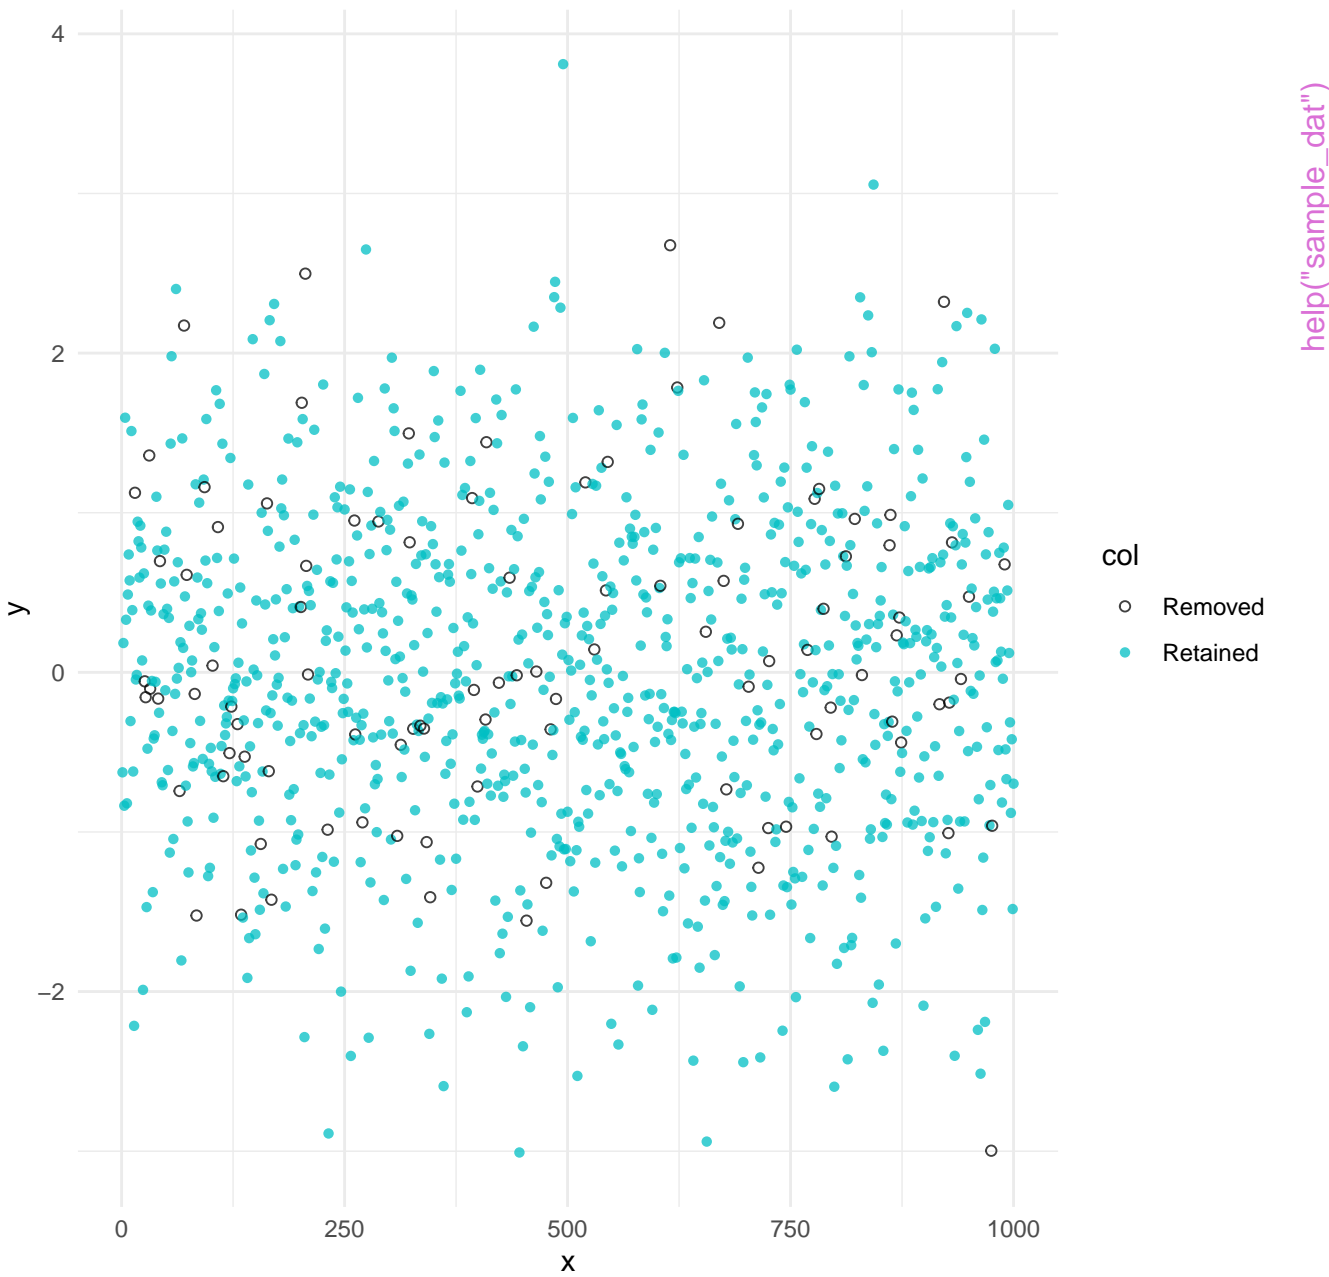

Example of simulating missing data

○ Removed ● Retained

