




rmse

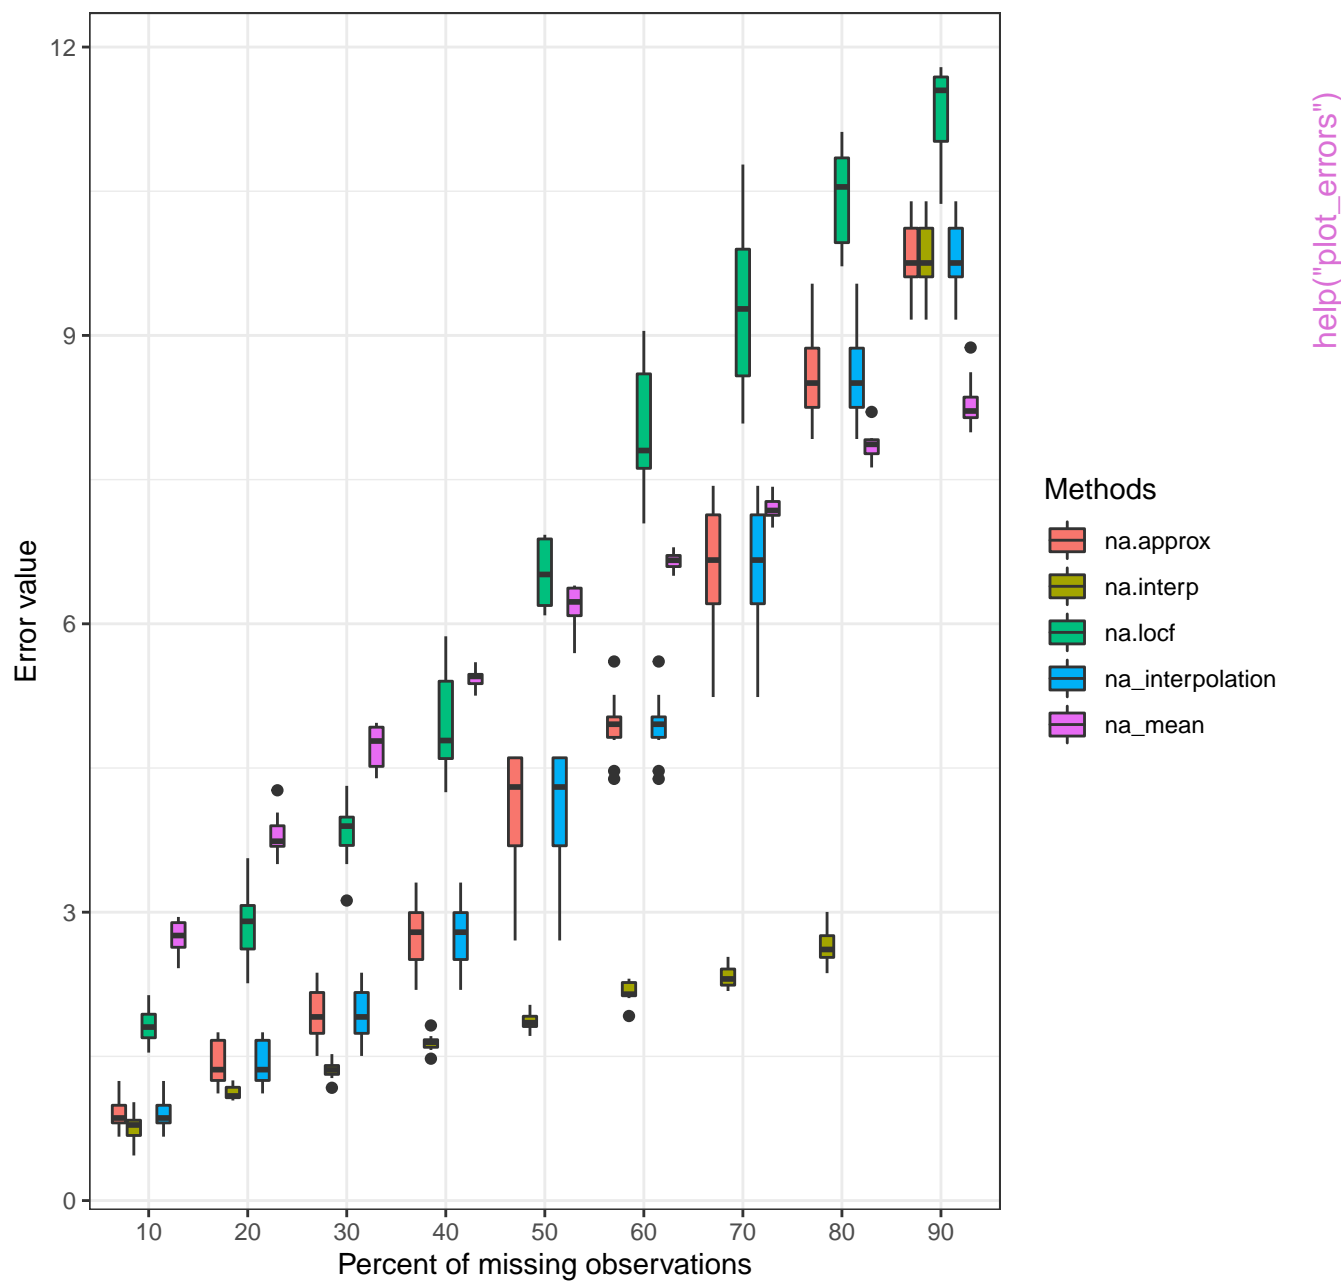


Imputed Retained

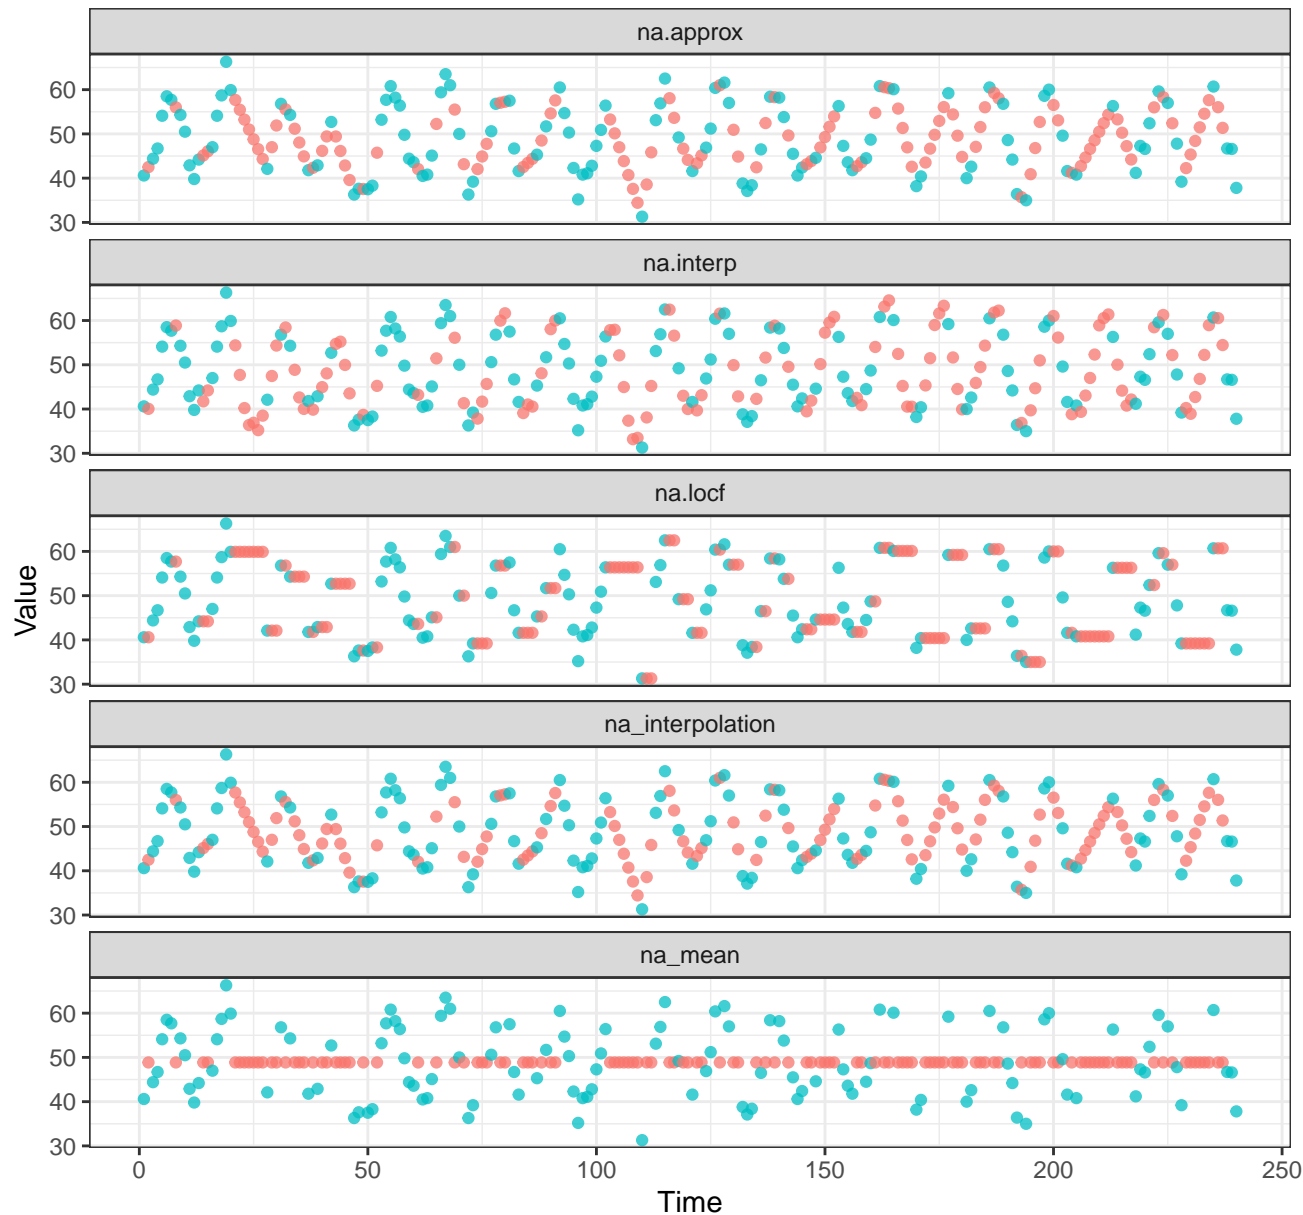


Imputed Retained

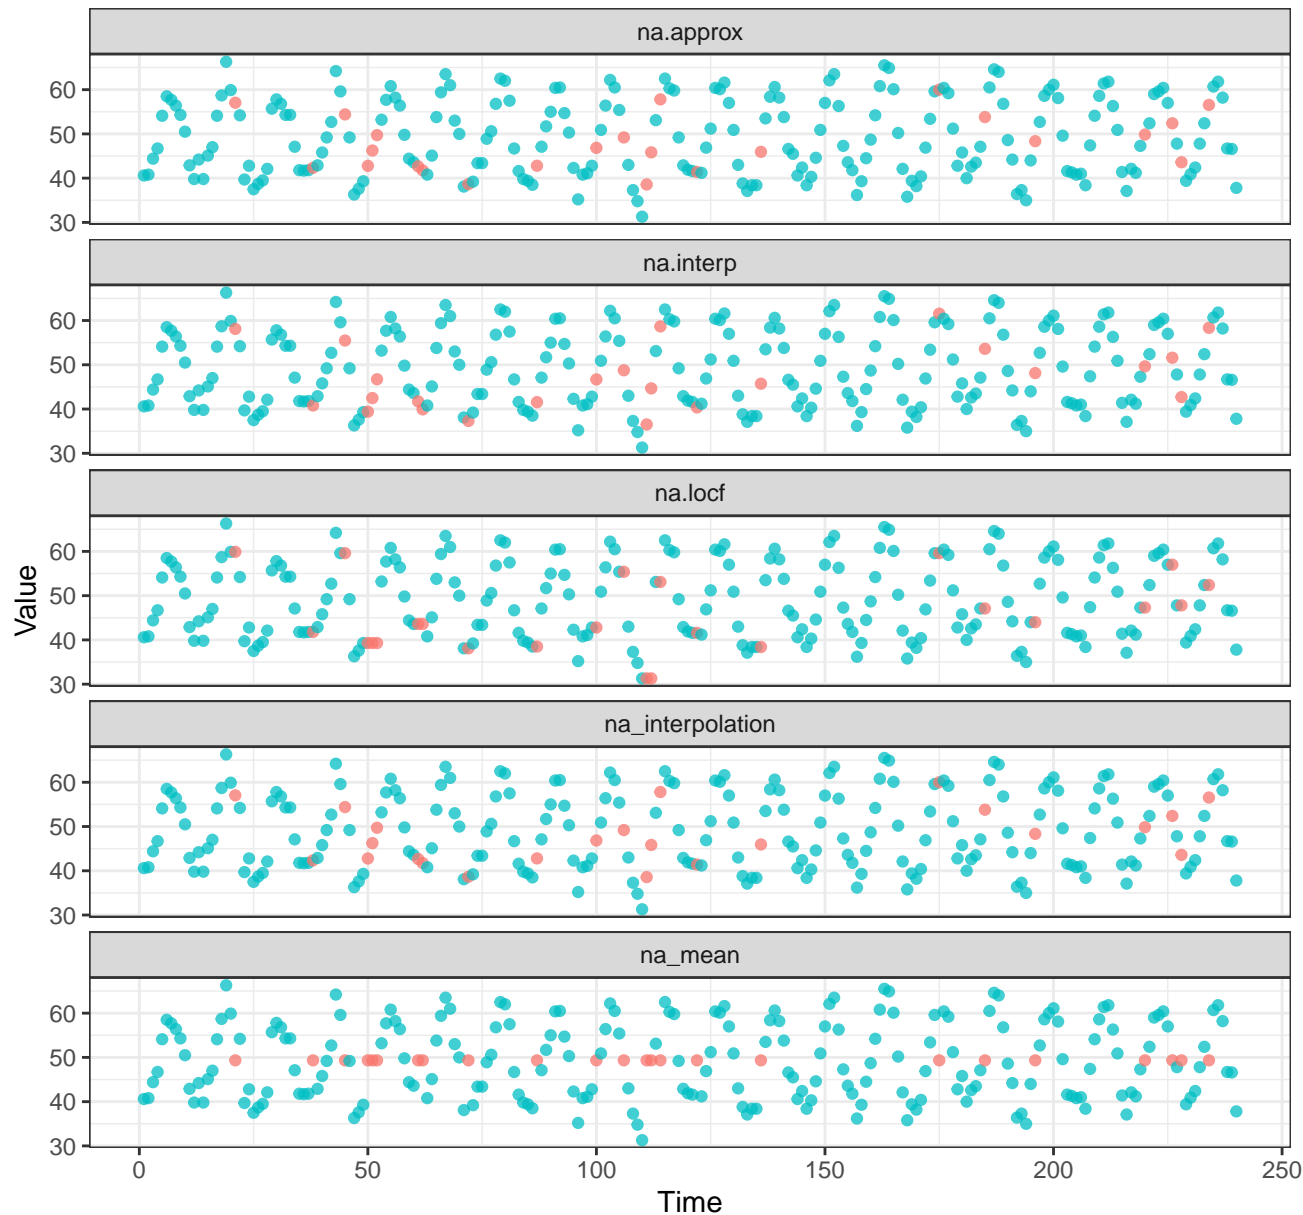

Imputed Retained Removed

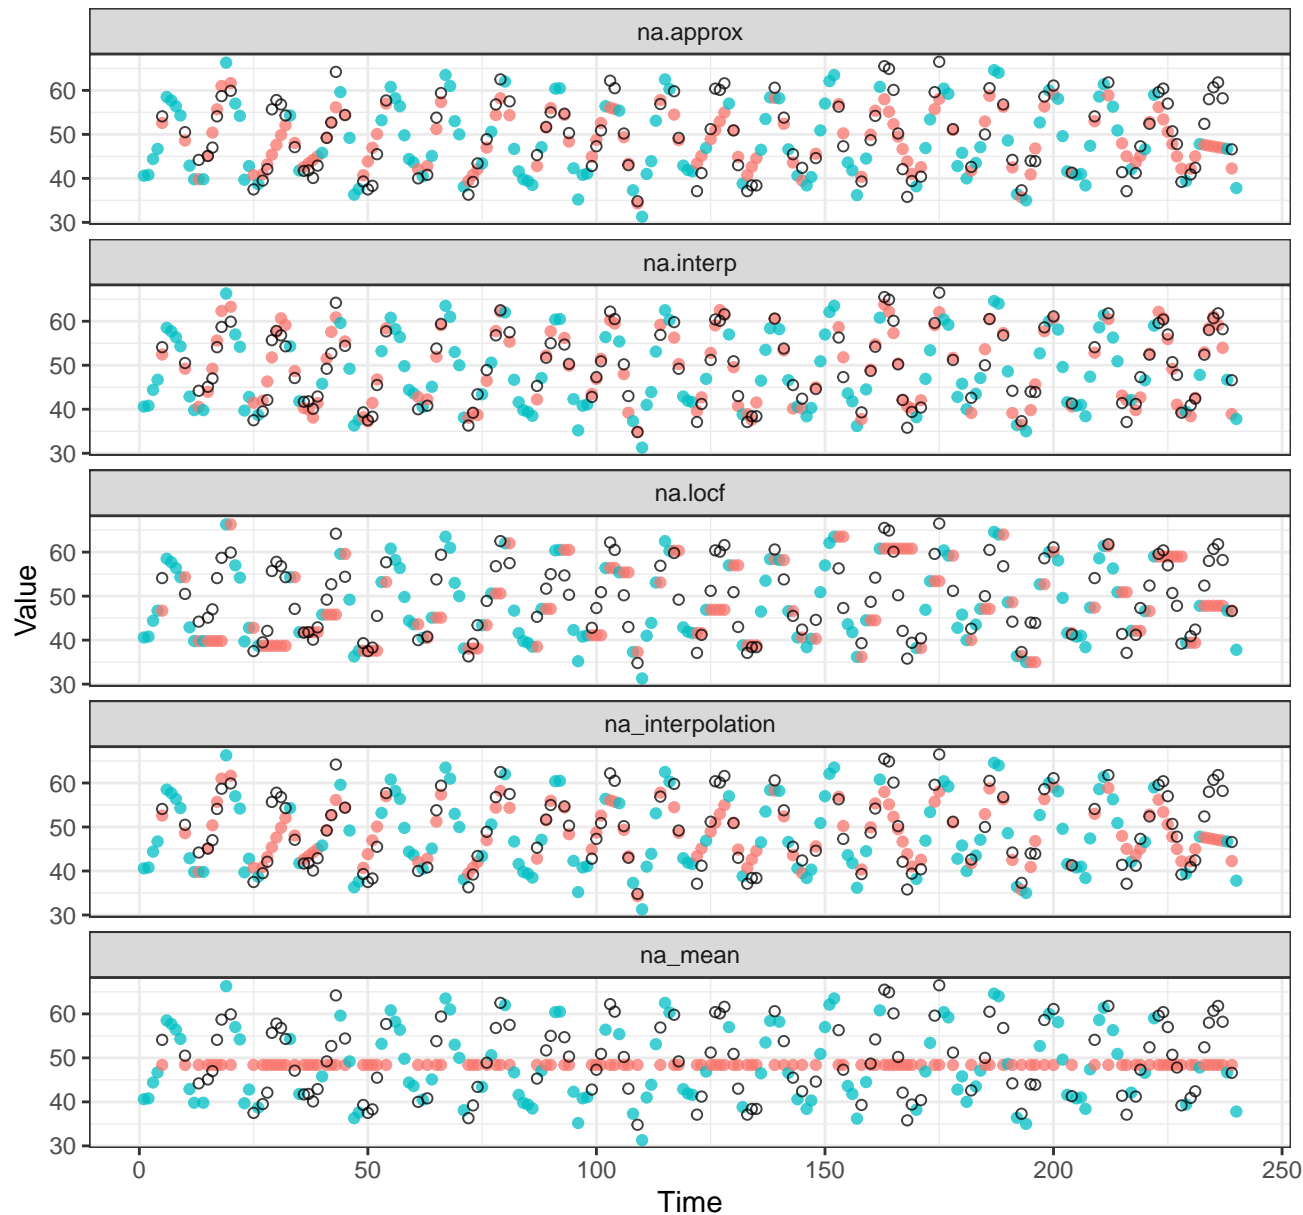


Imputed Retained

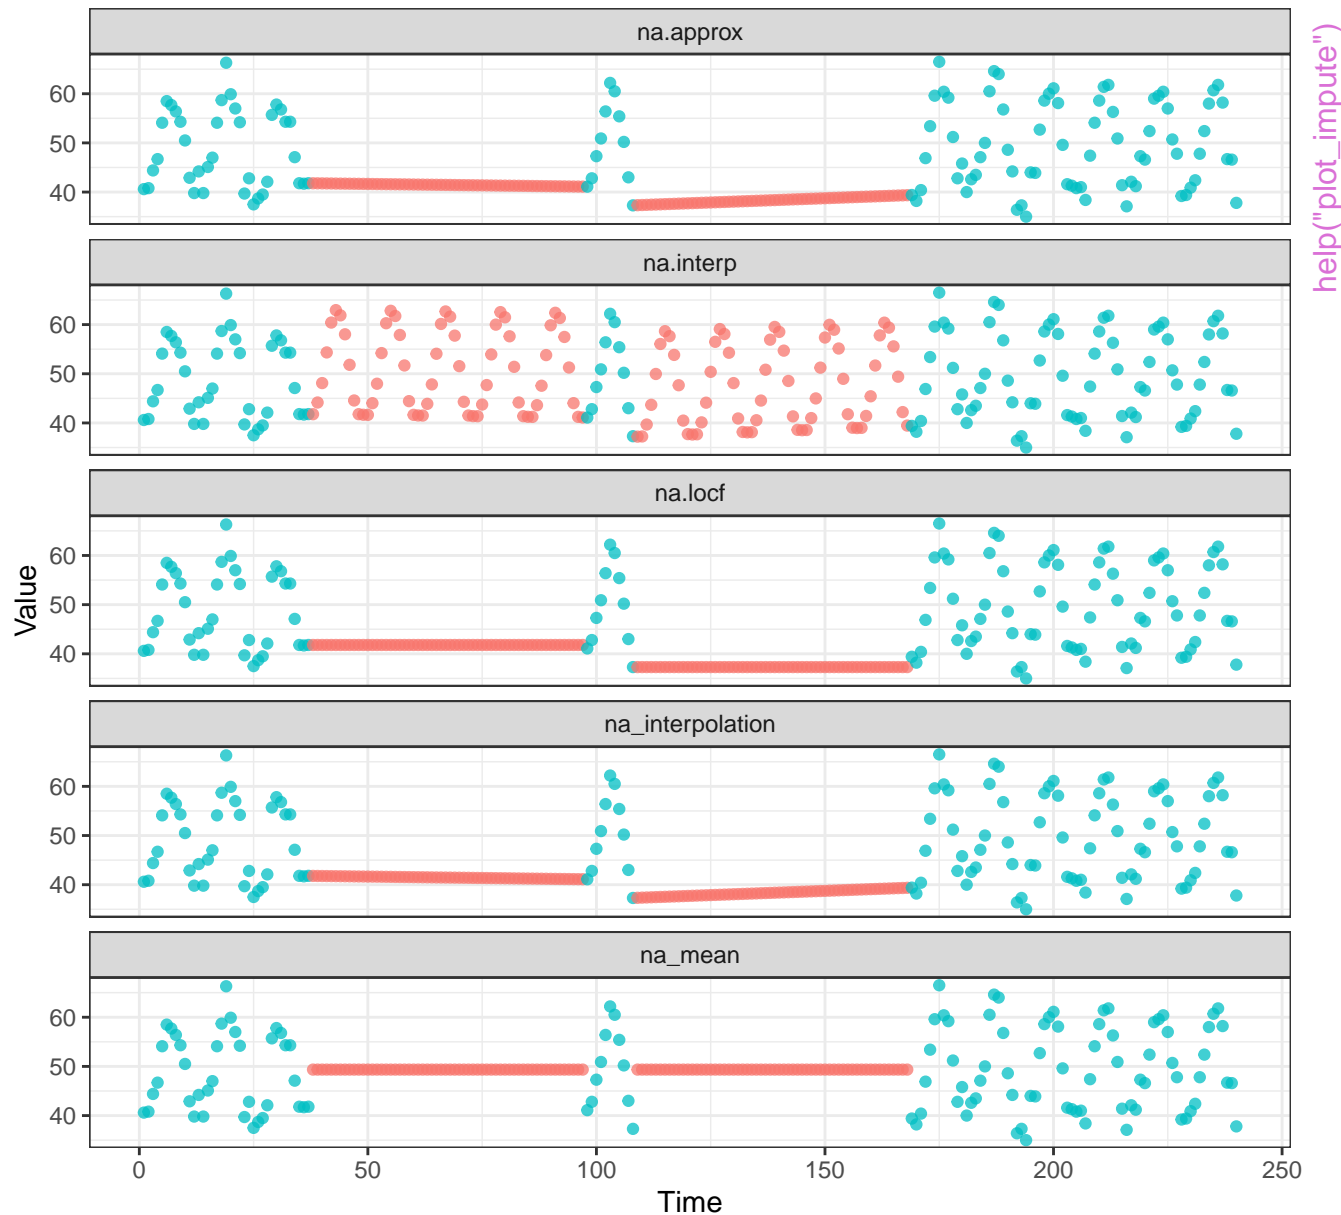

$b = 10$, `smps = "mcar"`


○ Removed ● Retained

`help("sample_dat")`

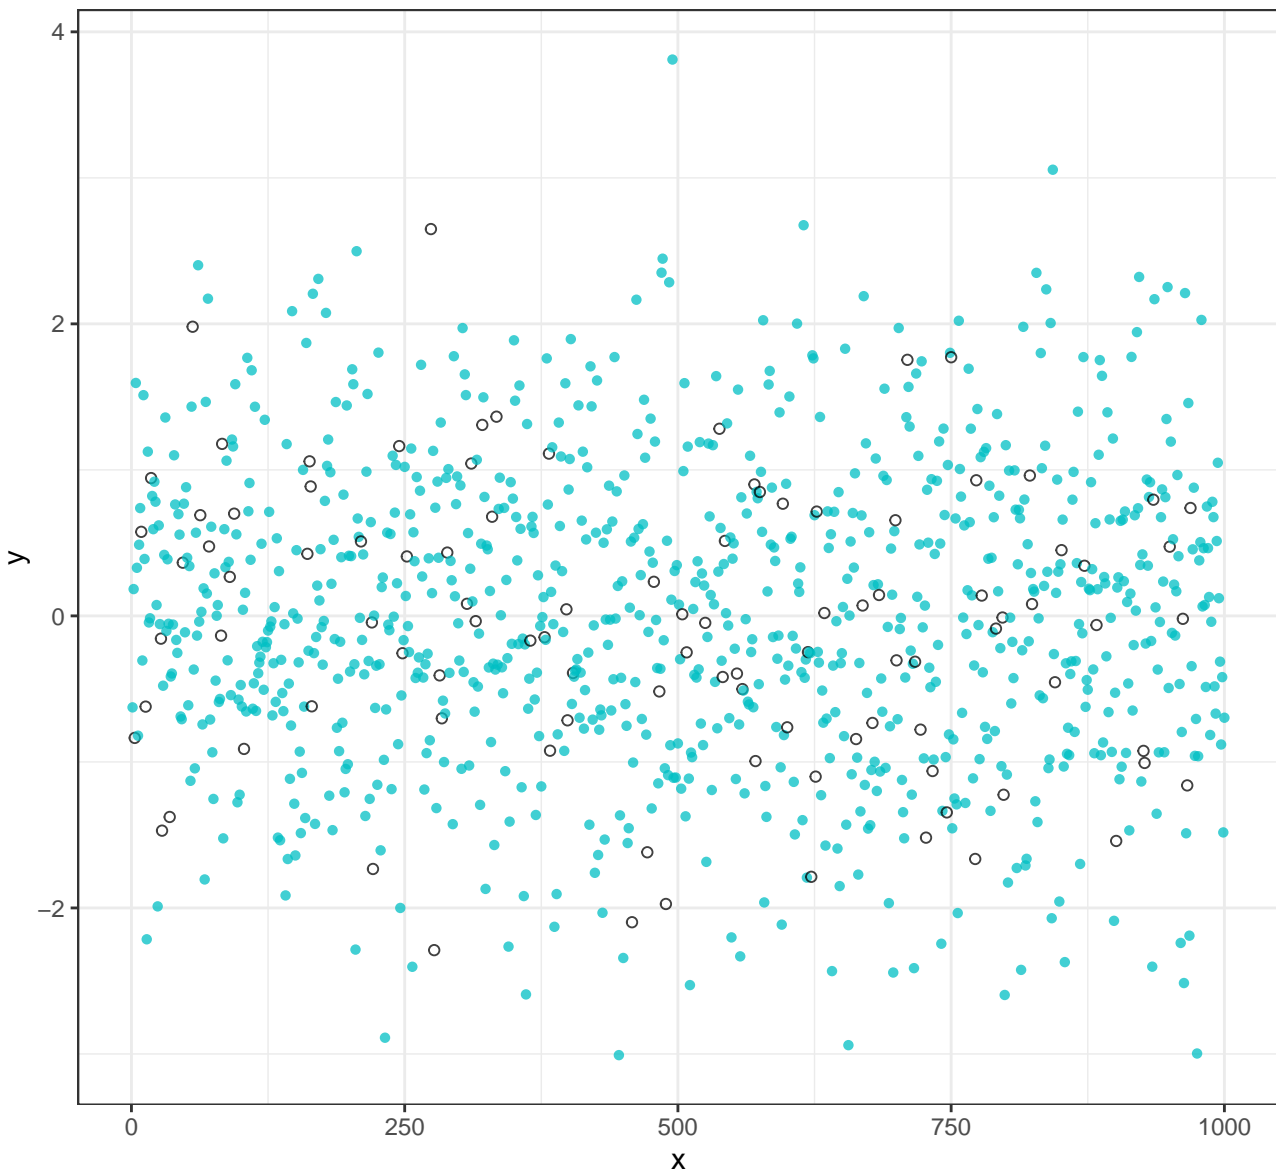

b = 10, smps = "mar", blk = 50, blkper = TRUE


○ Removed ● Retained

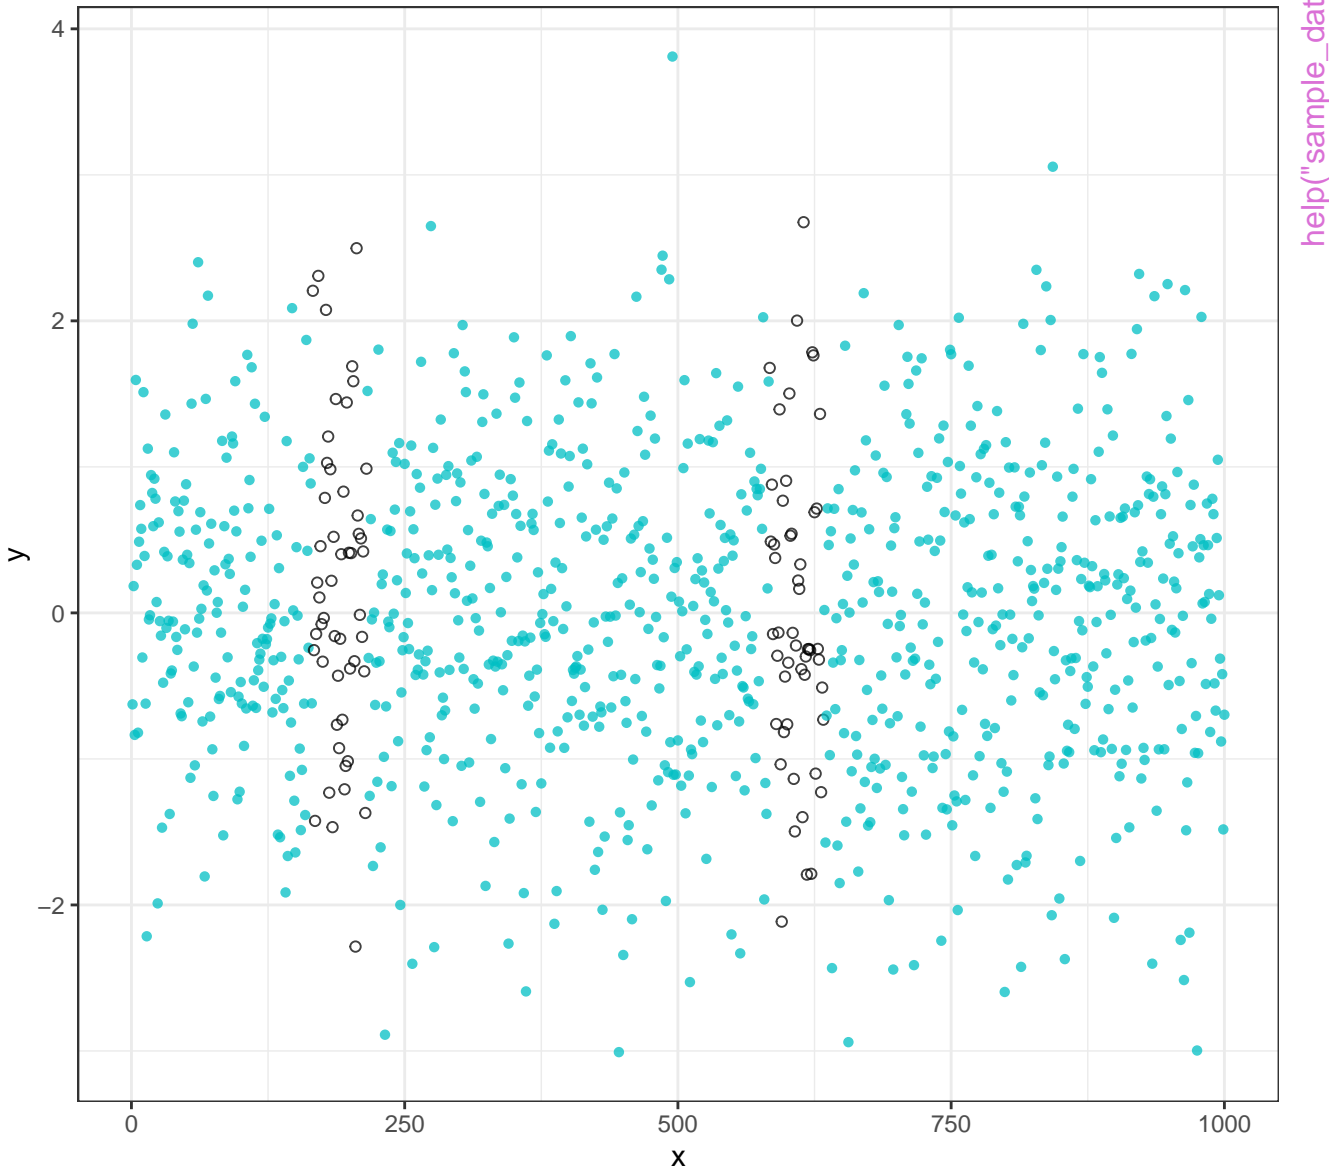


$b = 10$, `smps = "mcar"`

○ Removed ● Retained

`help("sample_dat")`

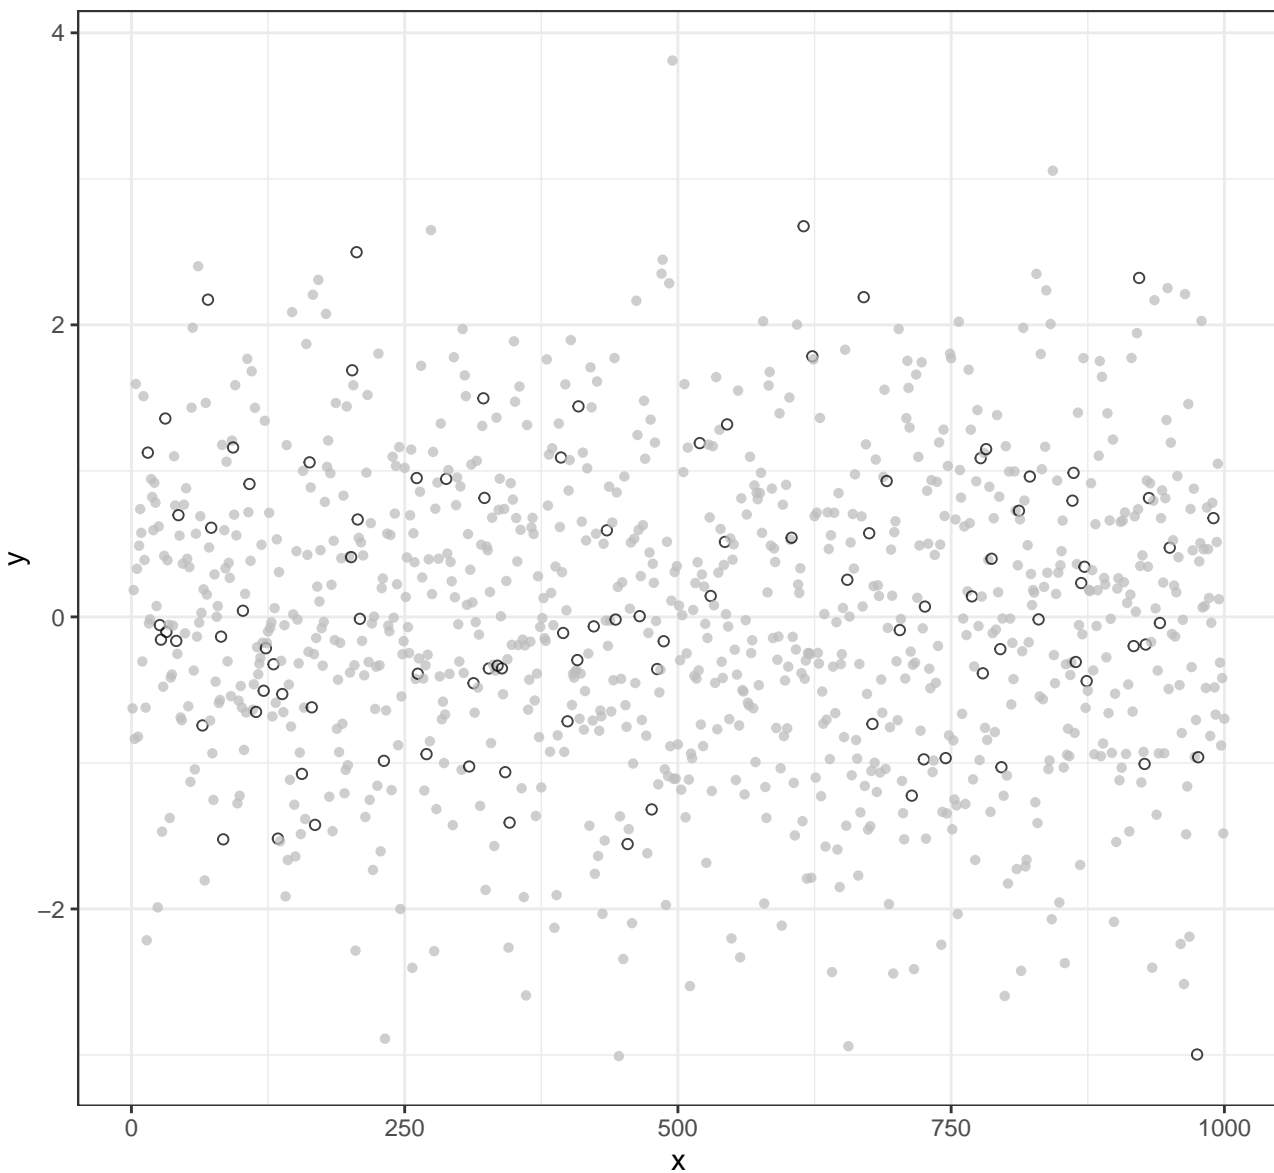

b = 10, smps = "mcar"

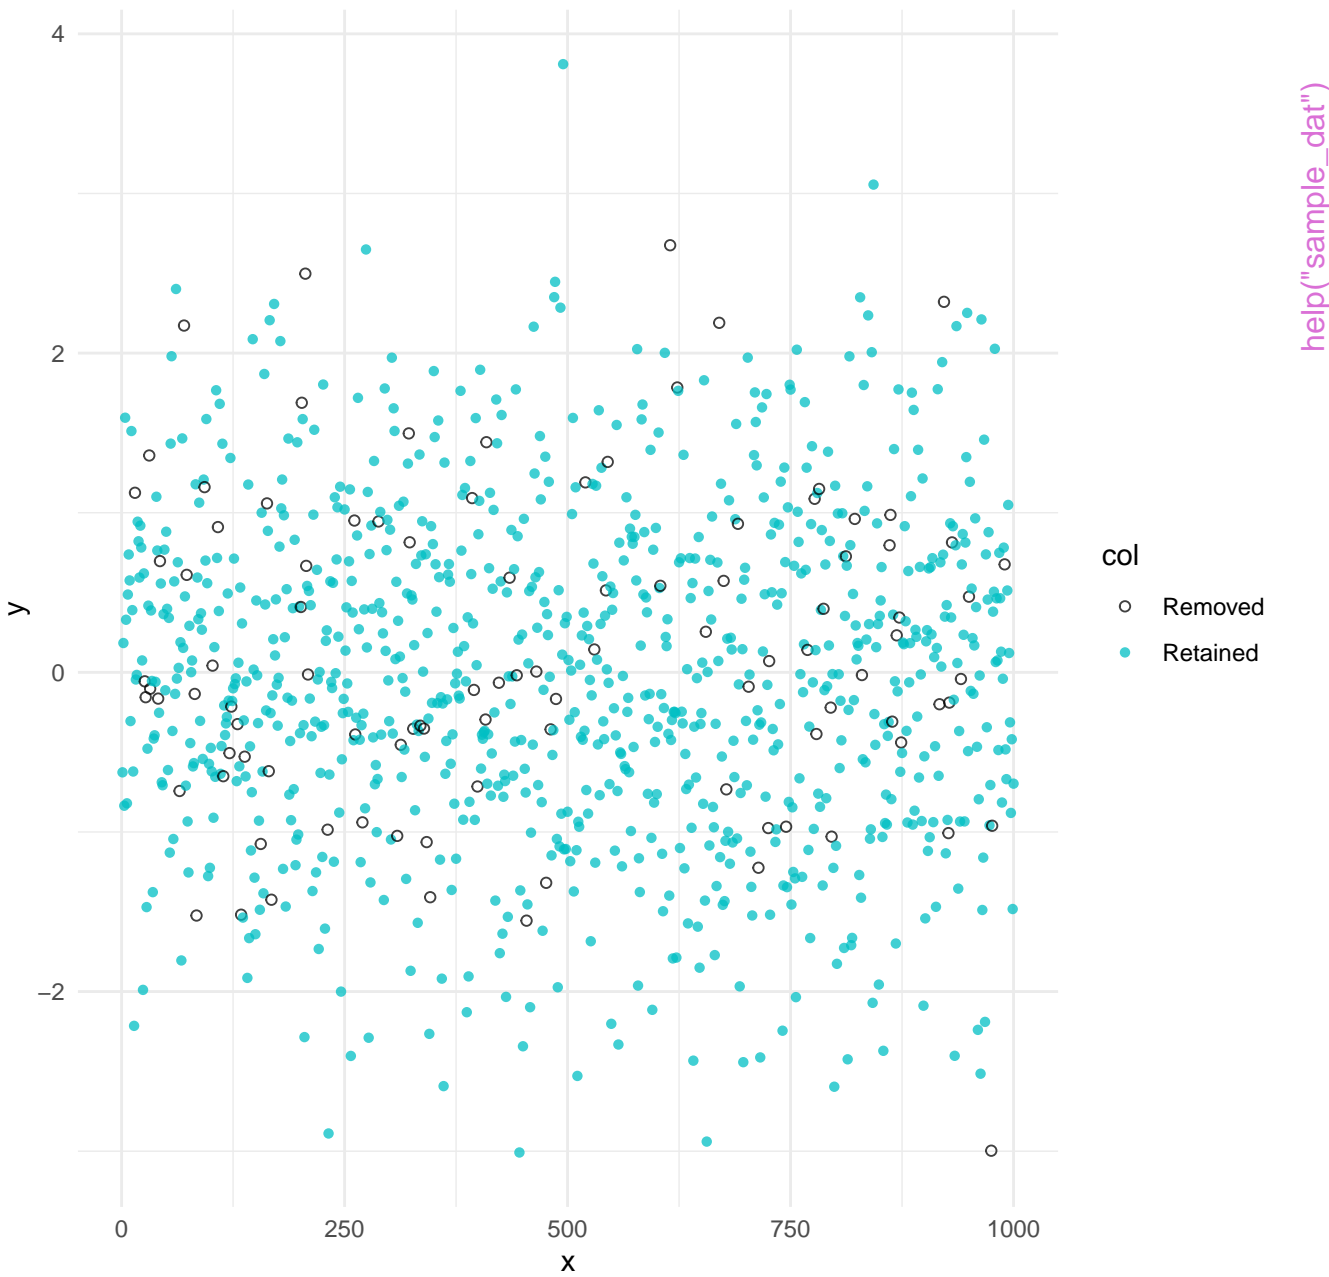

Example of simulating missing data

○ Removed ● Retained

