Battery Shipments Authorized for US Ground Transport

Packaging Authorization §173.185(c)(1)(ii)

Customer Defined Shipment Specifications


- Lithium content is ≤ 1 g/cell or ≤ 2 g/battery
- The net weight of lithium cells or batteries per package is ≤ 5 kg
- Equipment/circuit boards contains button cell batteries

Packaging Requirements

- Cells and batteries protected to prevent short circuits, movement, and accidental activation
- Inner packagings that completely enclose the cell or battery
- The strong rigid outer packaging must be constructed of a suitable material of adequate strength and design in relation to the capacity of the packaging and its intended use unless the battery is afforded equivalent protection by the equipment in which it is contained

Marking and Labeling Requirements

There are no required markings under the regulations and exceptions other than shipper and/or consignee name and address.

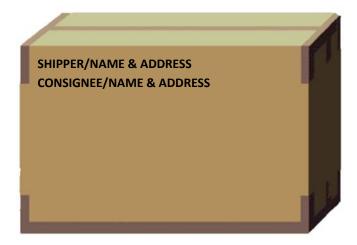



Battery Shipments Authorized for US Ground Transport

Packaging Authorization §173.185(c)(1)(ii)

Documentation Requirements

- 1. There is no specific statement required under the regulations and exceptions other than just a standard bill of lading indicating the equipment being shipped
- 2. Additional emergency response information may be required per the carrier(s)

Street			City, State, Zip Code				
City, State, Zip Code			24 hr. Emergency Contact Tel. No.				
Route						Vehicle Number	
No. of Units & Container Type	НМ	BASIC DESCRIPTION UN or NA Number, Proper Shipping Name, Hazard Class,	Packing Group	(Weight, Volume, Gallons, etc.)	WEIGHT (Subject to Correction)	RATE	CHARGES (For Carrier Use Only)
1 box		Computer Circuit Boards		8 lb.			

