




deeplearning.ai

Object Detection

Anchor boxes


Overlapping objects:

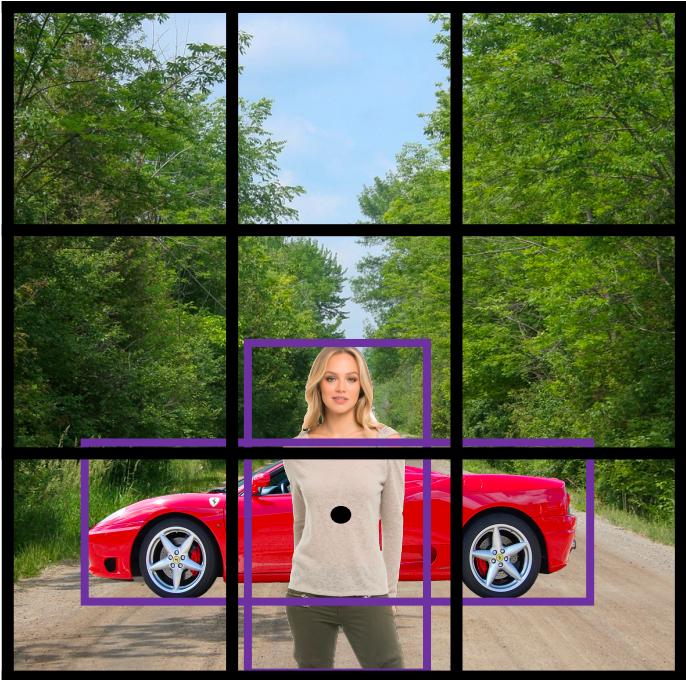



$$y = \begin{bmatrix} p_c \\ b_x \\ b_y \\ b_h \\ b_w \\ c_1 \\ c_2 \\ c_3 \end{bmatrix}$$

Annotations: A green arrow points from the first column of the grid to the p_c entry. A blue arrow points from the second column to the b_x entry. A curly brace groups the last three entries (c_1, c_2, c_3) together.

Anchor box 1:

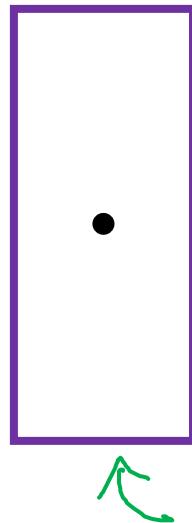

Anchor box 2:

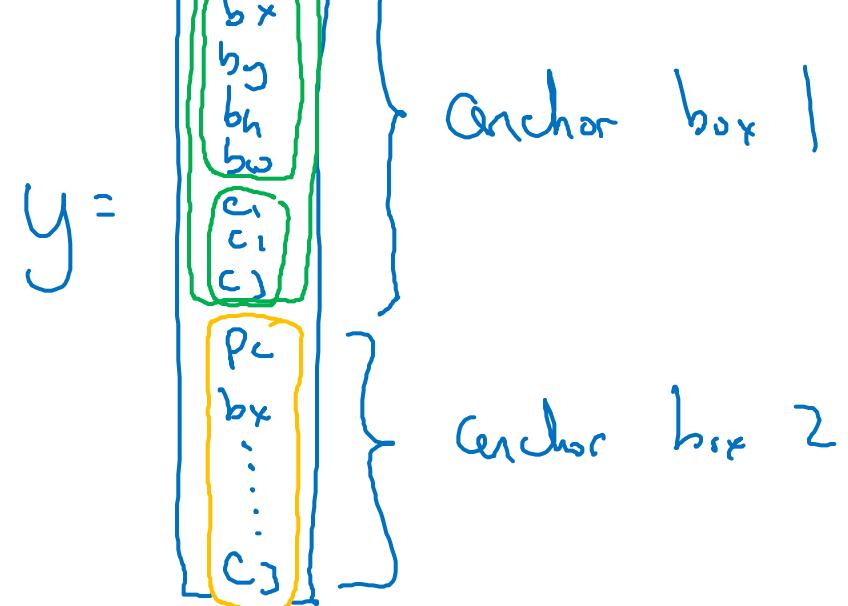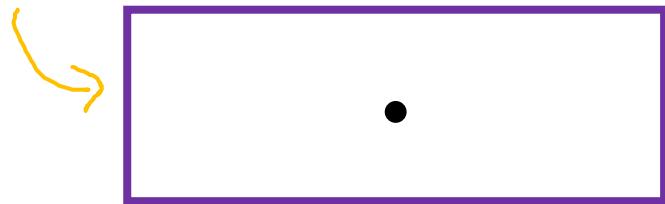


Anchor box algorithm

Previously:

Each object in training image is assigned to grid cell that contains that object's midpoint.

Output y:

$3 \times 3 \times 8$

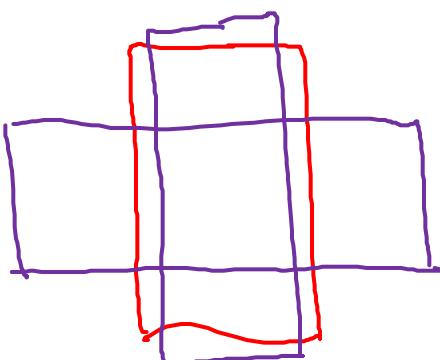

With two anchor boxes:

Each object in training image is assigned to grid cell that contains object's midpoint and anchor box for the grid cell with highest IoU.


(grid cell, anchor box)

Output y:



$3 \times 3 \times 16$

$3 \times 3 \times 2 \times 8$

Anchor box example

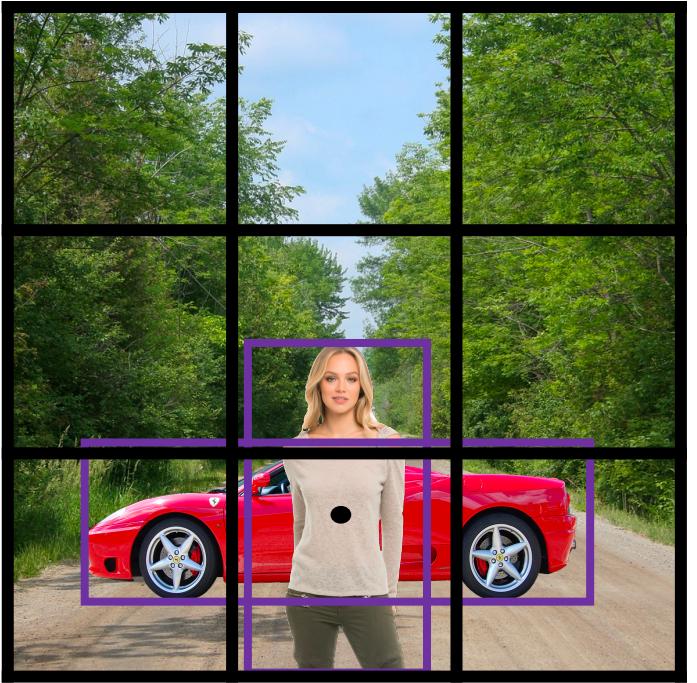

Anchor box 1: Anchor box 2:

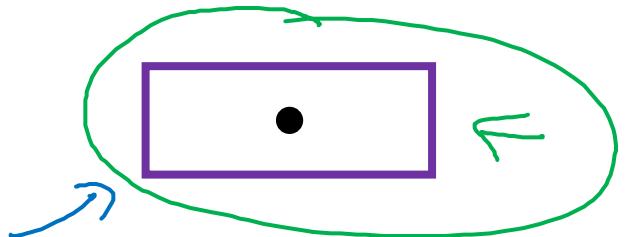

$$y =$$

$$\begin{bmatrix} p_c \\ b_x \\ b_y \\ b_h \\ b_w \\ c_1 \\ c_2 \\ c_3 \\ p_c \\ b_x \\ b_y \\ b_h \\ b_w \\ c_1 \\ c_2 \\ c_3 \end{bmatrix}$$

$$\begin{bmatrix} 1 \\ b_x \\ b_y \\ b_h \\ b_w \\ 1 \\ 0 \\ 0 \\ 1 \\ b_x \\ b_y \\ b_h \\ b_w \\ 0 \\ 1 \\ 0 \end{bmatrix}$$

Car only?

$$\begin{bmatrix} 0 \\ ? \\ ? \\ ? \\ ? \\ ? \\ ? \\ ? \\ ? \\ 1 \\ b_x \\ b_y \\ b_h \\ b_w \\ 0 \\ 1 \\ 0 \end{bmatrix}$$

Anchor box 1

Anchor box 2