



Best of Modern Java 21 – 25

My Favorites

<https://github.com/Michaeli71/Best-Of-Modern-Java-21-25-My-Favorite-Features>



Michael Inden



Head of Development, freelance author and trainer

Speaker Intro



michael_inden@hotmail.com

- **Michael Inden**, Year of Birth 1971
- Diploma Computer Science, C.v.O. Uni Oldenburg
- ~8 ¼ Years **SSE** at Heidelberger Druckmaschinen AG in Kiel
- ~6 ¾ Years **TPL, SA** at IVU Traffic Technologies AG in Aachen
- ~4 ¼ Years **LSA / Trainer** at Zühlke Engineering AG in Zurich
- ~3 Years **TL / CTO** at Direct Mail Informatics / ASMIQ in Zurich
- Independent **Consultant, Conference Speaker and Trainer**
- **Since January 2022 Head of Development at Adcubum in Zurich**
- **Author @ dpunkt.verlag and APress**

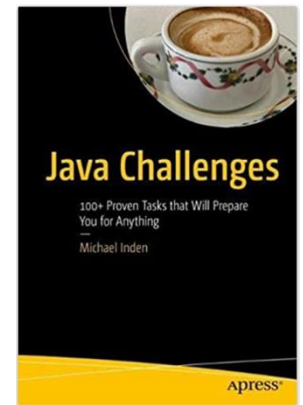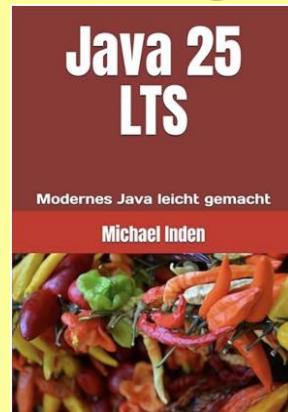

<https://github.com/Michaeli71/Best-Of-Modern-Java-21-25-My-Favorite-Features>



Agenda

All Time Favorites + My Top 10 from Java 21 LTS to Java 25 LTS (in chronological order)



All Time Favorites:

- ATF1: Switch Expressions / Text Blocks / Records (Java 17)
- ATF2: Helpful NullPointerExceptions / Pattern Matching for instanceof (Java 17)

My top 10 from Java 21 LTS to Java 25 LTS:

1. Record Patterns (Java 21)
2. Pattern Matching for switch (Java 21)
3. Virtual Threads (Java 21)
4. *Structured Concurrency (Preview) (Java 21 & 25)*
5. Unnamed Variables & Patterns (Java 22)
6. Launch Multi-File Source-Code Programs (Java 22)
7. Markdown Comments (Java 23)
8. Stream Gatherers (Java 24)
9. Flexible Constructor Bodies (Java 25)
5. Compact Source Files and Instance Main Methods (Java 25)





Build-Tools, IDEs and Sandbox



IDE & Tool Support für Java 25 LTS






- **Eclipse: Version 2025-09 (mit Plugin)**
- **IntelliJ: Version 2025.2.1**
- **Maven: 3.9.11, Compiler Plugin: 3.13.0**
- **Gradle: 9.0 (officially 9.1)**
- **Activation of preview features / Incubator necessary**
 - In dialogs
 - In build scripts



IDE & Tool Support Java 25 LTS



- Eclipse 2025-09 with Plugin
- Activation of preview features / Incubator necessary

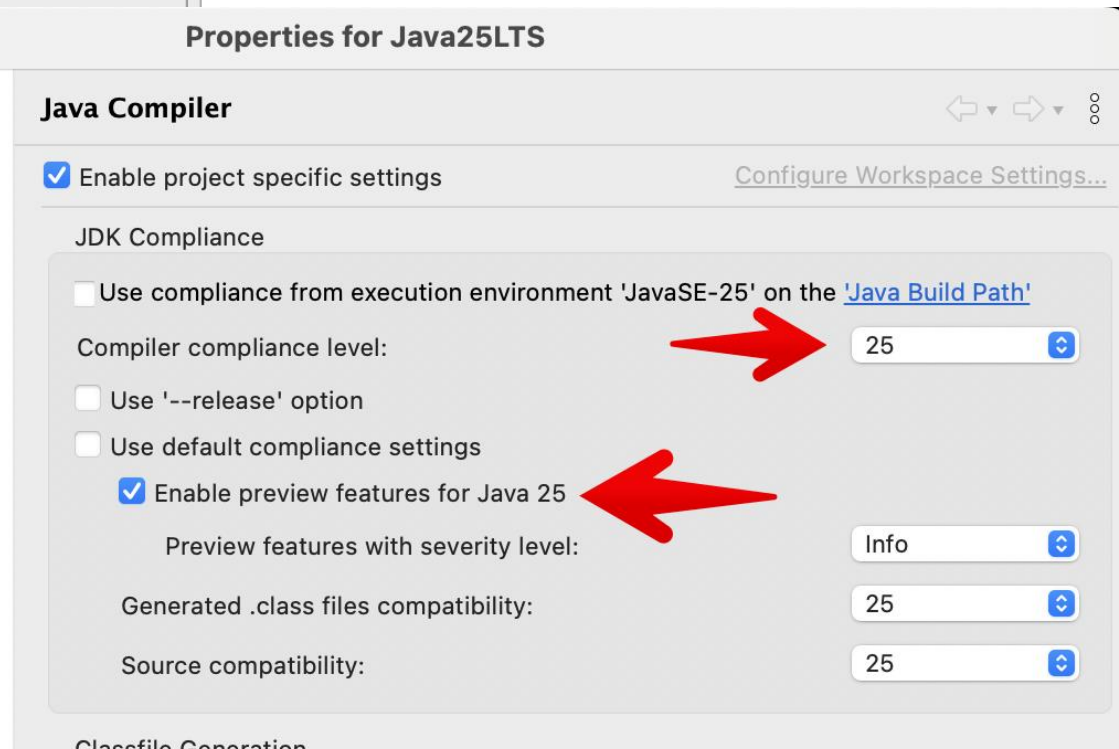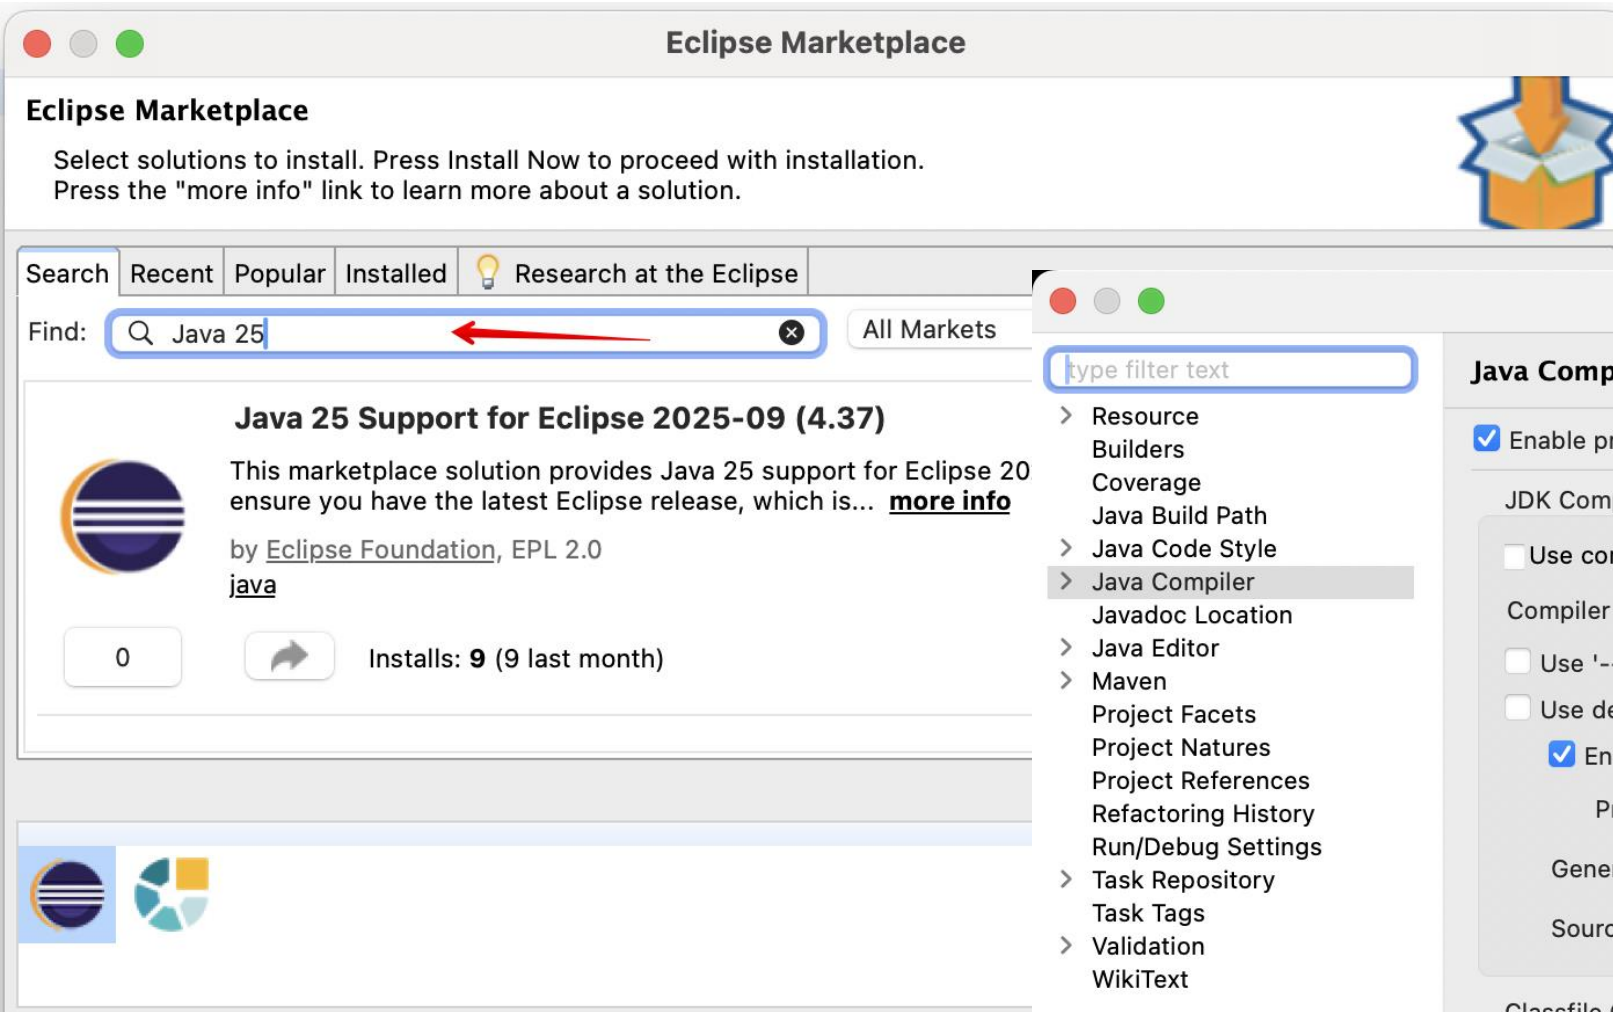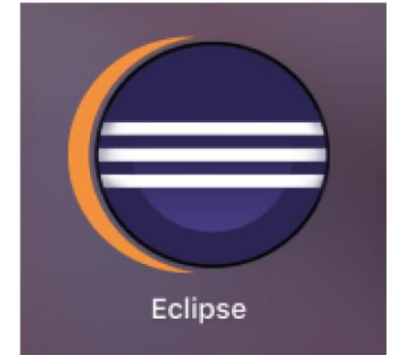

IDE & Tool Support Java 25 LTS



- IntelliJ 2025.2.1
- Activation of preview features / Incubators necessary



Project Structure

Project
Default settings for all modules. Configure these parameters for each module on the module page as needed.

Name:

SDK:

Language level:

Compiler output:

Used for module subdirectories, Production and Test directories for the corresponding sources.



- Activation of preview features / Incubators necessary

```
java {  
    toolchain {  
        languageVersion = JavaLanguageVersion.of(25)  
    }  
}  
  
tasks.withType(JavaCompile).configureEach {  
    options.compilerArgs += ["--enable-preview"]  
}  
  
tasks.withType(JavaCompile).configureEach {  
    options.compilerArgs += ["--enable-preview",  
        "--add-modules", "jdk.incubator.vector"]  
}
```





- Activation of preview features / Incubators necessary

```
<plugins>
  <plugin>
    <groupId>org.apache.maven.plugins</groupId>
    <artifactId>maven-compiler-plugin</artifactId>
    <version>3.13.0</version>
    <configuration>
      <source>25</source>
      <target>25</target>
      <!-- Important for Preview Features -->
      <compilerArgs>--enable-preview</compilerArgs>
    </configuration>
  </plugin>
</plugins>
```

Maven™

3.9.11

```
<plugin>
  <artifactId>maven-compiler-plugin</artifactId>
  <version>3.13.0</version>
  <configuration>
    <release>25</release>
    <compilerArgs>
      <arg>--enable-preview</arg>
      <arg>--add-modules</arg>
      <arg>jdk.incubator.vector</arg>
    </compilerArgs>
  </configuration>
</plugin>
```

The Java Version Almanac

Systematic collection of information about the history and the future of Java.



Details	Status	Documentation	Download	Compare API to
Java 26	DEV	API Notes	JDK JRE	25 24 23 22 21 20 19 18 17 16 ...
Java 25	LTS	API Lang VM Notes	JDK JRE	24 23 22 21 20 19 18 17 16 15 ...
Java 24	EOL	API Lang VM Notes	JDK JRE	23 22 21 20 19 18 17 16 15 14 ...
Java 23	EOL	API Lang VM Notes	JDK JRE	22 21 20 19 18 17 16 15 14 13 ...
Java 22	EOL	API Lang VM Notes	JDK JRE	21 20 19 18 17 16 15 14 13 12 ...
Java 21	LTS	API Lang VM Notes	JDK JRE	20 19 18 17 16 15 14 13 12 11 ...
Java 20	EOL	API Lang VM Notes	JDK JRE	19 18 17 16 15 14 13 12 11 10 ...
Java 19	EOL	API Lang VM Notes	JDK JRE	18 17 16 15 14 13 12 11 10 9 ...
Java 18	EOL	API Lang VM Notes	JDK JRE	17 16 15 14 13 12 11 10 9 8 ...
Java 17	LTS	API Lang VM Notes	JDK JRE	16 15 14 13 12 11 10 9 8 7 ...
Java 16	EOL	API Lang VM Notes	JDK JRE	15 14 13 12 11 10 9 8 7 6 ...
Java 15	EOL	API Lang VM Notes	JDK JRE	14 13 12 11 10 9 8 7 6 5 ...
Java 14	EOL	API Lang VM Notes	JDK JRE	13 12 11 10 9 8 7 6 5 1.4 ...
Java 13	EOL	API Lang VM Notes	JDK JRE	12 11 10 9 8 7 6 5 1.4 1.3 ...
Java 12	EOL	API Lang VM Notes	JDK JRE	11 10 9 8 7 6 5 1.4 1.3 1.2 ...
Java 11	LTS	API Lang VM Notes	JDK JRE	10 9 8 7 6 5 1.4 1.3 1.2 1.1 ...
Java 10	EOL	API Lang VM Notes	JDK JRE	9 8 7 6 5 1.4 1.3 1.2 1.1 1.0
Java 9	EOL	API Lang VM Notes	JDK JRE	8 7 6 5 1.4 1.3 1.2 1.1 1.0
Java 8	LTS	API Lang VM Notes	JDK JRE	7 6 5 1.4 1.3 1.2 1.1 1.0
Java 7	EOL	API Lang VM Notes	JDK JRE	6 5 1.4 1.3 1.2 1.1 1.0
Java 6	EOL	API Lang VM Notes	JDK JRE	5 1.4 1.3 1.2 1.1 1.0
Java 5	EOL	API Lang VM Notes		1.4 1.3 1.2 1.1 1.0
Java 1.4	EOL	API		1.3 1.2 1.1 1.0
Java 1.3	EOL	API		1.2 1.1 1.0
Java 1.2	EOL	API Lang		1.1 1.0
Java 1.1	EOL	API		1.0
Java 1.0	EOL	API Lang VM		
Pre 1.0	EOL			
Data Source				



Sandbox

Instantly compile and run Java 25 snippets without a local Java installation.

Java25.java ▶ Run 25+36-3489

```
1 import module java.base;
2
3 void main() {
4     var v = ClassFileFormatVersion.latest();
5     IO.println("Hello Java bytecode version %s!".formatted(v.major()));
6 }
```

No Support
for Preview
Features!

Sandbox

Instantly compile and run Java 25 snippets without a local Java installation.

Java25.java ▶ Run 25+36-3489

```
Hello Java bytecode version 69!
```



All Time Favorites





ATF 1:

Switch Expressions / Text Blocks / Records



Switch Expressions



- Mapping of weekdays to their length ... elegantly with modern Java:

Return-
Value

```
DayOfWeek day = DayOfWeek.FRIDAY;  
int numOfLetters = switch (day)  
{  
    case MONDAY, FRIDAY, SUNDAY -> 6;  
    case TUESDAY                 -> 7;  
    case THURSDAY, SATURDAY     -> 8;  
    case WEDNESDAY              -> 9;  
};
```

- More elegance using case:
 - Besides the obvious arrow instead of the colon also several values allowed
 - No break necessary, no case-through either
 - switch can now return a value, avoids artificial auxiliary variables

Switch Expressions



- Mapping months to their names... elegantly with modern Java:

```
static String monthToName(final Month month)
{
    return switch (month)
    {
        case JANUARY -> "January";
        default -> "N/A"; // here is NO Fall Through
        case FEBRUARY -> "February";
        case MARCH -> "March";
        case JULY -> "JULY";
    };
}
```

Switch Expressions: **yield** with return value



```
public static void main(final String[] args)
{
    DayOfWeek day = DayOfWeek.SUNDAY;

    int numOfLetters = switch (day)
    {
        case MONDAY, FRIDAY, SUNDAY -> {
            if (day == DayOfWeek.SUNDAY)
                System.out.println("SUNDAY is FUN DAY");
            yield 6;
        }
        case TUESDAY -> 7;
        case THURSDAY, SATURDAY -> 8;
        case WEDNESDAY -> 9;
    };
    System.out.println(numOfLetters);
}
```

SUNDAY is FUN DAY



Text Blocks



Text Blocks



```
String jsonObj = ""  
    {  
        "name": "Mike",  
        "birthday": "1971-02-07",  
        "comment": "Text blocks are nice!"  
    }  
    "";  
;
```

Text Blocks



```
public String exportAsHtml()
{
    String result = ""
        <html>
        <head>
            <style>
                td {
                    font-size: 18pt;
                }
            </style>
        </head>
        <body>
            """;

    result += createTable();
    result += createWordList();
    result += ""
        </body>
        </html>
        """;

    return result;
}
```

D	F	I	L	Z	N	C	O	M	P	U	T	E	R	K	B	H	L	M	G
V	N	T	Ö	N	B	V	R	M	M	L	M	S	J	Z	O	Ä	U	Q	R
G	L	C	W	C	A	L	A	R	G	L	Q	I	D	T	R	Z	R	N	Y
C	J	L	E	M	E	C	V	A	W	E	U	A	T	H	B	S	L	D	Z
F	L	E	R	I	J	J	U	R	I	A	H	T	E	L	E	F	A	N	T
B	A	M	Z	R	P	K	V	V	Q	H	P	J	Y	U	X	M	M	O	F
Y	T	E	L	Q	B	U	B	Y	C	C	X	Q	C	J	C	C	E	J	F
J	Y	N	Z	R	N	X	S	P	I	I	U	G	I	R	A	F	F	E	V
C	Q	S	O	N	D	N	N	V	M	M	K	C	E	K	W	Z	J	Y	Y
W	O	Q	O	V	A	H	A	N	D	Y	O	Z	D	G	H	A	Z	V	A

- LÖWE
- COMPUTER
- BÄR
- GIRAFFE
- HANDY
- CLEMENS
- ELEFANT
- MICHAEL
- TIM



Records



Enhancement Record

```
record MyPoint(int x, int y) { }
```



What you get

```
Michaels-iMac:java14 michaeli$ javap MyPoint
Compiled from "MyPoint.java"
final class java14.MyPoint extends java.lang.Record {
    public java14.MyPoint(int, int);
    public int x();
    public int y();
    public java.lang.String toString();
    public int hashCode();
    public boolean equals(java.lang.Object);
}
```

```
public final class MyPoint
{
    private final int x;
    private final int y;

    public MyPoint(int x, int y)
    {
        this.x = x;
        this.y = y;
    }

    @Override
    public boolean equals(Object o)
    {
        if (this == o)
            return true;
        if (o == null || getClass() != o.getClass())
            return false;

        MyPoint point = (MyPoint) o;
        return x == point.x && y == point.y;
    }

    @Override
    public int hashCode()
    {
        return Objects.hash(x, y);
    }

    @Override public String toString()
    {
        return "MyPoint[x=" + x + ", y=" + y + "]";
    }

    // Zugriffsmethoden auf x und y
}
```

Records for Complex Return Types or Parameters



```
record IntStringReturnValue(int code, String info) { }  
record IntListReturnValue(int code, List<String> values) { }
```

```
record ReturnTuple(String first, String last, int amount) { }  
record CompoundKey(String name, int age) { }
```

```
IntStringReturnValue calculateTheAnswer()  
{  
    // Some complex stuff here  
    return new IntStringReturnValue(42, "the answer");  
}
```

```
IntListReturnValue calculate(CompoundKey inputKey)  
{  
    // Some complex stuff here  
    return new IntListReturnValue(201,  
        List.of("This", "is", "a", "complex", "result"));  
}
```

Records for modelling Pairs and Tuples



```
record IntIntPair(int first, int second) {};
```

```
record StringIntPair(String name, int age) {};
```

```
record Pair<T1, T2>(T1 first, T2 second) {};
```

```
record Top3Favorites(String top1, String top2, String top3) {};
```

```
record CalcResultTuple(int min, int max, double avg, int count) {};
```

- **Extremely little effort**
 - Very practical for Pairs, Tuples etc.
 - Records work great with primitive types
 - **Implementations of accessor methods as well as equals() and hashCode() automatically and adhering to contracts**
-



ATF 2:

Helpful NullPointerExceptions / Pattern Matching for instanceof




Helpful NullPointerExceptions



```
public static void main(final String[] args)
{
    SomeType a = null;
    a.value = "ERROR";
}
```

Exception in thread "main" [java.lang.NullPointerException](#)
at java14.NPE_Example.main([NPE_Example.java:8](#))

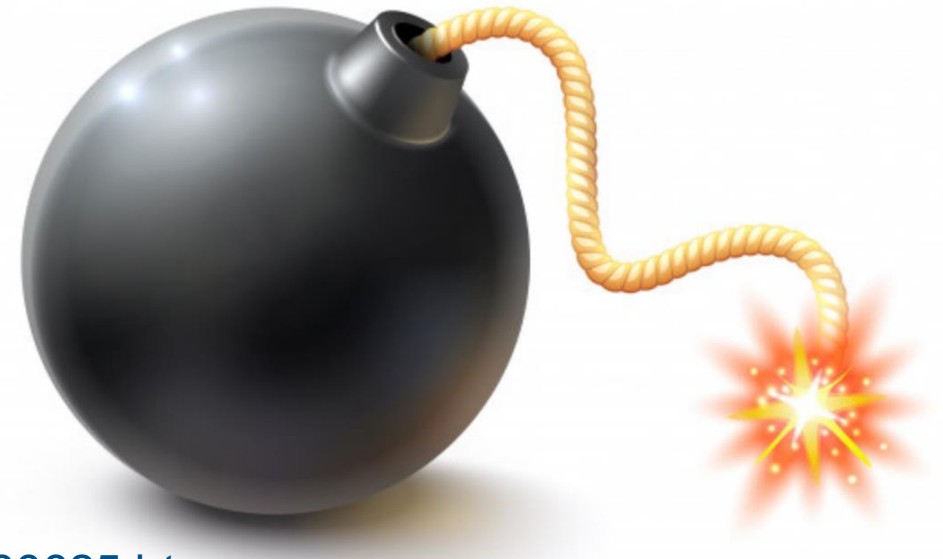

Helpful NullPointerExceptions



```
public static void main(final String[] args)
{
    SomeType a = null;
    a.value = "ERROR";
}
```

Exception in thread "main" [java.lang.NullPointerException](#)
at java14.NPE_Example.main([NPE_Example.java:8](#))

-XX:+ShowCodeDetailsInExceptionMessages

Exception in thread "main" [java.lang.NullPointerException](#): Cannot assign field "value" because "a" is null
at java14.NPE_Example.main([NPE_Example.java:8](#))

Helpful NullPointerExceptions



```
public static void main(final String[] args)
{
    int width = getWindowManager().getWindow(5).size().width();
    System.out.println("Width: " + width);
}
```

Exception in thread "main" [java.lang.NullPointerException](#): Cannot invoke
"jvm.NPE_Third_Example\$Window.size()" because the return value of
"jvm.NPE_Third_Example\$WindowManager.getWindow(int)" is null
at jvm.NPE_Third_Example.main([NPE_Third_Example.java:7](#))



Pattern Matching instance of



Pattern Matching instanceof



- **OLD STYLE**

```
final Object obj = new Person("Michael", "Inden");
if (obj instanceof Person)
{
    final Person person = (Person) obj;
    // ... Access to person...
}
```

- **NEW STYLE**

```
if (obj instanceof Person person)
{
    // here is is possible to access variable person directly
}
```

Pattern Matching instanceof



```
if (obj2 instanceof String str2 && str2.length() > 5)
{
    System.out.println("Length: " + str2.length());
}
```



My Top 10





Position 1: Record Patterns



JEP 440: Record Patterns



- The basis for this JEP is the pattern matching for instanceof from Java 16:

```
record Point(int x, int y) {}
```

```
static void printCoordinateInfo(Object obj)
```

```
{
```

```
    if (obj instanceof Point point)
```

```
    {
```

```
        int x = point.x();
```

```
        int y = point.y();
```

```
        System.out.println("x: %d, y: %d, sum: %d".formatted(x, y, x + y));
```

```
    }
```

```
}
```

- Although this is often already practical, you still have to access the individual components in some cases in a cumbersome way.
- The goal is to be able to decompose records into their components and access them.

JEP 440: Pattern Matching for switch



- Decompose records into their components and make them accessible

```
static void printCoordinateInfo(Object obj)
{
    if (obj instanceof Point point)
    {
        int x = point.x();
        int y = point.y();
        System.out.println("x: %d y: %d, sum: %d".formatted(x, y, x + y));
    }
}
```

- =>

```
static void printCoordinateInfoNew(Object obj)
{
    if (obj instanceof Point(int x, int y))
    {
        System.out.println("x: %d y: %d, sum: %d".formatted(x, y, x + y));
    }
}
```

JEP 440: Pattern Matching for switch



- Record patterns can be **nested**
- provide a declarative, powerful, and combinable form of **data navigation** and processing.

```
record Point(int x, int y) {}
```

```
enum Color { RED, GREEN, BLUE }
```

```
record ColoredPoint(Point point, Color color) {}
```

```
record Rectangle(ColoredPoint upperLeft, ColoredPoint lowerRight) {}
```

```
static void printColorOfUpperLeftPoint(Rectangle rect)
```

```
{
```

```
    if (rect instanceof Rectangle(ColoredPoint(Point point, Color color),  
                                   ColoredPoint lowerRight))
```

```
    {
```

```
        System.out.println(color);
```

```
    }
```

```
}
```



**Where can Record Patterns
show their strength?**



JEP 440: Record Patterns



- **Let's assume the following records as a data model:**

```
record Person(String firstname, String lastname, LocalDate birthday) {  
}
```

```
record Phone(String areaCode, String number) {  
}
```

```
record City(String name, String country, String languageCode) {  
}
```

```
record FlightReservation(Person person,  
    Phone phoneNumber,  
    City origin,  
    City destination) {  
}
```


JEP 440: Record Patterns



- Legacy code contains deeply nested queries like this:

```
boolean checkAgeAndDestinationLanguageCorrectOld(Object obj)
{
    if (obj instanceof FlightReservation reservation)
    {
        if (reservation.person() != null)
        {
            Person person = reservation.person();
            LocalDate birthday = person.birthday();

            if (reservation.destination() != null) {
                City destination = reservation.destination();
                String languageCode = destination.languageCode();

                if (birthday != null && languageCode != null) {
                    long years = ChronoUnit.YEARS.between(birthday, LocalDate.now());
                    return years >= 18 && List.of("EN", "DE", "FR").contains(languageCode);
                }
            }
        }
    }
    return false;
}
```

JEP 440: Record Patterns



- Nested record patterns allow a more elegant and much more understandably way
- Checking with `instanceof` automatically fails if one of the record components is `null`, i.e. here `Person` or `City` (destination).

```
boolean checkAgeAndDestinationLanguageCorrectNew(Object obj)
{
    if (obj instanceof FlightReservation(
        Person(String firstname, String lastname, LocalDate birthday),
        Phone phoneNumber, City origin,
        City(String name, String country, String languageCode)))
    {
        if (birthday != null && languageCode != null)
        {
            long years = ChronoUnit.YEARS.between(birthday, LocalDate.now());
            return years >= 18 &&
                List.of("EN", "DE", "FR").contains(languageCode);
        }
    }
    return false;
}
```

JEP 440: Record Patterns



```
boolean checkAgeAndDestinationLanguageCorrectNew(Object obj)
{
    if (obj instanceof FlightReservation(
        Person(String firstname, String lastname, LocalDate birthday),
        Phone phoneNumber, City from,
        City(String name, String country, String languageCode)))
    {
        if (birthday != null && languageCode != null)
        {
            long years = ChronoUnit.YEARS.between(birthday, LocalDate.now());
            return years >= 18 &&
                List.of("EN", "DE", "FR").contains(languageCode);
        }
    }
    return false;
}
```

- Only the attributes are not protected in this way and may need to be checked for null.
- However, if you get into the good habit of avoiding `null` as a value of parameters in calls, you can even do without it.



Position 2: Pattern Matching and switch



JEP 427: Pattern Matching for switch: Dominance check



- **Problem area: Multiple patterns can match on one input.**

```
public static void main(String[] args) {  
    multiMatch("Python");  
    multiMatch(null);  
}
```

```
static void multiMatch(Object obj) {  
    switch (obj) {  
        case null -> System.out.println("null");  
        case String s && s.length() > 5 -> System.out.println(s.toUpperCase());  
        case String s -> System.out.println(s.toLowerCase());  
        case Integer i -> System.out.println(i * i);  
        default -> {}  
    }  
}
```

- The one that fits "most generally" is called the **dominant pattern**.
- In the example, the shorter pattern `String s` dominates the longer one specified before it.

JEP 441: Pattern Matching for switch: Dominance check



- The whole thing becomes problematic when the order of the patterns is reversed:

```
static void dominanceExample(Object obj)
{
    switch (obj)
    {
        case null -> System.out.println("null");
        case String str -> System.out.println(str.toLowerCase());
        case String str && str.length() > 5 -> System.out.println(str.strip());
        case Integer i -> System.out.println(i);
        default -> { }
    }
}
```

Label is dominated by a preceding case label 'String str'

Move switch branch 'String str && str.length() > 5' before 'String str'

© java.lang.String

- The dominance check uncovers the problem and leads to a compile error since Java 18 and Java 17.0.6, because the second case is de facto unreachable code.
- With the first Java 17 versions this was not detected as error!

JEP 427: Pattern Matching for switch with Record Patterns



```
record Pos3D(int x, int y, int z) { }
```

```
enum RgbColor {RED, GREEN, BLUE}
```

```
static void recordPatternsAndMatching(Object obj) {
```

```
    switch (obj) {
```

```
        case RgbColor color when color == RgbColor.RED ->
            System.out.println("RED WARNING");
```

```
        case Pos3D pos when pos.z() == 0 ->
            System.out.println("Record: " + pos);
```

```
        case Pos3D(int x, int y, int z) when y > 0 ->
            System.out.println("Record decomposed: " + x + ", " + y + ", " + z);
```

```
        default -> System.out.println("Something else");
```

```
    }
```

```
}
```




Position 3: Virtual Threads



JEP 444: Virtual Threads



- Concept of **lightweight virtual threads**
- Virtual threads "feel" like normal threads, but are not mapped 1:1 to operating system threads.

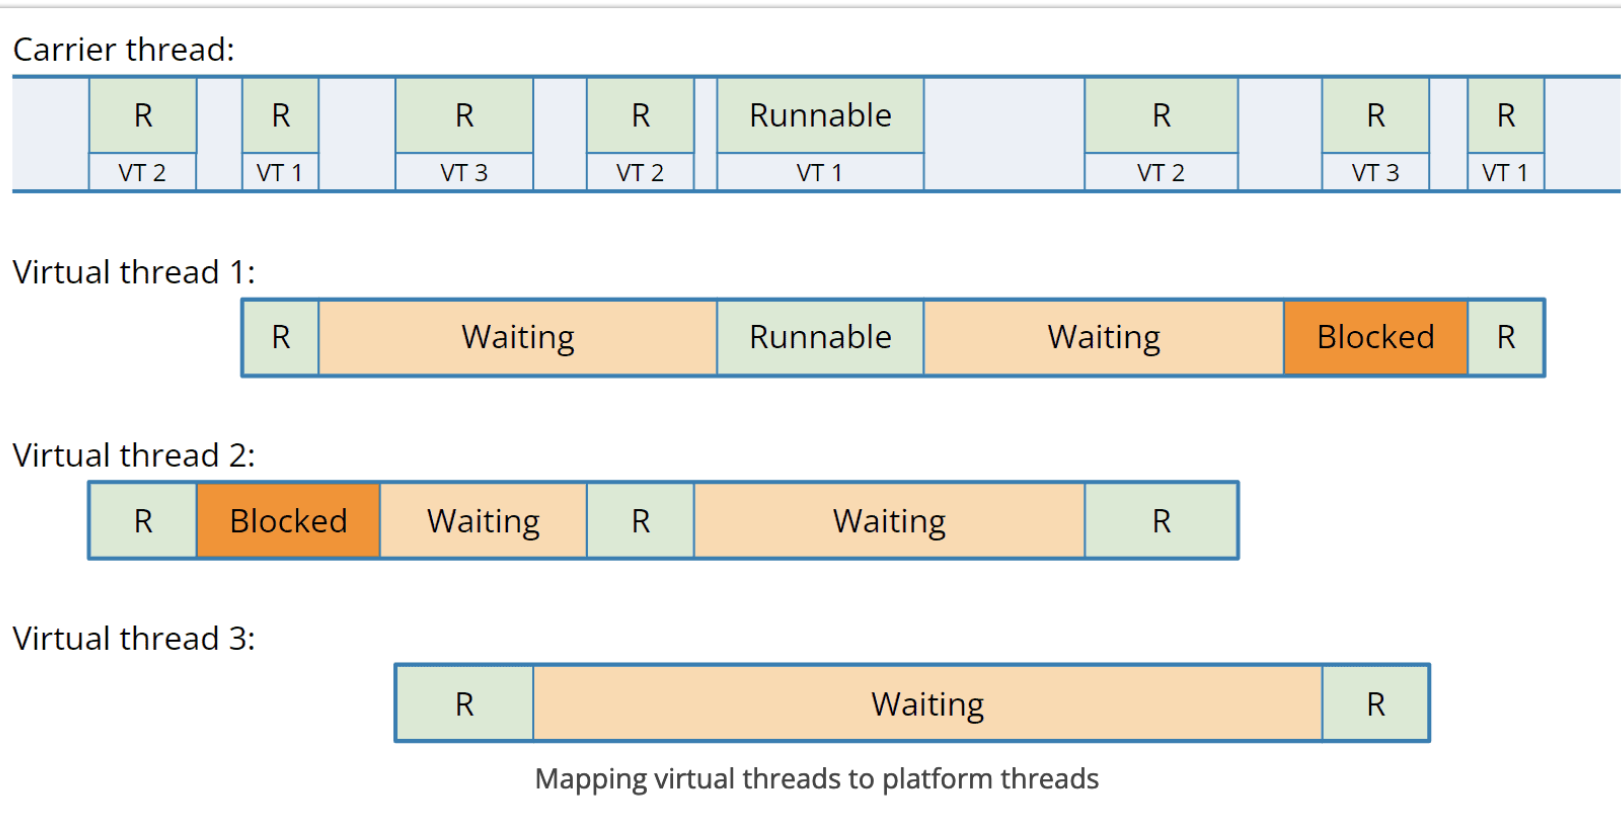



- What is the problem with blocking I/O? => miserable server utilization

Concurrency Issues

Why is it bad to block?

```
Json request      = buildContractRequest(id);  
String contractJson = contractServer.getContract(request);  
Contract contract  = Json.unmarshal(contractJson);
```



- Virtual threads permit to work with a separate thread per request.
- This is helpful because many client requests usually perform blocking I/O such as retrieving resources.

JEP 444: Platform Threads => Virtual Threads



```
public static void main(String[] args)
{
    System.out.println("Start");

    try (var executor = Executors.new Executors.newVirtualThreadPerTaskExecutor())
    {
        for (int i = 0; i < 10_000; i++)          10_000_000; i++)
        {
            final int pos = i;
            executor.submit(() -> {
                Thread.sleep(Duration.ofSeconds(5));
                return pos;
            });
        }
    }
    // executor.close() is called implicitly,
    // and waits until all tasks are completed
    System.out.println("End");
}
```



Position 4: Structured Concurrency (Preview)



Significant
changes in
Java 25

JEP 505: Structured Concurrency



- Structured Concurrency as a simplification of multithreading.
- Different tasks executed in multiple threads are considered as a single unit.
- This improves reliability, reduces the risk for errors and simplifies their handling.
- Let's consider determining a user and their orders based on a user ID:

```
static Response handleSynchronously(Long userId) throws InterruptedException
{
    var user = findUser(userId);
    var orders = fetchOrders(userId);

    return new Response(user, orders);
}
```

- Both actions could run in parallel.
 - If one of both throws an exception, complete execution is aborted
-

Try 1: Classical ExecutorService



```
static Response handleOldStyle(Long userId) throws ExecutionException,  
                                           InterruptedException  
{  
    var executorService = Executors.newCachedThreadPool();  
  
    var userFuture = executorService.submit(() -> findUser(userId));  
    var ordersFuture = executorService.submit(() -> fetchOrders(userId));  
  
    var user = userFuture.get();    // Join findUser  
    var orders = ordersFuture.get(); // Join fetchOrders  
  
    return new Response(user, orders);  
}
```

- Because the subtasks are executed in parallel, they can succeed or fail independently.
- **Error handling can become quite complicated.**
- Often, for example, one does not want the second `get()` to be called if an exception has already occurred during the processing of the `findUser()` method.

Remedy: Structured Concurrency



- **Implementation of Structured Concurrency with class `StructuredTaskScope`:**

```
static Response handleJava25(Long userId) throws InterruptedException
{
    //var joiner = StructuredTaskScope.Joiner.awaitAllSuccessfulOrThrow();
    try (var scope = StructuredTaskScope.open())
    {
        var userSubtask = scope.fork(() -> findUser(userId));
        var orderSubtask = scope.fork(() -> fetchOrder(userId));

        scope.join();    // Join both forks

        // Here, both forks have succeeded, so compose their results
        return new Response(userSubtask.get(), orderSubtask.get());
    }
}
```

- **With structured concurrency, one splits off competing subtasks with `fork()`.**
- **The results are collected with a blocking call to `join()`, which waits until all subtasks are processed or an error occurred.**

JEP 453: Structured Concurrency



The `StructuredTaskScope` class offers two main joining strategies:

- `awaitAllSuccessfulOrThrow()` – catches the first exception and terminates the `StructuredTaskScope`. This class is intended when **results of all subtasks** are needed ("**invoke all**"); if one subtask fails, the results of the other uncompleted subtasks are no longer needed.
 - `anySuccessfulResultOrThrow()` – determines the first incoming result and then terminates the `StructuredTaskScope`. This helps when the **result of an arbitrary subtask** is already sufficient ("**invoke any**") and it is not necessary to wait for the results of other uncompleted tasks.
-

JEP 505: Structured Concurrency



- **Implementation of Structurd Concurrency with class StructuredTaskScope:**


```
var joiner =  
    StructuredTaskScope.Joiner.<NetworkConnection>anySuccessfulResultOrThrow();  
try (var scope = StructuredTaskScope.open(joiner))  
{  
    var result1 = scope.fork(() -> tryToGetWifi());  
    var result2 = scope.fork(() -> tryToGet5g());  
    var result3 = scope.fork(() -> tryToGet4g());  
    var result4 = scope.fork(() -> tryToGet3g());  
  
    NetworkConnection result = scope.join();  
  
    System.out.println("Wifi " + result1.state() + "/5G " + result2.state() +  
        "/4G " + result3.state() + "/3G " + result4.state());  
    System.out.println("found connection: " + result);  
}
```

- **Konkurrierende Teilaufgaben mit `fork()` abspalten und mit blockierendem Aufruf von `join()` das zuerst vorliegende Ergebnis einsammeln**
- **`join()` wartet, bis eine Teilaufgabe erfolgreich ist**
- **`state()` liefert SUCCESS (erster), UNAVAILABLE (andere) oder FAILED (Exception)**

JEP 505: Structured Concurrency



- Structured concurrency can also be nested:

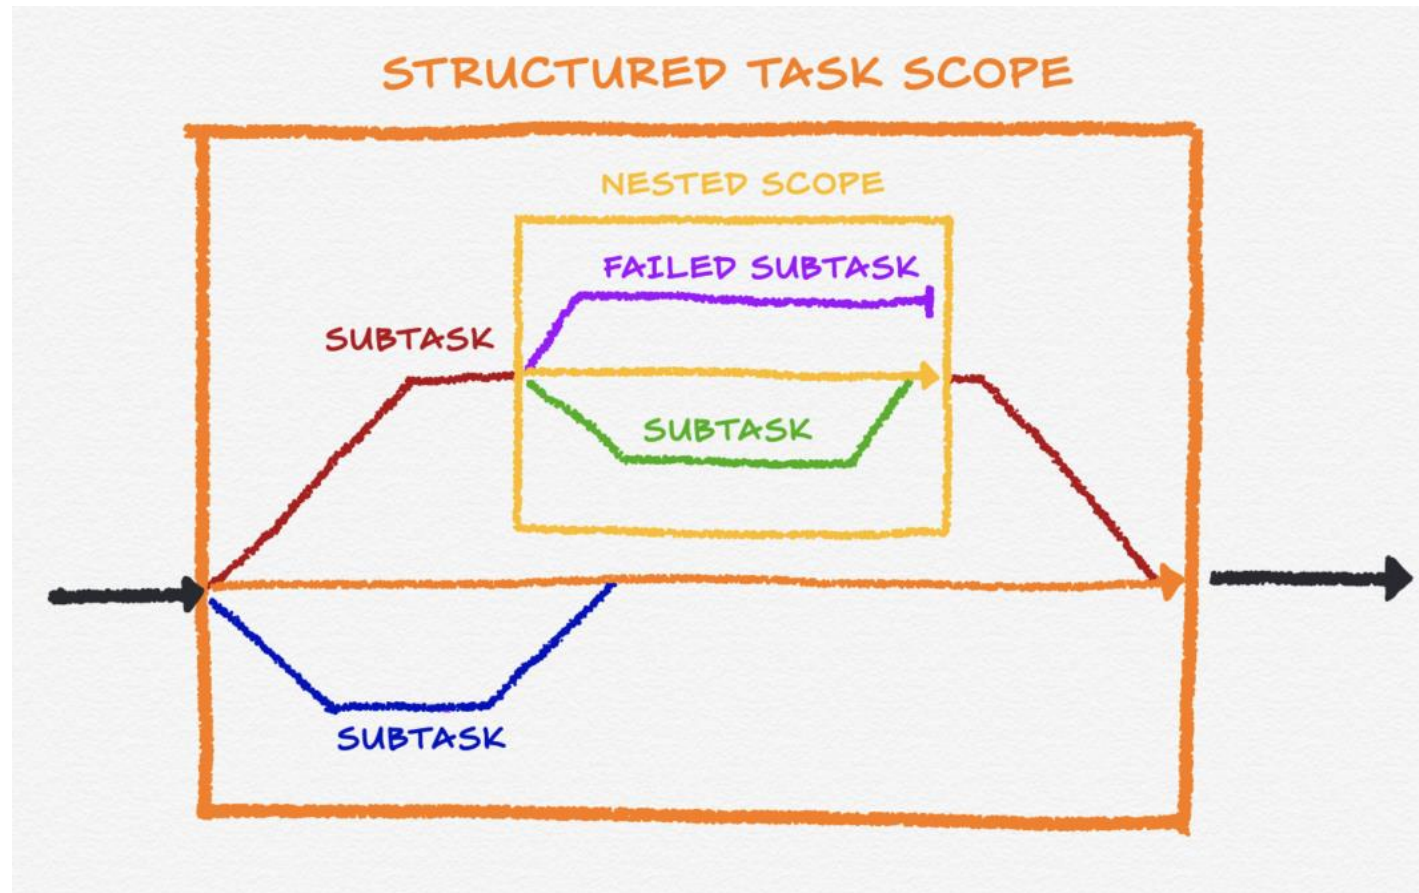



Position 5: Unnamed Variables and Patterns



JEP 456: Unnamed Patterns and Variables (Preview)



- What do you observe using record patterns?

```
Point point = new Point(3, 4);  
var coloredPoint = new ColoredPoint(point, Color.GREEN);
```

```
if (coloredPoint instanceof ColoredPoint(Point point, Color color))  
{  
    System.out.println("x = " + point.x());  
}
```

```
if (coloredPoint instanceof ColoredPoint(Point(int x, int y),  
                                           Color color))  
{  
    System.out.println("x = " + x);  
}
```

- Only a few parts are really of interest

JEP 456: Unnamed Patterns and Variables



- And what about similar situations in «normal» Java code:

```
BiFunction<String, String, String> doubleFirst =  
    (String str1, String str2) -> str1.repeat(2);
```

```
try  
{  
    Files.writeString(Path.of("UnnamedVars.txt"), "Underscore");  
}  
catch (IOException ex)  
{  
    // just some logging  
}
```

- Some variables are unused
-

JEP 456: Unnamed Patterns and Variables



- The following three variations exist:
 1. **unnamed variable** – allows to use `_` for naming or marking unused variables
 2. **unnamed pattern variable** – allows the identifier that would normally follow the type (or var) in a record pattern to be omitted
 3. **unnamed pattern** – allows to omit the type and name of a record pattern component completely (and replace with single `_`)
-

JEP 456: Unnamed Patterns and Variables



- **Unnamed variable**

```
BiFunction<String, String, String> doubleFirst =  
    (String str1, String _) -> str1.repeat(2);
```

```
interface IntTriFunction  
{  
    int apply(int x, int y, int z);  
}
```

```
IntTriFunction addFirstTwo = (int x, int y, int _) -> x + y;
```

```
IntTriFunction doubleSecond = (int _, int y, int _) -> y * 2;
```

- **Interestingly, multiple unnamed variables can also be used in the same scope, which (besides simple lambdas) is of interest especially for record patterns and in switch.**

JEP 456: Unnamed Patterns and Variables



- **Unnamed pattern variable**

```
if (green_p3_4 instanceof ColoredPoint(Point point, Color color))  
{  
    System.out.println("x = " + point.x());  
}
```

- =>

```
if (green_p3_4 instanceof ColoredPoint(Point point, Color   ))  
{  
    System.out.println("x = " + point.x());  
}
```

- **Same applies for case ColoredPoint(Point point, Color)**

JEP 456: Unnamed Patterns and Variables



- **Unnamed pattern**

```
if (green_p3_4 instanceof ColoredPoint(Point(int x, int y), Color color))  
{  
    System.out.println("x = " + x);  
}
```

- =>

```
if (cp instanceof ColoredPoint(Point(int x, ), ))  
{  
    System.out.println("x = " + x);  
}
```

- **Same applies for case.**

instanceof _
instanceof _(int x, int y)



Unnamed Variables & Patterns



```
static boolean checkFirstNameTravellingTimeAndZipCode(Object obj)
{
    if (obj instanceof Journey(
        Person(var firstname, _),
        TravellInfo(_, var maxTravellingTime),
        City(var zipCode, _))) {

        if (firstname != null && maxTravellingTime != null && zipCode != null) {

            return firstname.length() > 2 && maxTravellingTime.toHours() < 7 &&
                zipCode >= 8000 && zipCode < 8100;
        }
    }
    return false;
}
```



Position 6: Launch Multi-File Source-Code Programs



JEP 458: Launch Multi-File Source-Code Programs: Direct Compilation



- Allows Java applications consisting of only one file to be compiled and executed directly in one go.
- Saves work and requires no knowledge of bytecode or .class files
- Particularly useful for executing smaller Java files as scripts and for getting started with Java

```
package direct.compilation;  
  
public class HelloWorld  
{  
    public static void main(String... args)  
    {  
        System.out.println("Hello Execute After Compile");  
    }  
}
```

```
java ./HelloWorld.java
```



```
Hello Execute After Compile
```

- However, up to and including Java 21 LTS, only for a single Java file!

JEP 458: Launch Multi-File Source-Code Programs



```
package jep458_Launch_MultiFile_SourceCode_Programs;
```

```
public class MainApp
{
    public static void main(final String[] args) {
        var result = Helper.performCalculation();
        System.out.println(result);
    }
}
```

```
package jep458_Launch_MultiFile_SourceCode_Programs;
```

```
class Helper
{
    public static String performCalculation() {
        return "Heavy, long running calculation!";
    }
}
```

```
$ java MainApp.java
```

```
Heavy, long running calculation!
```

JEP 458: Launch Multi-File Source-Code Programs



```
package jep458_Launch_MultiFile_SourceCode_Programs;

public class MainAppV2
{
    public static void main(final String[] args) {
        var result = StringHelper.mark(Helper.performCalculation());
        System.out.println(result);
    }
}
```

```
package jep458_Launch_MultiFile_SourceCode_Programs;

class StringHelper
{
    public static String mark(String input) {
        return ">>" + input + "<<";
    }
}
```

```
$ java MainAppV2.java
>>Heavy, long running calculation!<<
```



Position 7: Markdown Comments



JEP 467: Markdown Documentation Comments



- Document your code using mark down
- It is also displayed in IntelliJ directly on the commented program element (class / method)

```
/// Returns the greater of two `int` values. That is, the  
/// result is the argument closer to the value of  
/// [Integer#MAX_VALUE]. If the arguments have the same  
/// value, the result is that same value.  
///  
/// @param a an argument.  
/// @param b another argument.  
/// @return the larger of `a` and `b`.  
public static int max(int a, int b) {  
    return (a >= b) ? a : b;  
}
```

 `syntax.MarkDownComment`

```
@Contract(pure = true) ↗ ↗  
public static int max(  
    int a,  
    int b  
)
```

Returns the greater of two `int` values. That is, the result is the argument closer to the value of `Integer#MAX_VALUE`. If the arguments have the same value, the result is that same value.

Params: `a` – an argument.
`b` – another argument.

Returns: the larger of `a` and `b`.



- **Text passages should be emphasized from time to time**
 - *italics* (*...* or _..._) or **bold** (**...**)
 - Change font by backtick ('...') to typewriter font. Bold and/or italics are also possible.
 - Integrate multi-line source code snippets with ("...") into a comment.

```
/// **FETT** \  
/// *kursiv* \  
/// _kursiv_ \  
/// _**FETT und KURSIV**_ \  
/// `code-font` \  
/// _**`code-font FETT und KURSIV`**_ \  
///  
/// Mehrzeiliger Sourcecode:  
/// ```  
/// public static int max(int a, int b) {  
///     return (a >= b) ? a : b;  
/// }  
/// ```
```

📁 syntax

```
public class MarkDownComment
```

FETT

kursiv

kursiv

FETT und KURSIV

`code-font`

`code-font FETT und KURSIV` \

Mehrzeiliger Sourcecode:

```
public static int max(int a, int b) {  
    return (a >= b) ? a : b;  
}
```

JEP 467: Markdown Documentation Comments – Lists & Tables



```
/// - Punkt A
/// * Punkt B
/// - Punkt C
///
/// 1. Eintrag 1
/// 1. Eintrag 2 -- **wird automatisch nummeriert, also 2.**
/// 1. Eintrag 3
/// 2. Eintrag 4 -- **wird automatisch auf 4. geändert**
```

- Punkt A
- Punkt B
- Punkt C

1. Eintrag 1
2. Eintrag 2 -- **wird automatisch nummeriert, als**
3. Eintrag 3
4. Eintrag 4 -- **wird automatisch auf 4. geändert**

```
/// | Latein | Griechisch |
/// |-----|-----|
/// | a      | &alpha; (alpha) |
/// | b      | &beta; (beta)  |
/// | c      | &gamma; (gamma) // &Gamma; |
/// | ...    | ...           |
/// | z      | &omega; (omega) |
```

Latein Griechisch

a	α (alpha)
b	β (beta)
c	γ (gamma) // Γ
...	...
z	ω (omega)



Position 8: Stream Gatherers



JEP 485: Stream Gatherers



- Let's assume we want to filter out all duplicates from a stream and specify a criterion for this:

```
var result = Stream.of("Tim", "Tom", "Jim", "Mike").  
    distinctBy(String::length).    // Hypothetical  
    toList();
```

- You can solve this conventionally with a trick as follows:

```
var result = Stream.of("Tim", "Tom", "Jim", "Mike").  
    map(DistinctByLength::new).  
    distinct().  
    map(DistinctByLength::str).  
    toList();
```

JEP 485: Stream Gatherers



- Another example is grouping a stream's data into sections of a fixed size.

```
var result = Stream.iterate(0, i -> i + 1).  
    windowFixed(4).    // Hypothetical  
    limit(3).  
    toList();
```

```
// result ==> [[0, 1, 2, 3], [4, 5, 6, 7], [8, 9, 10, 11]]
```

- Over the years, various intermediate operations such as `distinctBy()` or `windowFixed()` have been proposed as additions to the Stream API.
 - These are often useful in specific contexts, but they would make the Stream API rather bloated and (further) complicate access to the (already extensive) API.
-

JEP 485: Stream Gatherers



- Java 24 now provides a `gather(Gatherer)` method for providing a user-defined intermediate operation, analogous to `collect(Collector)` for terminal operations.
 - This is done using the `java.util.stream.Gatherer` interface, which may initially seem a little challenging to implement yourself.
 - Conveniently, the `java.util.stream.Gatherers` utility class provides various predefined gatherers such as:
 - `windowFixed()`
 - `windowSliding()`
 - `fold()`
 - `scan()`
-

JEP 485: Stream Gatherers – windowFixed()



- To divide a stream into smaller components of fixed size without overlapping, `windowFixed()` is used.

```
private static void windowFixed() {  
    var result = Stream.iterate(0, i -> i + 1).  
        gather(Gatherers.windowFixed(4)).  
        limit(3).  
        toList();  
    System.out.println("windowFixed(4): " + result);  
  
    var result2 = Stream.of(0, 1, 2, 3, 4, 5, 6).  
        gather(Gatherers.windowFixed(3)).  
        toList();  
    System.out.println("windowFixed(3): " + result2);  
}
```

- In some cases, the dataset does not contain enough elements. This means that the last sub-range simply contains fewer elements.

```
windowFixed(4): [[0, 1, 2, 3], [4, 5, 6, 7], [8, 9, 10, 11]]  
windowFixed(3): [[0, 1, 2], [3, 4, 5], [6]]
```

JEP 485: Stream Gatherers – windowSliding()



- To divide a stream into smaller components of fixed size with overlapping, `windowSliding()` is used:

```
private static void windowSliding() {  
    var result = Stream.iterate(0, i -> i + 1).  
        gather(Gatherers.windowSliding(4)).  
        limit(3).  
        toList();  
    System.out.println("windowSliding(4): " + result);  
  
    var result2 = Stream.of(0, 1, 2, 3, 4, 5, 6).  
        gather(Gatherers.windowSliding(3)).  
        toList();  
    System.out.println("windowSliding(3): " + result2);  
}
```

- In some cases, the dataset does not contain enough elements. This means that the last sub-range simply contains fewer elements (not shown here):

`windowSliding(4): [[0, 1, 2, 3], [1, 2, 3, 4], [2, 3, 4, 5]]`

`windowSliding(3): [[0, 1, 2], [1, 2, 3], [2, 3, 4], [3, 4, 5], [4, 5, 6]]`

JEP 485: Stream Gatherers – fold()



- The `fold()` method is used to combine the values of a stream. Similar to `reduce()`, a start value and a calculation rule are specified:

```
private static void foldMult()
{
    var crossMult = Stream.of(10, 20, 30, 40, 50).
        gather(Gatherers.fold(() -> 1L,
            (result, number) -> result * number)).
        findFirst();
    System.out.println("mult with fold(): " + crossMult);
}
```

- To access the value, the call to `findFirst()` is used again, which returns an `Optional<T>`:

```
mult with fold(): Optional[120000000]
```


JEP 485: Stream Gatherers – fold()



- What happens if we also want to execute actions for the value combination and these actions are not defined for the types of the values, in this case `int`?
- As an example, a numerical value is converted into a string and this is repeated according to the numerical value with `repeat()`:

```
private static void foldRepeat()
{
    var repeatedNumbers = Stream.of(1, 2, 3, 4, 5, 6, 7).
        gather(Gatherers.fold(() -> "",
            (result, number) -> result + ("" +
                number).repeat(number))).
            toList();
    System.out.println("repeat with fold(): " + repeatedNumbers);
}
```

- The output is as follows:

```
repeat with fold(): [1223334444555556666667777777]
```

JEP 485: Stream Gatherers – scan()



- If the elements of a stream are to be merged into **new combinations** so that one element is added at a time, then this is the task of `scan()`.
- `scan()` works in a similar way to `fold()`, however, a new result is produced for each combination of values:

```
private static void scanRepeat()
{
    var repeatedNumbers = Stream.of(1, 2, 3, 4, 5, 6, 7).
        gather(Gatherers.scan((() -> "",
            (result, number) -> result + (" " +
                number).repeat(number)))
            .toList());
    System.out.println("repeat with scan(): " + repeatedNumbers);
}
```

- **The output is as follows:**

```
repeat with scan(): [1, 122, 122333, 1223334444, 122333444455555, 122333444455555666666,
1223334444555556666667777777]
```



Position 9: Flexible Constructor Bodies



JEP 513: Flexible Constructor Bodies



```
public class PositiveBigIntegerOld1 extends BaseInteger
{
    public PositiveBigIntegerOld1(long value)
    {
        super(value);           // Potentially unnecessary work

        if (value <= 0)
            throw new IllegalArgumentException("non-positive value");
    }
}
```

- If we look at the source code, it doesn't look very elegant. Furthermore, the check only takes place after the base class has been constructed ...
- Potentially unnecessary calls and object constructions have already taken place
- Especially older legacy code is often ingloriously characterized by the fact that (too) many actions already take place in the constructor.

JEP 513: Flexible Constructor Bodies



- **Conventional workaround: static helper method**

```
public class PositiveBigIntegerOld2 extends BigInteger
{
    public PositiveBigIntegerOld2(final long value)
    {
        super(verifyPositive(value));
    }

    private static long verifyPositive(final long value)
    {
        if (value <= 0)
            throw new IllegalArgumentException("non-positive value");

        return value;
    }
}
```

JEP 513: Flexible Constructor Bodies



- The argument check is much easier to read and understand if the validation logic takes place directly in the constructor before `super()` is called.
- JEP 482 allows the arguments of a constructor to be validated before the constructor of the super class is called:

```
public class PositiveBigIntegerNew extends BigInteger
{
    public PositiveBigIntegerNew(final long value) {
        if (value <= 0)
            throw new IllegalArgumentException("non-positive value");

        super(value);
    }
}
```

JEP 513: Flexible Constructor Bodies



- Sometimes it makes sense to execute actions before calling `this()` to avoid multiple actions, like calls to `split()`, in the following:

```
record MyPointOld(int x, int y)
{
    public MyPointOld(final String values)
    {
        this(Integer.parseInt(values.split(",")[0].strip()),
              Integer.parseInt(values.split(",")[1].strip()));
    }
}

record MyPoint3dOld(int x, int y, int zy)
{
    public MyPoint3dOld(final String values)
    {
        this(Integer.parseInt(values.split(",")[0].strip()),
              Integer.parseInt(values.split(",")[1].strip()),
              Integer.parseInt(values.split(",")[2].strip()));
    }
}
```


JEP 513: Flexible Constructor Bodies



- With the new syntax, we can extract the actions from the call to `this()` and, in particular, call the `split()` only once.
- An additional helper method `parseInt()` may be introduced if you want to make the stripping more elegant and the constructor easier to read:

```
record MyPoint3d(int x, int y, int z)
{
    public MyPoint3d(final String values)
    {
        var separatedValues = values.split(",");
        int x = parseInt(separatedValues[0]);
        int y = parseInt(separatedValues[1]);
        int z = parseInt(separatedValues[2]);

        this(x, y, z);
    }

    private static int parseInt(final String strValue)
    {
        return Integer.parseInt(strValue.strip());
    }
}
```

JEP 513: Flexible Constructor Bodies – New since Java 23



- When using inheritance, surprises can sometimes occur when methods are called in constructors that are overridden in subclasses.

```
public class BaseClass
{
    private final int baseValue;

    public BaseClass(int baseValue)
    {
        this.baseValue = baseValue;

        logValues();
    }

    protected void logValues()
    {
        System.out.println("baseValue: " + baseValue);
    }
}
```

JEP 513: Flexible Constructor Bodies



```
public class SubClass extends BaseClass
{
    private final String subClassInfo;

    public SubClass(int baseValue, String subClassInfo)
    {
        super(baseValue);
        this.subClassInfo = subClassInfo;
    }

    protected void logValues()
    {
        super.logValues();
        System.out.println("subClassInfo: " + subClassInfo);
    }

    public static void main(final String[] args)
    {
        new SubClass(42, "SURPRISE");
    }
}
```

baseValue: 42
subClassInfo: null

During the processing of the base class constructor, the attribute subClassInfo is still unassigned, as the call to super() takes place BEFORE the assignment to the variable. This results in the above but unexpected output.

JEP 513: Flexible Constructor Bodies



```
public class NewSubClass extends BaseClass {  
  
    private final String subClassInfo;  
  
    public NewSubClass(int baseValue, String subClassInfo)  
    {  
        this.subClassInfo = subClassInfo;  
        super(baseValue);  
    }  
  
    protected void logValues()  
    {  
        super.logValues();  
        System.out.println("subClassInfo: " + subClassInfo);  
    }  
  
    public static void main(final String[] args)  
    {  
        new NewSubClass(42, "AS_EXPECTED");  
    }  
}
```

baseValue: 42

subClassInfo: AS_EXPECTED

During the processing of the base class constructor, the attribute subClassInfo is now already unassigned, as the call to super() takes place AFTER the assignment to the variable. This results in the above and expected output.



Position 10: Compact Source Files and Instance Main Methods



Implicitly Declared Classes and Instance Main Methods



- Maybe it's been a while since you learned Java, too.
- If you want to teach Java to novice programmers, you realize **how difficult it is to get started**.
- From the beginner's perspective Java has a **really steep learning curve**.
- It already starts with the simplest Hello-World.

package preview;

```
public class OldStyleHelloWorld {  
    public static void main(String[] args) {  
        System.out.println("Hello, World!");  
    }  
}
```

- Python – reduced to the essentials:

```
print("Hello, World!")
```

You as trainer mention the following facts for beginners:

- 1) Forget about package, public , class, static, void, etc. they are not important right now ...
- 2) Just look at the one line with the System.out.println()
- 3) Oh yes, System.out is an instance of a class, but even that is not important now.

Quite a lot of confusing and distracting words and concepts apart from the actual task.

Implicitly Declared Classes and Instance Main Methods



- **PAST**

```
public class InstanceMainMethodOld {  
    public static void main(final String[] args) {  
        System.out.println("Hello, World!");  
    }  
}
```

- **PRESENT**

```
class InstanceMainMethod {  
    void main() {  
        System.out.println("Hello, World!");  
    }  
}
```

- **PRESENT OPTIMIZED**

```
void main() {  
    System.out.println("Hello World!");  
}
```

Implicitly Declared Classes and Instance Main Methods



Further possibilities

```
String greeting = "Hello again!!";
```

```
String enhancer(String input, int times)
```

```
{  
    return " ---> " + input.repeat(times) + " <---";  
}
```

```
void main()
```

```
{  
    System.out.println("Hello World!");  
    System.out.println(greeting);  
    System.out.println(enhancer("Michael", 2));  
}
```

```
$ java --enable-preview --source 21\ src/main/java/preview/UnnamedClassesMoreFeatures.java
```

```
Hello, World!
```

```
Hello again!
```

```
---> MichaelMichael <---
```

JEP 512: Compact Source Files and Instance Main Methods



- **Two significant innovations were already added in Java 23 and finalized in Java 25 LTS:**
 - **Interaction with the console:** Implicitly declared classes automatically import three static methods `print()`, `println()` and `readln()` defined in the `java.io.IO` class that simplify textual interaction with the console.
 - **Automatic module import from `java.base`:** Implicitly declared classes automatically import all public classes and interfaces of the packages exported by the `java.base` module.
- **Based on both, the `main()` method in Java 23 can be written more clearly and briefly as follows:**

```
void main()  
{  
    IO.println("Shortest and Python-like 'Hello World!'");  
}
```



Conclusion

Positive things



- Reliable 6-month release cadence and LTS versions will be released every 2 years
- Java becomes easier and more attractive
- Many nice improvements in syntax and APIs like switch, records, text blocks, ...
- Pattern Matching and record patterns
- Virtual Threads & Structured Concurrency
- **JAVA 25 LTS has recently been released ☺**



On the negative side




- Next releases were on time, but sometimes bringing just a few new features (except Java 14), even only preview features.
- Java 21 LTS contains lots of unfinished things ... in my opinion LTS should contain only few preview and incubators, ideally none
- We have to wait 2 more years to have the nice unnamed classes and vars accessible for stable use
- Why is the syntax of pattern matching inconsistent for instanceof and switch?







Try it out :-)

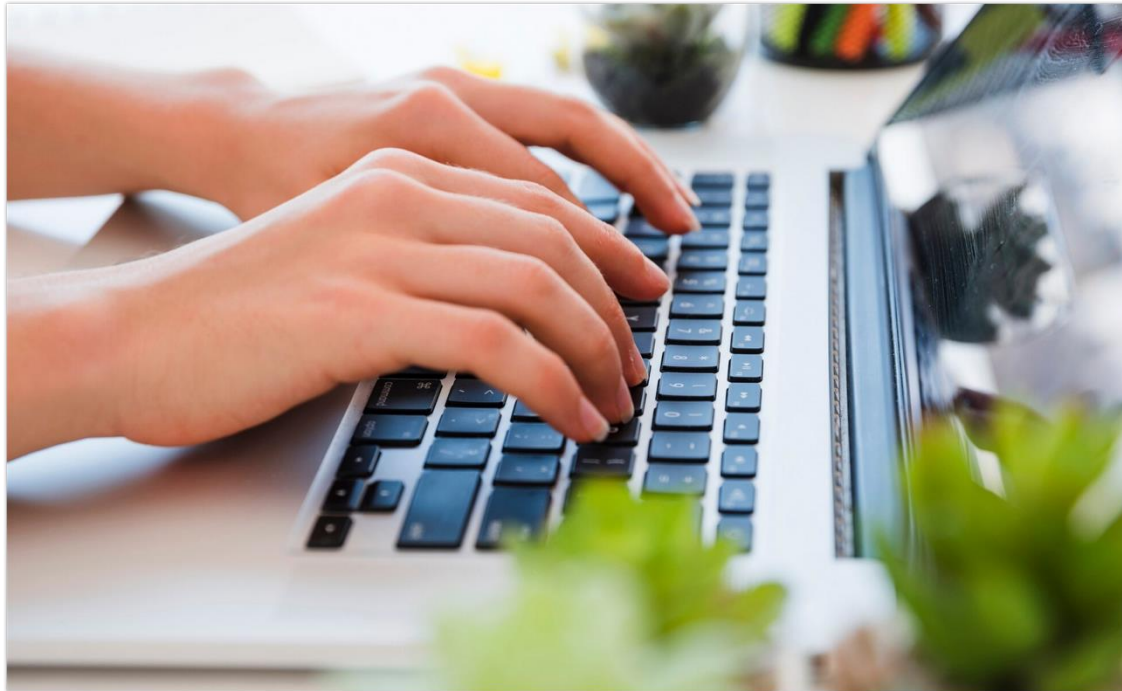

<https://github.com/Michaeli71/Best-Of-Modern-Java-21-25-My-Favorite-Features>

Help

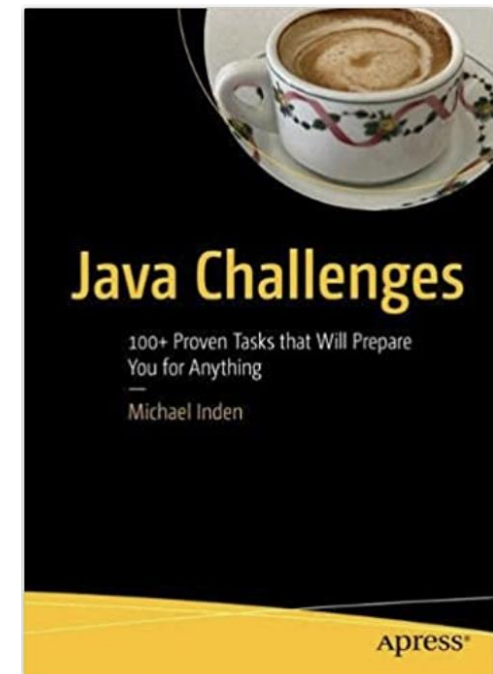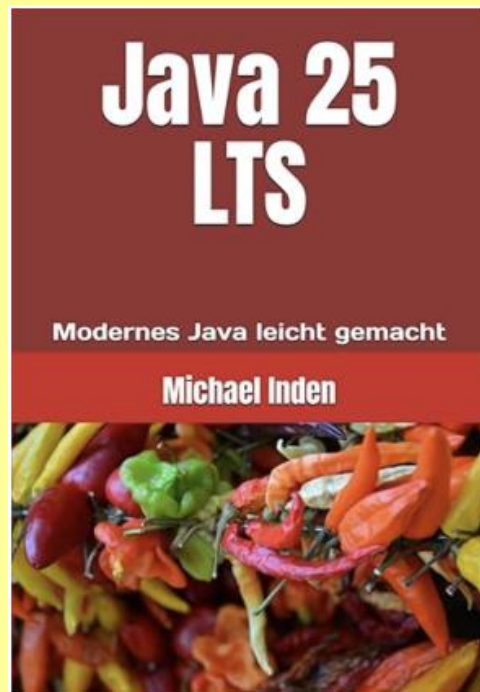



Questions?



Thank You
