
spinmate

AI AGENT FOR SPINTRONICS SIMULATION

Spintronics simulation, by conversation.

Describe a setup in plain language or provide a parameter file. SpinMate checks it with the solver's own parser, runs two-sublattice macrospin simulations and explains the result from the actual magnetization dynamics.

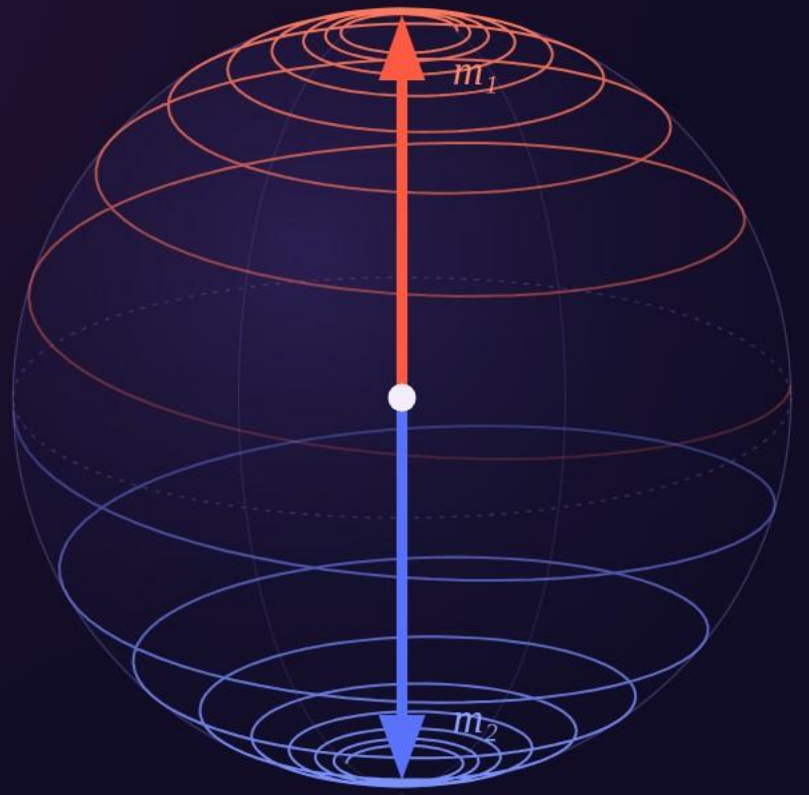


Michael Lianeris · github.com/Michaellianeris/Spinmate-AI-Agent · MIT license

Outline

01	**Architecture**	How the browser, the agent, the tools and the solver fit together
02	**Models**	Five personas over Claude and OpenAI, and how the router chooses
03	**Value**	Runs, sweeps, figures, reports and the catalog, on real runs
04	**In numbers**	Speed, tests, tools and the codebase
05	**How to run**	Docker, the Windows app and the first start

Architecture

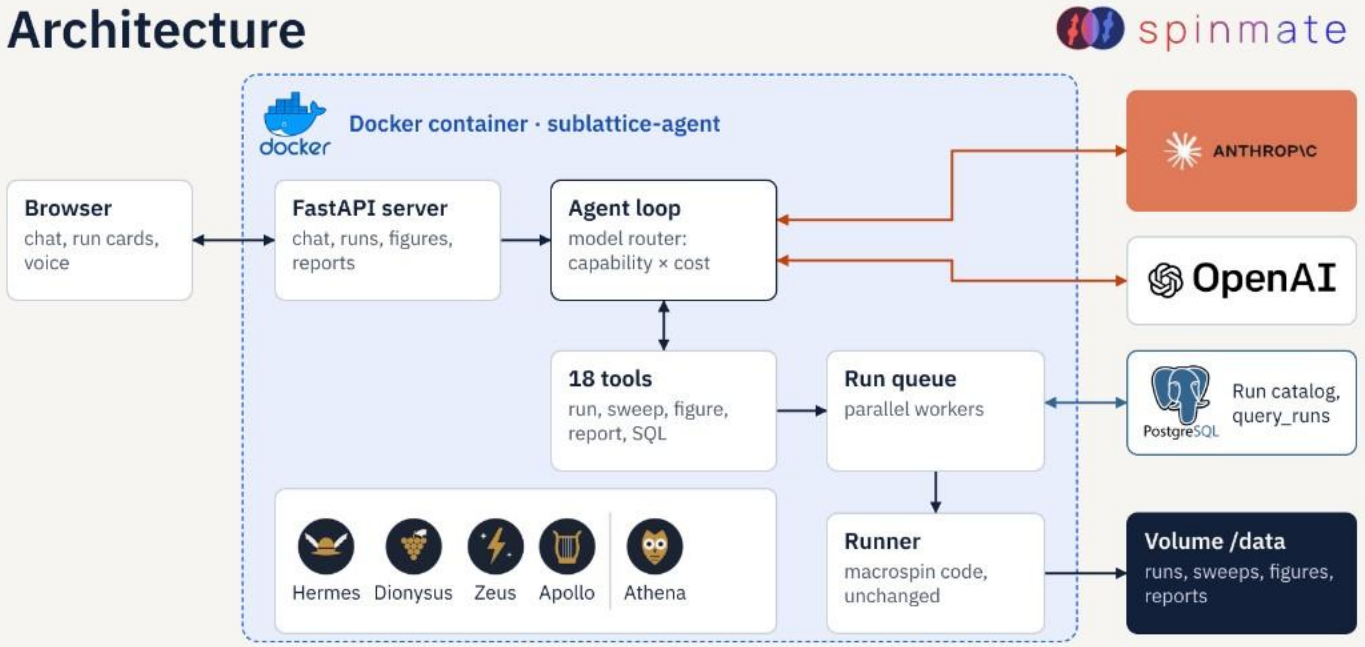

In the browser

Chat, run cards, Runs panel, voice input

In the container

FastAPI server, agent loop with the router, 18 tools, run queue, runner

Outside it

Claude and OpenAI, the run catalog, the /data volume

Five personas, one router

Hermes

Quick and economical

Claude Haiku, GPT nano / mini

Dionysus

Balanced, the default

Claude Sonnet, GPT-5.x

Zeus

Deep, most capable

Claude Opus, OpenAI o-series

Apollo

Specialised and new

Claude Fable / Mythos, new models

Athena

The guide

How to use the app; built-in answers offline

ON AUTO, EVERY REQUEST IS SCORED OVER THE PERSONA'S MODELS

$$\text{score} = \text{capability} + \text{bonus} - \lambda(\text{persona}, \text{request}) \times \log_{10}(\text{price} / \text{cheapest}) - \text{shortfall}$$

The strongest model wins unless a cheaper one is clearly enough. Every answer shows the model, the reason and the cost in €, at the daily ECB rate.

A tour of the home page



LEFT BAR

1. New conversation
2. Conversation history
3. Runs panel and catalog
4. Default parameters
5. Run setup, no AI needed
6. Model gods, tools guide
7. Settings: theme, API keys

MESSAGE BOX

8. Ask, or attach a .txt file
9. Voice input
10. Persona: the model level
11. Fast or Deep, tokens and €

START HERE

12. Find a skill: ready questions
13. Athena, the how-to guide

What SpinMate gives you

BY HAND

1. Edit the parameter file
2. Run the solver and wait
3. Write a plotting script
4. Read the curves for switches and settling
5. Collect parameters and figures into a write-up

WITH SPINMATE

1. One sentence, or the same .txt file
2. Every value checked by the solver’s parser
3. Run card with the sphere, curves and metrics
4. Answer written from the computed metrics
5. IEEE figure and PDF report on request

Same solver, same physics: the agent removes the steps around it, not the model.


One question, one run



Behind one question

1. The router picks a model for the chosen persona and request.
2. The model calls validate_parameters, then start_simulation.
3. The run queue starts the solver; the card shows live progress.
4. wait_for_run returns the metrics, and the answer is written from them.

Sweeps, thresholds and continued runs

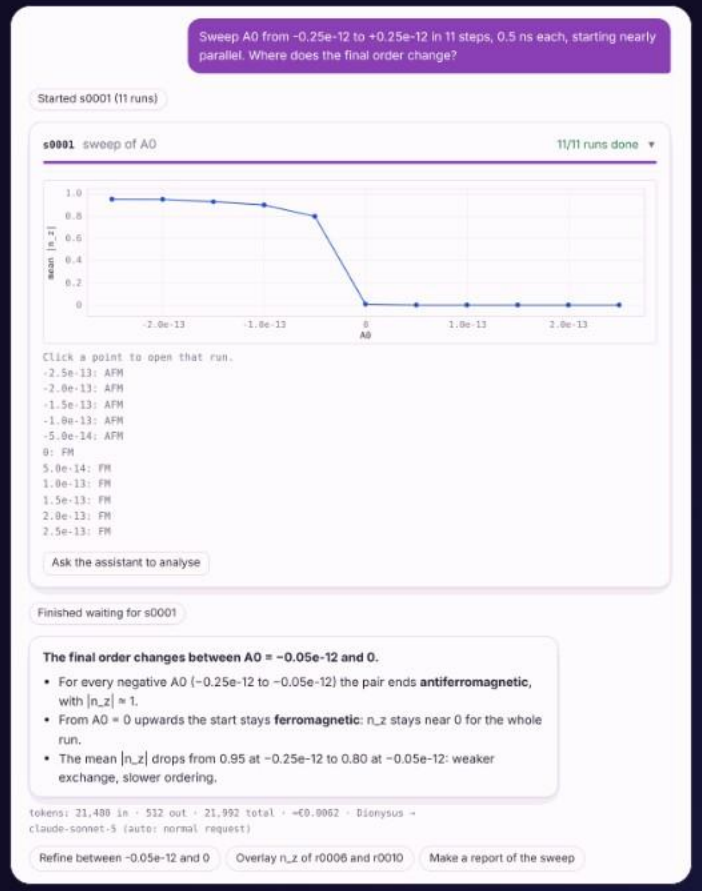


“Sweep A0 from −0.25e-12 to +0.25e-12 in 11 steps, 0.5 ns each. Where does the final order change?”


RESULT

The order changes between A0 = −0.05e-12 and 0: AFM below, FM from 0 upwards.

- Runs go in parallel; click a point to open that run.
- Threshold search: bracketing sweeps narrow the interval.
- Continue run keeps the clock, so AC fields and the FeRh cycle do not restart.

Figures and reports, ready to share

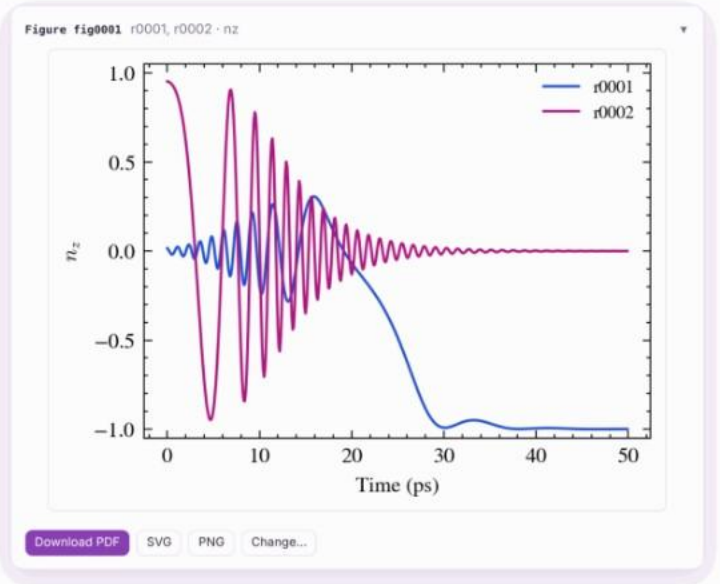

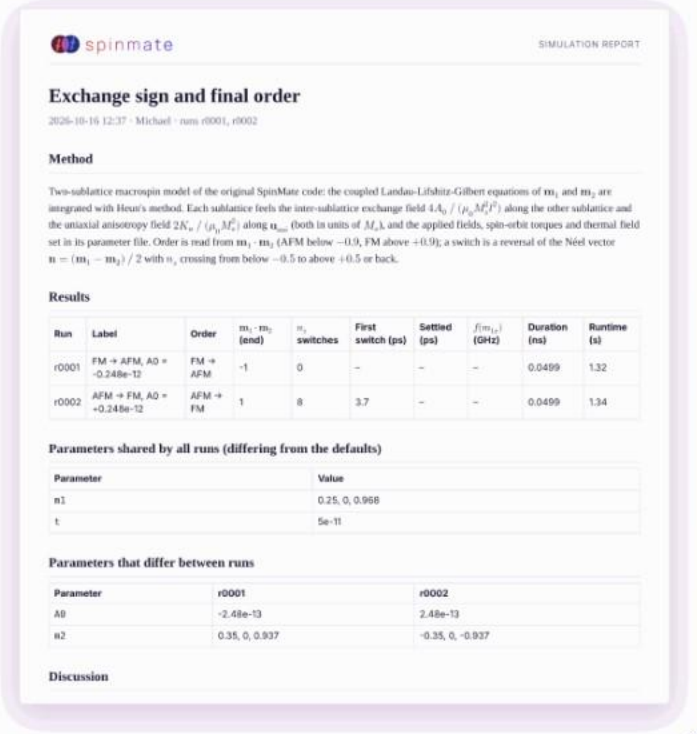
spinmate

SIMULATION REPORT

Exchange sign and final order

2026-10-16 12:37 · Michael · runs r0001, r0002

Method

Two-sublattice macrospin model of the original SpinMate code: the coupled Landau-Lifshitz-Gilbert equations of $\mathbf{m}_1$ and $\mathbf{m}_2$ are integrated with Heun's method. Each sublattice feels the inter-sublattice exchange field $4A_0 / (\mu_0 M_s^2 l^2)$ along the other sublattice and the uniaxial anisotropy field $2K_u / (\mu_0 M_s^2)$ along $\mathbf{u}_{ani}$ (both in units of M_s), and the applied fields, spin-orbit torques and thermal field set in its parameter file. Order is read from $\mathbf{m}_1 \cdot \mathbf{m}_2$ (AFM below -0.9, FM above $+0.9$); a switch is a reversal of the Néel vector $\mathbf{n} = (\mathbf{m}_1 - \mathbf{m}_2) / 2$ with n_z crossing from below -0.5 to above $+0.5$ or back.

Results

Run	Label	Order	$\mathbf{m}_1 \cdot \mathbf{m}_2$ (end)	n_z switches	First switch (ps)	Settled (ps)	$f(m_{1,y})$ (GHz)	Duration (ns)	Runtime (s)
r0001	FM → AFM, A0 = -0.248e-12	FM → AFM	-1	0	–	–	–	0.0499	1.32
r0002	AFM → FM, A0 = +0.248e-12	AFM → FM	1	8	3.7	–	–	0.0499	1.34

Parameters shared by all runs (differing from the defaults)

Parameter	Value
n1	0.25, 0, 0.968
t	5e-11

Parameters that differ between runs

Parameter	r0001	r0002
A0	-2.48e-13	2.48e-13
n2	0.35, 0, 0.937	-0.35, 0, -0.937

Discussion

Figures

IEEE, Nature and science styles, as PDF, SVG and PNG.


Reports

Method, results, parameters and figures, with LaTeX math and the SpinMate header.

Export

Print to PDF, or download the HTML or a Markdown and figures zip.

Every run in one catalog

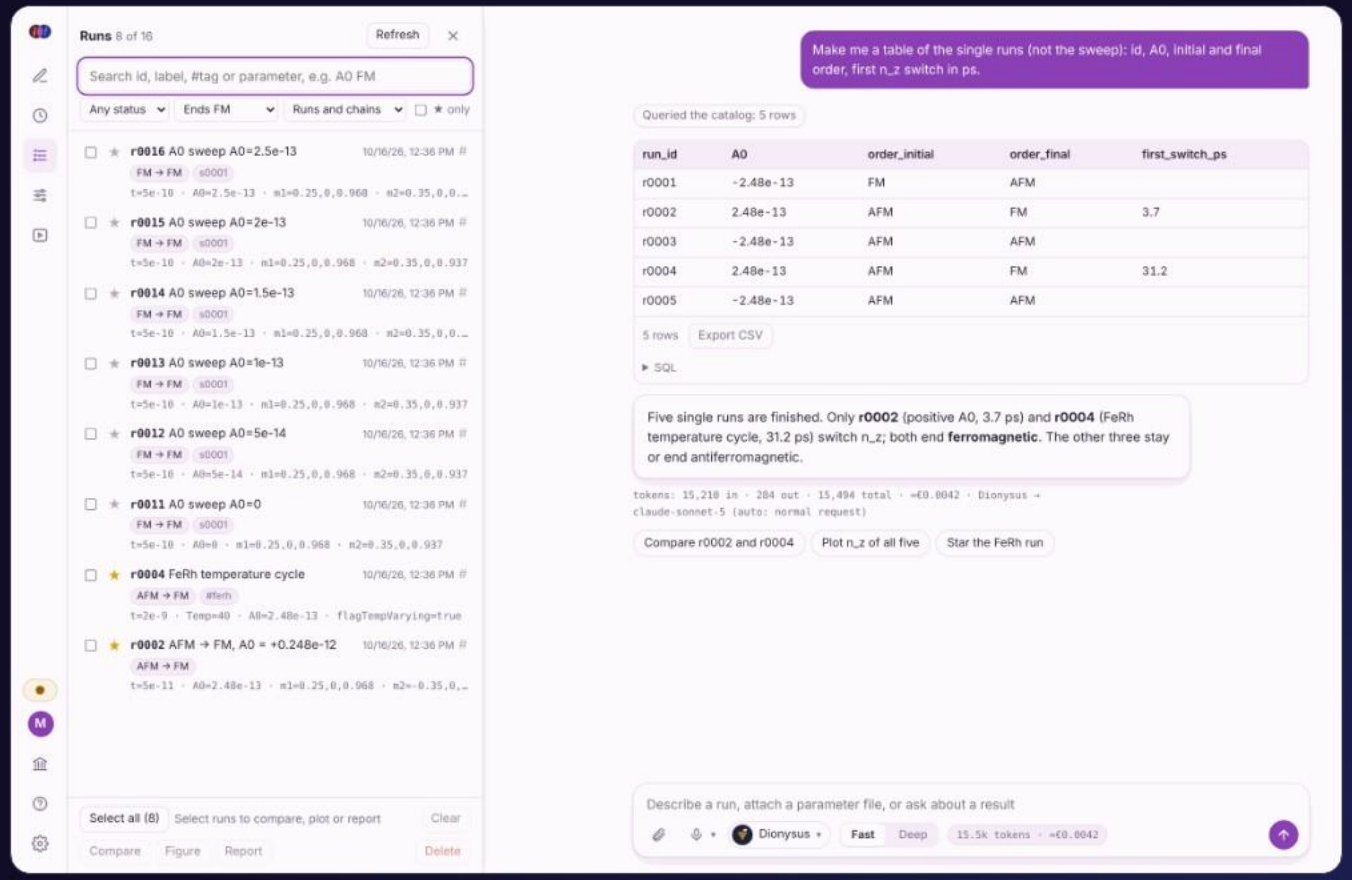

One row per run

Postgres in Docker, SQLite in the Windows app: parameters, summary and the links between runs.

Questions across runs

The model writes one read-only SELECT; the result comes back as a table with Export CSV.

Runs panel

Search by id, label, #tag or parameter; filter, star, compare, plot or report.

SpinMate in numbers

1.3 s
to simulate 50 ps (500 steps), run r0001

51 s
for an 11-run A0 sweep, 0.5 ns each

47
automated tests, all passing

16
eval cases through the real agent and solver

Codebase by part · 8,881 lines



- **44 %** agent and server
- **31 %** web UI
- **13 %** tests and evals
- **7 %** original solver, unchanged
- **5 %** desktop app and guide

The 18 tools by job



- **4** inputs and validation
- **5** runs
- **3** sweeps
- **2** continue and combine
- **4** compare, figure, report, SQL

Measured on the runs in this deck; lines of .py, .html and .js in the repository

Runs on your machine

Local by default

Listens on 127.0.0.1 only. Docker on Linux, macOS and WSL, or a Windows app.

Your keys

In .env or the browser tab, never committed. Calls bill your own account; TOKEN_BUDGET sets a cap.

Your data

Runs, figures, reports and accounts stay in /data. Only the optional welcome email leaves; MAIL_RELAY=off turns it off.

Guard rails

Read-only SQL with a timeout; runs start only through the solver’s parser; big requests ask first.

Get started

Docker

```
cp .env.example .env
docker compose up --build
```

Add an Anthropic or OpenAI key to .env, then open localhost:8421.

Windows app

Download SpinMate-windows.zip from Releases, unzip and run SpinMate.exe. No Docker or Python needed; the catalog is SQLite.

First start

Athena asks your name and, optionally, your email for the PDF guide. No key yet? Run setup runs a preset directly.

spinmate **github.com/Michaellianeris/Spinmate-AI-Agent**

Free and open source under the MIT license · the user guide is web/spinmate-guide.pdf