

# Stream Assembly Is an Uncontrolled Treatment in Streaming Intrusion-Detection Benchmarks

MICHEL YOUSSEF, Independent Researcher, Lebanon

Public network captures are rarely usable as evaluation streams as they stand, so streaming intrusion-detection studies assemble them: interleaving capture days, pooling temporally disjoint captures, or replaying records round robin. We show on two benchmarks that this assembly step is not neutral plumbing but an *uncontrolled experimental treatment*. On CICIDS2017, holding the full record multiset identical and changing only the ordering, a fixed positional 70/15/15 split then produces held-out samples that share only 32.5% of their records, at held-out prevalences of 68.235% and 25.2396% — a 42.9954-point difference — and the measured ordering of the two deterministic scorers reverses. Restricting both arms to the 78000 records they both held out removes that reversal: the same scorer leads in both arms there. The reversal is therefore a consequence of which records the assembly hands to the test set, not of the order in which the detector saw its history, and we locate it accordingly. On LITNET-2020, pooling three temporally disjoint captures reports a single 6.4982% operating point that is the equal-weight mean of per-capture held-out prevalences spanning 0.176% to 15.7747%; we present that identity as an audit check rather than a discovery. We also audit the evaluated detector against its description: its reset and growth branches share a predictive term that cancels, so the run-length posterior equals the hazard rate exactly below the run-length cap, while the evaluations spend nearly all their length at or beyond that cap, where the posterior instead wanders; and the score the evaluation consumes is a function of  $P(r \leq 5)$ , not of  $P(r=0)$ . Scoring that detector one branch at a time yields a separate result: its deployed max composition ranks *worse than its own tail term alone* (0.103477 AP, 0.302658 AUC-ROC), because the auxiliary branch is inverted rather than uninformative (AUC-ROC 0.281890) and a maximum lets it govern the rank wherever the tail is small — a defect no metric computed on the assembled score can attribute. Finally, we quantify a batch dependence in the ECOD reference implementation, whose empirical CDFs are recomputed over the training matrix concatenated with the scored batch: holding the evaluated records and the fitted model fixed and changing only the accompanying batch moves its AUC-PR by 0.003063, so published ECOD numbers are not comparable across studies that score different batch sizes. Every measured value traces to an archived, hash-verified run manifest, and the sentence-level claim ledger ships with the artifact.

CCS Concepts: • **Security and privacy** → **Intrusion detection systems**; • **Computing methodologies** → *Machine learning*; • **General and reference** → *Evaluation*.

Additional Key Words and Phrases: streaming network intrusion detection, benchmark stream construction, evaluation methodology, experimental design, anomaly detection benchmarks, reproducibility, provenance

## 1 Introduction

Machine-learning evaluations for network intrusion detection rest on a small number of public benchmarks, and a substantial literature questions what those benchmarks measure [5, 17, 42]. This paper contributes a quantified case study and mechanism audit of one step in that pipeline: the step that assembles capture files into an evaluation stream. CICIDS2017 spans five capture days of very different attack density [22, 44], and LITNET-2020’s captures are temporally disjoint [18], so evaluations interleave, pool, or replay records to obtain a single stream with workable splits. We measure what that step does on these two benchmarks.

## What this paper claims, and what it does not

Our CICIDS2017 intervention changes the ordering of a fixed record multiset and holds the split *rule* fixed. It does not hold the evaluated *sample* fixed: under a positional split, reordering changes which records land in training, validation and test, and therefore changes held-out membership, held-out prevalence, and within-split order simultaneously.

---

Author’s Contact Information: Michel Youssef, Independent Researcher, Beirut, Lebanon, [michelyoussef@hotmail.com](mailto:michelyoussef@hotmail.com).

Stream assembly is in this precise sense an **uncontrolled treatment**. We therefore make a pipeline-level claim — assembling the stream differently changes the measured evaluation outcome — and we do *not* claim that order alone causes the change, nor that attack prevalence is excluded as an explanation. Isolating those factors requires a factorial or prevalence-matched design that we identify as the natural next experiment.

Two further scoping statements belong here rather than in a limitations section. First, we make no claim about how often the practice occurs: we have not conducted a systematic literature survey, and the construction we contrast against is the one used by the audited earlier evaluation of this same work, with interleaving and pooling also discussed in the cited benchmark-criticism literature. Second, the conceptual warning that arbitrary temporal ordering and sampling can distort security-ML evaluation is established prior art [5, 17]; our contribution is the exact same-multiset measurement on a real benchmark, with overlap, relocation, prevalence and outcome reported together, plus the audit of the released detector.

### Origin of this version

Earlier versions of this manuscript (arXiv:2605.24696, v1 and v2) reported results produced under the pooled and interleaved constructions studied here, and described a scoring rule the released code did not implement. An independent adversarial review and a line-by-line audit of the archived artifacts established both. The present version is the rebuild from that audit: the assembled constructions are retained as explicitly labelled protocols and contrasted against least-transformed alternatives; the detector is described as what the code computes; and every number was regenerated — or, for the retained prevalence sweep, re-derived from the archived pre-audit runs — by a script that wrote, in the same execution, an archived manifest recording the git commit, configuration hash, input SHA-256, seed, environment hash and output path. Section 11 states which measurements this paper shares with those versions and which are new; the per-result-group account and the dated correction history are supplied to the editors confidentially, because printing them here would defeat anonymization.

### Contributions

- (1) **Stream assembly as an uncontrolled treatment** (Section 5). On the identical 1600000-record multiset (352962 attacks, whole-stream prevalence 22.060125%, permutation verified mechanically), reordering under a fixed positional split yields held-out slices sharing 78000 of 240000 records (32.5%), moves held-out prevalence by 42.9954 points, relocates 103189 attacks out of the held-out slice, and reverses the measured ordering of the two deterministic scorers — a reversal that does *not* survive when both arms are restricted to the records they both held out (Section 6).
- (2) **A pooling identity, offered as an audit check** (Section 5.4). LITNET’s pooled 6.4982% is the equal-weight mean of the three per-capture held-out prevalences, forced by equal budgets and a divisible round-robin boundary. It is arithmetic, not a discovery; its value is diagnostic — a pooled operating point can correspond to no capture in the pool.
- (3) **A scoped method-identity audit** (Section 3). Below the run-length cap the reset and growth branches share a predictive term that cancels, so  $P(r_t=0)$  equals the hazard rate for any data; at and beyond the cap — where the evaluated runs spend nearly all their length — truncation breaks that identity and the posterior wanders. The score the evaluation consumes is a function of  $P(r_t \leq 5)$ , not  $P(r_t=0)$ . We state these three facts separately because only the first is an exact result.

- (4) **A composition defect that costs more than it appears to** (Section 7). Scored branch-wise on the timestamp-ordered held-out slice, the deployed max composition ranks *worse than its own tail term alone* — by 0.103477 *AP* and 0.302658 AUC-ROC. The auxiliary branch is not uninformative but inverted (AUC-ROC 0.281890), and because the score is a maximum it governs the rank wherever the tail is small, dragging the deployed detector to near-chance AUC-ROC (0.526623) while its tail component reaches 0.829281. No metric computed on the assembled score can attribute this, and the decomposition that finds it uses values the scorer already computes.
- (5) **A measured batch dependence in a widely used baseline** (Section 6.3). PyOD’s ECOD recomputes its empirical CDFs over the training matrix concatenated with whatever batch is passed to `decision_function`, so a record’s score depends on which other records accompanied it. Holding the evaluated records and the fitted model identical and varying only the accompanying batch moves ECOD’s AUC-PR by 0.003063. Published ECOD numbers are therefore not comparable across studies that score different batch sizes.
- (6) **A provenance discipline that is itself auditable** (Section 10), including the correction history and overlap statement of Section 11.

## 2 Related Work

**Benchmark criticism.** Catillo et al. [17] question whether results on public intrusion datasets represent concrete advances and warn specifically that partitioning timestamped records in arbitrary order can alter split representativeness. Arp et al. [5] catalogue sampling bias, mixing incompatible sources and temporal snooping as recurring security-ML pitfalls. Sommer and Paxson [45] set out earlier why machine learning is harder to apply to intrusion detection than to other domains, pointing to the high cost of errors, the semantic gap between results and operational meaning, and the difficulty of sound evaluation. Ring et al. [42] survey dataset limitations, and Engelen et al. [22] correct label and flow-construction defects in CICIDS2017; we build on their corrected release. Liu et al. [33] quantify how prevalent such labelling errors are in CIC-IDS-2017 and CSE-CIC-IDS-2018, and Lanvin et al. [29] show that correcting the CICIDS2017 errors changes measured detection performance. Catillo et al. [16] earlier showed that a detector learned on a public IDS dataset degrades against emulated attacks in a controlled network, which is the transfer-side counterpart of the question we ask on the construction side. We do not claim to discover that temporal assembly is non-neutral. Our addition is quantitative and specific: the same full multiset under two assemblies, with membership overlap, attack relocation, prevalence and measured outcome reported together on a real benchmark.

**The evaluation protocol as the variable under study.** A line of work treats the protocol itself, rather than the model, as what determines a reported result. TESSERACT [40] shows that spatial and temporal bias in how train/test sets are constituted inflates malware classification results, and gives a construction discipline for removing it; Apruzzese et al. [4] formalise cross-evaluation and show how much a reported NIDS result depends on which corpora are combined; Olszewski et al. [39] find that a large fraction of tier-1 security ML papers cannot be reproduced from what they report. Apruzzese, Laskov and Schneider [3] survey how machine-learning NIDS are assessed and set out pragmatic criteria for evaluations that practitioners can act on. Concurrent with this work, Moczkodan and Ragab [38] reformulate CICIDS2017 as a temporal task and find that a padding convention, not the architecture, determines whether Transformers appear to help — a protocol variable of a different kind (input formatting) on the same benchmark. Biswas [12] likewise argues the evaluation protocol is the hidden variable, reporting that models trained under random splits on CSE-CIC-IDS2018 collapse under a class-blind chronological split and that zero-shot cross-dataset transfer falls below chance. That work isolates *unseen-attack coverage* from drift across *different datasets* and does not, so far as we can establish, evaluate two protocols on an intersected held-out set; this work isolates *composition* from *history order* within a single fixed record

multiset, and does so by restricting both arms to the records they both held out. The two are complementary rather than overlapping: theirs bounds what transfers between corpora, ours attributes an effect within one.

**Streaming anomaly detection.** The baselines evaluated in this rebuild are Half-Space Trees [46] and LODA [41] (streaming), with LOF [13] and ECOD [32] as batch diagnostic references. KitNET [37], xStream [34], RRCF [24], streaming isolation forest [20] and COPOD [31] have implementations in the artifact but no archived evaluation runs in this rebuild, and carry no numbers here. Cao et al. [15] benchmark streaming detectors under controlled anomaly types and drifts and report strong sensitivity to assessment design; our results give one such sensitivity a measured mechanism on an IDS benchmark. Wu and Keogh [49] argue that the standard time-series anomaly benchmarks are themselves flawed in ways that create an illusion of progress.

**Change-point detection.** The evaluated detector descends from Bayesian online change-point detection [1] with a truncated run-length posterior [23, 28]. Section 3 shows the implementation’s posterior is data-independent below its cap; van den Burg and Williams [47] document how often change-point evaluations mismeasure their subject.

**Conformal and calibrated alerting.** Laxhammar and Falkman [30] established conformal anomaly detection for sequential data, with guarantees resting on exchangeability assumptions [48]. Three 2026 lines run concurrent with this work and are distinct from it. FIRCE [9] and its successor FADES [8] integrate conformal evaluation into streaming IDS pipelines to drive drift detection and adaptive retraining; both propose detection machinery and evaluate it, whereas this paper proposes no detector and instead audits what an evaluation pipeline measures. Gurjar and Camp [25] forecast tail-risk escalation in enterprise alert streams with extreme-value methods over 251 million Suricata alerts — a forecasting task on operational alert volume, not a question about how a benchmark is assembled. None of the three examines the assembly step. Our results are relevant but must be stated carefully: reordering one realized dataset does not establish exchangeability, which is a distributional symmetry. What interleaving can do is *mask temporal dependence, or make exchangeability appear more plausible to a diagnostic* applied to the assembled stream. Conformal methods that relax exchangeability already exist [7].

**Metric behaviour under class imbalance.** That precision-recall summaries move with the positive-class base rate is long-established and is not a finding of this paper. Davis and Goadrich [19] characterise the ROC/PR correspondence and show that the achievable PR region depends on the class ratio; Saito and Rehmsmeier [43] demonstrate that PR summaries are the informative choice precisely because they respond to imbalance while ROC summaries do not; and Axelsson [6] established the base-rate consequence for intrusion detection specifically. McDermott et al. [36] caution that AUC-PR is not automatically the better summary under class imbalance and that the choice should follow how the scores will be used. We use these results, we do not extend them: every AUC-PR this paper compares *across* prevalence regimes is reported with its chance floor  $p$  and with normalized lift  $(AP - p)/(1 - p)$  for that reason, and comparisons made within one slice, where the floor is shared, are reported at that fixed floor. What is ours is narrower and is about this benchmark’s construction, not about the metric: the prevalence regime these evaluations operate in is *doubly constructed* — first by a retention budget whose per-day sampling is anti-correlated with attack density, and then by the assembly step, which redistributes the surviving attacks across the split. Neither construction step is visible in a reported operating point.

**Cost-sensitive thresholds.** The threshold actually implemented is the prior-inclusive Bayes rule of Elkan [21] (Section 3); SRE-style error budgets [11] motivated the original framing.

### 3 The System Under Study

We characterize the detector as implemented, from measurement. All values here are archived under run `s3_score_threshold_verification`.

#### 3.1 The score the evaluation consumes

The published description defines the anomaly score as the run-length-reset posterior  $P(r_t=0 \mid x_{1:t})$ . The implementation returns

$$s_t = \max(\text{tail}_t, 0.25 \cdot P(r_t \leq 5 \mid x_{1:t})),$$

where  $\text{tail}_t$  is a  $\chi^2$  CDF of the squared standardized residual under a global, slowly adapting diagonal Gaussian. Two facts follow directly. The evaluated score is not the described score; and it is a function of  $P(r_t \leq 5)$ , so results about  $P(r_t=0)$  do not transfer to it without further argument. Because  $0.25 \cdot P(r \leq 5) \leq 0.25$ , the auxiliary branch can set the score only where the tail term is below 0.25. Measured over the 49970 post-warm-up records at the *head* of the timestamp-ordered CICIDS2017 stream — a prefix, not the whole stream, and one that carries no attacks at all — it does so on 75.039% of records, at a mean contributed value of 0.002531. The same share measured on the attack-bearing held-out slice is 58.452% (Section 7); the two are different populations and are not in tension. A mean magnitude does not establish which branch *discriminates*, since ranking metrics are invariant to the scale of a branch that sets the ranking; we therefore make no claim about that here and measure it directly in Section 7.

#### 3.2 The run-length posterior below the cap, and at it

In the implementation the reset and growth branches share the same run-conditional predictive likelihood, which cancels in the posterior normalization. Below the run-length cap, therefore,  $P(r_t=0)$  equals the hazard rate *exactly*, for *any data*. Under a  $6\sigma$  mean shift with hazard 0.001: mean  $P(r=0)$  before the shift 0.001; peak in the 50-record window after it 0.001; maximum deviation from the hazard between initialization and truncation 0.

That exact result covers only part of the evaluated regime, and we state the limit plainly. At  $t \geq 500$  the run array is truncated before normalization, the cancellation no longer holds, and the posterior wanders (mean 0.01099, maximum 1). Every stream evaluated in this paper is far longer than 500 records, so the published runs spent nearly all of their length in the truncated regime. We have therefore proved data-independence where it is provable and measured behaviour where it is not; we have not established that the auxiliary branch is uninformative over the regime that produced almost all reported scores, and we do not claim it.

#### 3.3 The threshold

The implemented decision threshold is the prior-inclusive Bayes rule [21],  $\tau = C_{FP}(1 - \rho) / [C_{FP}(1 - \rho) + C_{FN}\rho]$ , giving 0.655172 at incident prior  $\rho=0.05$  and 0.261745 at  $\rho=0.22$  — not the cost-only  $C_{FP} / (C_{FP} + C_{FN}) = 0.090909$  described in earlier versions. AUC-PR and AUC-ROC are threshold-free and unaffected; we report no threshold-dependent column, which is also why none of the non-comparable precision/recall/F1 columns appears in this paper.

#### 3.4 Detection delay, not latency

The quantity previously reported as “latency in milliseconds” is a count of records between attack onset and first alert; the evaluation contains no wall-clock instrumentation (0 clock calls in the module). We report it as detection delay in records and report no per-flow compute cost, which this pipeline does not measure.

Table 1. The evaluation streams (Stage 1 manifests). Run lengths are contiguous attack runs in the labelled stream; span is the wall-clock extent of the capture.

| stream              | records | prevalence | held-out prev. | run med/p90/max | span (min) |
|---------------------|---------|------------|----------------|-----------------|------------|
| CICIDS2017 (week)   | 1600000 | 22.0601%   | 68.235%        | 2/70/2522       | 6246.71    |
| LITNET udp_flood    | 500000  | 14.9384%   | 15.7747%       | 1/2/20          | 3.97       |
| LITNET blaster_worm | 500000  | 0.6562%    | 3.544%         | 1/2/5           | 1.62       |
| LITNET spam         | 500000  | 0.0276%    | 0.176%         | 1/1/2           | 39122.23   |

## 4 Datasets, Assembly, and Protocol

### 4.1 CICIDS2017: a timestamp-sorted budgeted subsample

We use the Engelen-corrected release [22]. The evaluation corpus is a **timestamp-sorted budgeted subsample**: 1600000 of 2087997 eligible records, a retention of 76.628%, selected by fixed per-day budgets with proportional stride subsampling. Because the budgets are fixed rather than a common factor, larger days are cut harder and the attack-heavy days are the largest: per-day retention runs from 64.399% (Friday, the densest day) to 93.156% (Tuesday). Measured consequence: the eligible week’s prevalence is 24.2065% while the corpus is 22.0601%, a bias of -2.1464 points from the budget step alone. Sorting a stride-subsampled corpus preserves relative order but is not the full event stream; missing flows can break attack runs and alter online sufficient statistics. We measured the prevalence bias and did not measure the effect on attack-family mix, feature distributions or run lengths, so we use “timestamp-sorted budgeted subsample” throughout and avoid claims that require the complete natural chronology. Table 1 summarizes all four streams.

### 4.2 LITNET-2020: three disjoint captures

LITNET-2020’s captures are temporally disjoint — udp\_flood roughly four minutes, blaster\_worm under two, spam about four weeks — so no coherent global timestamp order exists across them. We evaluate three per-attack-type streams of 500000 records each, never a manufactured composite; the pooled composite appears only as the explicitly labelled assembled arm of Section 5.4. Multi-window burn-rate alerting over 60/360/4320-minute windows is undefined on captures spanning minutes; we report that as a finding about the benchmark, and no burn-rate result appears in this paper.

### 4.3 Protocol

Table 2 states the protocol in full so the paper is self-contained; the artifact reproduces it exactly. Stream assembly, stated as an algorithm:

```

timestamp-order arm:
  rows <- corpus sorted by Timestamp (stable mergesort)
day-round-robin arm:
  groups <- rows grouped by capture date, each in timestamp order
  for k = 0, 1, 2, ...:
    for d in sorted(dates):
      if k < len(groups[d]): emit groups[d][k]
pooled-composite arm (LITNET):
  groups <- per-attack-type streams, each in timestamp order
  emit round robin over sorted(attack_type) as above
split (both arms): i_tr = floor(0.70 n); i_va = i_tr + floor(0.15 n)

```

Table 2. Experimental protocol. Every entry is taken from the code the archived manifests pin, not from intent.

| element                  | setting                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| features                 | all numeric columns after dropping the label; non-numeric columns dropped, so no categorical encoding is used                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| scaling                  | none applied by the harness                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| missing / infinite       | $\pm\infty$ mapped to NaN, then all NaN filled with 0.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| label rule               | $y=1$ unless the label string is benign, normal, 0 or false                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| eligibility (CICIDS)     | rows whose label contains “ - Attempted” dropped                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| per-day budgets          | 300k / 300k / 350k / 300k / 350k (Mon–Fri)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| subsampling              | proportional stride within each class, preserving per-day prevalence                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| split                    | positional 70/15/15 over the assembled stream order                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| detector: hazard         | 0.001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| detector: run-length cap | 500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| detector: warm-up        | 30 records                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| detector: short-run mass | $P(r \leq 5)$ , weight 0.25                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| update timing            | score computed from the pre-update predictive; sufficient statistics updated after scoring, on every record including held-out ones                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| label access             | the detector and HST see no labels at any point; baselines receive a validation-derived threshold; <b>ECOD and LOF are fitted on benign-only training rows and therefore have label access</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| metric                   | sklearn.metrics.average_precision_score (AUC-PR) and roc_auc_score, scikit-learn 1.8.0, positive class 1, no sample weighting; average precision is the step-wise sum $\sum_n (R_n - R_{n-1})P_n$ , not trapezoidal interpolation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| chance floor             | average precision of an uninformative ranking equals the positive-class prevalence $p$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| reported precision       | every <i>dimensionless</i> metric on $[0, 1]$ — AUC-PR, AUC-ROC, chance floor, fractional prevalence, normalized and additive lift, and the margins, spreads and differences taken between them, including per-seed draws — is reported to six decimal places, and any of those derived from other reported quantities is computed from their <i>reported</i> values. Every such derived number therefore equals the arithmetic on the numbers printed beside it, exactly, and a reader can check any of them; the cost is that it may differ from its full-precision counterpart by a few units in the last reported place, below $10^{-5}$ throughout and orders of magnitude below any effect claimed here. Deliberately outside that rule, and reported at the precision each was emitted with: percentage- and percentage-point-scaled values (the same quantities at 100×, where six decimals would fabricate digits), integer counts, the protocol constants in this table, and values quoted from cited work |

## 5 Assembly as a Treatment

### 5.1 Design and what it identifies

CICIDS2017 admits a clean manipulation of the assembly step: the same record multiset can be presented in timestamp order or in day-of-week round robin. The reordering is verified mechanically to be an exact permutation — both arms hold 1600000 records and 352962 attacks (22.060125%). The assembled arm reproduces the archived earlier evaluation exactly (60575 held-out attacks in 240000 records), so the contrast is against the assembly actually used, not a strawman.

What the design does *not* do is hold the evaluated sample fixed. Under a positional split, reordering changes split membership, so the two arms differ in held-out records, held-out prevalence, training composition and within-split

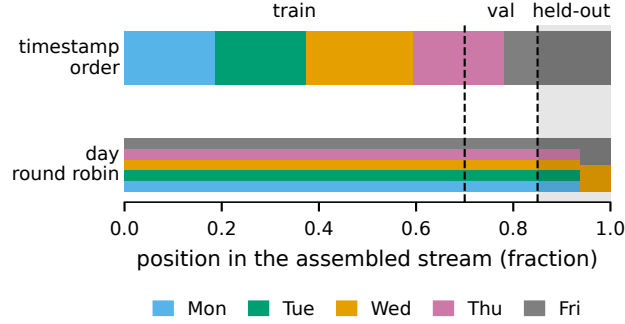


Fig. 1. The two assemblies of the same CICIDS2017 records under one fixed positional split. In timestamp order the capture days follow one another, so the held-out slice is the tail of the last day. In day round robin every day still supplying records contributes to every position, so the held-out slice draws from the tail of each day. Block widths follow the per-day record budgets of Table 2. The figure is a schematic of the protocol and carries no measured value.

Table 3. The assembly contrast. Held-out prevalence, attacks, and the proposed detector’s AUC-PR per arm. Every cell is a macro resolving to an archived manifest.

| Benchmark           | Construction          | Held-out prev. | Attacks | AUC-PR (proposed) |
|---------------------|-----------------------|----------------|---------|-------------------|
| CICIDS2017          | natural (timestamp)   | 68.235%        | 163764  | 0.728337          |
| CICIDS2017          | synthetic (day RR)    | 25.2396%       | 60575   | 0.544998          |
| LITNET udp flood    | natural (per type)    | 15.7747%       | 11831   | 0.394428          |
| LITNET blaster worm | natural (per type)    | 3.544%         | 2658    | 0.964091          |
| LITNET spam         | natural (per type)    | 0.176%         | 132     | 0.846154          |
| LITNET pooled       | synthetic (3-type RR) | 6.4982%        | 14621   | 0.943056          |

order at once. The estimand is therefore the effect of the complete assembly pipeline under a fixed split rule, and nothing finer. We report the joint change and decline to decompose it. Figure 1 shows why the held-out membership differs.

## 5.2 What assembly does to the evaluated sample

Held-out prevalence differs by 42.9954 points. The two held-out slices share only 78000 of 240000 records (32.5%); the assembled arm’s held-out attacks are a strict subset of the timestamp-ordered arm’s, with 103189 attacks relocated into training. The mechanism of the prevalence change is dilution: every held-out attack in the assembled arm is a Friday record (1 of five days contribute any), while Monday–Thursday contribute 162000 attack-free held-out rows. The assembled arm’s Friday sub-slice is denser (77.66%) than the timestamp-ordered arm’s entire slice: prevalence falls because attack-free days are mixed in, not because attacks are redistributed. This dilution accounts for the prevalence change; it is not by itself an account of the outcome change in Section 5.3.

## 5.3 What assembly does to the measured outcome

AUC-PR’s chance floor is the positive-class prevalence, which the treatment moves (0.682350 against 0.252396), and additive lift  $AP - p$  has a prevalence-dependent ceiling of  $1 - p$ . We therefore report raw  $AP$ , the floor  $p$ , and the normalized lift  $(AP - p)/(1 - p)$  together, and report no raw cross-arm difference.



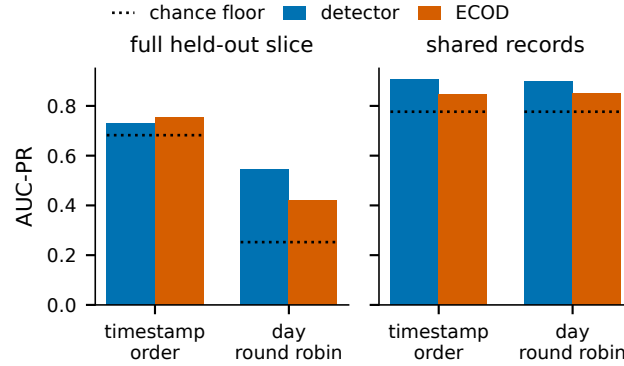


Fig. 2. Detector and ECOD AUC-PR in the two arms. Left: the full held-out slice of each arm, where the measured ordering reverses. Right: the 78000 records both arms held out, where the detector leads in both arms. Dotted marks are each group’s chance floor, the held-out prevalence: 0.682350 and 0.252396 for the full slices and 0.776603 for the shared records. Values are those of Section 5.3 and Table 5.

- **Timestamp order** ( $p = 0.682350$ ): ECOD  $AP = 0.755142$  (normalized lift 0.229158), detector  $AP = 0.728337$  (normalized lift 0.144773). HST scores 0.588902 here, 0.093448 below its chance floor, from a single seed, so no placement is asserted for it.
- **Day round robin** ( $p = 0.252396$ ): detector  $AP = 0.544998$  (normalized lift 0.391386), ECOD  $AP = 0.418966$  (normalized lift 0.222805). HST’s three-seed values are 0.513623, 0.427004 and 0.358504 (mean 0.433044, sd 0.077736); its ordering against ECOD flips across those seeds, so it carries no placement.

The measured ordering of the two deterministic scorers reverses between arms, in both raw and normalized terms. **This is a pipeline-level evaluation outcome under the stated protocol, not a statement about method quality.** Three qualifications are load-bearing and are stated here rather than deferred. (i) ECOD is fitted on benign-only training rows and therefore has label access the streaming methods do not; we treat it throughout as a *label-privileged diagnostic reference*, and no superiority is claimed for or against it. (ii) The two arms score different held-out samples, so the reversal is not measured on a common sample. Section 6 measures what happens when that difference is removed, and the reversal does not survive it (Figure 2). (iii) Determinism removes seed variance but not sampling uncertainty from the selected window, correlated attack runs, or the subsample; we report no confidence interval and therefore claim no stable ordering, only a measured one under this protocol.

#### 5.4 LITNET-2020: pooling as an audit check

Round robin *within* a per-attack-type stream is the identity, so the LITNET contrast is compositional: three per-type streams against the pooled composite used by earlier versions. The pooled held-out slice is by construction exactly the union of the three per-type held-out slices — equal budgets, a perfect three-cycle, and a divisible split boundary — so its prevalence 6.4982% is the equal-weight mean of 15.7747%, 3.544% and 0.176%. This is arithmetic, and we present it as an audit check with pedagogical value rather than as a finding: a pooled operating point can correspond to no capture in the pool, and the equal weighting is an artifact of equal budgets. Per-stream values are in Table 4.

Table 4. LITNET-2020: AUC-PR per stream against the pooled assembled composite. The detector and ECOD (label-privileged diagnostic reference) are deterministic; HST is a single draw per cell, so no ordering involving HST is asserted. Its measured composite spread across three seeds is 0.238840, 0.177599, 0.367761.

| stream                  | held-out prev. | detector | ECOD     | HST (1 seed) |
|-------------------------|----------------|----------|----------|--------------|
| udp_flood (per type)    | 15.7747%       | 0.394428 | 0.321185 | 0.552675     |
| blaster_worm (per type) | 3.544%         | 0.964091 | 0.035710 | 0.147731     |
| spam (per type)         | 0.176%         | 0.846154 | 0.106805 | 0.008447     |
| pooled (assembled)      | 6.4982%        | 0.943056 | 0.229143 | 0.238840     |

Table 5. Both arms restricted to the 78000 records they both held out. Membership and prevalence are identical by construction; only the history each detector saw before scoring them differs.

| arm             | detector $AP$ | ECOD $AP$ | detector AUC-ROC | ECOD AUC-ROC |
|-----------------|---------------|-----------|------------------|--------------|
| timestamp order | 0.905613      | 0.844487  | 0.869219         | 0.799910     |
| day round robin | 0.900371      | 0.849842  | 0.864159         | 0.805657     |

## 6 Isolating What the Treatment Changes

The contrast of Section 5 moves membership, prevalence and order together. Three analyses separate what can be separated from the archived per-record scores of both arms. All three use the metric implementation of Table 2; the dumps reproduce the archived arms to 0.000018 AUC-PR on the timestamp-ordered arm and exactly on the assembled arm.

### 6.1 The records both arms held out

The two held-out slices share 78000 records, carrying 60575 attacks at prevalence 0.776603 — they are the Friday records both assemblies happen to place in the test set, which is why their prevalence is far above either arm’s. Restricting both arms to exactly those records, and recomputing:

**The ordering does not reverse on the shared records.** The detector leads ECOD in both arms (margins 0.061126 and 0.050529, both computed from the reported cells above), and its own score changes by only 0.005242  $AP$  between the two histories. This is the round’s most consequential result and it constrains the paper’s central claim: the reversal reported in Section 5.3 is produced by *which records the assembly places in the test set*, not by the order in which the detector processed its history. We report the reversal as an evaluation-level consequence of assembly and explicitly not as an effect of ordering on detector behaviour.

Two cautions on reading Table 5. The shared records are not a random subsample — they are the intersection two particular assemblies produce, at a prevalence unlike either arm’s — so its absolute values characterise that intersection, not the benchmark. And the detector remains prequential, so the two rows still differ in the history preceding each scored record; what is held fixed is the evaluated sample, not the model state.

### 6.2 Where the split falls

A detector score depends only on the records preceding it, so one pass supports every chronological cut point; ECOD is refit at each cut because its training set moves with the boundary. Over 7 cuts from 60% to 90% of the stream, ECOD exceeds the detector at 3 of them, including the 85% cut this paper’s fixed split uses, and the detector leads at the others.

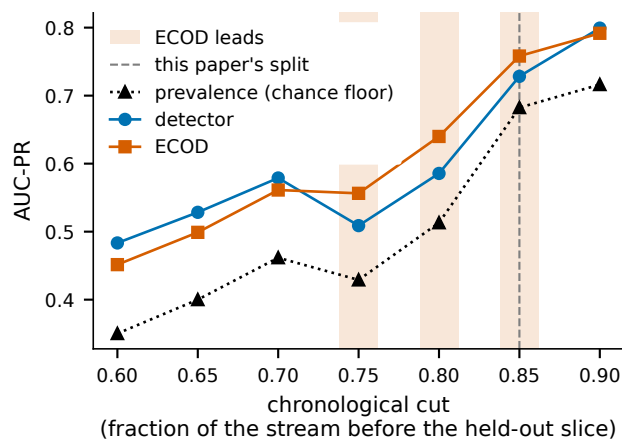


Fig. 3. AUC-PR of the two deterministic scorers at each of the 7 chronological cuts of the timestamp-ordered CICIDS2017 stream. The held-out prevalence at each cut is drawn on the same axis. It is the AUC-PR chance floor. Shaded cuts are the 3 at which ECOD leads. The dashed line marks the cut this paper’s fixed split uses. Values are recomputed from the archived per-record scores, as those of Table 6 are, with ECOD refit at each cut, and so differ slightly from Table 3 at the cut this paper uses.

The measured ordering is therefore a property of the split point as well as of the assembly; the archived split is not adversarially chosen, but it is not neutral either, and no claim here is a stable property of CICIDS2017. Per-cut values are in the archived findings and in Figure 3.

### 6.3 ECOD’s scores depend on the batch they are scored in

The sweep above evaluates the same 240000 held-out records that Section 5.3 evaluates, under the same fitted model, and returns a different ECOD number. The discrepancy is not noise — ECOD is deterministic and both figures reproduce exactly on re-execution — and running it down exposes a property of the reference implementation that bears on every study that reports an ECOD number.

PyOD’s `ECOD.fit` stores the training matrix, and `decision_function` then prepends it to whatever batch it is asked to score before recomputing the per-column empirical CDFs (PyOD 2.0.5, `pyod/models/ecod.py`):

```
if hasattr(self, 'X_train'):
    original_size = X.shape[0]
    X = np.concatenate((self.X_train, X), axis=0)
self.U_l = -1 * np.log(column_ecdf(X))
self.U_r = -1 * np.log(column_ecdf(-X))
skewness = np.sign(skew(X, axis=0))
...
decision_scores_ = self.0.sum(axis=1)[-original_size:]
```

The ECDF denominator is the height of the concatenated matrix and the skewness sign is taken over it, so a record’s score is a function of which *other* records shared its `decision_function` call. ECOD is transductive over the scored batch, not a fitted function evaluated pointwise.

We measured the size of the effect with everything else pinned. The evaluated index set is fixed at the same 240000 records, the model is fitted once on the same benign training rows, and only the number of records accompanying them in the call varies. Scored alone, ECOD reaches  $AP = 0.758205$ ; scored in the 480000-record validation-plus-test call this paper’s contrast arms use, the same records give  $AP = 0.755142$  — a difference of 0.003063  $AP$  on identical records with an identical model. Across a four-point batch ladder the value spans 0.006966  $AP$ , and it does not move monotonically with batch size, so the dependence cannot be corrected for by a simple adjustment.

The second of those two figures is the diagnostic one: 0.755142 is exactly 0.755142, the value the timestamp-ordered arm of Section 5.3 reports, recovered here from an independent pass. The batch composition therefore accounts for the discrepancy completely rather than approximately, which is what distinguishes this from an unexplained numerical difference. The threshold inherits the dependence too, because it is read off the validation portion of the same call.

**What is and is not new here.** That ECOD mixes the training and scored sets is known: it was reported as a defect against the reference implementation in 2022 [35] and remains open, and ADBench [26] evaluates PyOD detectors in a fixed harness that holds the scored batch constant, which sidesteps rather than measures the issue. The ECOD paper [32] specifies an ECDF computed over the data at hand and gives no rule for scoring an out-of-sample record without recomputation, so the implementation is not contradicting its specification — the specification is silent. It is not the only unresolved question about this reference: a separate open report [27] argues that the aggregation the code applies is not the one either the ECOD or the COPOD paper describes. We take no position on that second report; we note only that a detector used as a fixed point of comparison across a literature has open, unresolved questions about what it computes. What we add is narrow and precise: a *quantification* of the effect on a real benchmark with the evaluated records held identical, and the statement of its cross-study consequence. We searched for a published measurement of the effect’s size and found none — the behaviour is recorded in the implementation’s issue tracker and, so far as we can establish, has been treated as a correctness question rather than measured as an evaluation hazard — so we state this as a first quantification and a first statement of the cross-study consequence, in the ordinary sense that we are aware of no prior one. We would rather be corrected on priority than have the measurement go unreported, and the claim is about the measurement, not about the mechanism, which is not ours. That consequence is that published ECOD numbers are not comparable across studies that score different batch sizes, even on the same dataset, the same split and the same model, and that a reported ECOD number is therefore under-specified unless the scoring batch is reported with it. Campos et al. [14] showed for unsupervised outlier detection generally that reported comparisons depend on evaluation choices that papers rarely state.

We hold ourselves to that standard. Every ECOD number in this paper states the batch it was scored in. The contrast, LITNET and sweep numbers come from a call of the form

```
run_batch_reference('ecod', Xfit, np.vstack([Xva, Xte]))
```

so for those the scoring batch is validation-plus-test: 480000 records for both CICIDS arms (Section 5.3), 150000 for each per-capture LITNET stream and 450000 for the pooled composite (Section 5.4), and between 160917 and 480000 across the levels of the prevalence sweep (Section 8), which resamples the stream and so changes the batch with the level. The shared-record analysis of Section 6 scores each arm’s 240000-record held-out slice and then restricts to the 78000 shared records, so its ECOD values carry a 240000-record batch; the split sweep above scores the tail of the stream at each cut, so its batch is the test slice itself and varies by cut. Cross-arm comparisons in this paper are made within a fixed batch size, which is why the batch dependence does not disturb them; the 240000-versus-480000 discrepancy is visible precisely because the split sweep and the contrast were the one pair of analyses that did not share one.

Table 6. Branch-wise discrimination on the timestamp-ordered held-out slice. Values are recomputed from the archived per-record score dump and so differ from Table 3 by 0.000018 *AP* on the deployed composition (Section 6).

| scoring branch       | <i>AP</i> | AUC-ROC  |
|----------------------|-----------|----------|
| deployed composition | 0.728355  | 0.526623 |
| tail term only       | 0.831832  | 0.829281 |
| auxiliary term only  | 0.600270  | 0.281890 |

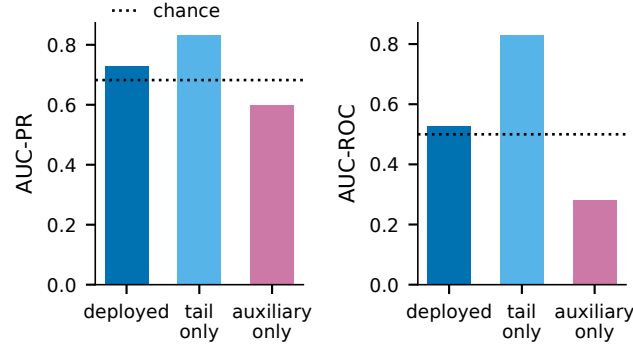


Fig. 4. Branch-wise discrimination on the timestamp-ordered held-out slice, the values of Table 6. Left: AUC-PR with the chance floor at the slice prevalence, 0.682350. Right: AUC-ROC with the chance level of an uninformative ranking. The deployed composition is the detector of the other figures. The tail term alone ranks above the deployed composition on both metrics, and the auxiliary term ranks below chance on AUC-ROC.

## 7 The Deployed Score Ranks Worse Than Its Own Tail Term

The audit of Section 3 establishes what the two branches *are*. This section measures what they *do*, and the answer is a finding in its own right rather than a corollary: the way the two branches are combined destroys discriminative power that one of them already had.

The score is  $\max(\text{tail}, 0.25 \cdot P(r \leq 5))$ , and a branch’s mean magnitude says nothing about which branch ranks. Scoring the timestamp-ordered held-out slice with each branch alone, using the components `update_score` itself computed:

The tail term alone *outranks* the deployed composition, by 0.103477 *AP* and 0.302658 AUC-ROC. Deleting the auxiliary branch would therefore improve the detector on this slice. Figure 4 draws the three branches against chance.

The mechanism is identified and is not statistical. The auxiliary term ranks *below* chance here (AUC-ROC 0.281890 against 0.5), which means it is not noise but an actively inverted signal: it scores attacks lower than benign records more often than not. Because the deployed score is a max, the auxiliary value governs the record’s rank whenever it exceeds the tail value — which is 58.452% of this held-out slice, counted from the same archived components — so an inverted ranking is imposed on top of a working one. That is why the deployed composition’s AUC-ROC (0.526623) sits near chance while its tail component reaches 0.829281.

Three consequences follow, and we state them at their proper strength. First, the near-chance ranking of the deployed detector on this slice is a property of the *composition*, not of either component: a defect in how two signals are combined,

Table 7. AUC-PR by prevalence level on the assembled construction (mean over three resampling draws). “Floor” is the achieved held-out prevalence. At the unresampled level all draws see the same records; at resampled levels the spread of every method is the resampling draw. Per-draw values and normalized lift are in the archived findings.

| Level       | Floor    | proposed detector | HST      | LODA     | ECOD (batch) | LOF (batch) |
|-------------|----------|-------------------|----------|----------|--------------|-------------|
| 5%          | 0.049524 | 0.367164          | 0.199261 | 0.207581 | 0.166239     | 0.537596    |
| 10%         | 0.099004 | 0.447213          | 0.299702 | 0.247426 | 0.252198     | 0.697003    |
| unresampled | 0.252396 | 0.544998          | 0.433044 | 0.341715 | 0.418966     | 0.863194    |
| 40%         | 0.399995 | 0.494217          | 0.476031 | 0.399422 | 0.527364     | 0.896968    |
| 64%         | 0.639991 | 0.619546          | 0.499341 | 0.524691 | 0.678404     | 0.904855    |

not in either signal, and it would not be found by any evaluation that scores only the assembled detector. Second, it generalises as a warning rather than as a measurement — any detector that combines a calibrated signal with an uncalibrated one under a max (or any other order statistic that lets one branch dominate) can have the worse branch silently determine its ranking, and no downstream metric will attribute the loss. Third, it supersedes, in the opposite direction, any claim that the tail term simply performs the discriminative work of the deployed score: the tail term does not merely carry the score, it is held back by it. We state the measurement as a property of one slice of one benchmark; the branch-wise decomposition needed to find it costs nothing, because the components are values `update_score` already computes.

## 8 Prevalence Within One Assembled Construction

An earlier version reported a prevalence sweep as evidence about deployment regimes. Retained here, it is a controlled experiment *on the assembled (interleaved) CICIDS2017 stream* and nothing more: prevalence is varied by stratified resampling at five levels, three draws each. It does not isolate prevalence either — only the unresampled level’s draws see identical records, so record identity, repetition and temporal adjacency vary with the nominal level. Table 7 reports *AP* with the achieved held-out prevalence as the floor beside every level.

Two observations. The first is at the unresampled level, where all draws see identical records and the detector, ECOD and LOF are each deterministic, so a flat comparison is admissible here — identical records, no seed variance to withhold: the batch label-privileged reference LOF attains  $AP = 0.863194$  against the detector’s  $AP = 0.544998$  on that identical slice. Second, the detector’s normalized lift runs 0.334190 at 5%, 0.386471 at 10%, 0.391386 unresampled, 0.157035 at 40%, and -0.056790 at 64% — below zero at the highest level, meaning below what an uninformative ranking achieves. We note that the additive and normalized forms peak at different levels, which is precisely why both are reported. Nothing in this section transfers to the timestamp-ordered stream or to deployment.

## 9 Repairing the Change-Point Statistic

Section 3 showed the evaluated posterior is pinned below the cap. A standard repair is a prior-predictive term on the reset branch. We implemented **one untuned instance** of that repair — a Normal-Inverse-Gamma prior predictive (Student- $t$ ,  $\nu=2$ , squared scale twice the global variance, standard vague hyperparameters, nothing tuned) — and measured both variants under a 30-minute compute cap whose reductions bind this paragraph: one stream (`udp_flood`), a 200000-record prefix, one seed. On the synthetic probe the repair responds:  $P(r=0)$  peaks at 1 after a  $6\sigma$  shift against 0.001 for the evaluated detector. On real data it ranks near chance:  $AP = 0.169912$  against 0.397486 (floor 0.161333; normalized lift 0.010229 against 0.281581), with AUC-ROC 0.509620.

Table 8. One untuned repair saturates the score. Diagnostics over the first 15000 records of the ablation stream; detection metrics on the 200000-record prefix (held-out 30000 records, 4840 attacks, floor 0.161333).

|                                    | evaluated detector | one untuned repair |
|------------------------------------|--------------------|--------------------|
| mean posterior mass $P(r \leq 5)$  | 0.006472           | 1                  |
| scores exactly at the 0.25 cap     | 0.004733           | 0.9274             |
| distinct score values              | 3899               | 747                |
| score standard deviation           | 0.218999           | 0.159341           |
| $AP$ on the prefix                 | 0.397486           | 0.169912           |
| normalized lift $(AP - p)/(1 - p)$ | 0.281581           | 0.010229           |
| AUC-ROC on the prefix              | 0.848216           | 0.509620           |

Table 8 shows why. Under the repair the posterior sits on short runs at every step (mean  $P(r \leq 5) = 1$ ), the  $0.25 \cdot P(r \leq 5)$  branch saturates, 0.9274 of scores sit exactly at the 0.25 cap, and 747 distinct values are emitted against 3899. The score is *not* constant — it takes many values and has standard deviation 0.159341 — but it ranks near chance on this sample, which is what an AUC-ROC close to 0.5 indicates. Both variants are thus degenerate in opposite directions: the evaluated one never resets below the cap, this repair almost always resets. We draw no conclusion about what a *tuned* prior-predictive scale would achieve; that requires a training/validation tuning protocol and more than one stream, and selecting it on test labels is forbidden by our protocol.

## 10 Provenance Discipline

Every measured value in this paper is a  $\LaTeX$  macro generated from archived run manifests recording git commit, configuration hash, input SHA-256, seed, environment hash, timestamps and output paths. Protocol constants that define the experiment rather than result from it (the 70/15/15 split, budget sizes, the auxiliary weight, library versions) and values quoted from cited third-party work are typed, and are identified as such where they appear. A claim ledger maps every sentence of the abstract and introduction to its generating run.

**What the checks cover, stated as a scope rather than a name.** The build fails on: a measurement-shaped number with no manifested value, anywhere in the manuscript, in any file it includes, or in any file the claim ledger cites; a macro two runs claim with different values; drift between the derived macro index and the manifests behind it; a cited key with no bibliography entry; and a derived quantity that disagrees with the values printed beside it. Files whose purpose is to record withdrawn numbers are scanned and reported rather than failed, because forcing a withdrawn value through the macro layer would manifest an error as a measurement, and the few genuine non-measurements inside enforced files sit in a named allowlist with a stated reason each.

The checks do *not* cover: protocol constants and values quoted from cited work, which are typed and identified as such; prose; or — the important one — whether the code, labels, preprocessing or interpretation are correct. Provenance establishes that a displayed number came from a recorded execution on recorded inputs, and nothing beyond that.

We state the covered set explicitly, rather than the mechanism’s name, for a reason that generalises past this paper: a check is trusted according to what its name claims and enforces only what it inspects, and the gap between the two is invisible precisely because the name is reassuring — a gate reported that every number in this manuscript traced to a manifest while reading only the file it had itself generated from those manifests, and a compile check reported zero undefined references in a document carrying citations that resolved to nothing. Both were true statements about a narrower scope than their names implied. A reader should ask of any such check what set it actually reads.

## 11 Relationship to Prior Versions of This Work

Earlier versions of this manuscript were publicly posted and are superseded by this one. Because a per-result-group account of what is reused, re-derived, corrected, withdrawn or new would identify those versions — and they are not anonymous — that account is supplied to the editors confidentially rather than printed here, together with the dated version history and the list of claims each correction invalidates.

Three statements can be made in the body without breaking anonymity, and are made here because they bear on how the results should be read. First, some measurements in this paper also appear in the earlier versions: the pooled LITNET composite and the assembled CICIDS arm are the *same measurements*, reported there under a regime interpretation that this paper withdraws and replaces with an assembly interpretation. Second, the timestamp-ordered CICIDS arm, the per-capture LITNET streams, the shared-record analysis, and the method-identity audit have no counterpart in any earlier version. Third, results on a third dataset that appeared in the earlier versions are withdrawn and are not relied upon anywhere in this paper.

One result from those earlier versions is worth restating here as *corroboration*, explicitly not as a contribution of this paper. Conformal risk control [2] extends conformal prediction from coverage to any monotone risk, such as a false-positive rate, and holds that risk at or below a chosen level under exchangeability. It builds on the distribution-free risk-controlling prediction sets of Bates et al. [10]. Applying conformal risk control to the uncalibrated scores at a nominal alert budget of  $\alpha = 0.01$  was infeasible on one of the evaluated datasets — no threshold in  $[0, 1]$  yielded an upper-bounded false-positive rate at or below  $\alpha$ , so the guarantee could not be instantiated at all. That observation was published in the superseded versions, is not new here, and rests on a pipeline this paper does not otherwise retain. It is mentioned only because it points the same way as Section 5.3: an operating point manufactured by the assembly step is not merely an inflated number, it can be a regime in which a downstream bounded-error guarantee has no feasible setting. We draw no conclusion from it and no claim in this paper depends on it.

The corrected-incident log in the artifact records each correction with its evidence and closure status. The count of incidents is not itself a quality claim.

## 12 Threats to Validity

**Internal.** The assembly treatment is uncontrolled by construction: it moves held-out membership, prevalence and order together, so no single factor is identified by the contrast alone. Section 6 removes the membership difference post hoc and finds the ordering reversal does not survive, which locates the effect in sample membership; it does not decompose the remaining factors, and a factorial design still would. ECOD is a label-privileged diagnostic reference, not a competitor under equal information. Determinism removes seed variance only; we report no confidence interval, and with attack runs of median/p90/max 2/70/2522 an IID row bootstrap would be inappropriate, so an event-block or rolling-origin procedure is the right instrument and is not yet applied. Stochastic baselines appear either as single draws marked as such or as means over draws with the draw spread stated, and the per-draw values are archived.

**External.** Two benchmarks, one split rule, one corpus per benchmark. The CICIDS mechanism depends on that dataset’s scripted per-day schedule meeting a positional split; it does not establish the direction or magnitude of assembly effects elsewhere. The LITNET identity depends on equal budgets and a divisible boundary. The corpus is a 76.628% budgeted subsample. The timestamp-ordered held-out slice is one 204.2-minute window — what a positional chronological split yields on this corpus, stated rather than engineered around. Timestamp order is the least transformed reference available for CICIDS2017, not a universal gold standard: multi-sensor deployments legitimately merge



asynchronous sources, and the durable recommendation is to preserve capture and time metadata, justify the assembly, and report sensitivity to plausible alternatives.

**Construct.** We do not claim the evaluated detector is change-point detection, we do not claim the untuned repair characterizes corrected change-point detection, and we do not claim that ordering alone causes the outcome change.

### 13 Conclusion

On these two benchmarks, the step that assembles capture files into an evaluation stream is an uncontrolled experimental treatment: it changes which records are evaluated, at what prevalence, in what order, and thereby what is measured. On CICIDS2017 the same multiset reordered yields held-out slices sharing 32.5% of their records at prevalences 42.9954 points apart, and reverses the measured ordering of the two deterministic scorers — a reversal that disappears once both arms are restricted to the records they share, locating it in the sample the assembly selects rather than in the order it imposes. On LITNET-2020, pooling reports an operating point no capture exhibits. The practical recommendation is not that chronology is always right; it is that assembly belongs in the experimental design and in the provenance record — report capture identity, mixture weights, split membership, held-out overlap, and sensitivity to the plausible alternatives — so that a reported operating point can be recognized as a property of the assembly when it is one.

### Data and Artifact Availability

The code, stream-assembly scripts with SHA-256 verification, all run manifests, the macro layer, the claim ledger and the corrected-incident history are archived. The repository is public at <https://github.com/MichelYsf/rcbsid-paper> (branch `rebuild/honest-v1`); the artifact is archived as version 2.0.0 of the Zenodo record lineage, doi:10.5281/zenodo.22213264 (v1.0.0: doi:10.5281/zenodo.20074590).

### Acknowledgements: Generative AI Usage

In accordance with the ACM Policy on Authorship, the authors disclose that generative AI tools were used in producing this work. Large language models were used, under continuous human direction, to write and refactor analysis scripts, to draft prose subsequently verified against the archived measurements, and to operate an adversarial review harness that audited the authors' own claims. No generative AI tool is an author of this work, and none produced any reported measurement: every measured value was generated by executed code that wrote an archived run manifest in the same execution, and the provenance gate and claim ledger exist in part to make that boundary externally auditable. The authors take full responsibility for the entire content of this work, including any portion drafted with such assistance.

### Companion Manuscript Disclosure

A companion manuscript from the same research programme (arXiv:2510.09619) shares parts of the underlying codebase and predates the audit reported here. The method-identity findings of Section 3 apply to that shared lineage, and correcting it is in hand. It is a public preprint and is not under review at any venue; its status was verified against the submission system of record on 27 August 2026, and there is accordingly no other editor to inform and no concurrent consideration to declare. Its relationship to the results reported here, and the relationship to the earlier public versions of this manuscript, are stated in Section 11; the earlier public versions are arXiv:2605.24696 v1 and v2.

## References

- [1] Ryan Prescott Adams and David J. C. MacKay. 2007. Bayesian Online Changepoint Detection. *arXiv preprint arXiv:0710.3742* (2007). doi:10.48550/arXiv.0710.3742
- [2] Anastasios N. Angelopoulos, Stephen Bates, Adam Fisch, Lihua Lei, and Tal Schuster. 2024. Conformal Risk Control. In *The Twelfth International Conference on Learning Representations (ICLR)*. arXiv:2208.02814. <https://openreview.net/forum?id=33XGfHLtZg>
- [3] Giovanni Apruzzese, Pavel Laskov, and Johannes Schneider. 2023. SoK: Pragmatic Assessment of Machine Learning for Network Intrusion Detection. In *2023 IEEE 8th European Symposium on Security and Privacy (EuroS&P)*. IEEE, 592–614. doi:10.1109/EuroSP57164.2023.00042
- [4] Giovanni Apruzzese, Luca Pajola, and Mauro Conti. 2022. The Cross-Evaluation of Machine Learning-Based Network Intrusion Detection Systems. *IEEE Transactions on Network and Service Management* 19, 4 (2022), 5152–5169. doi:10.1109/TNSM.2022.3157344
- [5] Daniel Arp, Erwin Quiring, Feargus Pendlebury, Alexander Warnecke, Fabio Pierazzi, Christian Wressnegger, Lorenzo Cavallaro, and Konrad Rieck. 2022. Dos and Don'ts of Machine Learning in Computer Security. In *31st USENIX Security Symposium (USENIX Security 22)*. USENIX Association, 3971–3988.
- [6] Stefan Axelsson. 2000. The Base-Rate Fallacy and the Difficulty of Intrusion Detection. *ACM Transactions on Information and System Security* 3, 3 (2000), 186–205. doi:10.1145/357830.357849
- [7] Rina Foygel Barber, Emmanuel J. Candès, Aaditya Ramdas, and Ryan J. Tibshirani. 2023. Conformal Prediction Beyond Exchangeability. *The Annals of Statistics* 51, 2 (2023), 816–845. doi:10.1214/23-AOS2276
- [8] Seth Barrett, Gokila Dorai, Lin Li, and Swarnamugi Rajaganapathy. 2026. FADES: Adaptive Drift Estimation via Conformal Signals for Streaming Intrusion Detection. *Electronics* 15, 10 (2026), 2114. doi:10.3390/electronics15102114
- [9] Seth Barrett, Lin Li, Gokila Dorai, and Swarnamugi Rajaganapathy. 2026. FIRCE: A Framework for Intrusion Response and Conformal Evaluation. In *2026 International Conference on Smart Applications, Communications and Networking (SmartNets)*. 1–9. arXiv:2605.01962. doi:10.1109/SMARTNETS69662.2026.11604738
- [10] Stephen Bates, Anastasios Angelopoulos, Lihua Lei, Jitendra Malik, and Michael I. Jordan. 2021. Distribution-Free, Risk-Controlling Prediction Sets. *Journal of the ACM* 68, 6 (2021), 43:1–43:34. doi:10.1145/3478535
- [11] Betsy Beyer, Chris Jones, Jennifer Petoff, and Niall Richard Murphy (Eds.). 2016. *Site Reliability Engineering: How Google Runs Production Systems*. O'Reilly Media.
- [12] Md Anas Biswas. 2026. The Evaluation Protocol Is the Hidden Variable: A Drift-Aware Re-Examination of Flow-Based Intrusion Detection Benchmarks. *Preprints.org* (2026). Preprint, posted 11 June 2026. doi:10.20944/preprints202606.0903.v1
- [13] Markus M. Breunig, Hans-Peter Kriegel, Raymond T. Ng, and Jörg Sander. 2000. LOF: Identifying Density-Based Local Outliers. In *Proceedings of the 2000 ACM SIGMOD International Conference on Management of Data*. 93–104. doi:10.1145/342009.335388
- [14] Guilherme O. Campos, Arthur Zimek, Jörg Sander, Ricardo J. G. B. Campello, Barbora Micenková, Erich Schubert, Ira Assent, and Michael E. Houle. 2016. On the Evaluation of Unsupervised Outlier Detection: Measures, Datasets, and an Empirical Study. *Data Mining and Knowledge Discovery* 30, 4 (2016), 891–927. doi:10.1007/s10618-015-0444-8
- [15] Yang Cao, Yixiao Ma, Ye Zhu, and Kai Ming Ting. 2025. Revisiting Streaming Anomaly Detection: Benchmark and Evaluation. *Artificial Intelligence Review* 58, 1 (2025), 8. doi:10.1007/s10462-024-10995-w
- [16] Marta Catillo, Andrea Del Vecchio, Antonio Pecchia, and Umberto Villano. 2021. A Critique on the Use of Machine Learning on Public Datasets for Intrusion Detection. In *Quality of Information and Communications Technology (QUATIC 2021) (Communications in Computer and Information Science, Vol. 1439)*. Springer, 253–266. doi:10.1007/978-3-030-85347-1\_19
- [17] Marta Catillo, Antonio Pecchia, and Umberto Villano. 2023. Machine Learning on Public Intrusion Datasets: Academic Hype or Concrete Advances in NIDS?. In *2023 53rd Annual IEEE/IFIP International Conference on Dependable Systems and Networks, Supplemental Volume (DSN-S)*. 132–136. doi:10.1109/DSN-S58398.2023.00038
- [18] Robertas Damasevicius, Algimantas Venckauskas, Sarunas Grigaliunas, Jevgenijus Toldinas, Nerijus Morkevicius, Tautvydas Aleliunas, and Paulius Smuikys. 2020. LITNET-2020: An Annotated Real-World Network Flow Dataset for Network Intrusion Detection. *Electronics* 9, 5 (2020), 800. doi:10.3390/electronics9050800
- [19] Jesse Davis and Mark Goadrich. 2006. The Relationship Between Precision-Recall and ROC Curves. In *Proceedings of the 23rd International Conference on Machine Learning (ICML)*. 233–240. doi:10.1145/1143844.1143874
- [20] Zhiguo Ding and Minrui Fei. 2013. An Anomaly Detection Approach Based on Isolation Forest Algorithm for Streaming Data Using Sliding Window. *IFAC Proceedings Volumes* 46, 20 (2013), 12–17. doi:10.3182/20130902-3-CN-3020.00044
- [21] Charles Elkan. 2001. The Foundations of Cost-Sensitive Learning. In *Proceedings of the Seventeenth International Joint Conference on Artificial Intelligence (IJCAI 2001)*. Morgan Kaufmann, 973–978.
- [22] Gints Engelen, Vera Rimmer, and Wouter Joosen. 2021. Troubleshooting an Intrusion Detection Dataset: The CICIDS2017 Case Study. In *2021 IEEE Security and Privacy Workshops (SPW)*. 7–12. doi:10.1109/SPW53761.2021.00009
- [23] Paul Fearnhead and Zhen Liu. 2007. On-Line Inference for Multiple Changepoint Problems. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 69, 4 (2007), 589–605. doi:10.1111/j.1467-9868.2007.00601.x
- [24] Sudipto Guha, Nina Mishra, Gourav Roy, and Okke Schrijvers. 2016. Robust Random Cut Forest Based Anomaly Detection on Streams. In *Proceedings of the 33rd International Conference on Machine Learning (ICML) (Proceedings of Machine Learning Research, Vol. 48)*. PMLR, 2712–2721.

- [25] Ambarish Gurjar and L. Jean Camp. 2026. Predicting Tail-Risk Escalation in IDS Alert Time Series. *arXiv preprint arXiv:2601.14299* (2026).
- [26] Songqiao Han, Xiyang Hu, Hailiang Huang, Minqi Jiang, and Yue Zhao. 2022. ADBench: Anomaly Detection Benchmark. In *Advances in Neural Information Processing Systems 35 (NeurIPS 2022), Datasets and Benchmarks Track*. 32142–32159. arXiv:2206.09426. doi:10.52202/068431-2329
- [27] Hellsice. 2024. ECOD and COPOD Decision Functions Switched. PyOD issue #561, <https://github.com/yzhao062/pyod/issues/561>. Opened 30 April 2024; open as of 3 September 2026.
- [28] Jeremias Knoblauch and Theodoros Damoulas. 2018. Spatio-Temporal Bayesian On-Line Changepoint Detection with Model Selection. In *Proceedings of the 35th International Conference on Machine Learning (ICML) (Proceedings of Machine Learning Research, Vol. 80)*. PMLR, 2718–2727. arXiv:1805.05383.
- [29] Maxime Lanvin, Pierre-François Gimenez, Yufei Han, Frédéric Majorczyk, Ludovic Mé, and Éric Totel. 2023. Errors in the CICIDS2017 Dataset and the Significant Differences in Detection Performances It Makes. In *Risks and Security of Internet and Systems (CRiSIS 2022) (Lecture Notes in Computer Science, Vol. 13857)*. Springer, 18–33. doi:10.1007/978-3-031-31108-6\_2
- [30] Rikard Laxhammar and Göran Falkman. 2014. Online Learning and Sequential Anomaly Detection in Trajectories. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 36, 6 (2014), 1158–1173. doi:10.1109/TPAMI.2013.172
- [31] Zheng Li, Yue Zhao, Nicola Botta, Cezar Ionescu, and Xiyang Hu. 2020. COPOD: Copula-Based Outlier Detection. In *2020 IEEE International Conference on Data Mining (ICDM)*. 1118–1123. doi:10.1109/ICDM50108.2020.00135
- [32] Zheng Li, Yue Zhao, Xiyang Hu, Nicola Botta, Cezar Ionescu, and George H. Chen. 2023. ECOD: Unsupervised Outlier Detection Using Empirical Cumulative Distribution Functions. *IEEE Transactions on Knowledge and Data Engineering* 35, 12 (2023), 12181–12193. doi:10.1109/TKDE.2022.3159580
- [33] Lisa Liu, Gints Engelen, Timothy Lynar, Daryl Essam, and Wouter Joosen. 2022. Error Prevalence in NIDS Datasets: A Case Study on CIC-IDS-2017 and CSE-CIC-IDS-2018. In *2022 IEEE Conference on Communications and Network Security (CNS)*. IEEE, 254–262. doi:10.1109/CNS56114.2022.9947235
- [34] Emaad Manzoor, Hemank Lamba, and Leman Akoglu. 2018. xStream: Outlier Detection in Feature-Evolving Data Streams. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (KDD)*. 1963–1972. doi:10.1145/3219819.3220107
- [35] mbongaerts. 2022. ECOD Mixes Train Set and Test Set. PyOD issue #401, <https://github.com/yzhao062/pyod/issues/401>. Opened 28 April 2022; open as of 3 September 2026.
- [36] Matthew B. McDermott, Haoran Zhang, Lasse Hyldig Hansen, Giovanni Angelotti, and Jack Gallifant. 2024. A Closer Look at AUROC and AUPRC under Class Imbalance. In *Advances in Neural Information Processing Systems 37 (NeurIPS 2024)*. 44102–44163. arXiv:2401.06091. doi:10.52202/079017-1400
- [37] Yisroel Mirsky, Tomer Doitshman, Yuval Elovici, and Asaf Shabtai. 2018. Kitsune: An Ensemble of Autoencoders for Online Network Intrusion Detection. In *Proceedings of the 2018 Network and Distributed System Security Symposium (NDSS)*. Internet Society. arXiv:1802.09089. doi:10.14722/ndss.2018.23204
- [38] Zach Moczodan and Hany Ragab. 2026. Do Transformers Actually Help Intrusion Detection? A Temporal Sequence Evaluation on CIC-IDS2017. *arXiv preprint arXiv:2606.11098* (2026).
- [39] Daniel Olszewski, Allison Lu, Carson Stillman, Kevin Warren, Cole Kitroser, Alejandro Pascual, Divyayoti Ukirde, Kevin Butler, and Patrick Traynor. 2023. “Get in Researchers; We’re Measuring Reproducibility”: A Reproducibility Study of Machine Learning Papers in Tier 1 Security Conferences. In *Proceedings of the 2023 ACM SIGSAC Conference on Computer and Communications Security (CCS)*. 3433–3459. doi:10.1145/3576915.3623130
- [40] Feargus Pendlebury, Fabio Pierazzi, Roberto Jordane, Johannes Kinder, and Lorenzo Cavallaro. 2019. TESSERACT: Eliminating Experimental Bias in Malware Classification across Space and Time. In *28th USENIX Security Symposium (USENIX Security 19)*. USENIX Association, 729–746.
- [41] Tomáš Pevný. 2016. Loda: Lightweight On-Line Detector of Anomalies. *Machine Learning* 102, 2 (2016), 275–304. doi:10.1007/s10994-015-5521-0
- [42] Markus Ring, Sarah Wunderlich, Deniz Scheuring, Dieter Landes, and Andreas Hotho. 2019. A Survey of Network-Based Intrusion Detection Data Sets. *Computers & Security* 86 (2019), 147–167. doi:10.1016/j.cose.2019.06.005
- [43] Takaya Saito and Marc Rehmsmeier. 2015. The Precision-Recall Plot Is More Informative than the ROC Plot When Evaluating Binary Classifiers on Imbalanced Datasets. *PLOS ONE* 10, 3 (2015), e0118432. doi:10.1371/journal.pone.0118432
- [44] Iman Sharafaldin, Arash Habibi Lashkari, and Ali A. Ghorbani. 2018. Toward Generating a New Intrusion Detection Dataset and Intrusion Traffic Characterization. In *Proceedings of the 4th International Conference on Information Systems Security and Privacy (ICISSP)*. 108–116. doi:10.5220/0006639801080116
- [45] Robin Sommer and Vern Paxson. 2010. Outside the Closed World: On Using Machine Learning for Network Intrusion Detection. In *2010 IEEE Symposium on Security and Privacy*. IEEE, 305–316. doi:10.1109/SP.2010.25
- [46] Swee Chuan Tan, Kai Ming Ting, and Fei Tony Liu. 2011. Fast Anomaly Detection for Streaming Data. In *Proceedings of the Twenty-Second International Joint Conference on Artificial Intelligence (IJCAI 2011)*. AAAI Press, 1511–1516. doi:10.5591/978-1-57735-516-8/IJCAI11-254
- [47] Gerrit J. J. van den Burg and Christopher K. I. Williams. 2020. An Evaluation of Change Point Detection Algorithms. *arXiv preprint arXiv:2003.06222* (2020).
- [48] Vladimir Vovk, Alexander Gammerman, and Glenn Shafer. 2005. *Algorithmic Learning in a Random World*. Springer, New York. doi:10.1007/b106715
- [49] Renjie Wu and Eamonn J. Keogh. 2023. Current Time Series Anomaly Detection Benchmarks Are Flawed and Are Creating the Illusion of Progress. *IEEE Transactions on Knowledge and Data Engineering* 35, 3 (2023), 2421–2429. doi:10.1109/TKDE.2021.3112126