

# Web-based information systems 1

## General introduction

Michiel Noback (NOMI)  
Institute for Life Sciences and Technology  
Hanze University of Applied Sciences



# introduction

- We will investigate the power of dynamic web pages using server-side and client-side technology, and the ways they interact
- For the server-side, Java web technology was chosen
- For the client side, we'll fiddle around with HTML(5), CSS, Javascript and its libraries

# Ten Simple Rules for Providing a Scientific Web Resource


1. Plan Your Resource
2. Discuss Responsibilities
3. Know Your User Base
4. Use Services Available to You during Development
5. Ensure Portability
6. Create an Open Source Project
7. Provide Ample Documentation and
8. Listen to Feedback
9. Facilitate Reproducibility
10. Plan Ahead: Long-Term Maintenance
11. Switch off an Unused Resource

# tools

- these are the tools we are going to use to build our dynamic web applications:
  - **Java**: plain old Java to build the logic
  - **Servlets & Thymeleaf**: the server side Java technology to generate dynamic content
  - **Tomcat**: a container where the servlets live
  - **Javascript**: client-side scripting language to manipulate the view
  - **jQuery**: a Javascript library/platform for performing many tasks that are pretty hard to implement using raw Javascript
  - **css** (cascading style sheets): to style the view

# the basics

- when you click a simple link in a web page (the ***client***), you request a ***resource***
- the web ***server*** receives the request, locates the resource and returns something to the user: a ***response***

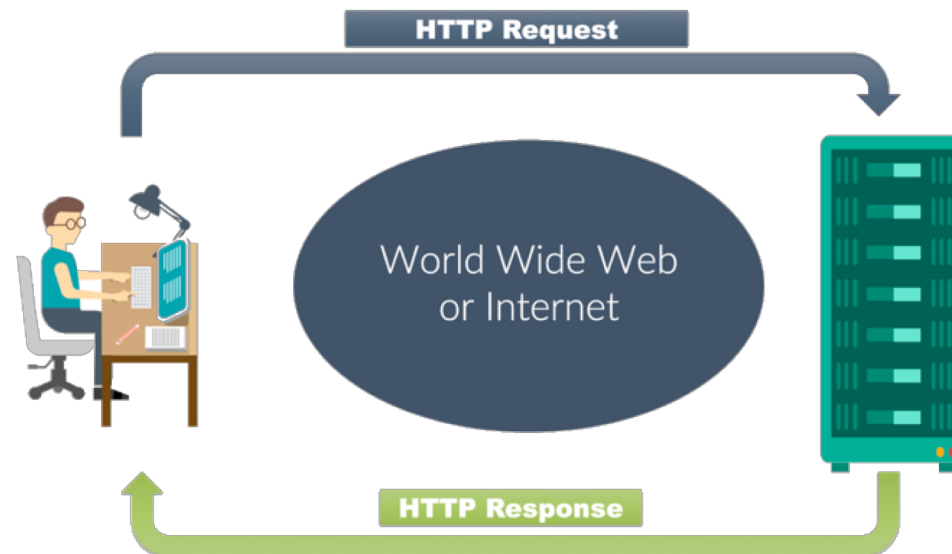

# the client

- the client (usually a web browser) formats a request and sends it to the server
- the client receives the *response* and *processes* it
- when the response is html, the response is ***rendered*** by the browser into a web page ***view***



# the server

- the server receives the request, locates the correct resource and formats the response before sending it to the client
- the server can **not**:
  - save anything
  - generate dynamic content
  - remember you or your previous requests
- these tasks have to be *delegated*



# http request types

http requests come in 7 flavors:

**Common requests** (99.99999% of the use cases)

- **get** a simple resource fetch request
- **post** a request that sends data to the server or requests to change its data

There are others, not often used and not always supported because of security issues:

- **delete**
- **head**
- **options**
- **put**
- **trace**



# http request with a form

```
<html>
  <head>
    <title>a page with a form</title>
  </head>
  <body>
    <h1>request bird pictures
    <form action="birdpic">
      Species name: <input type="text" name="species">
      <br />
      Minimum rating: <input type="text" name="rating">
      <br />
      <input type="submit" value="find">
    </form>
  </body>
</html>
```

If not specified,  
the http request  
type is GET

**request bird pictures**

The HTML is rendered  
into this view

Species name:


Minimum rating:

# http GET request

## request bird pictures

Species name:   
Minimum rating:

Filling in the form with a GET request type and clicking *find* generates this *location* (URL)



...and this HTTP GET request

here have your parameters gone

```
GET ~michiell/WebBased/birdpic?species=Roodborst&rating=4 HTTP/1.1
Host: www.bioinf.nl
User-Agent: Mozilla/5.0(...)
Accept: text/xml,application/xml,(...)
Accept-Language: en-us,en;q=0.5
Accept-Encoding: gzip,deflate
Accept-Charset: ISO-8859-1,utf-8,q=0.7,*;q=0.7
Keep-Alive: 300
Connection: keep-alive
```

# http POST request

```
<form action="birdpic" method="POST" >  
  Species name: <input type="text" name="species">  
  Minimum rating: <input type="text" name="rating">  
  <input type="submit" value="find">  
</form>
```

Changing the  
method to POST

gives this no-  
params location...

...and this HTTP  
POST request



```
POST ~michiel/WebBased/birdpic HTTP/1.1  
Host: www.bioinf.nl  
User-Agent: Mozilla/5.0(...)  
Accept: text/xml.application/xml,(...)  
Accept-Language: en-us,en;q=0.5  
Accept-Encoding: gzip,deflate  
Accept-Charset: ISO-8859-1,utf-8,q=0.7,*;q=0.7  
Keep-Alive: 300  
Connection: keep-alive
```

**species=Roodborst&rating=4**

your parameters are  
now located at the  
end of the request

# http response

- the response coming back from the server will look like this:

HTTP/1.1 200 OK

Set-Cookie: JSESSIONID=0AAB6CGSTGGC56DS3FF78; Path=/WebBased

Content-Type: text/html

Content-Length: 397

Date: Sun, 9 Nov 2009 02:50:40 CET

Server: Apache-Coyote/1.1

Connection: close

```
<html>  
  <head>  
    ...  
</html>
```

This is the HTTP response body with the HTML that the browser is going to display

This is the HTTP response header with a **status code** (200 / OK), a cookie and other important information about the response

# GET or POST


- use GET for (simple) requests that do not alter the data on the server side; these are called ***idempotent*** because they can be made over and over again without any effect on the server
- use POST for complex requests and requests that alter the data on the server side

# URL

- URL stands for Uniform Resource Locator
- Every web resource has its own unique address in the URL format:

`http://www.bioinf.nl:80/~michiël/WebBased/index.html`

`http://`                      **protocol**  
`www.bioinf.nl`            **server**  
`:80`                        **port**  
`~michiël/WebBased/` **path**  
`index.html`                **resource**

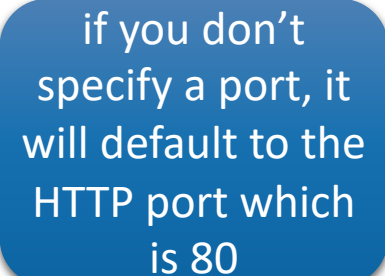

if you don't  
specify a port, it  
will default to the  
HTTP port which  
is 80

# TCP ports

- The TCP port is a 16-bit number that identifies a specific software program on the server hardware
- A server can have up to 65536 different server apps running
- TCP port numbers from 0 to 1023 are reserved for well-known services:
  - 21            FTP (file transfer protocol)
  - 22            SSH (secure shell)
  - 25            SMTP (mail)
  - 80            HTTP (Hypertext Transfer Protocol)
  - 443          HTTPS
- Don't use these ports for your own server programs
- Tomcat usually runs on port 8080

# static versus dynamic content

- Web servers can ONLY serve static content (html pages, pictures, xml documents etc)
- If you want dynamic content, you have to delegate this to another application

```
<html>
  <body>
    The current time is [insertTimeOnServer]
  </body>
</html>
```

a web server can't  
help you with this

Non-Java programs that can do this  
are called CGI scripts. Examples of  
languages used to write these are  
Perl, PHP, Python etc



# the CGI way of dynamic content

- This is a PHP script printing current time:

```
<html>
  <body>
    The current time is
      <?php
        // Prints something like: Monday 8th of July 2005 03:12:46 PM
        echo date('L jS \of F Y h:i:s A');
      ?>
    </body>
  </html>
```



showtime.php


# why use Java?

- Although Java is more of a fuss to get up and running, it is much better in serving heavy-duty analysis tools
- If you want a simple interface with forms accessing database data and presenting them, use Python or PHP
- If you want a real analysis tool running behind a web application, use Java
- But always...

# separation of responsibilities

- Always ***separate the responsibilities*** of the view, the data and the model!
- ***Avoid mixing html, styling, scripting, database access and application logic at all costs!***
- This is the essence of the ***Model View Controller (MVC) design pattern (or paradigm)***

# The MVC design pattern

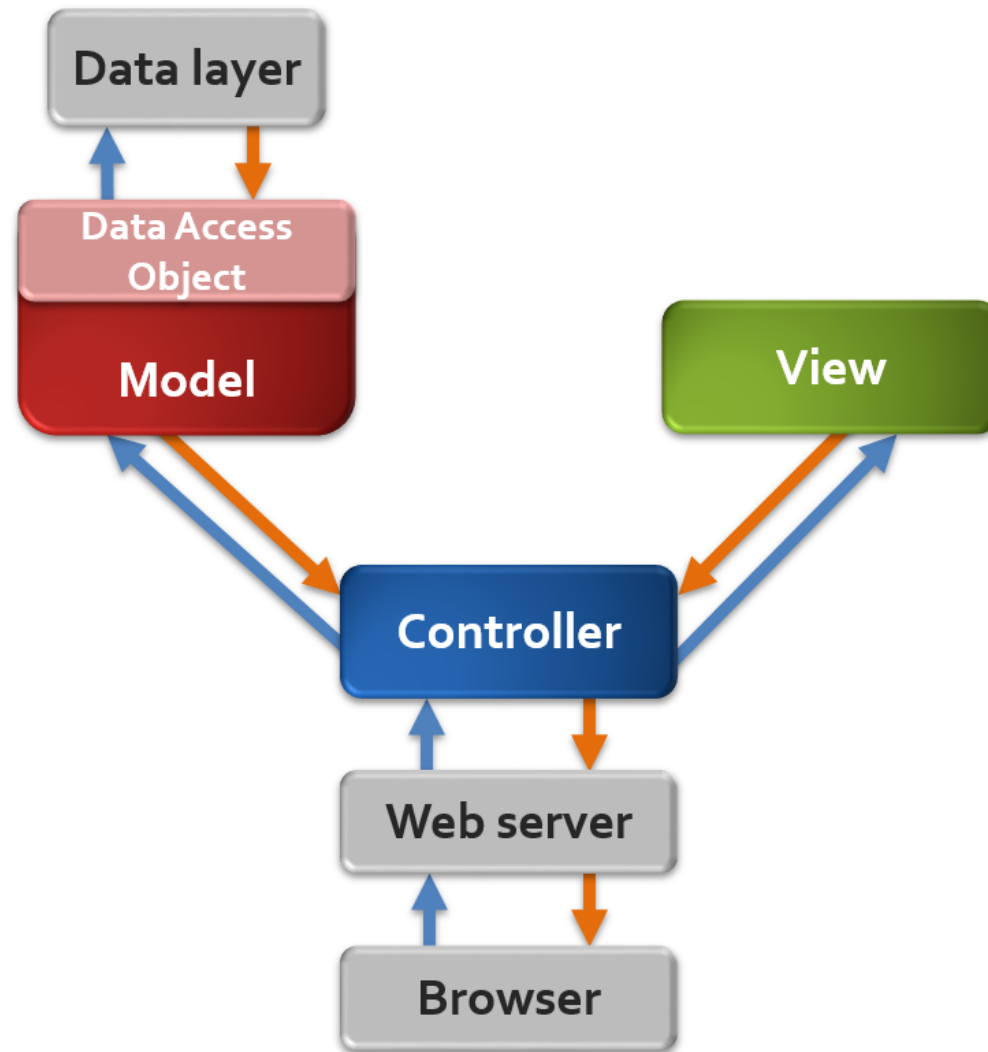

# MVC on different levels

- MVC can be applied on different levels
  - at the server for whole-application architecture (Servlet control – Thymeleaf view – Java model)
  - In a single web page DOM element: A Form HTML/css view, its Javascript controller and a Javascript model

# “old” versus “modern” web apps

- In the old days, almost every action or resource requested from the server resulted in a completely new page
- Now, single-page web apps are becoming the standard.
- The key to this is Ajax: it lets you load and update only those parts of the page where this is required
- Also, Javascript can take a LOT of logic away from the server

# preparing the environment: Tomcat

- To start working with Java web technology, you have to get Tomcat and install it:
  - go to <http://tomcat.apache.org/> and download the latest version
  - extract it in a suitable location
  - make the `bin/*.sh` file executable
  - To test, start up Tomcat using  
    `/tomcat/bin/startup.sh`  
    (you will need to make it executable first)
  - direct your browser to <http://localhost:8080/> and you should see the Tomcat management page

# Java development kit

- Besides Tomcat you will need:
  - Java EE 6 SDK
  - IntelliJ Idea Ultimate  $\geq 2018$  (You can get a free educational license)
  - A MySQL server and account (you can set this up at home using LAMP or WAMP)
  - A modern web browser, preferably Chrome or Firefox. This course uses Chrome.




# Debugging web sites

- All modern browsers have extensive debugging support
- Do not use the JavaScript function `alert("my debug message")` but `console.log("my debug message")`
- Use the context menu option “Inspect element” in the browser:

# The Chrome/Firefox inspectors

- Use the inspector to investigate, change and track DOM structure, bugs, network traffic, styling information, print info from JavaScript, change JavaScript variables...

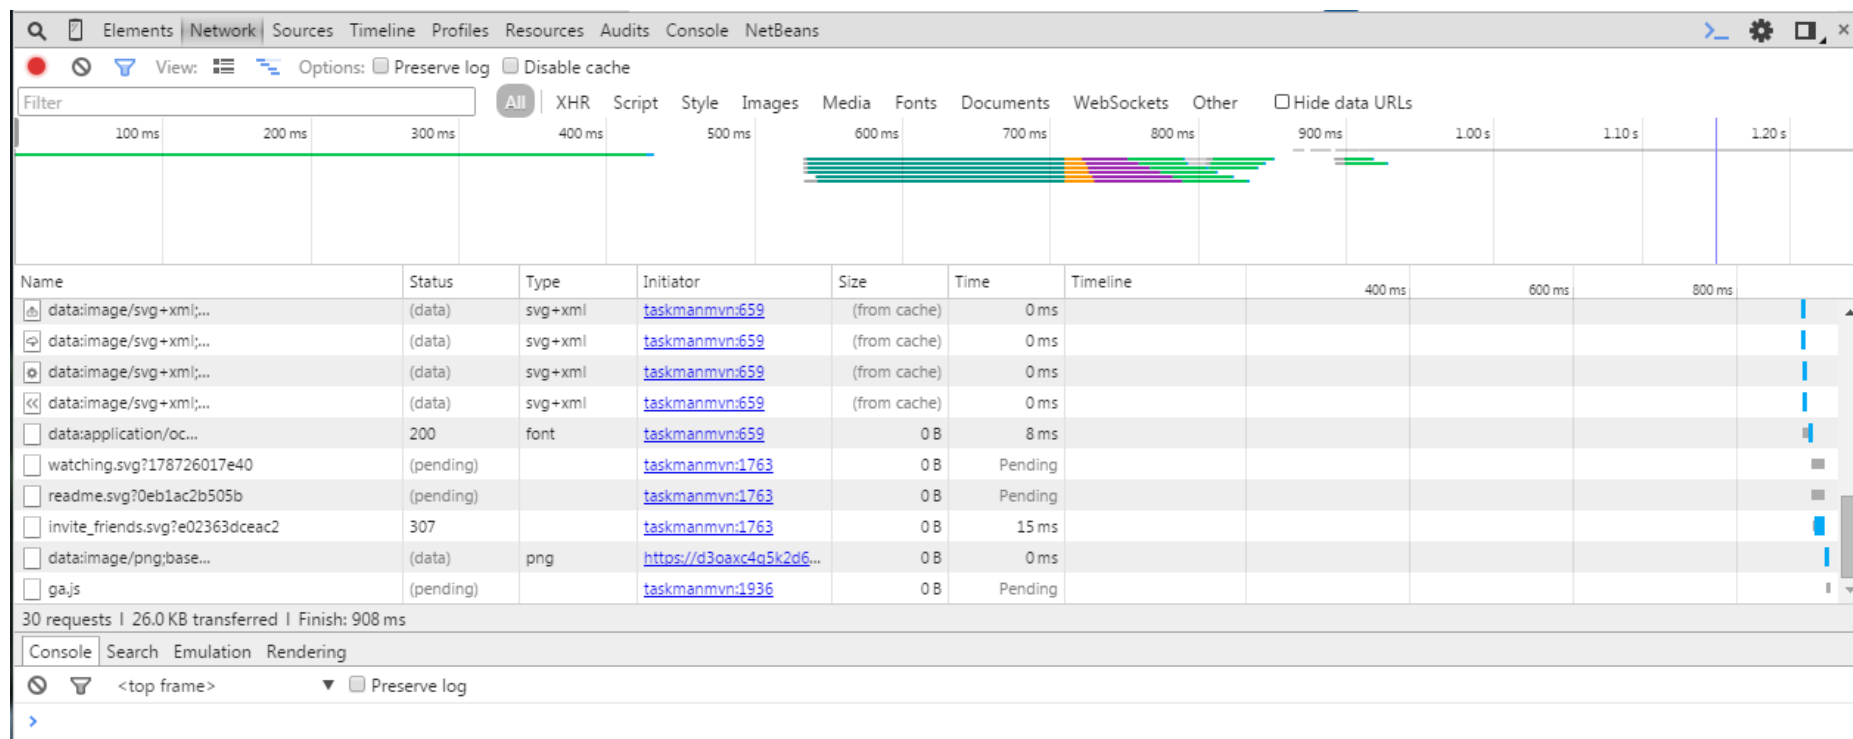

The screenshot displays the Chrome DevTools Network tab. The top section shows a timeline of network requests from 0 to 1.2 seconds. Below the timeline is a table of network requests. The table has columns for Name, Status, Type, Initiator, Size, Time, and Timeline. The requests include data:image/svg+xml, data:application/oc..., watching.svg, readme.svg, invite\_friends.svg, data:image/png;base..., and ga.js. The bottom section shows the Console tab with a search bar and a list of messages.


Name	Status	Type	Initiator	Size	Time	Timeline
data:image/svg+xml;...	(data)	svg+xml	taskmanmvn:659	(from cache)	0 ms	
data:image/svg+xml;...	(data)	svg+xml	taskmanmvn:659	(from cache)	0 ms	
data:image/svg+xml;...	(data)	svg+xml	taskmanmvn:659	(from cache)	0 ms	
data:image/svg+xml;...	(data)	svg+xml	taskmanmvn:659	(from cache)	0 ms	
data:application/oc...	200	font	taskmanmvn:659	0 B	8 ms	
watching.svg?178726017e40	(pending)		taskmanmvn:1763	0 B	Pending	
readme.svg?0eb1ac2b505b	(pending)		taskmanmvn:1763	0 B	Pending	
invite_friends.svg?e02363dceac2	307		taskmanmvn:1763	0 B	15 ms	
data:image/png;base...	(data)	png	https://d3oaxc4q5k2d6...	0 B	0 ms	
ga.js	(pending)		taskmanmvn:1936	0 B	Pending	

30 requests | 26.0 KB transferred | Finish: 908 ms

Console Search Emulation Rendering

<top frame> Preserve log

# Use Codepen for testing snippets


Hello   
A PEN BY Michiel


Save


Fork

Settings

Change View







HTML

```
1 <h1 id="my_header">Hello
  World</h1>
2
```

CSS


```
1 h1 {
2   color: navy;
3   margin-left: 500px;
4   margin-top: 50px;
5   border-style: dotted;
6   width: 250px;
7   text-align: center;
8 }
```

JS

```
1
2 document.getElementById("my_header").onmouseover
  = function (){
3   console.log("starting")
4   obj = document.getElementById("my_header")
5   var orig = obj.style.color;
6   obj.style.color = 'red';
7   window.setTimeout(function() {
8     obj.style.color = orig;
9   }, 5000);
10  console.log("ending")
11 };
12
13
```

Hello World

Console

Clear 


"ending"


> |

Console

Assets

Comments



Last saved 7 days ago 

Delete

Share

Export

Embed

Collections 