

MAGOWEB – User Manual

Summary


Purchase MagoWeb	3
Hardware and software prerequisites	4
Updating to version 5.1.0	5
Installation and first Configuration	6
Starting the Installer	7
Installation Mode	7
Select Installation Path	8
Start the installation	8
Initial configuration of parameters	9
Creation of the SYS-ADMIN user	10
Access to the system	10
Configuration of the SYS-ADMIN account	11
Configuration of the System Database	12
Selection of the Database Provider	12
Creation or Selection of the System Database	13
Summary of Operations	13
Creation of Subscription Database	14
Changes to the Initial Configuration	16
MagoWeb Update	16
Service Monitoring	18
Uninstallation of MagoWeb	19
Recovery of a Previous Installation	20
User and Subscription Management	20
Subscription Management	20
Database Management	21
Module Synchronization	24
Account Management	25
Creating a New Account	25
Management of Existing Accounts	26

System DB Management.....	29
Data Synchronization from Cloud Provisioning	30
Management and Configuration of SMTP Servers.....	32
Access to MagoWeb and Two-Factor Authentication Configuration	40
Access to MagoWeb	40
Access to MSH.....	41
Account Settings Management.....	43
Enabling Two-Factor Authentication (2FA)	44
Disabling Two-Factor Authentication (2FA)	45
Multi-Company and Multi-Tenant Management	47
Appendix A	52
Exposure of MagoWeb on the network	52
Appendix B	52
Certificate Configuration	52
Troubleshooting	53

Purchase MagoWeb

The purchase of MagoWeb subscriptions is done through the dedicated Zucchetti Portal, following the standard procedure.

- Once the order is placed, it is necessary to activate the subscription via the appropriate activation button in the "My Clients" section of the Mago Store screen.

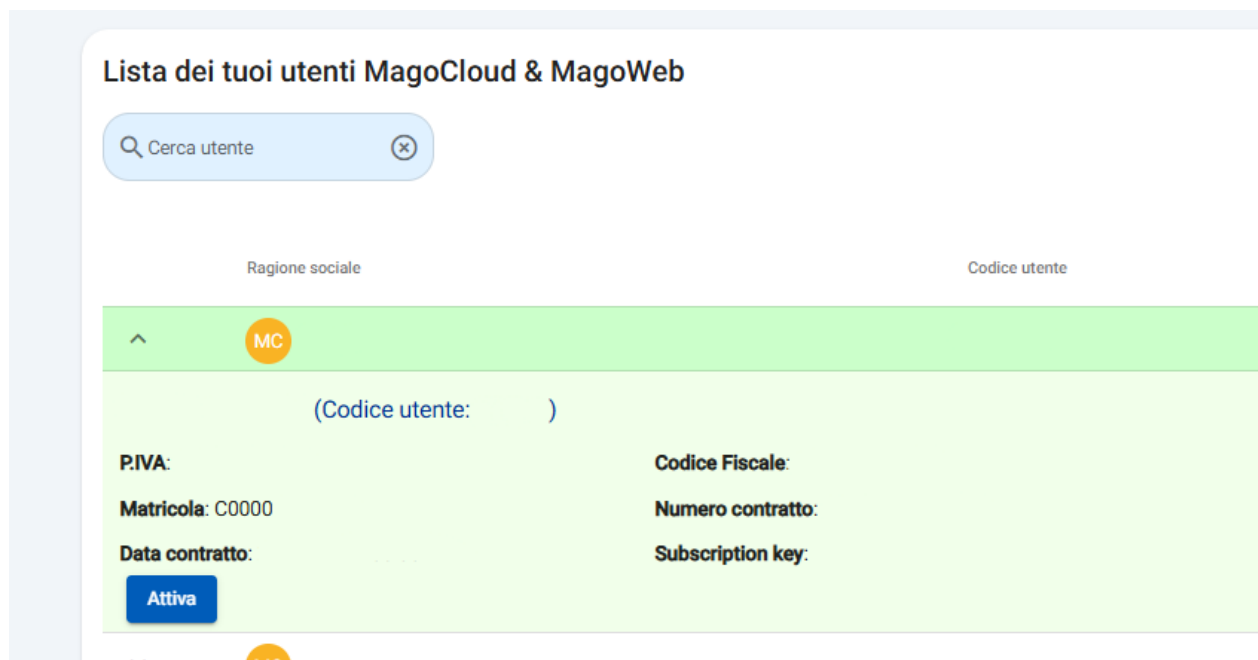


Lista dei tuoi utenti MagoCloud & MagoWeb

Cerca utente

Ragione sociale	Codice utente
MC	(Codice utente:)
P.IVA: Matricola: C0000 Data contratto:	Codice Fiscale: Numero contratto: Subscription key:
Attiva	

- At the end of the process, you will receive an email containing the necessary installation information, including the Instance Key and the Security Value.

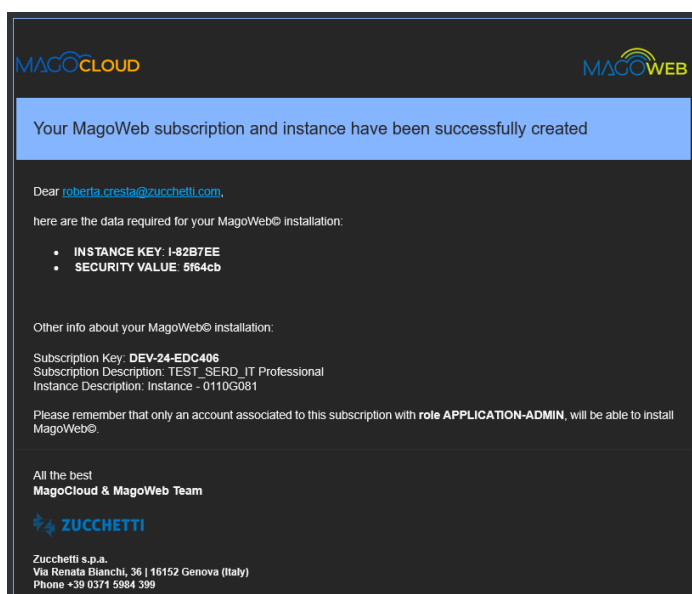

You need to provide these details during the initial installation.
Afterward, you will be able to proceed with the creation of the new database.

Hardware and software prerequisites

Below are the minimum requirements for a MagoWeb installation.

The hardware requirements refer to two ranges of workstations (PDL) and are related to the scenario where the same machine acts as both the Application and DB server.

The indicated hardware resources are based on load tests conducted by simulating interactive use of the program and may vary depending on the use cases.

With the same virtual resources, performance may vary depending on the underlying hardware and the virtualization system in use. The specified requirements should be considered as a general reference.

Range PDL	CPU	RAM	Requisiti SW
1-5	2 core	16 GB	- Windows Server Standard 2016, 2019, 2022, 2025 - Microsoft SQL Server 2017, 2019, 2022 - Postgres 14.9 , 15.3
6-10	4 core	16 GB	- Windows Server Standard 2016, 2019, 2022, 2025 - Microsoft SQL Server 2017, 2019, 2022 - <u>PostgreSQL</u> 14 , 15, 16

IMPORTANT

To ensure optimal performance and reduce the risk of conflicts, particularly those related to RabbitMQ and Erlang version alignment, we do not recommend installing MagoWeb, Mago4, and Mago.net on the same machine. The best solution is to use a dedicated machine for each product, ensuring greater stability, service isolation, and more efficient resource management.

Updating to version 5.1.0

Starting by version 5.1, the MagowebInstaller tool will change installation technology from “clikonce” to a proprietary technology.


The new installer will be placed at the following url:

<https://raw.githubusercontent.com/Microarea/magoweb-installer/stable/setup.exe>

The old “clickonce” version will be able to automatically update to the new technology.

Due to a limitation in the clickonce uninstallation procedure, the old version cannot be automatically uninstalled.


The user need to manually remove the old versione from the control panel: in order to differentiate the two version, the new one will be listed as “MagowebInstaller (new)”



In order to simplify the uninstallation process of the old version, a button will be added to the main window of the Magowebinstaller



The user need onlyt to confirm the “removal” of the old version.

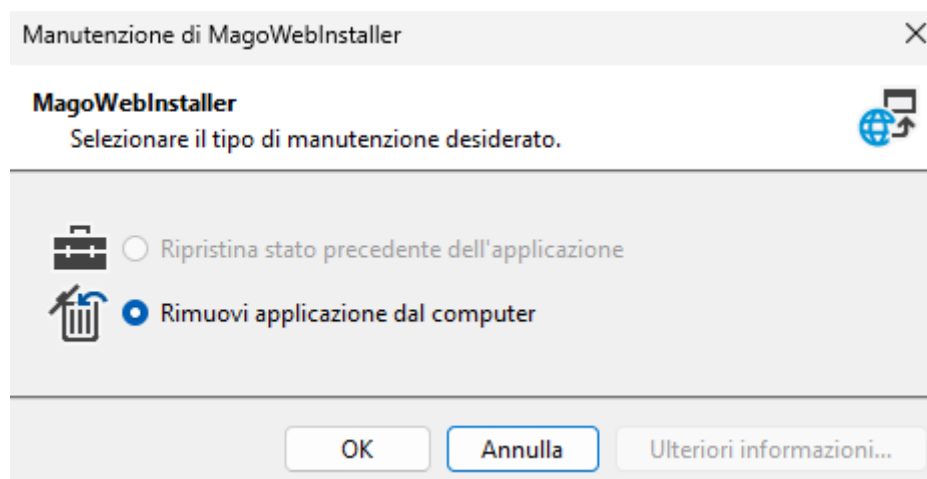


Installation and first Configuration

Log in to the machine where MagoWeb will be installed using an account with administrative privileges.

Download the installer and the .zst file for the version you intend to install from the Microarea website at <https://mymago.zucchetti.com>, ensuring that the versions of the two files match.

Starting from version 1.4, the MagoWeb installer has been modified. You must use the setup.exe installer, and it is NOT possible to use the MagoWebinstaller.exe from previous versions. Doing so will cause the installation to fail, and a clean reinstall of the product will be required.

Check and/or set the Windows User Account Control (UAC) security level to the default level as shown in the screenshot.

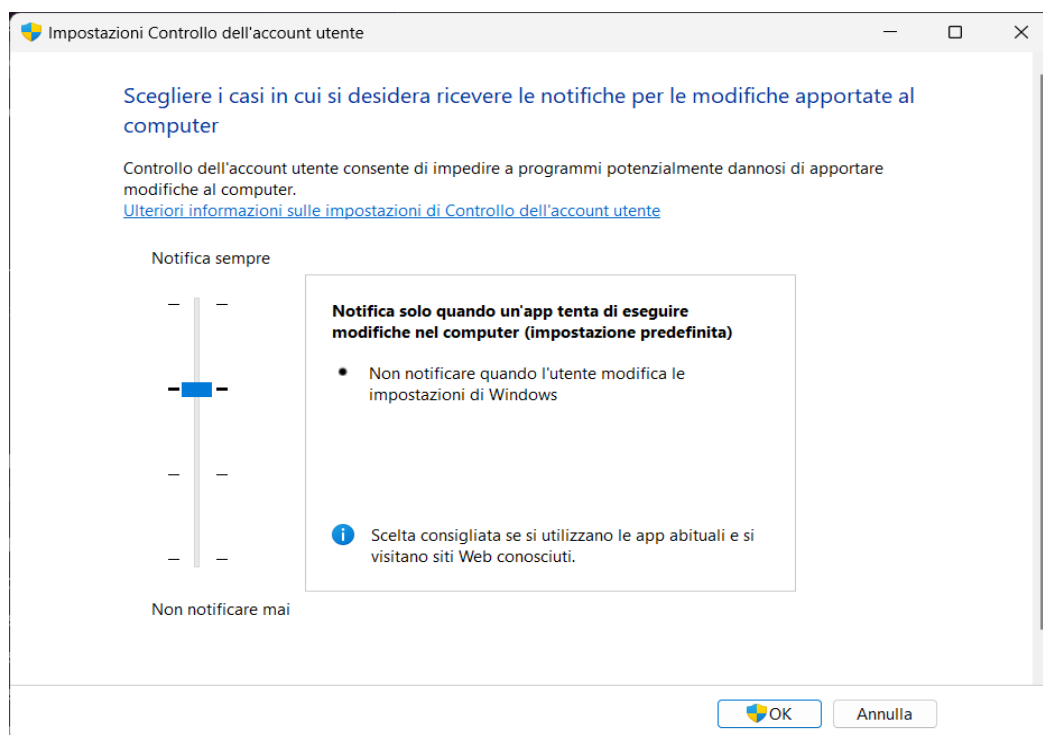

Versions 1.3 or earlier

Run **MagoWebInstaller.exe** as an administrator. If the previous step is not completed, a warning message will notify the user.

Versions 1.4 or later

Open an administrative command prompt and run the Setup.exe file. The setup will verify and download the necessary prerequisites, and once this operation is complete, it will open the installer window. Again, if the UAC permission levels are not set correctly, a message will notify the user.


Starting the Installer

Run the file MagoWebInstaller.exe

If the system has never been configured before, a configuration wizard will automatically start, guiding you step by step through the process.


Installation Mode

- **New Installation (Install MagoWeb):** If this is your first time installing MagoWeb.
- **Restore an Existing Installation (Recovery existing installation):** If you wish to use a previously existing configuration.

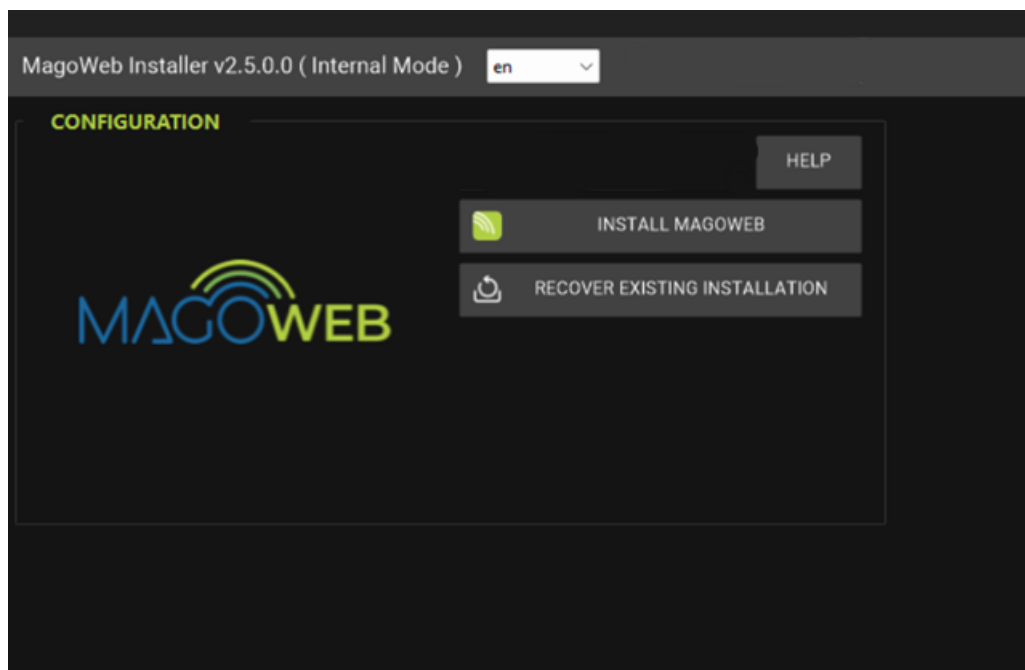

Select Installation Path


- By clicking **INSTALL MAGOWEB**, you need to select the folder where you wish to install MagoWeb. During the installation, MagoWeb will be created in a subfolder named "Zst file."
- **Zstd file path:** Enter the path of the Zst file associated with the MagoWeb installation (the downloaded file).

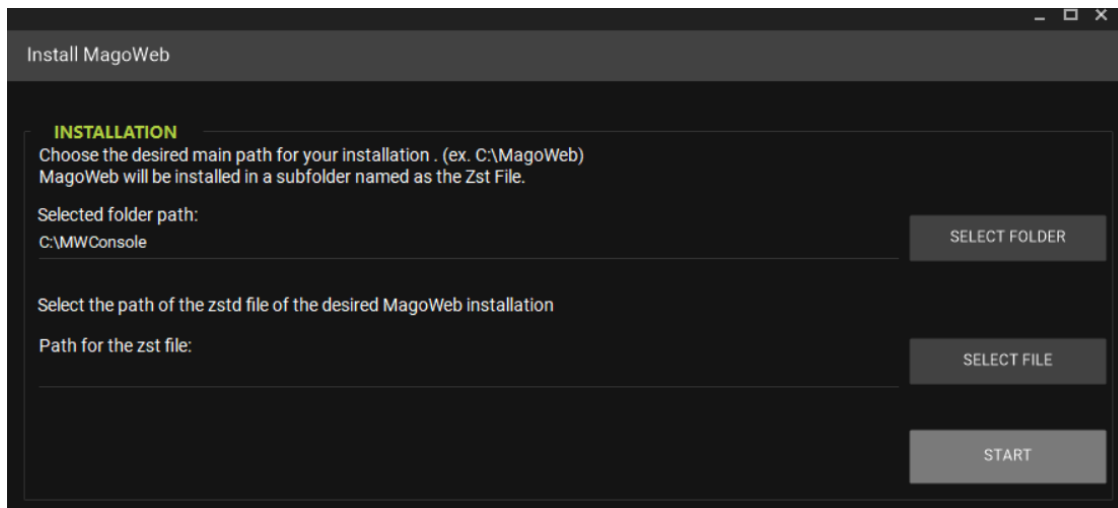

Start the installation


- After selecting the path, click **Start** to begin the installation.
- The system will proceed with downloading and installing the necessary files.

Alternatively, you can proceed with **Recovery existing installation**. In this case, the system will prompt you to select the path of the already existing MagoWeb installation folder. Once selected, click Start to begin the recovery procedure.

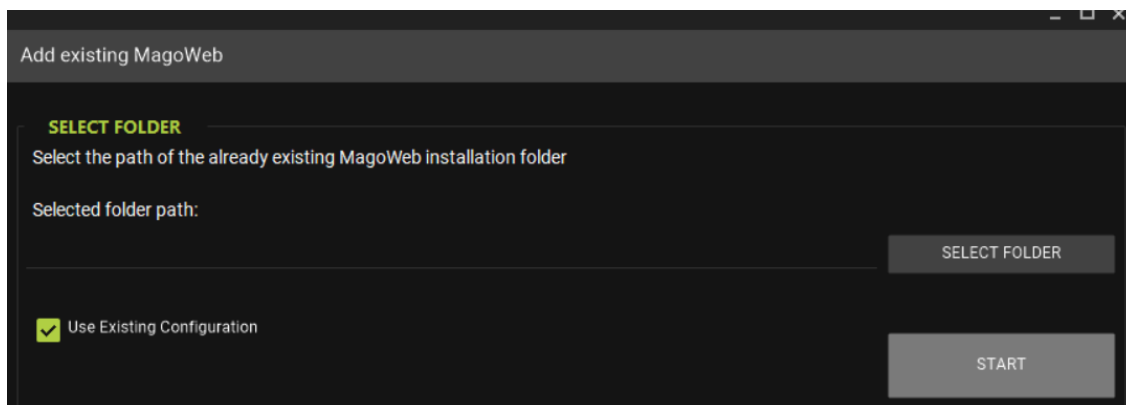

Initial configuration of parameters

The configuration window is divided into five main sections:

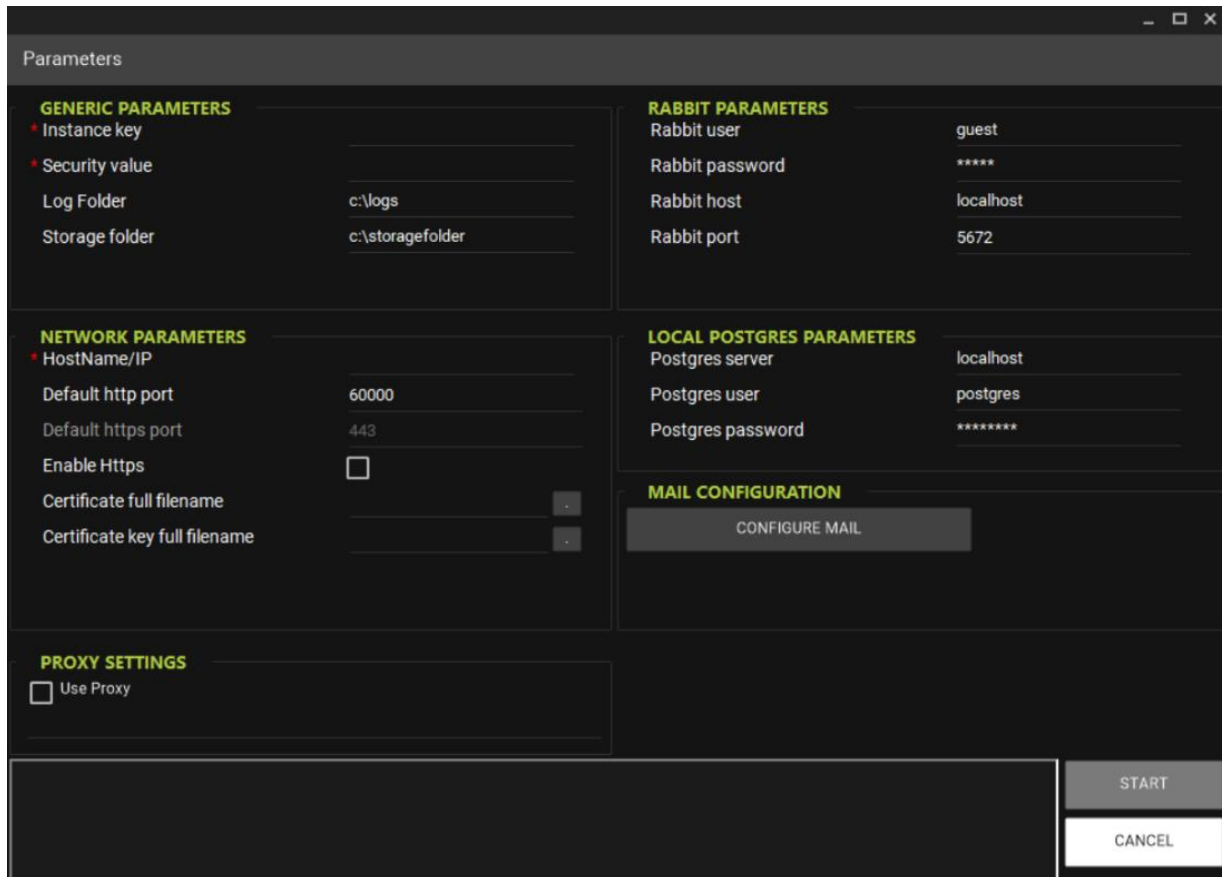

The screenshot shows a 'Parameters' configuration window with a dark theme. It is divided into five main sections: **GENERIC PARAMETERS**, **RABBIT PARAMETERS**, **NETWORK PARAMETERS**, **LOCAL POSTGRES PARAMETERS**, and **MAIL CONFIGURATION**.
 - **GENERIC PARAMETERS**: Includes fields for 'Instance key' (marked with a red asterisk), 'Security value' (marked with a red asterisk), 'Log Folder' (set to 'c:\logs'), and 'Storage folder' (set to 'c:\storagefolder').
 - **RABBIT PARAMETERS**: Includes fields for 'Rabbit user' (set to 'guest'), 'Rabbit password' (masked with '*****'), 'Rabbit host' (set to 'localhost'), and 'Rabbit port' (set to '5672').
 - **NETWORK PARAMETERS**: Includes fields for 'HostName/IP' (marked with a red asterisk), 'Default http port' (set to '60000'), 'Default https port' (set to '443'), an 'Enable Https' checkbox (unchecked), and two fields for 'Certificate full filename' and 'Certificate key full filename' with browse buttons.
 - **LOCAL POSTGRES PARAMETERS**: Includes fields for 'Postgres server' (set to 'localhost'), 'Postgres user' (set to 'postgres'), and 'Postgres password' (masked with '*****').
 - **MAIL CONFIGURATION**: Contains a 'CONFIGURE MAIL' button.
 - **PROXY SETTINGS**: Contains a 'Use Proxy' checkbox (unchecked).
 At the bottom right, there are 'START' and 'CANCEL' buttons.

General parameters:

- **The Instance Key and Security Value**, which you should have received via email earlier (see the MagoWeb Purchase section).
- **Log folder**: The folder where the diagnostic logs produced by the various services will be stored.
- **Storage folder**: This folder will temporarily store the various files during any Upload/Download operations.

Network parameters:

- **Hostname/Ip**: This field hosts the public IP address of the machine that will host the MagoWeb installation, or a related alias set externally at the DNS level.
- **Default http e Https port**: default 60000 (http) e 443 (https)
- **Enable Https**: Specifies whether to enable HTTPS management for the installation. Enabling this option will activate the parameters related to certificates.
- **Full path of the certificate file and the key**: (es. c:\cert\certificate.crt e c:\cert\certificate.key). Specify the certificate and key files related to the domain/IP set previously.

If HTTPS is enabled, ensure that the exact hostname corresponding to the certificate you will be using is entered in the HostName field.

The installer will automatically configure the various services to run over HTTPS and create rules in the Windows firewall to allow incoming traffic on the specified ports.

Proxy settings

If the MagoWeb installation is performed in a domain behind a proxy, enable the corresponding flag and set the proxy URL.

Rabbit parameters

In this section, enter the parameters for the RabbitMQ connection. The installer can use an existing version of RabbitMQ, or if it doesn't exist, it will be automatically installed and configured.

Postgres parameters

As with RabbitMQ, the installer can use existing versions of PostgreSQL or automatically install the necessary version.

Note: *PostgreSQL is a prerequisite for the operation of certain MagoWeb services and is not necessarily the database server is connected to the subscription.*


Port settings

Finally, this section highlights the default ports on which the various MagoWeb services will listen.

Creation of the SYS-ADMIN user

Access to the system


- Once the installation is complete, it will be necessary to create a SYS-ADMIN account.
- In the Provisioning section, click on **Login** to start the SYS-ADMIN account configuration wizard.
-

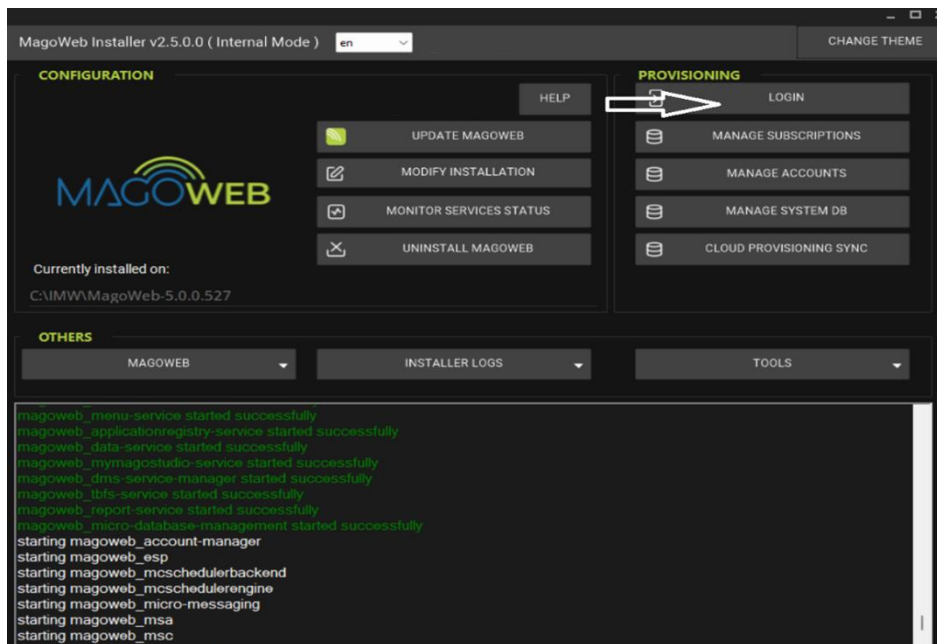

Configuration of the SYS-ADMIN account

- **Password:** Choose a password for the SYS-ADMIN account.
- **Email address:** Enter a valid email address for account recovery and notifications.
- **Account name:** This field is not editable and will be pre-filled with the SYS-ADMIN account name, which is **mwsysadmin**.

You can also choose your preferred language for the user interface.

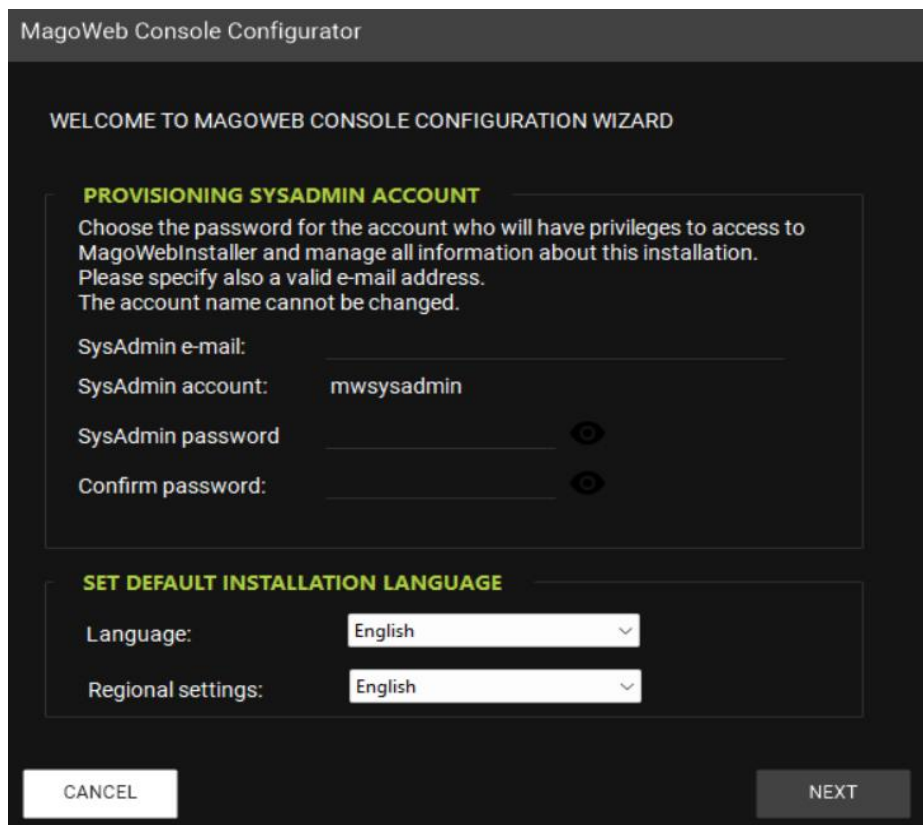

Click **Next** to proceed.

Configuration of the System Database

- Before configuring the database for MagoWeb Console, administrative database credentials will be required.

Selection of the Database Provider


Select the **database provider** to use:

- **SQL Server** or **PostgreSQL**.

Enter the database server details:

- **Reference server:** Enter the address of the SQL or PostgreSQL server.
- **SysAdmin User:** The username for administrative access (e.g., 'sa' for SQLServer / 'postgres' for PostgreSQL).
- **SysAdmin Password:** The password for the administrative user.

Note: *The provided administrative credentials are used only for system database management operations and will NOT be saved locally.*

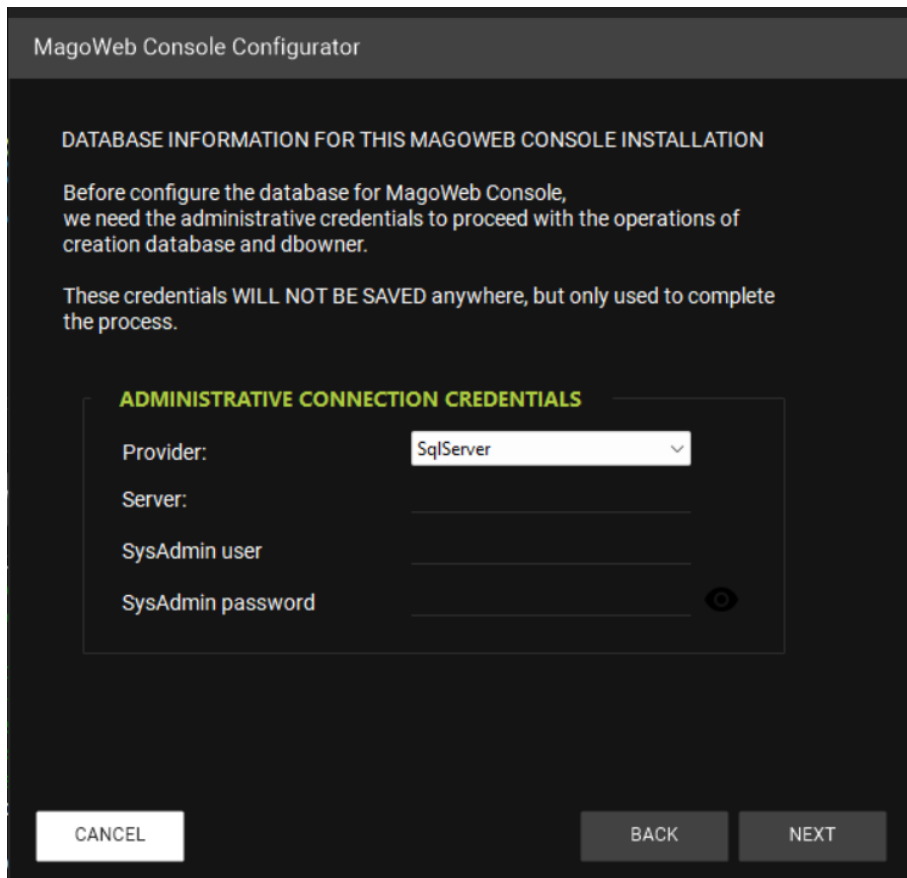

The screenshot shows a window titled "MagoWeb Console Configurator". Inside, there is a section titled "DATABASE INFORMATION FOR THIS MAGOWEB CONSOLE INSTALLATION". Below this, it states: "Before configure the database for MagoWeb Console, we need the administrative credentials to proceed with the operations of creation database and dbowner. These credentials WILL NOT BE SAVED anywhere, but only used to complete the process." Below this text is a form titled "ADMINISTRATIVE CONNECTION CREDENTIALS". The form has four fields: "Provider:" with a dropdown menu showing "SqlServer", "Server:" with a text input field, "SysAdmin user" with a text input field, and "SysAdmin password" with a text input field and a toggle icon. At the bottom of the window, there are three buttons: "CANCEL", "BACK", and "NEXT".


Click **Next** to proceed.

Creation or Selection of the System Database

- **New Database:** You can choose to create a new database.
- **Existing Database:** Select an existing database.
- **Downer:** Credentials of the user who will become the dbowner for the system database.

If the dbowner does not exist, it will be created automatically with the specified password. If it already exists, a **test connection** will be made to verify its validity. The chosen dbowner will be applied to all objects in the system database.

Note: *If the password of an existing dbowner cannot be retrieved, manual intervention will be required by connecting to the server and modifying it using the provider's administration tools.*

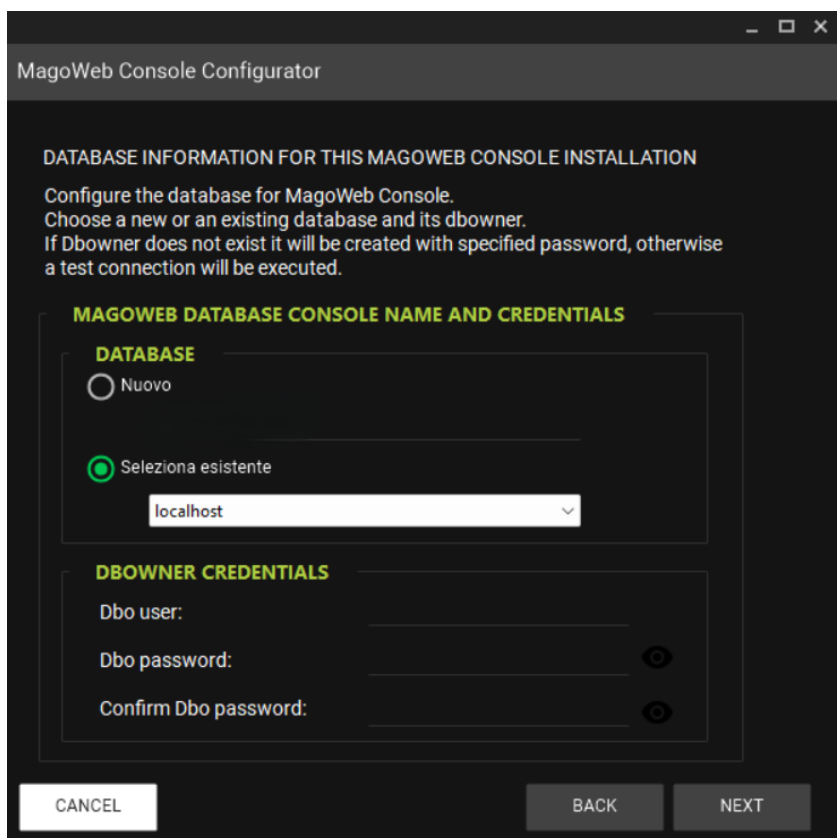

The screenshot shows the 'MagoWeb Console Configurator' window. It has a title bar with standard window controls. The main content area is titled 'DATABASE INFORMATION FOR THIS MAGOWEB CONSOLE INSTALLATION' and contains instructions: 'Configure the database for MagoWeb Console. Choose a new or an existing database and its dbowner. If Dbowner does not exist it will be created with specified password, otherwise a test connection will be executed.'


Below the instructions is a section titled 'MAGOWEB DATABASE CONSOLE NAME AND CREDENTIALS'. It contains two sub-sections:

- DATABASE:** This section has two radio buttons. The first is 'Nuovo' (unselected). The second is 'Seleziona esistente' (selected). Below the radio buttons is a dropdown menu currently showing 'localhost'.
- DBOWNER CREDENTIALS:** This section contains three input fields: 'Dbo user:', 'Dbo password:', and 'Confirm Dbo password:'. Each password field has a toggle icon to the right to show or hide the password.

At the bottom of the window are three buttons: 'CANCEL', 'BACK', and 'NEXT'.

Summary of Operations

- Once all the data has been entered, a summary of the configuration operations will be displayed.

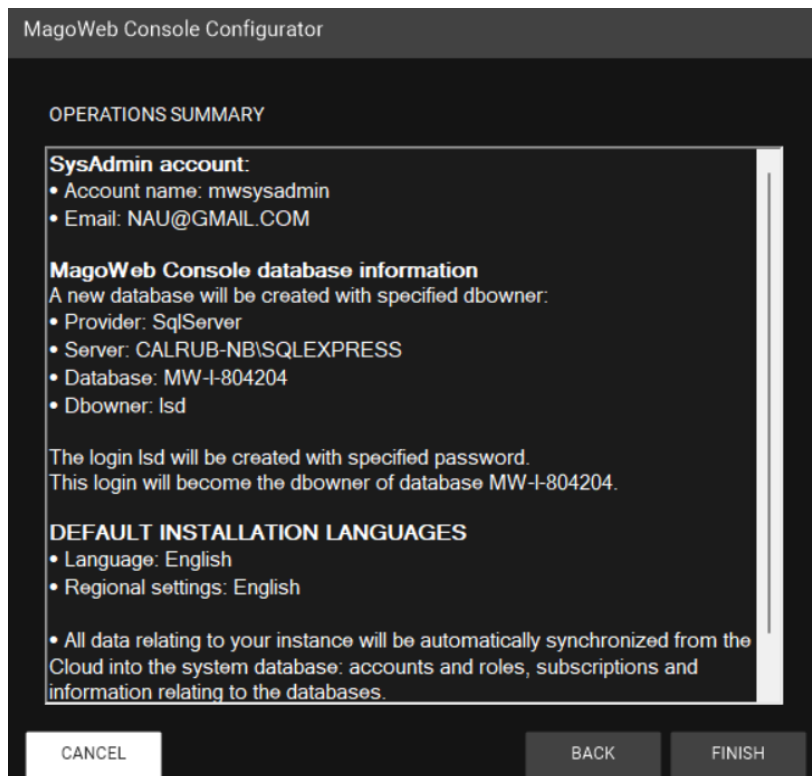

- Click on **Finish** to complete the configuration.

Installation completion.

- After clicking on **Finish**, the system will perform the final configuration operations, starting the necessary services for the proper functioning of MagoWeb Console.


Note: It is reminded that at the end of the Wizard, data synchronization from Provisioning Cloud is performed. Please refer to the details in the dedicated section.

Creation of Subscription Database

After authentication, you will find your subscriptions in the dropdown menu.

At this stage, the installer will notify you that the subscription does not yet have a database.

Proceed with creating the database by clicking the "**Create database for the subscription**" button.

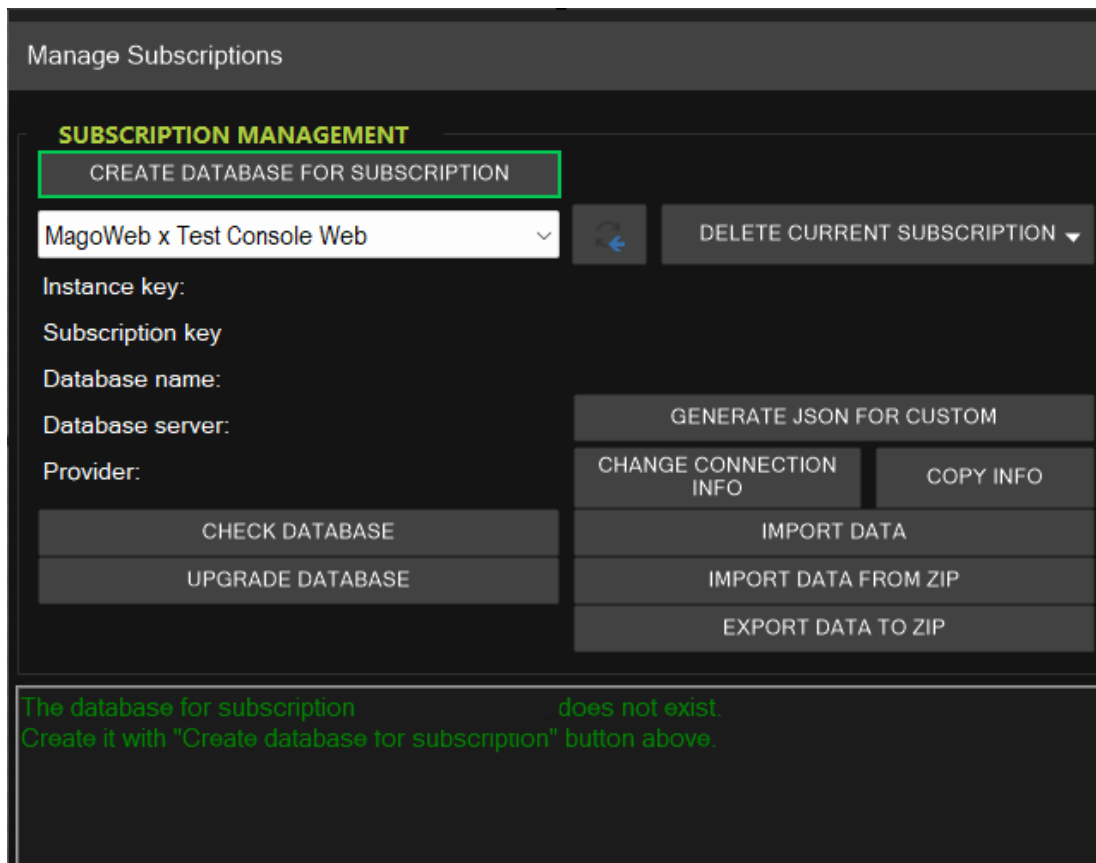

The screenshot shows a web interface titled "Manage Subscriptions". Under the "SUBSCRIPTION MANAGEMENT" section, there is a button "CREATE DATABASE FOR SUBSCRIPTION" highlighted with a green border. Below this is a dropdown menu showing "MagoWeb x Test Console Web" with a refresh icon and a "DELETE CURRENT SUBSCRIPTION" button. The interface includes input fields for "Instance key:", "Subscription key", "Database name:", "Database server:", and "Provider:". To the right of these fields are buttons for "GENERATE JSON FOR CUSTOM", "CHANGE CONNECTION INFO", and "COPY INFO". At the bottom, there are buttons for "CHECK DATABASE", "UPGRADE DATABASE", "IMPORT DATA", "IMPORT DATA FROM ZIP", and "EXPORT DATA TO ZIP". A green error message at the bottom states: "The database for subscription does not exist. Create it with 'Create database for subscription' button above."

Database Configuration


It is possible to use either SqlServer or PostgreSQL as the database provider.

Select the desired provider from the appropriate dropdown menu.

Once the provider is set, you will need to enter the Server, Login, and Password information for the connection.

You can use the "Test Connection" button to verify the validity of the information you just entered. You will need to enter the credentials of the dbowner to be associated with the database. You can enter the credentials of an existing dbowner or a new user; the installer will automatically create it.

Nota: *non è possibile indicare come dbowner un utente amministratore (e.g. sa / postgres)*

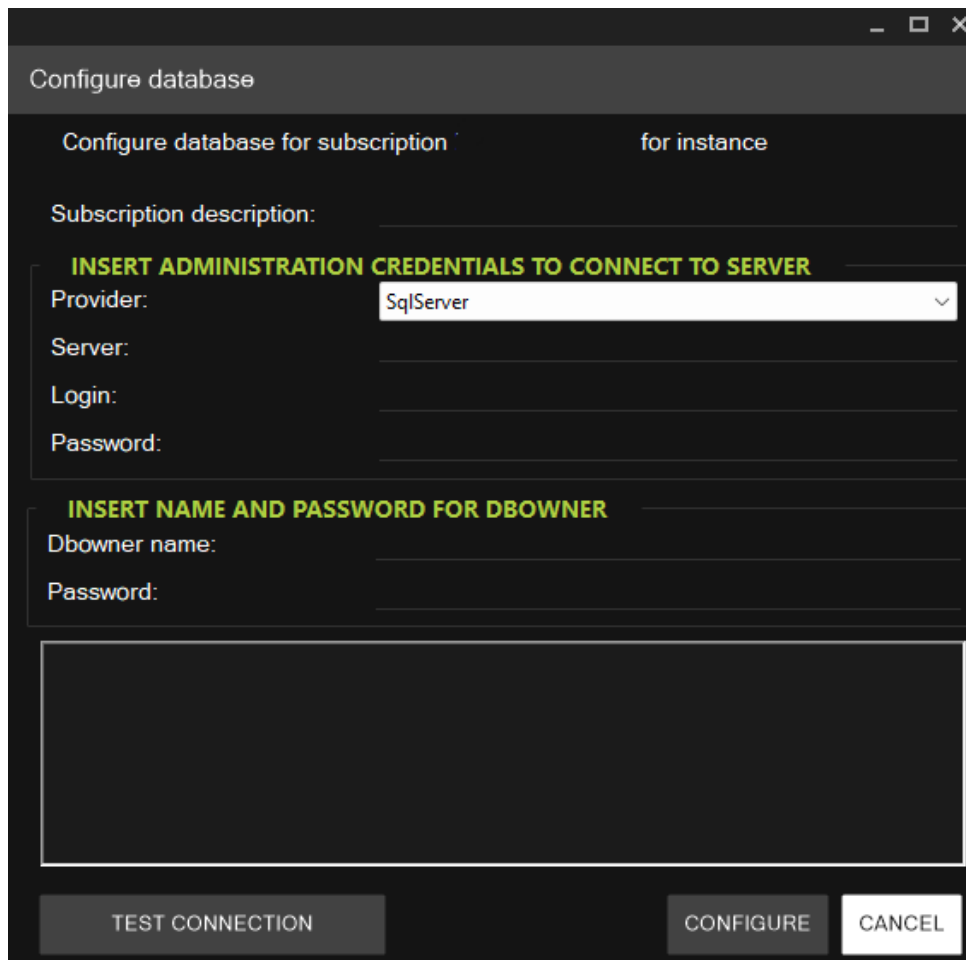

By pressing the "Configure" button, the database creation will begin.

Afterwards, you can proceed with importing a default or sample dataset.


Changes to the Initial Configuration

Once the initial configuration is complete, it will still be possible to make changes to the configuration.


MagoWeb Update

To update MagoWeb:

1. In the Configuration section, select **Update MagoWeb**.

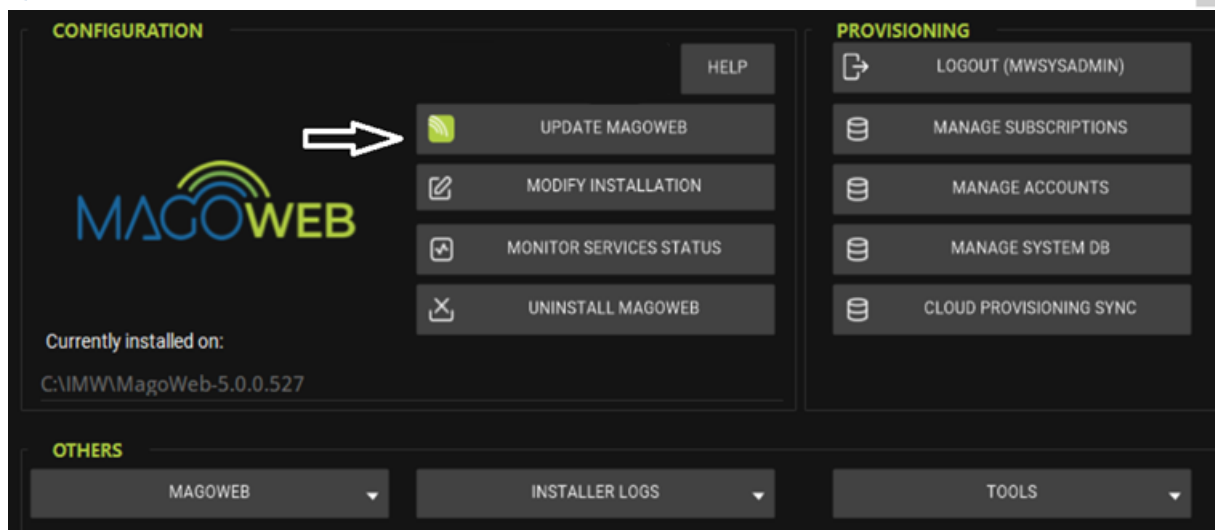

2. You will be prompted to select the path of the zst file for the version of MagoWeb you wish to install.

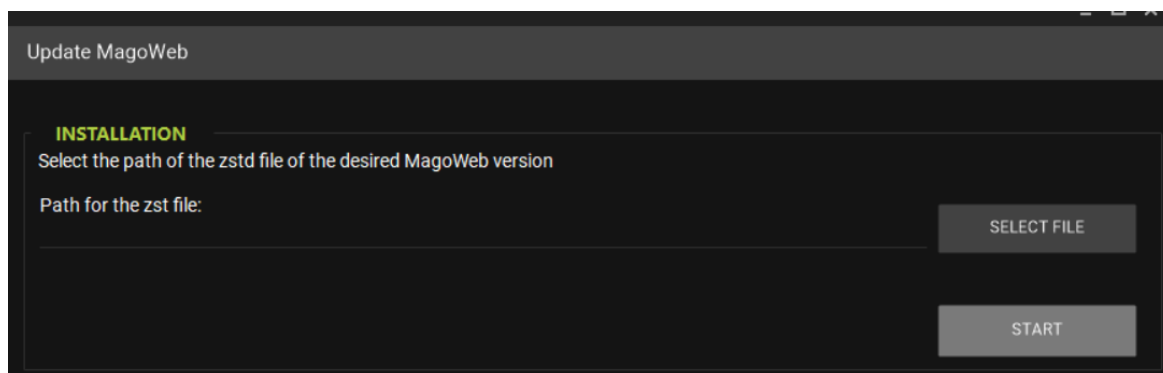


3. After selecting the file and clicking on **Start**, the system will automatically proceed with the update.

Note: *It is not possible to have multiple active MagoWeb installations at the same time. You must either update to a recent version or uninstall the current version and restore an existing one.*


Service Monitoring

To monitor the service status and manage them:

1. Go to the **Monitor Service Status** section.

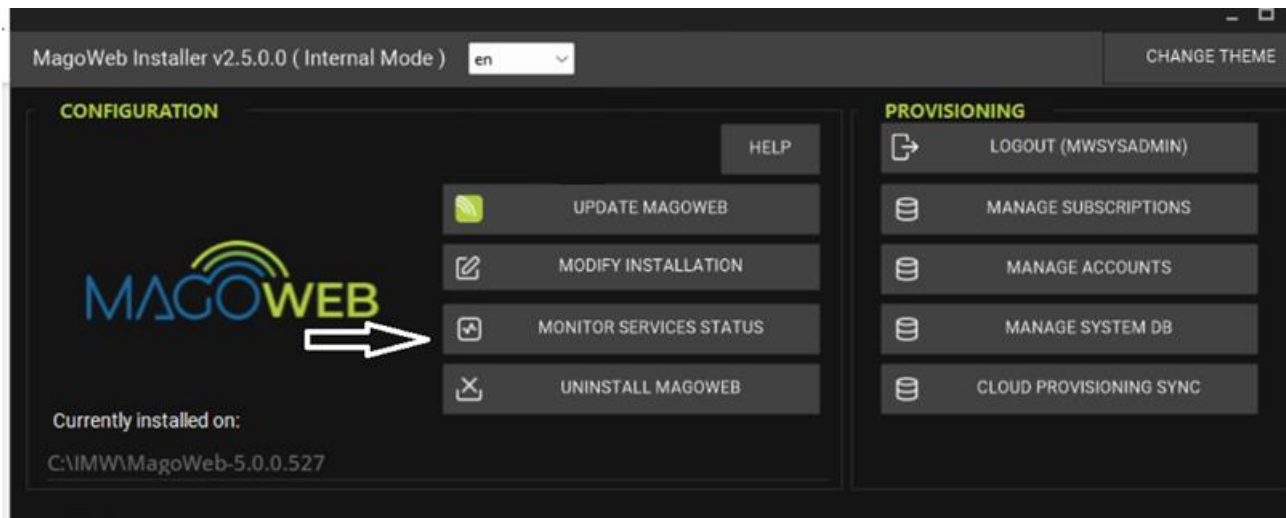

2. Here, you can view the status of the running services.
3. To restart a service, click on **Restart**.
4. To stop a service, click on Stop.

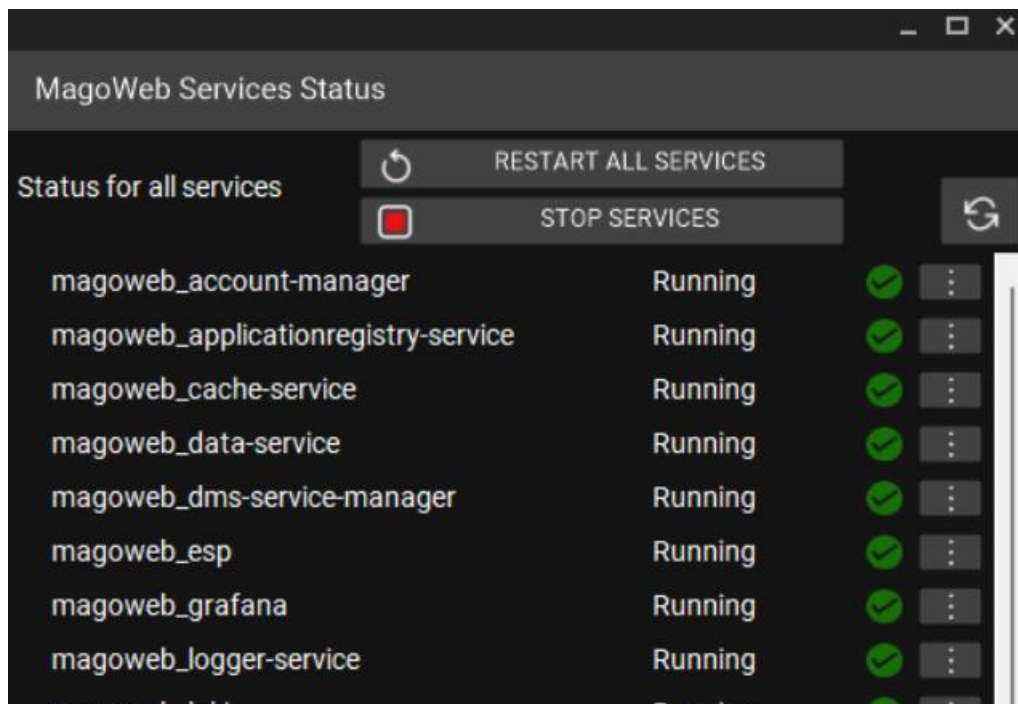

Note: The magoweb_micro-database-management service is automatically started and stopped as needed during database maintenance operations.

Outside of these uses, the service will be stopped to prevent unnecessary memory usage, so it will be normal to see it as "stopped" under typical usage conditions.

Note: Some services depend on others. If services that depend on or are dependencies of other services are manually restarted, the connected services will also be restarted accordingly.


Uninstallation of MagoWeb

To uninstall MagoWeb and its additional components:

1. Go to the **UNINSTALL MAGOWEB** section.



2. All services will be "stopped" and removed, except for RabbitMQ and PostgreSQL (unless the user has chosen not to remove them, as shown in the next image).
3. Click on **UNINSTALL** to start the uninstallation process.

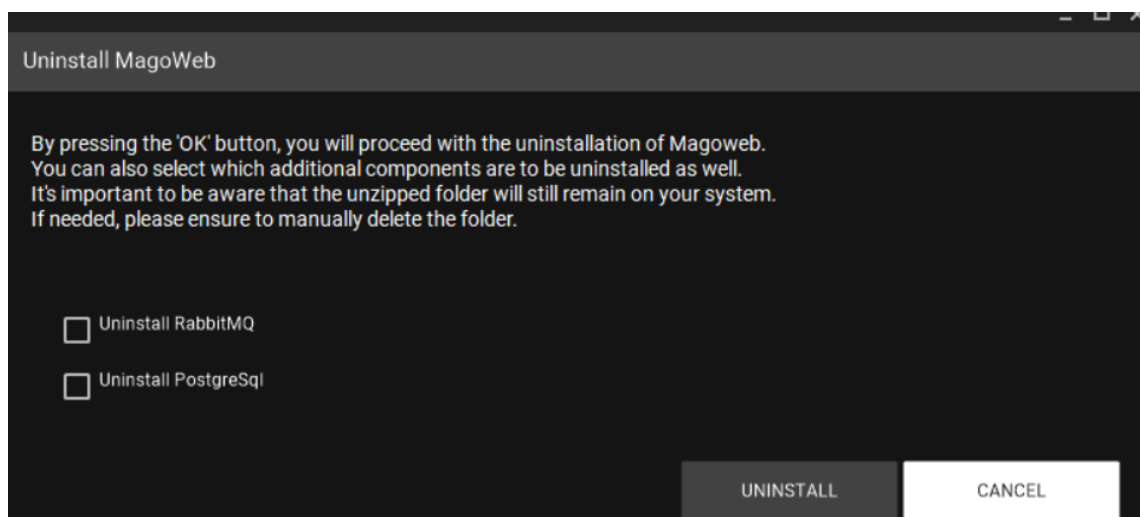


4. The system will proceed with the removal of MagoWeb and the selected components.

Note: *The installation folder will not be deleted; it is the user's responsibility to remove it manually. At any time, it will be possible to recover a version of MagoWeb using the **Recover Existing Installation** button.*

Recovery of a Previous Installation

At any time, it is possible to uninstall the current version of MagoWeb and recover a previously uninstalled version.

To recover a previously uninstalled version of MagoWeb, simply click on the **Recover Previous Installation** button.

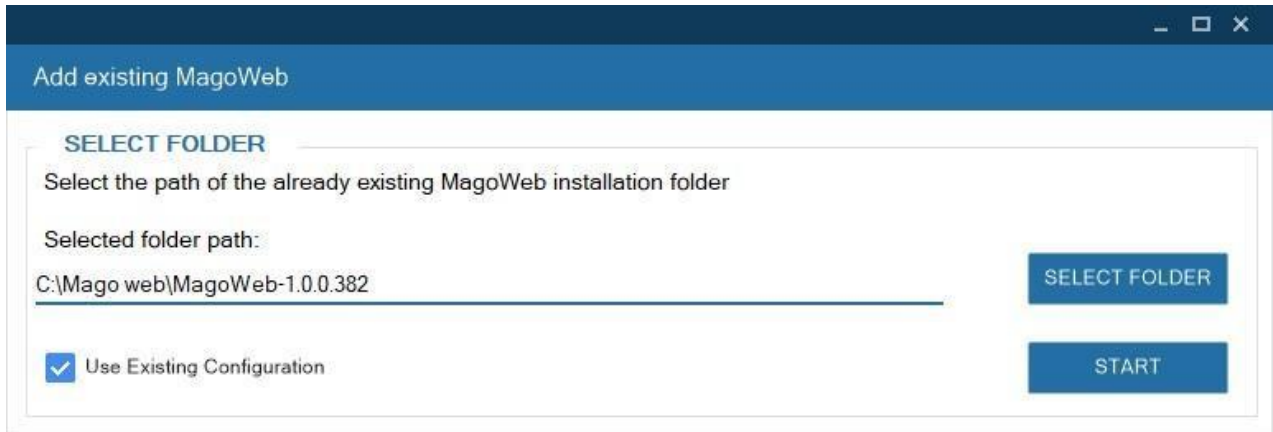


In the window that appears, select the folder of the version you want to restore. By pressing **Start**, all services will be reinstalled using the last configuration entered by the user.

User and Subscription Management


After logging in as SYS-ADMIN, go to the **Provisioning** section.

Subscription Management

In the **Provisioning** section, click on **Manage Subscriptions**.

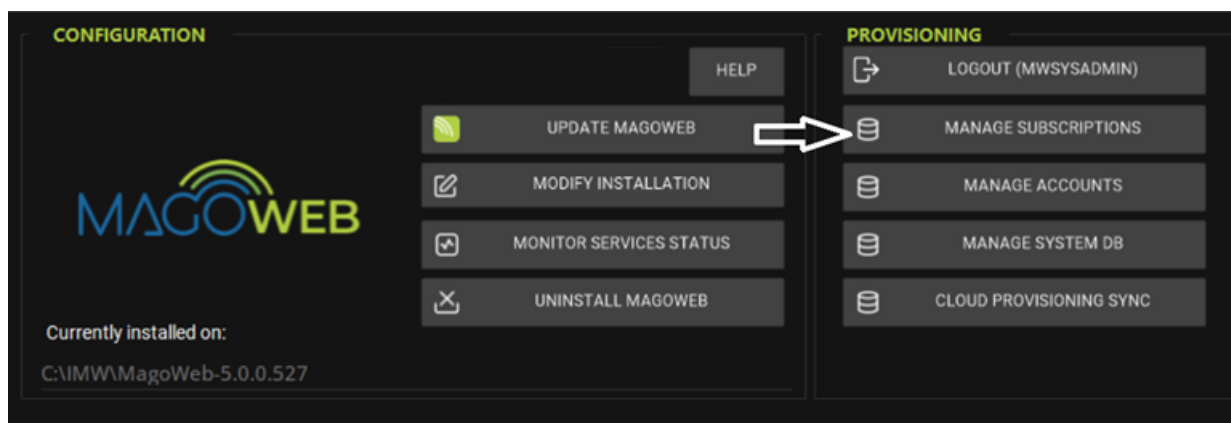

From this section, it will be possible to manage Databases, **Associated Accounts**, and **Modules**.

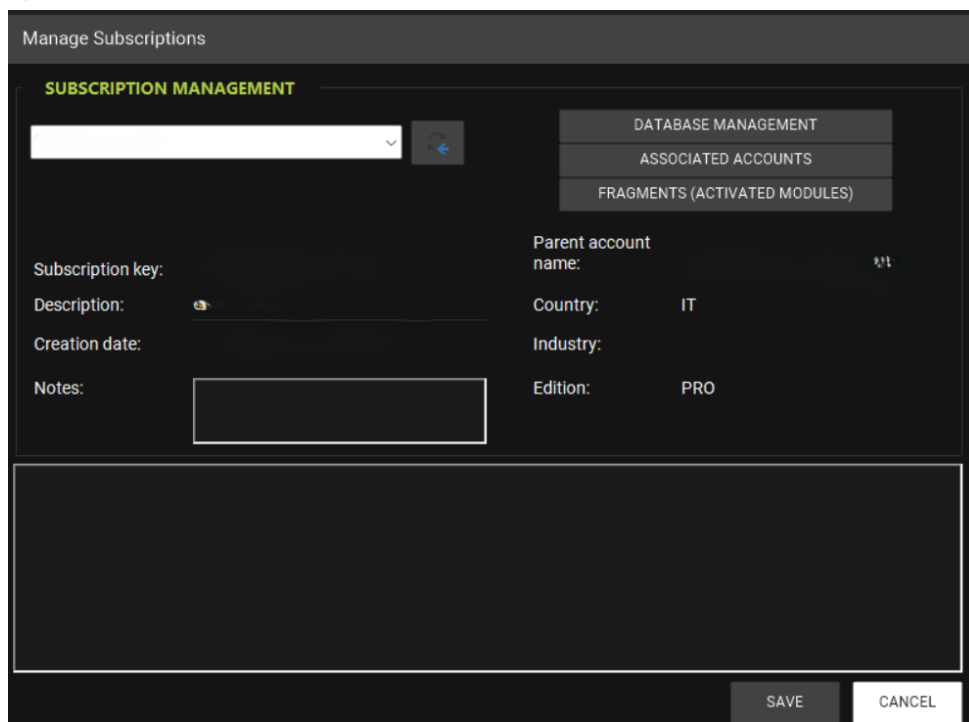

Manage Subscriptions

SUBSCRIPTION MANAGEMENT

Subscription key: [dropdown menu]

Description: [text field]

Creation date: [text field]

Notes: [text area]

Parent account name: [text field]

Country: IT

Industry: [text field]

Edition: PRO

DATABASE MANAGEMENT


ASSOCIATED ACCOUNTS

FRAGMENTS (ACTIVATED MODULES)


SAVE CANCEL

Database Management


By clicking on **Database Management**, information related to the database connection will be displayed.

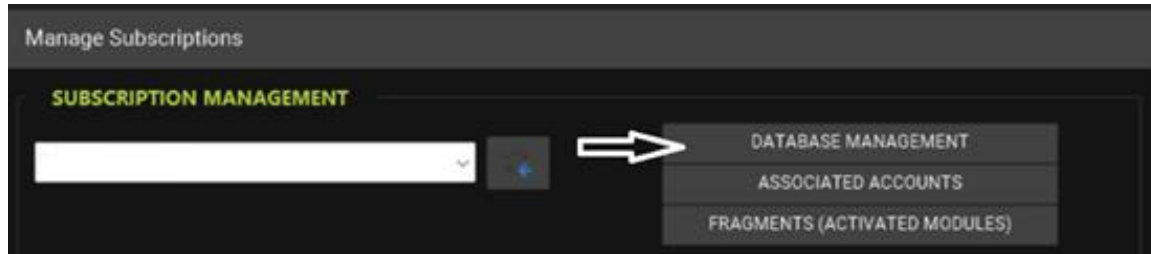

From this screen, you can perform the following operations:

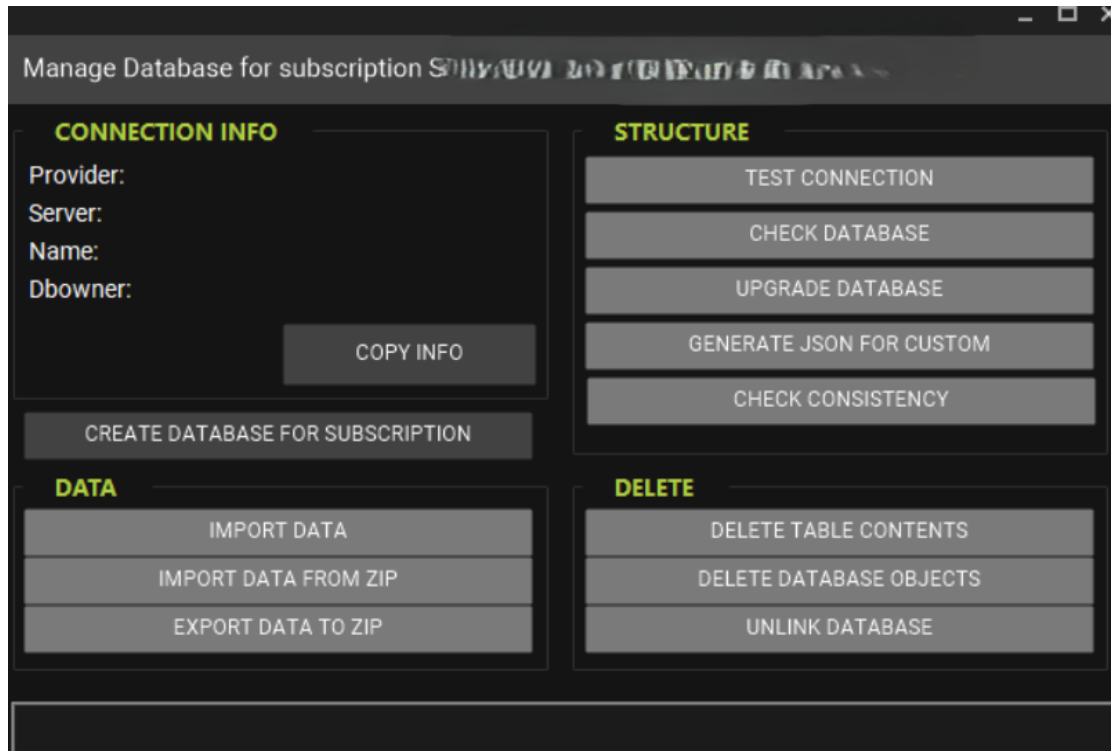


- In the **CONNECTION INFO** section:
 - **Change connection info** allows you to modify the database connection information (e.g., in case of a server or database name change).
 - **Copy info** copies the subscription information to the clipboard.
- In the **STRUCTURE** section:
 - **Test Connection** performs a test to check the reachability of the database.
 - **Check Database** runs a check on the current database of the subscription to verify if the table structure is aligned with the current version.
 - **Upgrade Database** triggers the database upgrade for the subscription.
 - **Generate JSON for Custom** creates a JSON file, which will be saved in the **tb_customtbfs** table, containing the entire current structure of the database. This information is used by Reporting Studio and MyMagoStudio.
 - **Check Consistency** initiates a check between the database structure of the subscription and the objects (tables, columns) declared in the **EFSchemaObjects.xml** files, highlighting any differences.
- In the **DATA** section:
 - **Import Data** allows you to import the default data for MagoWeb:
 - **Default data:** Configuration data necessary for the application procedures to function. These are divided by country and configuration. Usually, the country selection corresponds to the one chosen during the subscription purchase.
 - **Sample data:** A set of default data enriched with additional values that create a dataset for illustrative purposes.

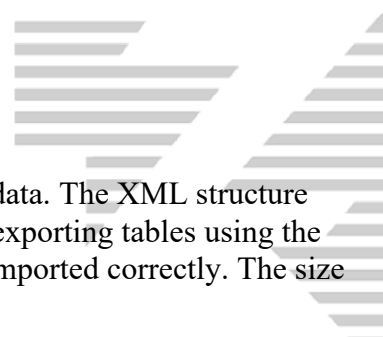

- **Import Data from ZIP** allows you to upload .xml files containing user-defined data. The XML structure must strictly follow the format that the system can read. This can be determined by exporting tables using the export function and then using them to generate the files, which can be zipped and imported correctly. The size limit is **100 MB**.
- **Export Data to ZIP** allows you to export the entire content of the tables in .xml format within a .zip file. This operation has a maximum database size limit of **2 GB**.
- In the **DELETE** section:
 - **Delete Table Contents** deletes, after confirmation, all data contained in the tables while leaving the table structure unchanged.
 - **Delete Database Objects** deletes, after confirmation, the entire table structure of the MagoWeb subscription.
 - **Unlink Database** removes the link between the subscription and the database **without** altering the database itself, which will remain available on the designated server.


Associated Account Management

By selecting **Associated Accounts**, a new screen will open displaying the list of all accounts associated with the subscription.

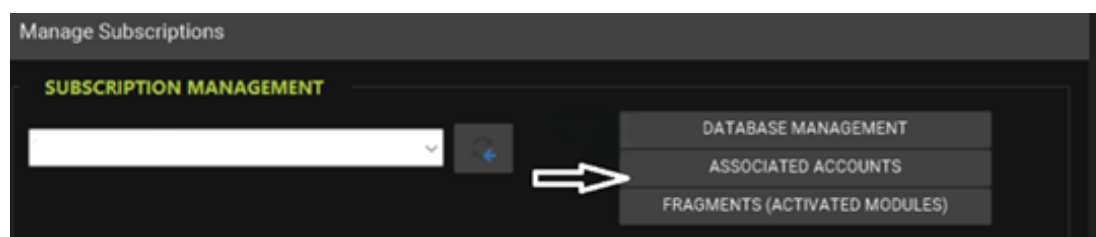


In this section, you can:

- **Associate a new account:** Click on the **Associate Account** button, select the desired account, and confirm by clicking **Save**.

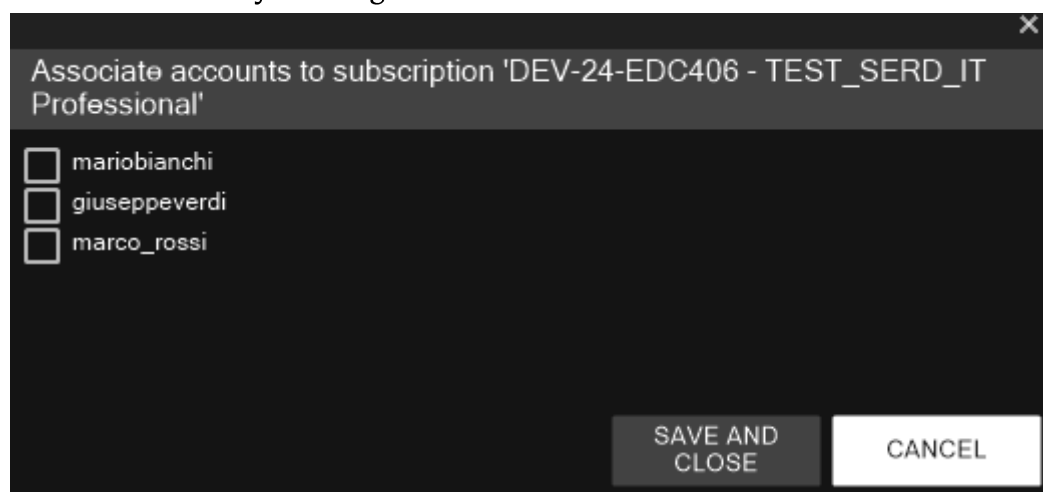


- **Modify an account's role:** Click on the pencil icon next to the account to edit its role.

- **Remove an account association:** To delete an account linked to the subscription, click on the trash bin icon.

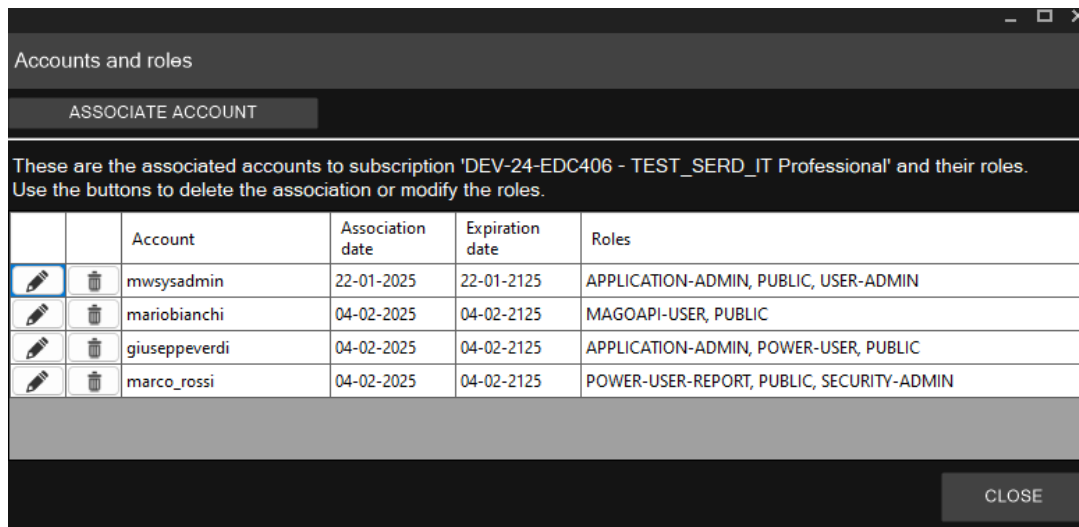


Clicking on the **Fragments (Activated Modules)** button will display all the modules associated with the subscription.

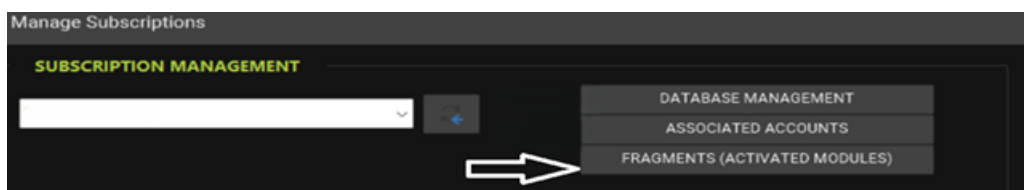

Module Synchronization


If new modules are added to the subscription in the future via the Infinity portal or the store, a local synchronization will be required for the new modules to become visible. To do this, click on the **Activation Sync** button to complete the synchronization process.

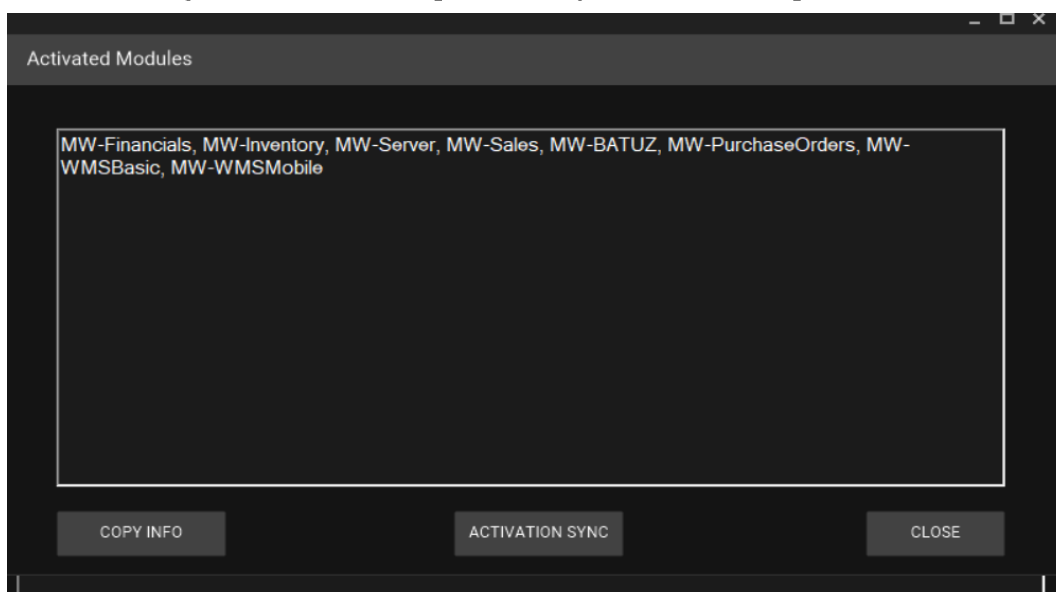


Note: Make sure to perform synchronization every time new modules are added to your subscription to ensure proper information updates.

Account Management

In the **Provisioning** section, click on **Manage Accounts**.

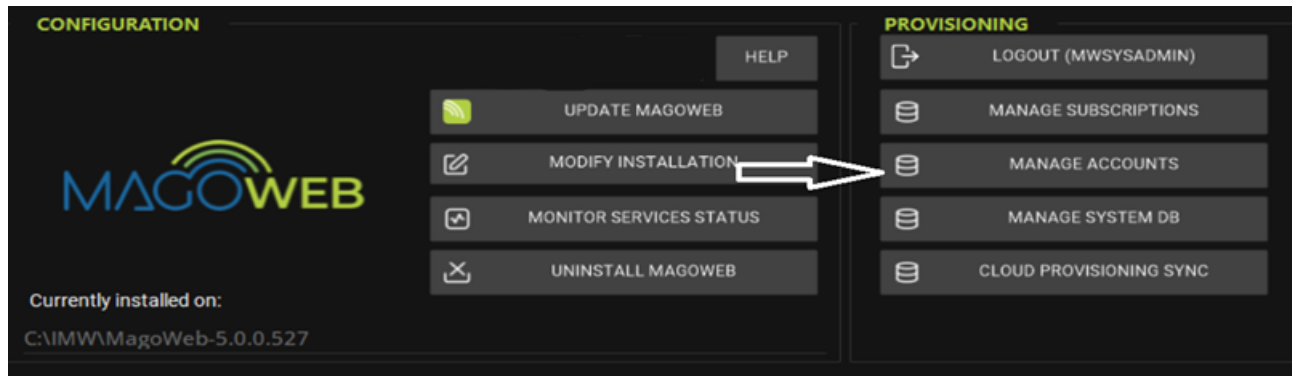

In this section, the **SYS-ADMIN** can view the list of current accounts and access the creation and management functionalities.

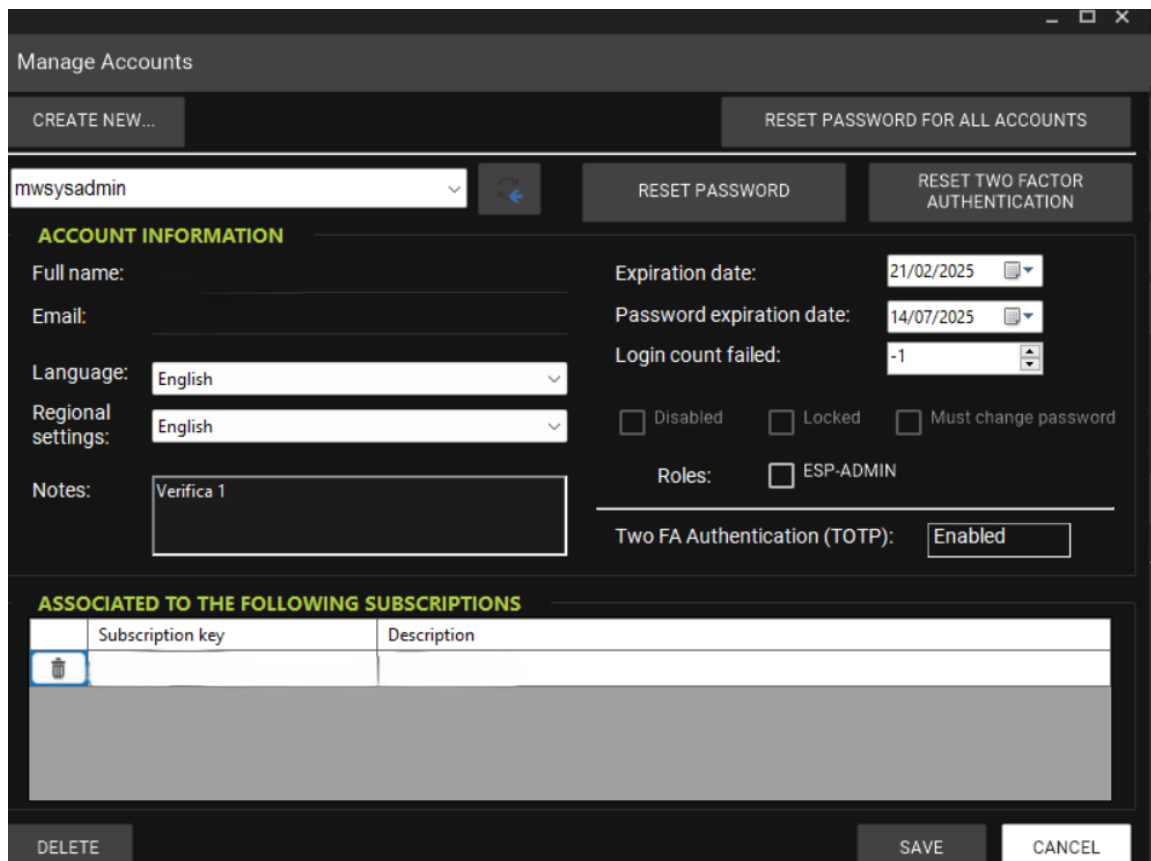

The 'Manage Accounts' window displays the following information for the 'mwsysadmin' account:


- ACCOUNT INFORMATION**
 - Full name: [Empty]
 - Email: [Empty]
 - Language: English
 - Regional settings: English
 - Notes: Verifica 1
 - Expiration date: 21/02/2025
 - Password expiration date: 14/07/2025
 - Login count failed: -1
 - Roles: ☐ Disabled, ☐ Locked, ☐ Must change password, ☐ ESP-ADMIN
 - Two FA Authentication (TOTP): Enabled
- ASSOCIATED TO THE FOLLOWING SUBSCRIPTIONS**

	Subscription key	Description

Buttons at the bottom: DELETE, SAVE, CANCEL.

Creating a New Account

Click on **Create new**.

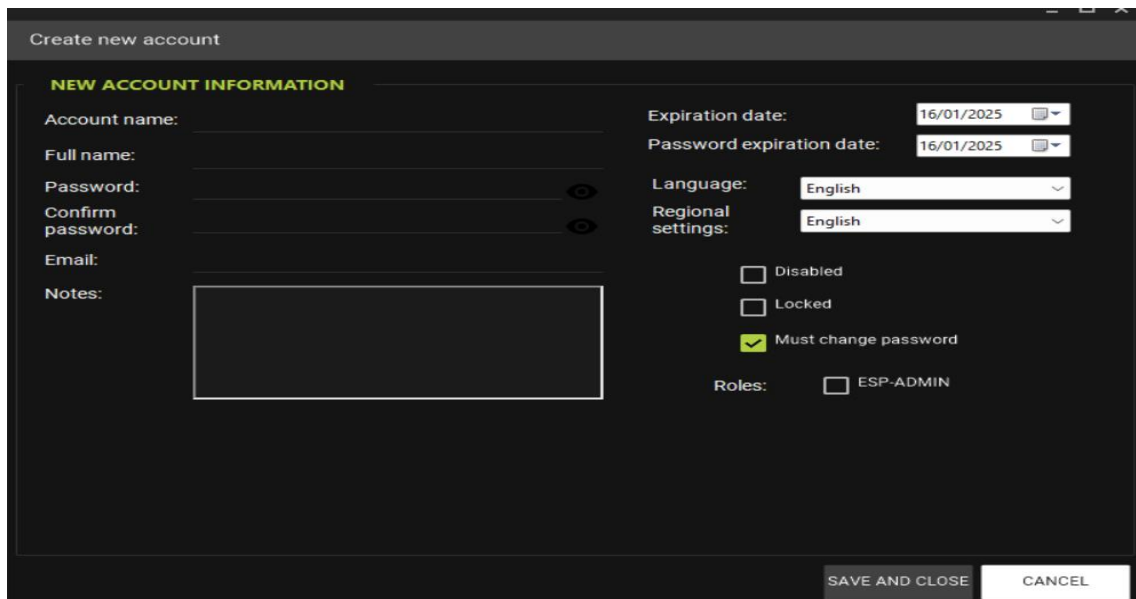

Then, fill in all the required fields:

- **Account Name:** The identifying name of the account.
- **Full Name:** The full name of the user.
- **Password:** Enter a secure password for the user.
- **E-mail:** The email address associated with the account.
- **Note (Optional):** You can add supplementary notes for the account (this field is optional).

Click on **Save and close** to complete the account creation.


After creating the account, upon first login, the user will be required to change the password using the **Change Password** functionality.

Management of Existing Accounts

The Sys-Admin can manage all accounts present in the console directly from the Manage Accounts screen.

The available actions include:

- **Disable Account:** Click on the appropriate icon to disable the account, preventing access.
- **Lock Account:** Click on the icon to lock the account, preventing access without fully disabling it.
- **Assign ESP-ADMIN Role:** If necessary, you can assign this role to the selected account.

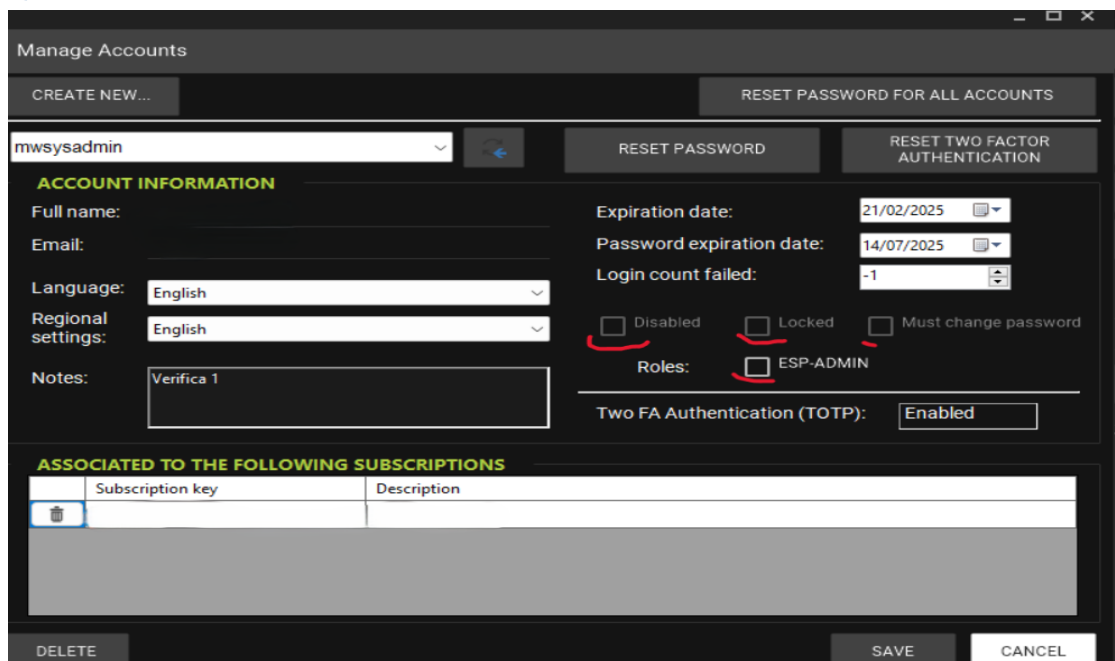

Manage Accounts

CREATE NEW... RESET PASSWORD FOR ALL ACCOUNTS

mwsysadmin

ACCOUNT INFORMATION

Full name: Expiration date: 21/02/2025

Email: Password expiration date: 14/07/2025

Language: English Login count failed: -1

Regional settings: English

Notes: Verifica 1

☐ Disabled ☐ Locked ☐ Must change password

Roles: ☒ ESP-ADMIN

Two FA Authentication (TOTP): Enabled

ASSOCIATED TO THE FOLLOWING SUBSCRIPTIONS


Subscription key	Description
	

DELETE SAVE CANCEL

- **Modify Password Expiration Date:** If necessary, you can set or update the password expiration date for the user.
- **Modify Language:** You can also change the preferred language for the user.

In the account management screen, the Sys-Admin can also perform the following actions:

- **Remove Association to Subscription:** Click on the trash bin icon to remove the account's association to the subscription.
- **Reset Password:** If required, the Sys-Admin can reset the password by setting a new temporary password for the user, who will be required to change it on their first login.
- **Enable/Disable Two-Factor Authentication (2FA):** If the account has Two-Factor Authentication (2FA) enabled, the status will be displayed as Enabled. If necessary, the Sys-Admin can disable 2FA by clicking the corresponding button.

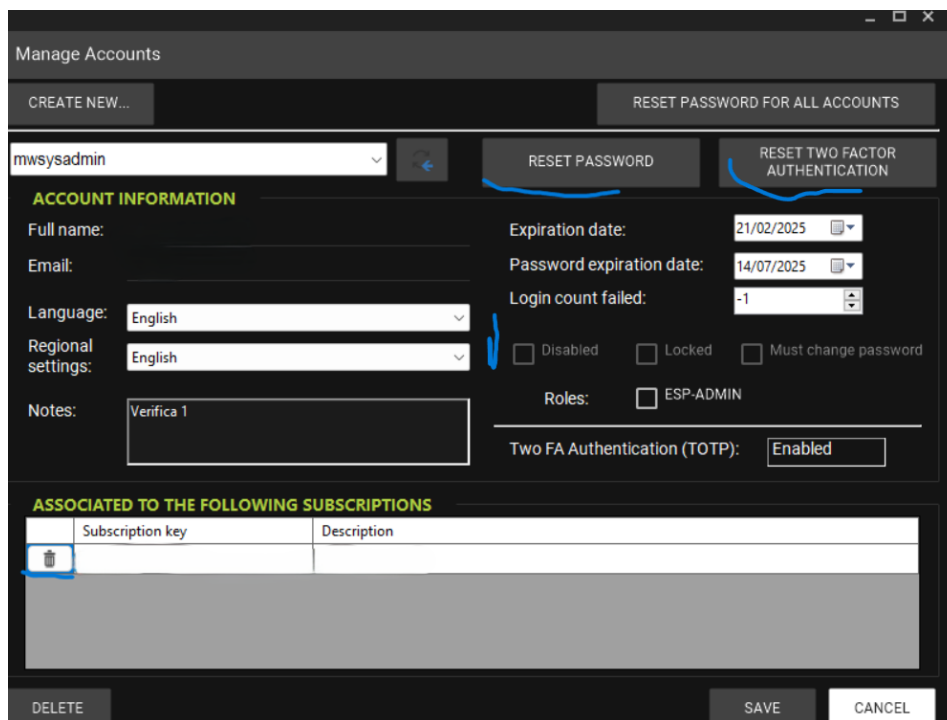

The screenshot shows the 'Manage Accounts' window. At the top, there are buttons for 'CREATE NEW...' and 'RESET PASSWORD FOR ALL ACCOUNTS'. Below this, a dropdown menu shows 'mwsysadmin'. To the right of the dropdown are buttons for 'RESET PASSWORD' and 'RESET TWO FACTOR AUTHENTICATION'. The main section is titled 'ACCOUNT INFORMATION' and contains fields for 'Full name:', 'Email:', 'Language:' (set to English), 'Regional settings:' (set to English), and 'Notes:' (containing 'Verifica 1'). To the right of these fields are fields for 'Expiration date:' (21/02/2025), 'Password expiration date:' (14/07/2025), and 'Login count failed:' (-1). Below these are checkboxes for 'Disabled', 'Locked', and 'Must change password'. There is also a 'Roles:' section with a checkbox for 'ESP-ADMIN'. At the bottom of the account information section is a 'Two FA Authentication (TOTP):' field set to 'Enabled'. Below this is a section titled 'ASSOCIATED TO THE FOLLOWING SUBSCRIPTIONS' with a table that has columns 'Subscription key' and 'Description'. The table is currently empty. At the bottom of the window are buttons for 'DELETE', 'SAVE', and 'CANCEL'.

In the account list, the Sys-Admin can view the following information for each account:


- **Account Name**
- **Account E-mail**
- **Two-Factor Authentication (2FA) Status:** If enabled, it will be shown as active.
- **Password Expiration Date:** The date when the account's password will expire.

If necessary, the Sys-Admin can update account information, such as the name and email, directly from the management screen.

Additionally, the Sys-Admin can quickly update the passwords for all accounts at once, without having to manually change each account individually, by using the **Reset Password for all accounts** button.




It will be possible to set a temporary password for all accounts without meeting complexity requirements, which must be changed upon the first login to the system. The Sys-Admin is automatically excluded from this mass reset operation.

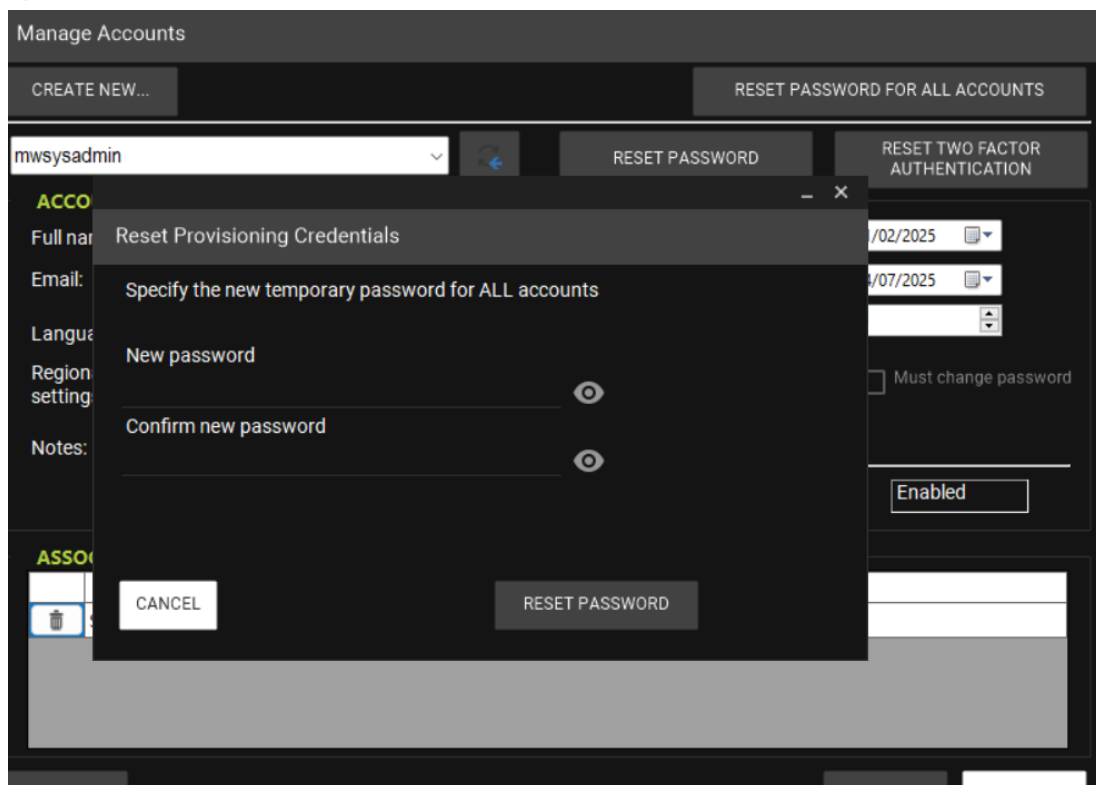

Note: The "Reset password for all accounts" functionality is particularly useful after the initial system configuration phase. In fact, account synchronization from the Provisioning Cloud removes certain sensitive data, such as email, full name, and password. With this mass reset option, it is possible to set a temporary password for all accounts in a single step.


System DB Management

In the **Provisioning** section, by clicking on **Manage System DB**, the MagoWeb Installer will take you to a screen displaying all the information related to the connection to the MagoWeb system database.

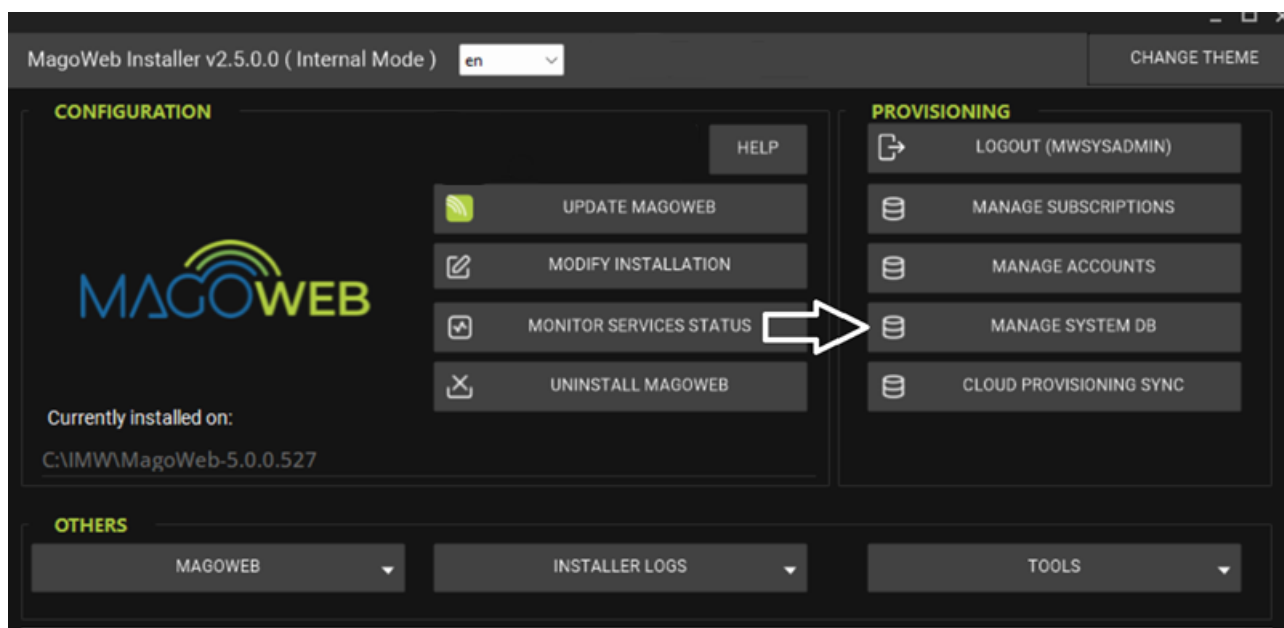

In this screen, you will find the following data:

- **Server:** Indicates the address of the server hosting the database.
- **Database:** The name of the system database that the application connects to.
- **Dbo user:** Identifies the database owner (dbowner).

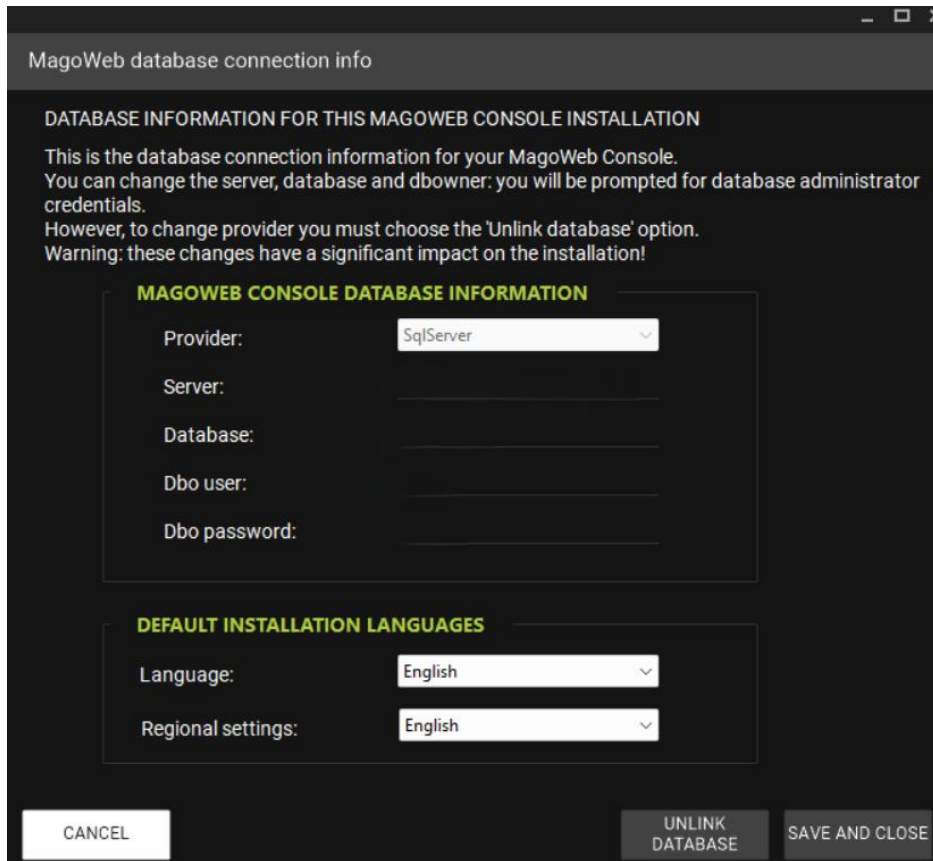

MagoWeb database connection info

DATABASE INFORMATION FOR THIS MAGOWEB CONSOLE INSTALLATION

This is the database connection information for your MagoWeb Console. You can change the server, database and dbowner: you will be prompted for database administrator credentials. However, to change provider you must choose the 'Unlink database' option. Warning: these changes have a significant impact on the installation!

MAGOWEB CONSOLE DATABASE INFORMATION

Provider:

Server:

Database:

Dbo user:

Dbo password:

DEFAULT INSTALLATION LANGUAGES

Language:

Regional settings:

It will be possible to modify the database connection credentials. To perform this operation, you will be prompted to enter the database administrator's credentials. These credentials are necessary to authorize the modification of settings and ensure correct access to the database.


If it is necessary to change the connection provider, you must choose the **Unlink DB** option. This operation will unlink the current database and allow you to configure a new connection with a different provider.

Data Synchronization from Cloud Provisioning

If you are using a MagoWeb instance with a version earlier than 5.0, it will be necessary to synchronize all the related data that is currently stored in the Provisioning Cloud archives.

Note: It is important to remember that the data synchronization from the Provisioning Cloud is automatically performed at the end of the system database configuration wizard.

Data synchronization can be repeated using the "Cloud Provisioning SYNC" option.

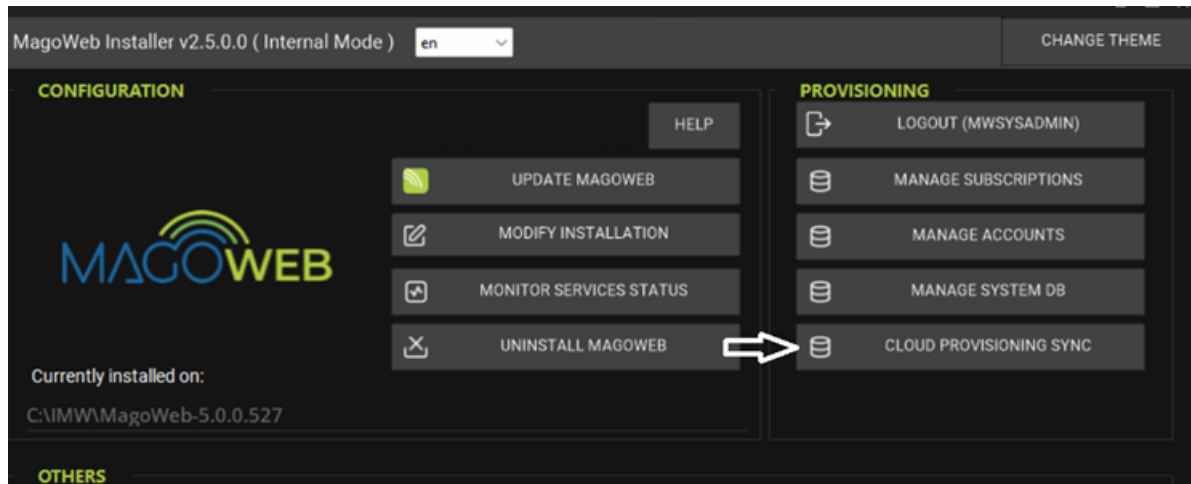

This operation is useful when you want to update local data with those in the Provisioning system in the Cloud.

If conflicts with existing data occur during the synchronization process, the Sync action will prevent overwriting to avoid losing essential information.

Accounts are synchronized after the deletion of certain sensitive data, such as email, full name, and password.

Through the "Reset password for all accounts" functionality, the Sys-Admin can set a temporary password for all accounts in one step, ensuring that users can access the program smoothly.

Management and Configuration of SMTP Servers

With MagoWeb 5.2, a new feature has been introduced that allows easy configuration and management of one or more SMTP servers for sending e-mails (automatic notifications, communications, reports, etc.), also supporting OAuth2 authentication.

This advanced management allows:

- To configure SMTP servers of classic or OAuth2 type.
- To associate specific servers to individual subscriptions or, in the presence of CGM, to fiscal companies within the subscriptions.
- To administer all configurations directly from the MagoWeb console.

From the console, by clicking on **MANAGE SMTP SERVERS**:

a dedicated section opens with the list of all existing SMTP and OAuth2 configurations, including those inherited from previous versions.

How it worked before MagoWeb 5.2

Until version 5.1, the e-mail configuration was managed through the MagoWebInstaller, where various sending modes could be set, but only one was active for the entire installation.


The sender e-mail address was specified in the company master data, and the messaging microservice handled the sending of e-mails.

What changes in version 5.2

- The e-mail configuration section in the MagoWebInstaller is no longer available.
- When updating from previous versions, all existing SMTP and OAuth configurations are automatically imported into the system database.
- Each imported server receives an alias composed of the provider type plus the suffix "import", which can be modified later.
- Sensitive data is encrypted in the database.
- All previously configured servers are automatically associated with all subscriptions of the instance, making them immediately available.
- Additionally, the identifier (SmtpId) assigned to the SMTP server set in version 5.1 will be automatically transferred to the company master data, after updating the subscription database to version 5.2.

Management and display of SMTP servers

- Click on **MANAGE SMTP SERVERS** to access the list of all active SMTP and OAuth2 configurations, including imported ones.

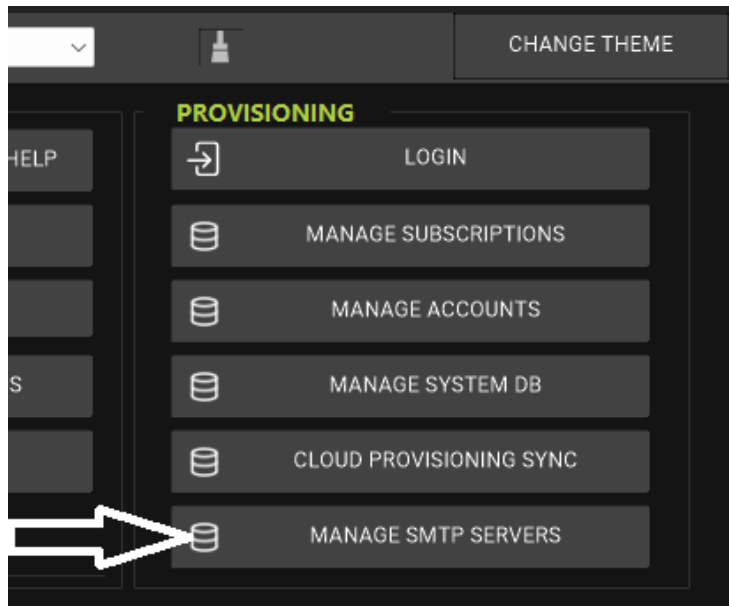

- In the dropdown menu, all configurations are listed along with their respective provider type (SMTP or OAuth2).

Manage SMTP Servers

CREATE NEW...

OAuth2_google_1

SMTP SERVER INFORMATION

Alias name:

OAuth2_google_1

Provider type:

OAuth2

Provider

google

Server

☐

Disabled

Email to register:

ClientId:

Client Secret:

TenantId:

Not needed

Token Expiry Date:

10/7/2025 1:21:14 PM

Port:

587

REFRESH TOKEN

ASSOCIATED TO THE FOLLOWING SUBSCRIPTIONS

	Subscription key	Description

DELETE

SAVE

CANCEL

- By selecting a configuration, you can view details such as alias, server, registration email, client ID (for OAuth2), and the associated subscriptions.
- You can remove a configuration's association from a subscription by clicking the trash bin icon.

Manage SMTP Servers

CREATE NEW...

OAuth2_google_1

SMTP SERVER INFORMATION

Alias name:

OAuth2_google_1

Provider type:

OAuth2

Provider:

google

Server:

☐ Disabled

Email to register:

ClientId:

Client Secret:

TenantId:

Not needed

Token Expiry Date:

10/7/2025 1:21:14 PM

Port:

587

REFRESH TOKEN

ASSOCIATED TO THE FOLLOWING SUBSCRIPTIONS

	Subscription key	Description
		

↑

DELETE

SAVE

CANCEL

Creating a new SMTP/OAuth2 configuration:

Click on **Create New** to launch the configuration wizard:

Manage SMTP Servers

CREATE NEW... 

AUTH2_google_1

SMTP SERVER INFORMATION

Alias name: OAUTH2_google_1
 Provider type: OAUTH2
 Provider: google
 Server:
☐ Disabled

Email to register:
 ClientId:
 Client Secret:
 TenantId: Not needed
 Token Expiry Date: 10/7/2025 1:21:14 PM
 Port: 587 REFRESH TOKEN

ASSOCIATED TO THE FOLLOWING SUBSCRIPTIONS

	Subscription key	Description
		

DELETE SAVE CANCEL

For SMTP providers

MagoWeb SMTP Server Configurator

WELCOME TO MAGOWEB SMTP SERVER CONFIGURATION WIZARD

SMTP PROVIDER TYPE INFORMATION

Choose the provider type you want to configure for send e-mail from this MagoWeb instance.

Provider type: SMTP

Provider name: default

Server name:


CANCEL NEXT

- The provider name is set to "default" by default (can be modified).
- Enter the following:
 - Server name
 - SMTP Username
 - SMTP Password



- SMTP Port
- SMTP Protocol Type
- If required, enable **Enable SSL**.
- Proceed to the summary and click Finish to save.

For OAuth2 providers (Google or Microsoft):

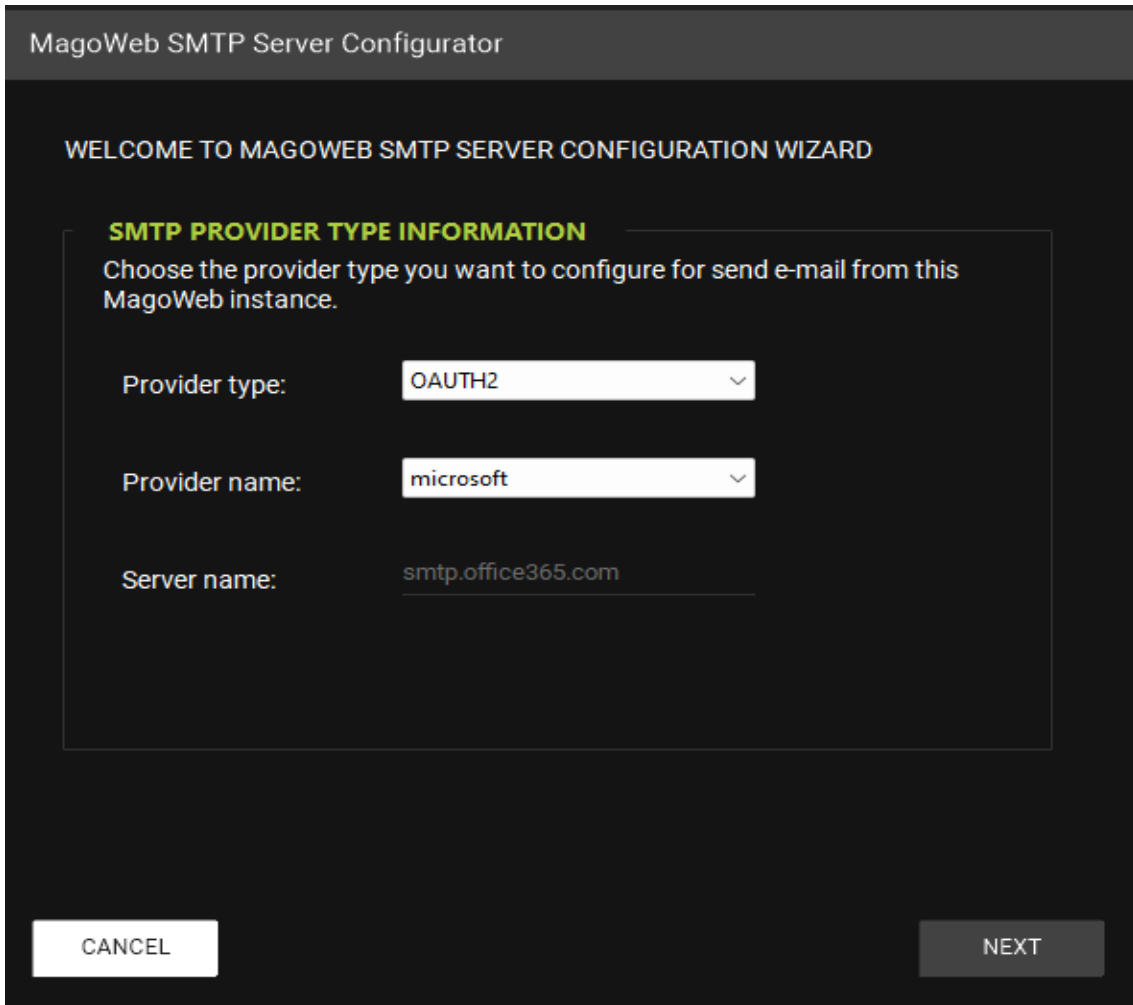

- Prepare the necessary credentials from the registered application (Client ID, Client Secret, Tenant ID).
- Enter the following:
 - Provider (Google or Microsoft)
 - SMTP Server (smtp.gmail.com for Google, smtp.office365.com for Microsoft)
 - Port (always 587)
 - Email to register
 - OAuth Client ID
 - OAuth Client Secret
 - OAuth Tenant ID (not mandatory for Google, but must be provided)

Click **Register** to generate the authentication URL, which should be opened in an incognito window of Chrome (or default browser if incognito is unavailable).

Enter the password and accept the terms.


If the procedure is successful, a page with encrypted information will be displayed, indicating that the token is ready.

Return to the console and click **IsTokenReady** to verify and complete the configuration by clicking **OK**.

Once finished, the configuration will be saved and visible in the list.

Associating SMTP servers with subscriptions

- From the console, **open Manage Subscriptions**

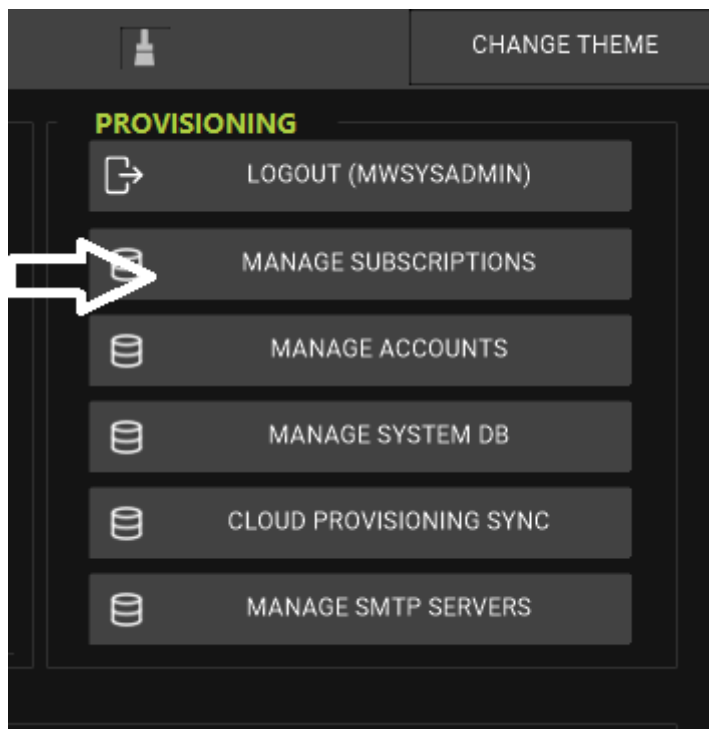

- Select a subscription and click on **Associated SMTP Servers**.

Manage Subscriptions

SUBSCRIPTION MANAGEMENT

Subscription key:

Description:

Creation date:

Parent account:

Notes:

Country: IT

Industry: Advanced Package

Edition: pro

Timezone: Europe/Rome

Language: it-IT

Regional settings: it-IT

DATABASE MANAGEMENT

ASSOCIATED ACCOUNTS

FRAGMENTS (ACTIVATED MODULES)

ASSOCIATED SMTP SERVERS

- Here you can:
 - View the SMTP servers already associated.
 - Associate new servers by clicking **Associate SMTP Server** and saving.
 - Remove associations by clicking the trash bin icon.

SMTP Servers associated to subscription

ASSOCIATE SMTP SERVER


These are the associated SmtP Servers to subscription 'DEV-25-19BD88 - TEST_ADPD_IT Professional'.
Use the buttons to delete the association.

	Alias name	Provider type	Provider name	Server name	Disabled	Association date
				smtp.gmail.com		


CLOSE

Using SMTP configurations in Mago

- In the company profile, under the **Email Addresses** tab, you can select the SMTP server to use via a combobox that lists the servers associated with the subscription.

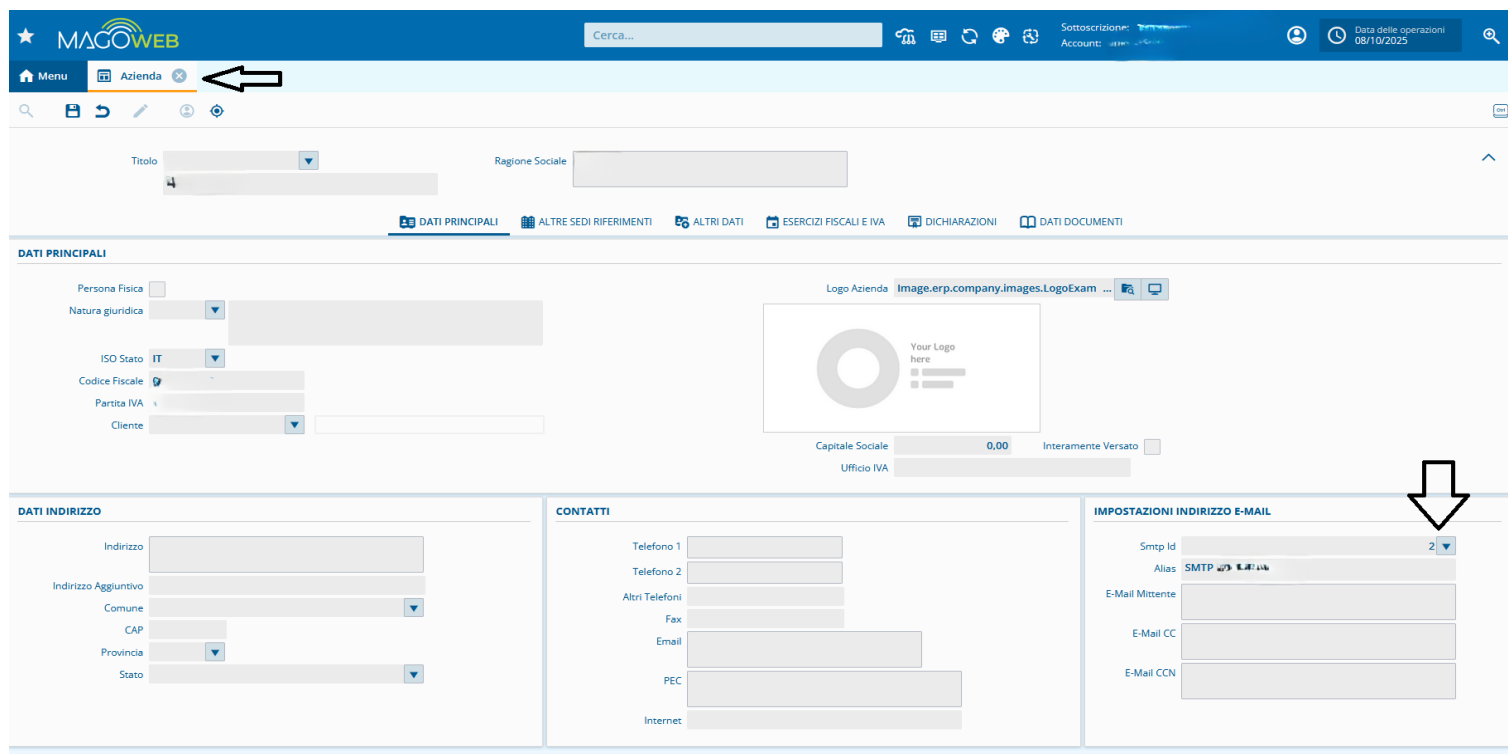


- For companies with CGM enabled, the SMTP selection can also be made for each individual fiscal company.
- In the case of OAuth2, the sender's email is fixed and corresponds to the configured one.
- A similar tab is available in the Workers' profile to set a different SMTP server for each user, which takes precedence over the company configuration.

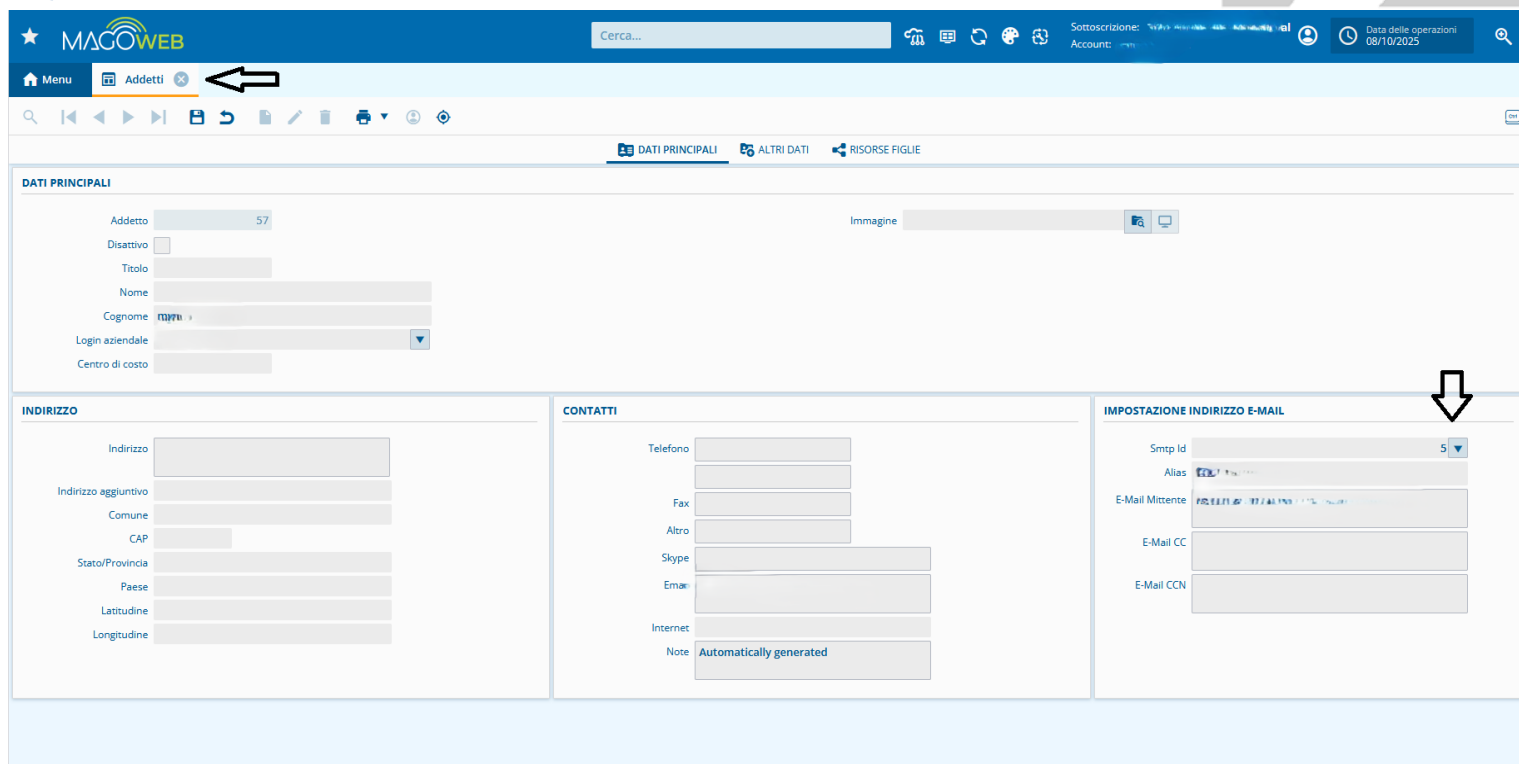

Access to MagoWeb and Two-Factor Authentication Configuration

Access to MagoWeb

From the console, by selecting Others-MagoWeb, a dropdown menu will appear. By clicking on Open Client, the browser will open for MagoWeb authentication.

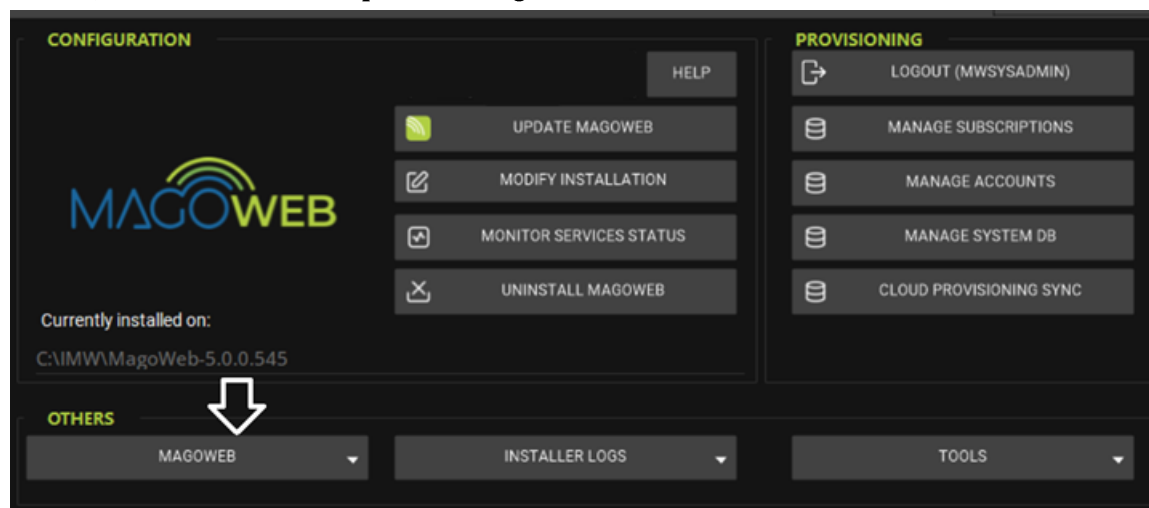

Authentication

Once the MagoWeb browser is opened, you will be prompted to enter the username and password.




After entering the credentials, the system will prompt you to select the subscription you wish to access.



After selecting the subscription, click on "Accedi" to enter the system.

Access to MSH

The "Open MSH Frontend" option opens the MSH frontend in the default browser.

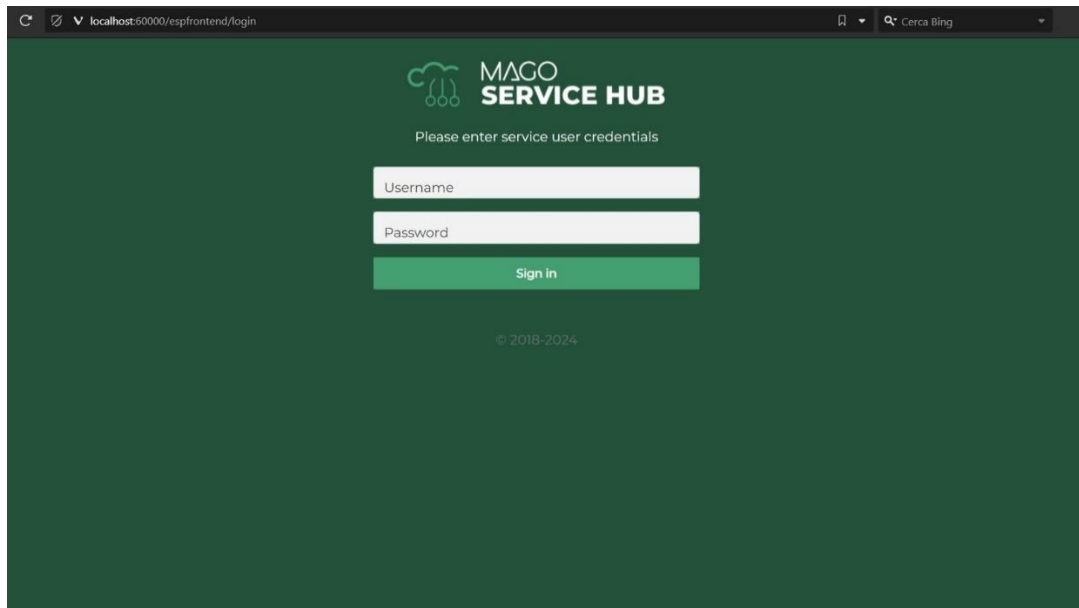


Note: Access to the MSH Frontend is done using the same credentials used for logging into the Mago Store. Unlike Mago4, there is no service account for MSH.


Account Settings Management

Viewing and Editing Settings:

Once logged into MagoWeb, the details related to your subscription and user will be displayed.

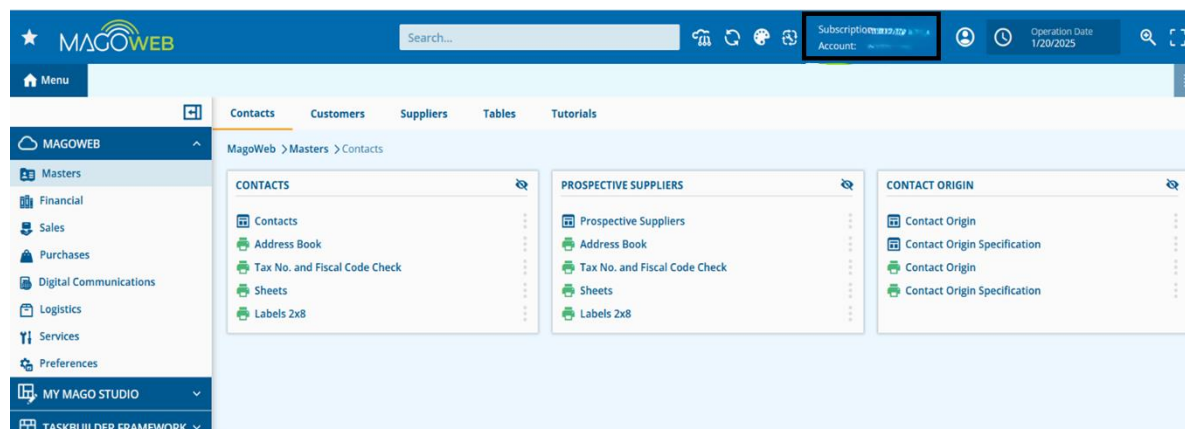


To access your account settings, click on Account Information and then on Settings.

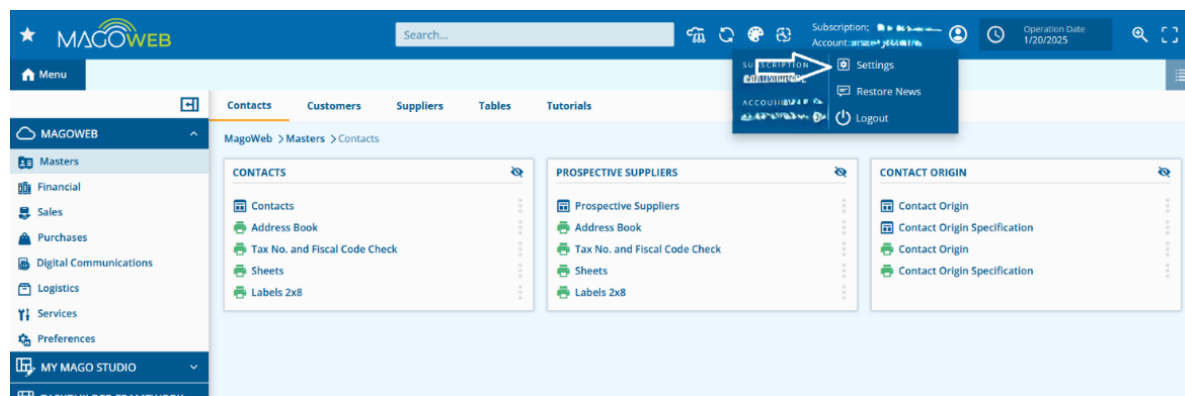

In this section, you can:

- **Change the system language.**
- **Modify the account password.**
- **Enable Two-Factor Authentication (2FA).**

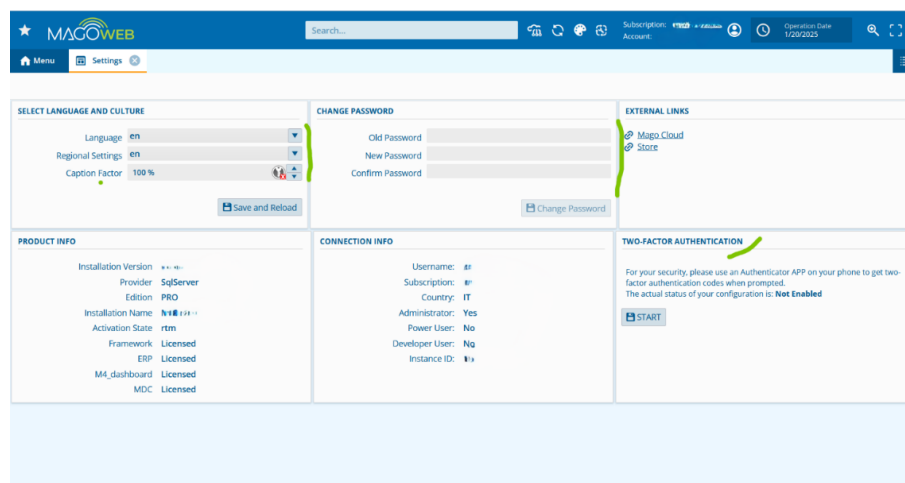


Enabling Two-Factor Authentication (2FA)

Note: In MagoWeb, the only type of authentication allowed for 2FA is via TOTP, meaning by an authentication app.

To start the activation process:


In the account settings screen, click "Start" to begin the 2FA setup process.

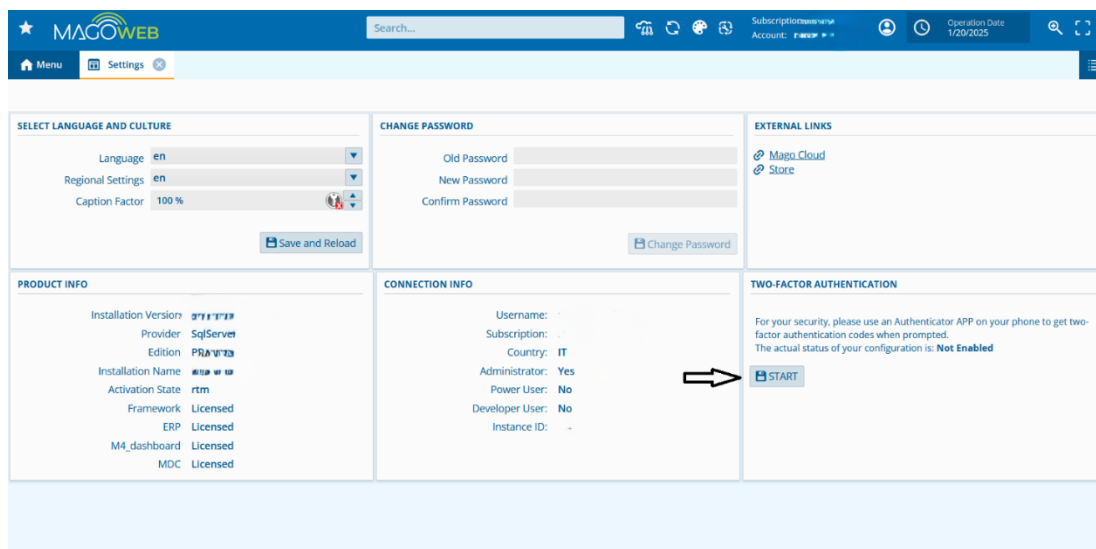

The screenshot shows the MagoWeb Settings interface. The 'TWO-FACTOR AUTHENTICATION' section on the right contains the following text: "For your security, please use an Authenticator APP on your phone to get two-factor authentication codes when prompted. The actual status of your configuration is: **Not Enabled**". Below this text is a blue button labeled 'START'. A white arrow points to this button from the 'CONNECTION INFO' section.

Scan the QR code:

Once the process is started, a QR code will appear on the screen. Use an authentication app (such as **Google Authenticator**, **Microsoft Authenticator**, Authy, or other apps compatible with the TOTP system) to scan the QR code.

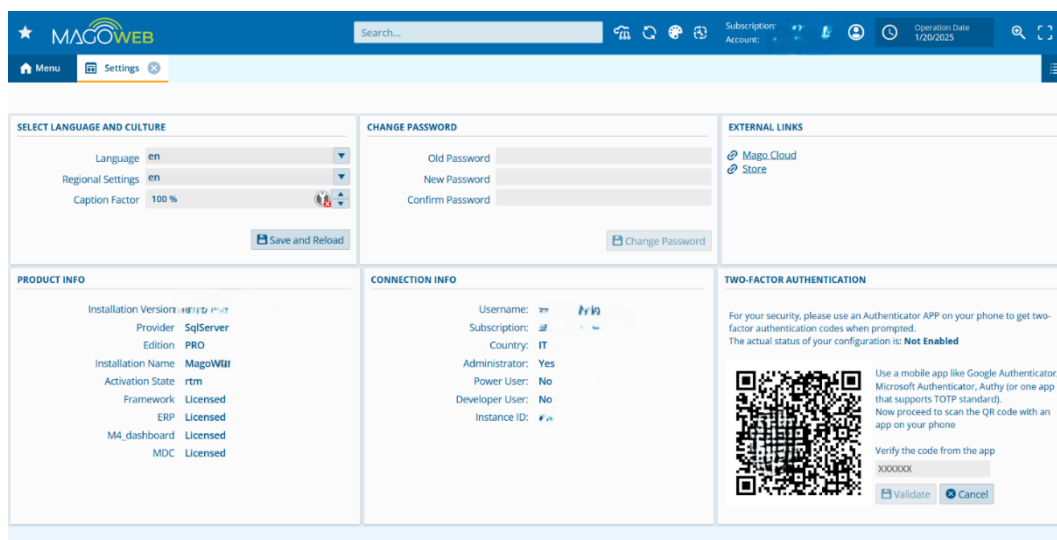

The screenshot shows the MagoWeb Settings interface after the 2FA process has started. The 'TWO-FACTOR AUTHENTICATION' section now displays a QR code. Below the QR code, the text reads: "Verify the code from the app XXXXXXXX". At the bottom of this section are two buttons: 'Validate' and 'Cancel'.

Verification of the OTP code:

After scanning the QR code, the mobile app will generate a temporary code (OTP - One Time Password).

Enter the code displayed in the app and click "Validate" to complete the activation of Two-Factor Authentication.

Future Access with Two-Factor Authentication Enabled

After enabling 2FA, the next time you log in to MagoWeb, in addition to entering your **username and password**, you will also need to enter the OTP code generated by the authentication app.



This temporary code will change every 30 seconds and will be automatically generated by the app you have configured, providing an extra layer of protection for your account.

Disabling Two-Factor Authentication (2FA)

Deactivation of 2FA:

If you later wish to disable Two-Factor Authentication, the Sys-Admin (system administrator) will have the ability to deactivate it for you, if necessary.

Manage Accounts

CREATE NEW...
RESET PASSWORD FOR ALL ACCOUNTS

RESET PASSWORD
RESET TWO FACTOR AUTHENTICATION

ACCOUNT INFORMATION

Full name:
Email:
Language: English
Regional settings: English
Notes: Verifica 1

Expiration date: 21/02/2025
Password expiration date: 14/07/2025
Login count failed: -1

☐ Disabled
☐ Locked
☐ Must change password

Roles: ☐ ESP-ADMIN

Two FA Authentication (TOTP): Enabled

ASSOCIATED TO THE FOLLOWING SUBSCRIPTIONS

	Subscription key	Description
	SUBSCRIPTION KEY	

DELETE
SAVE
CANCEL

This step must be conducted by the Sys-Admin, who has the necessary privileges to modify the account's security settings.

Multi-Company and Multi-Tenant Management

A standard MagoWeb installation provides a single instance deployed on a single machine, with one associated subscription.

However, there are two available modes that allow the number of subscriptions to be extended while maintaining the same instance code:

- **Multi-Company**

- **Multi-Tenant**

Technically, both modes allow the extension of the number of subscriptions, but with some substantial differences:

- **Multi-Company** -- Allows hosting data for multiple companies, provided they belong to the same corporate group.

Each additional subscription inherits the same modules, features, and configurations as the master subscription.

- **Multi-Tenant** -- Allows associating multiple subscriptions belonging to different customer companies, potentially located in different countries, to the same MagoWeb instance.


This functionality is transversal with respect to both Multi-Company and CGM (Corporate Group Management).

Individual companies in Multi-Tenant mode can use both functionalities. Each company has its own independent configuration (purchased modules, CALs, associated accounts, etc.), while sharing only the installer-level settings. Two guides available on our portal explain how to activate both modes and create additional subscriptions:


- **Website Guide** → **Management Subscription** -> **Multi-Company Management**

- **Website Guide** → **Subscription Purchase** → **Activation of MagoWeb Multi-Tenant Subscription**

Regardless of the selected mode, once an additional subscription has been activated, it is necessary to access the MagoWeb installer and click on the **Cloud Provisioning Sync** tab.

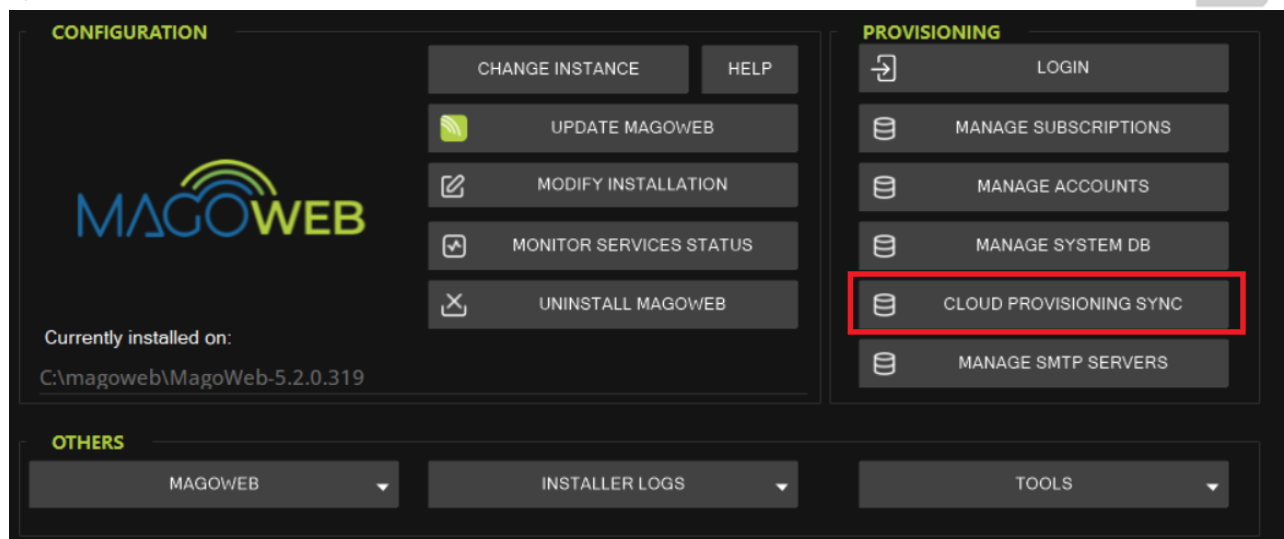

After this step, by accessing the **Manage Subscriptions** menu and selecting the drop-down list, the additional subscriptions will become available.

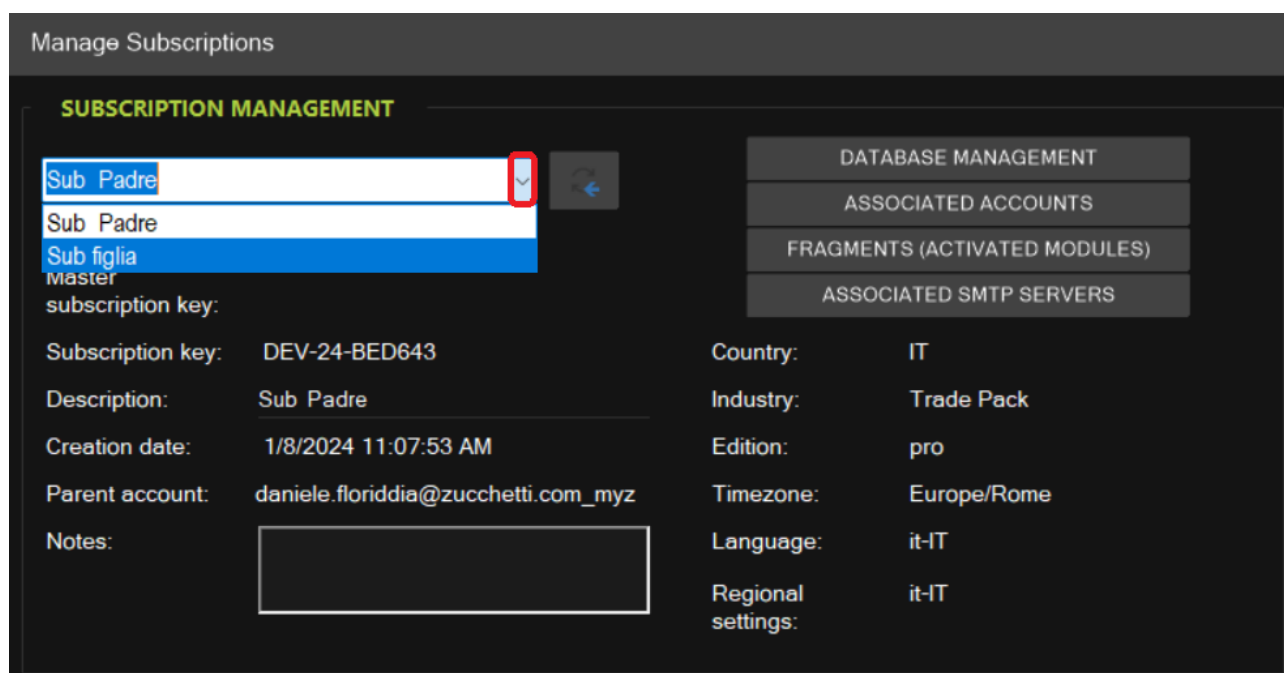


Once the newly created subscription is selected, by clicking on the **Database Management** tab, the database creation menu will appear.

Similarly to the activation process of the base subscription, it is sufficient to click the **Create Database for Subscription** button and configure the parameters of the company database connection string (see pages 15 and 16 of the guide).

It is important to note that the choice of the database provider may differ from that of the master subscription.

MagoWeb supports multi-subscription installations using different database providers (PostgreSQL / SQL Server).

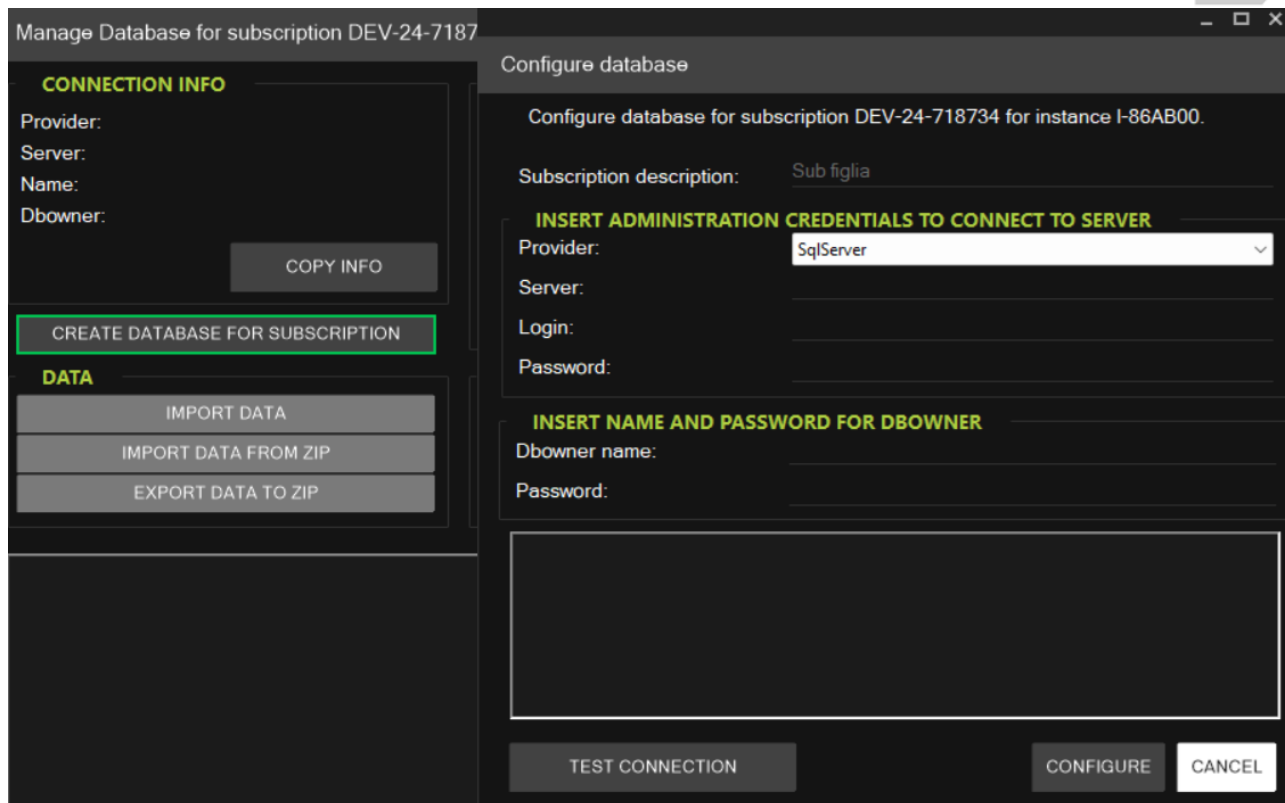

Manage Database for subscription DEV-24-7187

CONNECTION INFO

Provider:
Server:
Name:
Downer:

COPY INFO

CREATE DATABASE FOR SUBSCRIPTION

DATA

IMPORT DATA
IMPORT DATA FROM ZIP
EXPORT DATA TO ZIP

Configure database

Configure database for subscription DEV-24-718734 for instance I-86AB00.

Subscription description: Sub figlia

INSERT ADMINISTRATION CREDENTIALS TO CONNECT TO SERVER

Provider: SqlServer
Server:
Login:
Password:

INSERT NAME AND PASSWORD FOR DOWNER

Downer name:
Password:

TEST CONNECTION CONFIGURE CANCEL

Once the database for the additional subscription has been created, data import can be performed. By accessing the MagoWeb frontend page and logging in, the newly created subscription can be selected from the drop-down menu and then accessed by clicking **Login**.



Scegli la tua sottoscrizione

Nome utente: flodan

Sottoscrizione

Sub Padre

Sub Padre

Sub figlia

< INDIETRO

ACCEDI

When performing a version upgrade in a multi-tenant MagoWeb environment, a fundamental aspect must be considered.

The upgrade of the MagoWeb application component is unique and is performed only once at the instance level.

However, the upgrade of company databases must be executed for each individual subscription present in the environment.

The coexistence of subscriptions with different versions is **not supported**: all subscriptions must be aligned to the same version.

In a multi-tenant environment, the upgrade process can be considered successfully completed only when **all subscriptions have been correctly upgraded and aligned to the same version**.

For the management of additional functionalities (SMTP and OAuth configuration, network configuration, security, auditing, scheduler, and DMS), there are no particular differences compared to a standard installation.

Each subscription is managed completely independently and may have:

- its own configuration
- a different number of associated accounts, completely distinct if needed

- configurable features (Security, DMS, auditing, etc.) enabled differently
- different associated SMTP servers

Starting from version **5.2**, multi-SMTP management is available (see page 32 of the guide).

The instance code remains unique, but it is possible to define multiple SMTP servers or OAuth configurations and associate them differently with individual subscriptions.

Each subscription may therefore have one or more configured SMTP servers.

From a network configuration perspective, no changes are required.

If the MagoWeb installation is to be publicly exposed, frontend access remains unchanged, and the network opening and connection settings remain the same as those of a standard installation.

Appendix A

Exposure of MagoWeb on the network

For the network configuration to expose MagoWeb publicly and allow access from the outside, the following general configurations are recommended:

1. **Insert Public IP/DNS of the Server** in the hostname field of the MagoWeb installer.
2. **Firewall Configuration:**
 - Enable incoming rules to accept calls to the server from clients logging into MagoWeb, ensuring that ports between **60000 - 60300** are open. A sample rule might look like this:
 - Type: All TCP rules (or all traffic)
 - Protocol: All protocols
 - Port Range: 60000 - 60300
 - Source: client IP/32
3. **Outgoing Calls:**
 - All outgoing calls should be allowed with a rule like this:
 - Type: All TCP rules (or all traffic)
 - Protocol: All protocols
 - Port Range: All
 - Destination: 0.0.0.0/0
4. **Incoming Rule for Server's Public/Private IP:**
 - Set an incoming rule to allow calls from the server's own public/private IP:
 - Type: All TCP rules (or all traffic)
 - Protocol: All protocols
 - Port Range: 60000 - 60300
 - Source: server IP/32

An alternative option is to register an internal and external DNS. Specifically, you can define the private IP and registered DNS name in the server's hosts file, and in the external DNS server, you would map the same DNS name to the public IP of the host.

Note: These are general guidelines, and specific parameters or configurations may vary depending on the network structure where MagoWeb is located.

Appendix B

Certificate Configuration

In general, you can use any type of certificate that falls within the supported formats (*.pem, *.crt, *.der, *.cer, *.ca-bundle, *.p7b, *.p7c, *.p7s, *.der, *.pfx, *.p12, *.key).

Additionally, non-self-signed certificates generated and issued by a valid Certificate Authority (CA) can also be used.

There are no "official" integrations on the MagoWeb side. The installer only requires the two certificate files to be uploaded and ensures that the certificate is correctly installed and validated. Both paid certificates and those issued by a public CA work.

Typically, the private and public key parameters are separate, but if you have a single certificate that contains both the public and private parts, you can use only the first one (if the format is among those allowed).

The two indicated files must be uploaded in the first field. However, if the certificate contains both parts (public and private) without separation, only one of the two may be read, resulting in an error. There are many configurations, and we suggest conducting several tests.

For example, for certificates generated by Certbot/Let's Encrypt, the client/reseller can select a file path for the two certificates on the file system (e.g.,
`C:\Users\Administrator\Documents\certificate.cer` and
`C:\Users\Administrator\Documents\certificate.key`).

Certificate Format Conversion

Di seguito alcuni comandi per effettuare la conversione di alcuni certificati in formati supportati:

- Conversion to a combined PEM file
To convert a PFX file to a PEM file that contains both the certificate and private key, the following command needs to be used:
openssl pkcs12 -in filename.pfx -out cert.pem -nodes
- Conversion to separate PEM files
We can extract the private key from a PFX to a PEM file with this command:
openssl pkcs12 -in filename.pfx -nocerts -out key.pem
- Exporting the certificate only:
openssl pkcs12 -in filename.pfx -clcerts -nokeys -out cert.pem
- Removing the password from the extracted private key:
openssl rsa -in key.pem -out server.key

Troubleshooting

Where to find the logs

The MagoWeb logs are in the path set during installation (by default c:\logs), divided into files for the different MagoWeb services.

The logs of the Installer are located at C:\Users\user\AppData\Roaming\MagoWebInstaller\Logs

General guide Lines:

- It may be necessary to disable the firewall during the Mago Web installation.
- Check that the ports assigned to the services are not already occupied or in use.
- Ensure that UAC is set to the default value (2), as this is necessary for the correct execution of installation scripts. If it is not set correctly, a warning will appear in the installer.

Important: After making any changes in the installer interface, press START to save the changes.


Important: When a new build is released, download both the new installer and ztds packages from mymago.zucchetti.com. To perform the upgrade procedure, always use the installer aligned with the version you are installing/upgrading.

Important: Before performing an upgrade from a consecutive release (e.g., from 1.2 to 1.3), ensure that the "Use existing configuration" box is not checked. See anomaly 34747.

Important: When creating a new database, save and keep the credentials related to the dbowner part. These will be required if backup/restore operations are performed on the database server or migrations to a different database provider (e.g., from PostgreSQL to SQL or vice versa).

If credentials different from the ones displayed are entered, permission-related errors may occur.

(Version > 1.4) MagoWebInstaller Setup: An error occurred while downloading a required file.

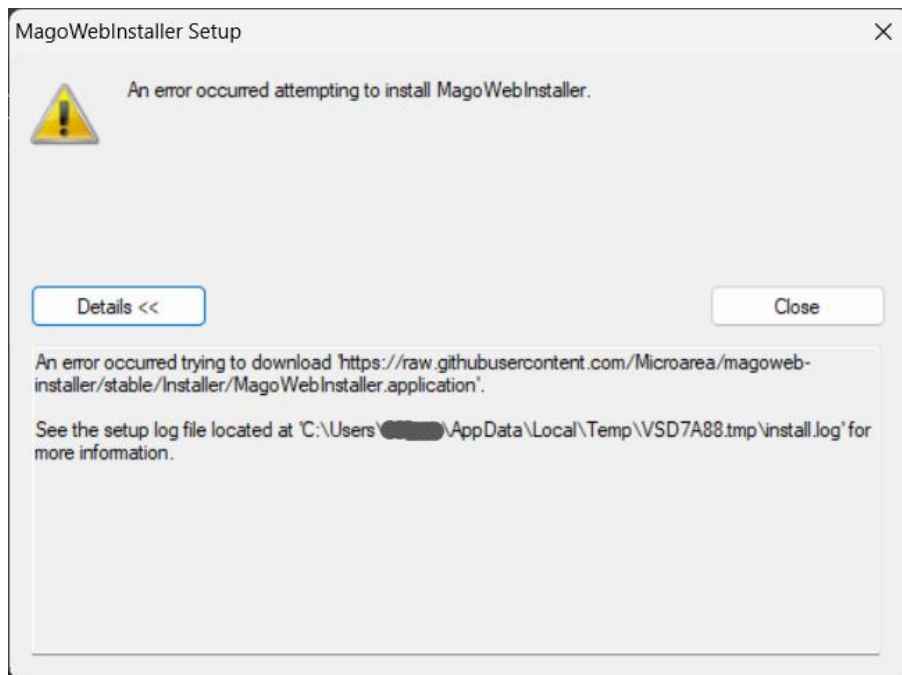

Open the Registry Editor, navigate to the path

HKEY_CURRENT_USER\Software\Microsoft\Windows\CurrentVersion\Internet Settings, and check the key DisableCachingOfSSLPages. If the value is 1, set it to 0. Then, relaunch the installer.

TestConnection exception: Response status code does not indicate success: 404 (Not Found).

Check the status of the services from the MagoWeb installer interface, ensuring that the Traefik microservice has started correctly and that the port used is not already in use. Restart the corresponding service and try accessing again. If the problem persists, modify the installation and restart Start.

Verify .NET installation

For MagoWeb to function correctly, .NET and its tools must be installed properly. To verify this:

- Open PowerShell and navigate to the folder containing the MagoWeb installer exe (and thus Psexec).
- Run: `.\psexec -s -i powershell`
- A second PowerShell window will open, run: `dotnet ef`

If the shell displays a unicorn image (<https://learn.microsoft.com/en-us/ef/core/cli/dotnet#verify-installation>), the installation is successful. If an error occurs, follow the workaround indicated in anomaly 34337.

Promtail not starting

Delete the positions.yaml file

Delete the positions.yaml file located in
C:\ProgramData\scoop\apps\promtail\current\positions.yaml.
Then, restart the Promtail service.

Error: I cannot find any subscriptions associated with this account.

This error occurs when, during the initialization of the MagoWeb instance, an incorrect instance key or security value was entered in the "Modify Installation" section of the interface.
Re-enter the correct security value under "Modify Installation" and click **Start**.

Frontend loading issue for versions prior to 1.4

In versions prior to 1.4, a frontend loading issue may occur with the following error:
net::ERR_CONTENT_LENGTH_MISMATCH 200 (OK). Even after refreshing the page, this issue may continue. This problem was fixed in version 1.4 and can be resolved by upgrading to this version of MagoWeb.

If the partner cannot upgrade soon but only as scheduled with the customer, there is a temporary workaround with specific instructions to resolve the issue until the upgrade is applied. Contact support for further assistance.