


```
midhun@localhost: ~ — awk [pts/1]$ awk

midhun@localhost:~$ awk '{sum+=$1; count++} END {print "sum=",
sum, "count=", count, "avg=", sum/count}' awk
sum= 75 count= 5 avg= 15
midhun@localhost:~$
```

```
midhun@localhost: ~ — awk [pts/1]$ awk

midhun@localhost:~$ awk '{total+=$1; print $1} END {print
"total=", total}' awk
10
20
30
40
50
60
total= 210
midhun@localhost:~$
```

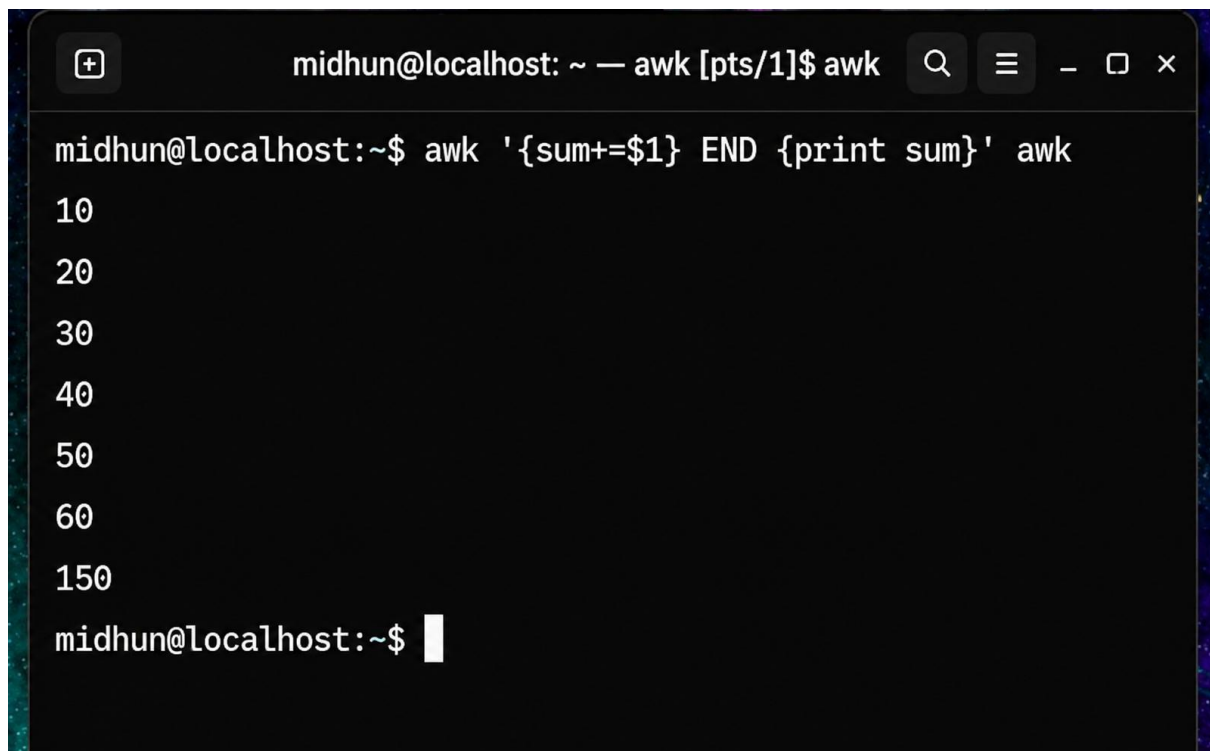

A terminal window titled "midhun@localhost: ~ — awk [pts/1]\$ awk" with standard window controls. The terminal shows a command being executed and its output.

```
midhun@localhost:~$ awk '{sum+=$1} END {print sum}' awk
10
20
30
40
50
60
150
midhun@localhost:~$
```