Transus API

Implementation Guide

Version 3.3

Contents

1 Before you start 3
2 Authentication and Activation 4
3 Connection restrictions 5
4 Send a message to Transus 6
4.1 SOAP request M10100 6
4.2 Example of SOAP request M10100 6
4.3 SOAP response M10100 7
4.4 Example of SOAP response M10100 7
5 Receive a message from Transus 8
5.1 SOAP request M10110 8
5.2 Example of SOAP request M10110 8
5.3 SOAP response M10110 9
5.4 Example of SOAP response M10110 9
6 Send a message receipt confirmation to Transus 10
6.1 SOAP request M10300 10
6.2 Example of SOAP request M10300 10
6.3 SOAP response M10300 11
6.4 Example of SOAP response M10300 11
7 Visual process flow 12
7.1 Send a message to Transus M10100 12
7.2 Receive a message from Transus M10110 12
7.3 Send message status and confirmation to Transus 13

1 Before you start

The purpose of this documentation is to give insight on how to connect to the Transus Platform. The actual EDI data (i.e. XML, CSV or EDIFACT) is to be sent or received in the "Message" tag. Please use our test services provided in the Online application to test your messages before sending them via the API.

Log on to Transus Online and go to the Connect tile to redeem your Client ID and Client key. In the same menu you will find the option to create a test entry for method M10110.

If you are already using the Windows Connect service, please disable before you start using the API. The Transus API and Windows Connect use the same resources so unexpected behaviour can occur if using both at the same time.

Please create a support ticket if you have technical questions or encounter problems with the implementation of the Transus API.

2 Authentication and Activation

In order to use Transus Connect, authentication is needed by using a Client ID and Client Key. The ID and Key can be found at Transus Online using the Connect tile.

Login to the Transus Online application and click Connect. After clicking this tile there is a menu available with the title “Transus API”.

You must activate this using the “Activate” button to be able to use the Transus API functionality.

It is also possible to add IP restrictions and compression. For more information about compression, review the M10100 and M10110 sections of this documentation.

3 Connection restrictions

The following connection restrictions apply:

SOAP request	Restriction
M10100	• Maximum 1 simultaneous request • Minimum 1 second in between requests • Maximum Message size of 10 MB
M10110	• Maximum 1 simultaneous request • Minimum 1 second in between requests, if previous request did return a message • Minimum 1 minute in between requests, if previous request didn't return a message
M10300	• Maximum 1 simultaneous request • Minimum 1 second in between requests

4 Send a message to Transus

URL **https://webconnect.transus.com/exchange.asmx**

4.1 SOAP request M10100

Parameter	Description
ClientID	The Transus-ID of the client
ClientKey	The Transus Web Connect Key of the client
Message	A Base64 encoded string with the content of the message. XML, CSV, EDIFACT and other formats are supported. For a XML message the encoding can be specified in the XML tag. For other formats the default encoding is CP-1252. If Compression is enabled (Connect tile at Transus Online), it is mandatory to **first** compress your data using Gzip/GNUzip. **After** compression it is encoded in Base64.

4.2 Example of SOAP request M10100

```
POST /exchange.asmx HTTP/1.1
Host: webconnect.transus.com
Content-Type: application/soap+xml; charset=utf-8
Content-Length: length

<?xml version="1.0" encoding="utf-8"?>
<soap12:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap12="http://www.w3.org/2003/05/soap-envelope">
  <soap12:Body>
    <M10100 xmlns="https://webconnect.transus.com/">
      <ClientID>87654321</ClientID>
      <ClientKey>LKJIHGFEDCBA</ClientKey>
      <Message>RURJIE1lc3NhZ2U=</Message>
    </M10100>
  </soap12:Body>
</soap12:Envelope>
```

4.3 SOAP response M10100

Parameter	Description
Transaction ID	The transaction ID for this message
ExitCode	0 = Successful completion 10 = The Client ID, Client key or IP address is invalid 20 = The access has been denied for this client 90 = Request restriction occurred 95 = Size restriction occurred 99 = An error has occurred

4.4 Example of SOAP response M10100

```
HTTP/1.1 200 OK
Content-Type: application/soap+xml; charset=utf-8
Content-Length: length

<?xml version="1.0" encoding="utf-8"?>
<soap12:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap12="http://www.w3.org/2003/05/soap-envelope">
  <soap12:Body>
    <M10100Response xmlns="https://webconnect.transus.com/">
      <TransactionID>12345</TransactionID>
      <ExitCode>0</ExitCode>
    </M10100Response>
  </soap12:Body>
</soap12:Envelope>
```

5 Receive a message from Transus

URL **https://webconnect.transus.com/exchange.asmx**

5.1 SOAP request M10110

Parameter	Description
ClientID	The Transus-ID of the client
ClientKey	The Transus Web Connect Key of the client

5.2 Example of SOAP request M10110

```
POST /exchange.asmx HTTP/1.1
Host: webconnect.transus.com
Content-Type: application/soap+xml; charset=utf-8
Content-Length: length

<?xml version="1.0" encoding="utf-8"?>
<soap12:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap12="http://www.w3.org/2003/05/soap-envelope">
  <soap12:Body>
    <M10110 xmlns="https://webconnect.transus.com/">
      <ClientID>87654321</ClientID>
      <ClientKey>LKJIHGFEDCBA</ClientKey>
    </M10110>
  </soap12:Body>
</soap12:Envelope>
```

5.3 SOAP response M10110

Parameter	Description
TransactionID	The transaction ID for this message
Message	A base 64 encoded string with the content of the message. XML, CSV, EDIFACT and other formats are supported. For a XML message the encoding can be specified in the XML tag. For other formats the default encoding is code page 1252. If Compression is enabled (Connect tile at Transus Online), it is mandatory to **first** de-compress your data using Gzip/GNUzip. **After** de-compression the Base64 string is decoded.
ExitCode	0 = Successful completion 10 = The Client ID, Client Key or IP address is invalid 20 = The access has been denied for this client 90 = Restriction occurred 99 = An error has occurred

5.4 Example of SOAP response M10110

```
HTTP/1.1 200 OK
Content-Type: application/soap+xml; charset=utf-8
Content-Length: length

<?xml version="1.0" encoding="utf-8"?>
<soap12:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap12="http://www.w3.org/2003/05/soap-envelope">
  <soap12:Body>
    <M10110Response xmlns="https://webconnect.transus.com/">
      <TransactionID>12345</TransactionID>
      <Message>VHJhbnN1cyB0ZXN0IGZpbGU=</Message>
      <ExitCode>0</ExitCode>
    </M10110Response>
  </soap12:Body>
</soap12:Envelope>
```

6 Send a message receipt confirmation to Transus

URL **https://webconnect.transus.com/exchange.asmx**

6.1 SOAP request M10300

Parameter	Description
ClientID	The Transus-ID of the client
ClientKey	The Transus Web Connect Key of the client
TransactionID	The transaction ID for the message as provided by SOAP response M10110
Status	Without confirming any status for a received message based on TransactionID, the system will present the same TransactionID until a Status is reported back. The status of the message: 0 = Delivered 1 = Delivery error 2 = Pending
StatusDetails	Optional. Only use in conjunction with Status = 1. Maximum of 250 characters. Use HTML encoding when sending HTML syntax characters. The text sent in StatusDetails will be shown in the Transus Online portal when the recipient reports back an error status. **Note:** There is no translation available for this error message by Transus. It lies within the responsibility of the sender to create a notification that can be correctly interpreted by the recipient.

6.2 Example of SOAP request M10300

```
POST /exchange.asmx HTTP/1.1
Host: webconnect.transus.com
Content-Type: application/soap+xml; charset=utf-8
Content-Length: length

<?xml version="1.0" encoding="utf-8"?>
<soap12:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap12="http://www.w3.org/2003/05/soap-envelope">
  <soap12:Body>
    <M10300 xmlns="https://webconnect.transus.com/">
      <ClientID>87654321</ClientID>
      <ClientKey>LKJIHGFEDCBA</ClientKey>
      <TransactionID>12345</TransactionID>
      <Status>0</Status>
      <StatusDetails></StatusDetails>
    </M10300>
  </soap12:Body>
</soap12:Envelope>
```

6.3 SOAP response M10300

Parameter	Description
ExitCode	0 = Successful completion 10 = The Client ID, Client Key or IP address is invalid 20 = The access has been denied for this client 30 = Invalid transaction ID 90 = Restriction occurred 99 = An error has occurred

6.4 Example of SOAP response M10300

```
HTTP/1.1 200 OK
Content-Type: application/soap+xml; charset=utf-8
Content-Length: length

<?xml version="1.0" encoding="utf-8"?>
<soap12:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap12="http://www.w3.org/2003/05/soap-envelope">
  <soap12:Body>
    <M10300Response xmlns="https://webconnect.transus.com/">
      <ExitCode>0</ExitCode>
    </M10300Response>
  </soap12:Body>
</soap12:Envelope>
```

7 Visual process flow

Below you will find a process diagram that gives insight on how to implement the Web services in this document.

7.1 Send a message to Transus M10100

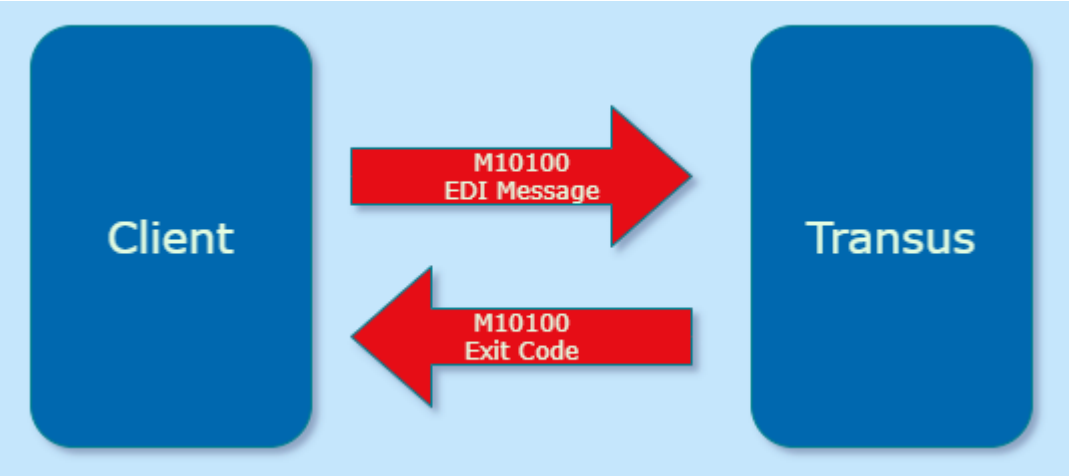

7.2 Receive a message from Transus M10110

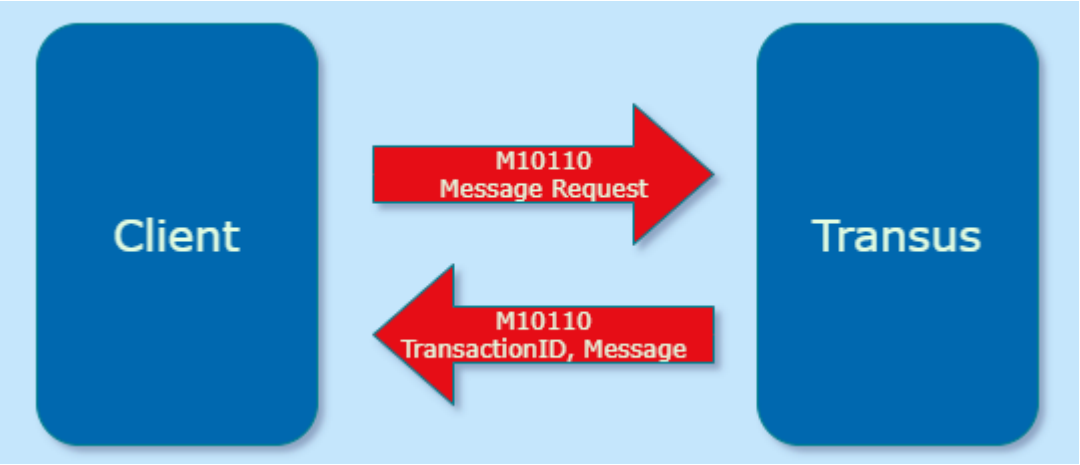
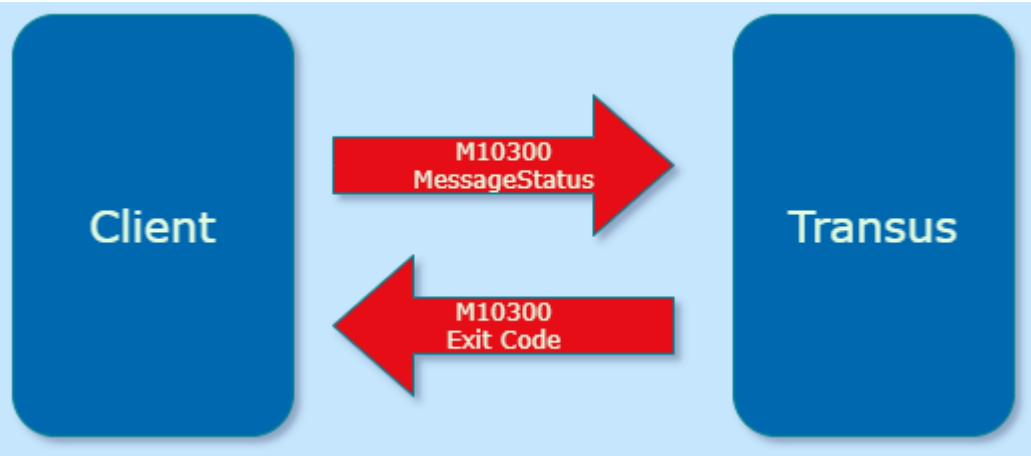
7.3 Send message status and confirmation to Transus