An informal introduction to Python

Inteligencia Artificial en los Sistemas de Control Autónomo Máster Universitario en Ingeniería Industrial

Departamento de Automática





Objectives

- $\scriptstyle\rm I.$ Understand the main Python features, strengths and weaknesses
- 2. Overview the main Python statements
- $_{\mbox{\scriptsize 3.}}$ Being able to program na\"ive Python scripts

Table of Contents

- I. Introduction
 - What is Python?
 - Features
 - Why Python?
 - History
 - Installation
- 2. The Python interpreter
 - Python operation modes
 - Non-interactive
 - Interactive
- 3. An informal introduction
 - Variables
 - Numbers
 - Strings
 - Lists
- 4. Control flow
 - Conditions
 - While loop
- 5. Examples
 - Example 1: Multiplication table



Introduction

What is Python?

Python is a general-purpose, high-level, interpreted programming language


- General-purpose: Many applications.
 High-level: Abstract data structures, doing more with python less code.
- Interpreted: No need to compile.

It emphasizes code **readibility** and programmer's productivity



Features


- Several paradigms
 - OO, imperative and functional
- Dynamic typing
- Interpreted
- Minimalistic syntax
- Portable
- Extensible Bindings to other languages
- Embeddable
- Application domains
 - Web, robotics, data science, game development, admin ...



Want to know other Monty Python's contribution to Computer Science? Click here



Why Python? (I)

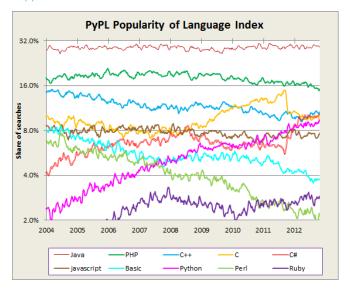

Why Python? (II)

Hello world! examples

Python

```
#!/usr/bin/python
print("Hello, world!")
```

Java

С

```
#include <stdio.h>
int main()
{
    printf("Hello, world!\n");
}
```

C++

```
#include <iostream >
int main()
{
    std::cout << "Hello, world!\n"
    ;
}</pre>
```

Why Python? (III)

More reasons to love Python

- Very easy to learn ...
 - ... yet extremely powerful
 - Clearner syntax compared to almost anything else
- Facilities in development
 - Wide standard library: http://docs.python.org/library/
 - Great number of modules.
 - Almost any software library has its associated wrapping in order to its access from Python.
- Interactive mode
 - Rapid testing and development
- Most languages are made to make big and fast programs
 - Python was designed to ease programmers' life
- It is free software!



Introduction

Where Python is used?

- In Google. One of the development oficial languages
- In YouTube.
- In BitTorrent.
- In animation: DreamWorks Animation, Pixar, Industrial Light & Magic.
- Red HatFedora Installer (Anaconda).
- And much more ...: http://www.python.org/about/success/



Where python is not suitable?

But ... Python is not perfect.

- It is not good for ...
 - Applications that require high computing capacity.
 - Programming of low level (system-programming): programming of kernels, drivers, etc.
 - Very big programs (open discussion).

History

Introduction

- Python was created by Guido van Rossum in the Netherlands
- Python 2.0: Released on 2000
- Python 3.0: Released on 2008. Backwards-incompatible

Python 2.X is still very popular, but Python 3.X is the future



Installation

- If you have a good OS such as Linux or Mac, you already have Python!
- Otherwise (Windows), you have to install it
 - Visit https://www.python.org/downloads/
- Bad news: There is no ``standard" IDE
 - PyCharm, Komodo, PyDev, ...
 - http://wiki.python.org/moin/PythonEditors



PyCharm



Komodo



PyDev



The Python interpreter

Python operation modes

Python is an interpreted language, i.e., it needs an interpreter.

- Interpreted = it is not complied = it needs no compilation.
- Faster development, slower execution.

Two operation modes:

- Interactive: The interpreter reads the program from the stdin (usually the keyboard).
- Non-interactive: The interpreter reads the program from a file (also known as script).



The Python interpreter

Non-interactive

The program is in a plain text file.

- It can be edited with any text editor.
- Extension ``.py".
- Execution permission (chmod u+x myscript.py).
- By default, UTF-8 encoding.

The first line must be #!/usr/bin/python

- It is the interpreter location.
- If not present, the interpreted must be invoked.

script.py

```
#!/usr/bin/python
print("Hello, world!")
```

python script.py
./script.py



The Python interpreter

Interactive

Just run python

- Different names for different versions to avoid conflicts.
- python, python3.4, ...

```
localhost:~ user$ python3.4
Python 3.4.2 (v3.4.2: ab2co23a9432, Oct 5 2014, 20:42:22)
[GCC 4.2.1 (Apple Inc. build 5666) (dot 3)] on darwin
Type "help", "copyright", "credits" or "license" for more information.
>>>
```

The programmer executes as he writes code down.



Variables (I)

Variable: A name that refers a value.

- No need to declare variables (Python is weakly typed!).
- Python automatically assigns types.
- Basic types: Numbers, strings and booleans.

Complex data structures:

Lists, tuples, dictionaries, associative arrays.

Variables

variable = value



Variables (II)

Hint: type() returns data type.

```
>>> integer = 4
>>> float = 2.3
>>> integer + float
6.3
>>> string = "Spam"
>>> boolean = True
>>> a = b = c = 0
>>> b
>>> type(integer)
<type 'int'>
```



Inteligencia Artificial en los Sistemas de Control Autónomo

Numbers (I)

Number types: Integer, float and complex.

Sign	OPERATOR	Sign	OPERATOR
		11	Floor division ¹
=	Assignment	//	
+	Add	**	Exponent
-	Substration	+=	Assign +
*	Multiplication	-=	Assign -
/	Division	*=	Assign *
%	Modulus	/=	Assign /

¹Only Python 3.x



Numbers (II)

ArithmeticDemo.py

```
a = int(input("Number: "))
b = float(input("Number: "))
c = (a * b) / 2
c += I
d = c ** 2
print("Result c: ", c)
print("Result d: ", d)
```

New Python elements:

- The input() function.
- The int() and float() functions.



Strings (I)

```
>>> 'hello'
'hello'
>>> "hello"
'hello'
```

Strings are delimited with single or double quotes, they can be used together.

Triple quotes to define multi-line strings.

```
>>> """hello
... there are multiple lines"""
'hello\nthere are multiple lines'
```

As C, C++ or Java, '\n' means carriage return.



Strings (II)

Of course, variables can contain strings.

```
>>> text = "hello"
>>> print(text)
hello
```

New Python elements:

• The print() function.



Strings (III)

Strings contatenation

>>> "hello" + " there" 'hello there' >>> "hello" "there" 'hellothere'

Variables with strings

String length

```
>>> len("hello")
5
```



Strings (IV)

Strings can be used as a sequence of characters: Slice notation.

- Quite common in Python data structures.
- It uses indices (as an array). First index is 0.

```
>>> a = "hello"
>>> a[2]
'1'
>>> a[2:]
'11o'
>>> a[:2]
'he'
>>> a[2:] + a[:2]
'llohe'
>>> a[2:4]
'11'
```



Lists (I)

List: An ordered collection of mutable data.

- Very powerful data structure, similar to an array.
- Ordered: Data in the list have a location.
- Mutable: Data can be modified.
- Data types can be different.

List initialization

```
variable = [data1, data2, ..., dataN]
```



Inteligencia Artificial en los Sistemas de Control Autónomo

Lists (II)

Definition example

```
['spam', 'eggs', 123]
```

>>> a

>>> a = ['spam', 'eggs', 123]

Slice notation and the len() function work on lists

```
>>> a[2]
123
>>> a[1:]
['eggs', 123]
>>> a + a[2:len(a)]
['spam', 'eggs', 123, 123]
```



Control flow

Conditions (I)

Conditional statements implement decision making

- Decide some code has to be executed or not.
- The result is a boolean.
- Execute code if condition is satisfied.

```
if statement

if condition:
    # Some code
else:
    # Some other code
```

New Python elements:

- Comments begin with '#'.
- Indentation plays a mayor role: It defines code bodies.



Conditions (II)

Condition example

```
temperature = float (input ('What is the temperature?'))
if temperature > 70:
    print ('Wear shorts.')
else:
    print ('Wear long pants.')
print ('Get some exercise outside.')
```

(Source)

New Python element:

Comparison operators.



Inteligencia Artificial en los Sistemas de Control Autónomo

Control flow

Conditions (III)

Sign	Operator	Sign	Operator
==	Equal	and	Logical and
!=	Not equal	or	Logical or
>	Greater	not	Logical not
<	Lower		
>=	Greater or equal		
<=	Lower or equal		

Example: ((age > 18) or (name == 'Biggus Dickus'))



While loop

Fibonacci series

```
#!/usr/bin/python
a, b = o, 1 # Init variables
while b < 10: # This is a loop
  print("b = ", b)
  print("a = ", a) # Identation is very important here!
  a, b = b, a+b
```

New Python elements:

• Multiple assignments.



Examples

Examples

Example 1: Multiplication table

```
multi.py
table = 8
start = 1
max = 10
s = '-' * 20
print (s)
print ('The table of 8')
print (s)
i = start
while i <= max.
    result = i * table
    print (i, ' * ', table, ' = ', result)
    i = i + I
print (s)
print ('Done counting ...')
print (s)
```

Source



Bibliographic references I

[van Rosum, 2012] G. van Rossum, Jr. Fred L. Drake. Python Tutorial Release 3.2.3, chapters 2 and 3. Python Software Foundation, 2012.

[Bahit, 2008] E. Bahit. Curso: Python para principiantes. Creative Commons Atribución-NoComercial 3.0, 2012.

[Swaroop, 2008] C H. Swaroop.
A Byte of Python.
Creative Commons Attribution-ShareAlike 3.0, 2008.

[Pilgrim, 2004] M. Pilgrim. Dive into Python. Ed. Prentice Hall, 2004.