

### Taula users.

Creació de la taula users, amb els camps:


ID - Primary Key INT

Nom - TEXT

Cognom - TEXT

email - TEXT

password - TEXT

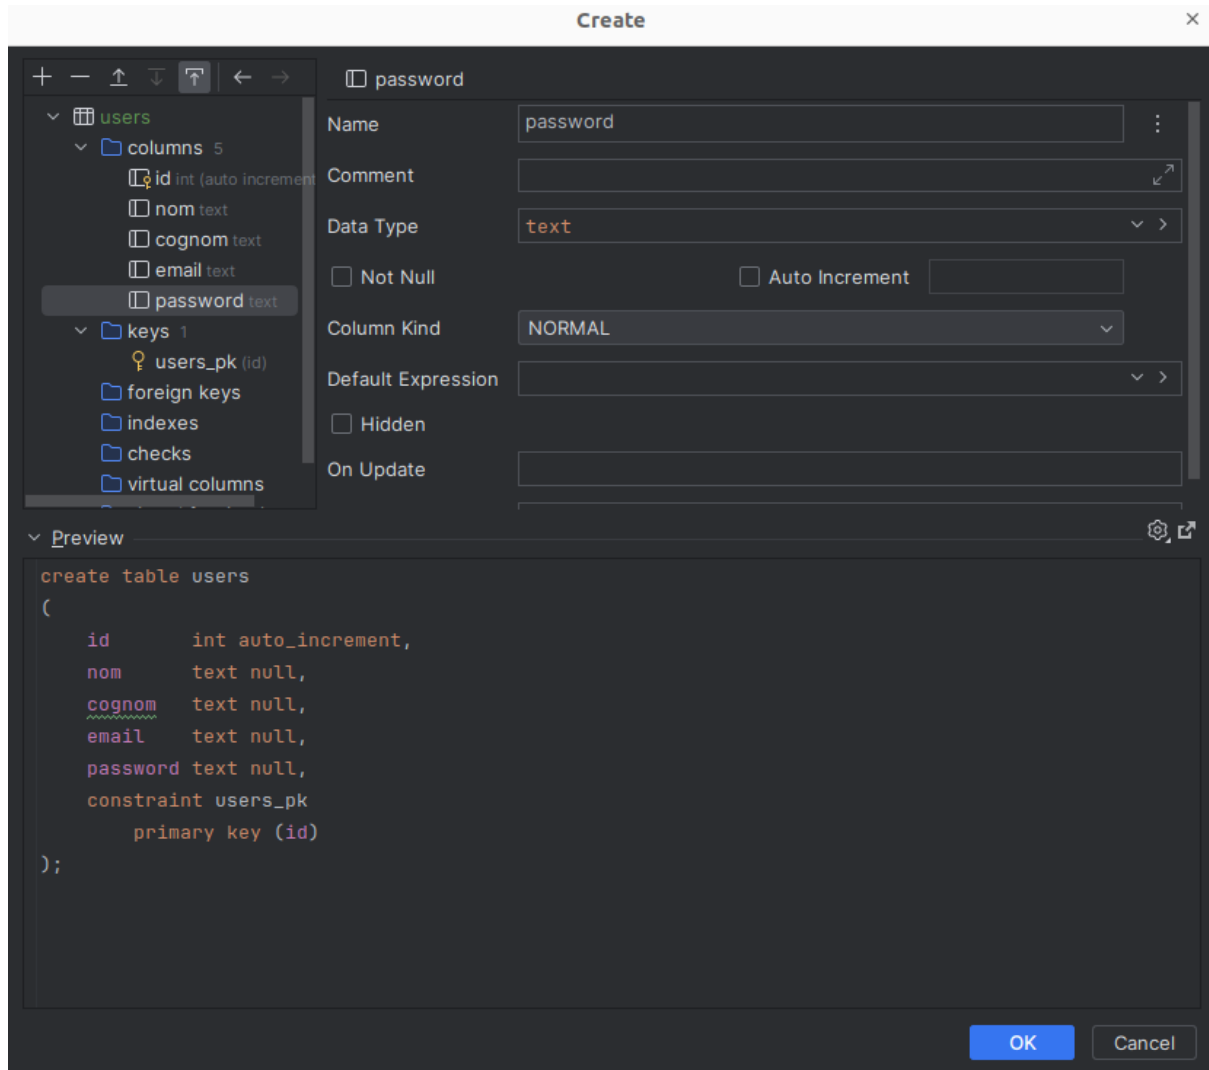


The 'Create' dialog box is shown, configuring the 'password' column for the 'users' table. The column configuration includes:

- Name: password
- Comment: (empty)
- Data Type: text
- Not Null: ☐
- Auto Increment: ☐
- Column Kind: NORMAL
- Default Expression: (empty)
- Hidden: ☐
- On Update: (empty)

The 'Preview' section displays the SQL code for creating the table:

```
create table users
(
  id      int auto_increment,
  nom      text null,
  cognom   text null,
  email    text null,
  password text null,
  constraint users_pk
    primary key (id)
);
```


Insert a la taula users.

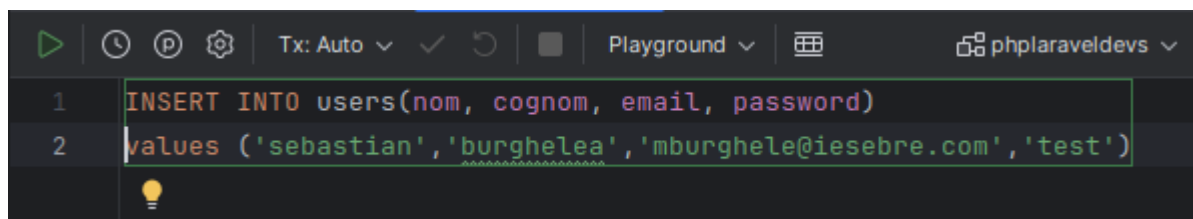

The SQL playground interface shows the following SQL code:

```
1 INSERT INTO users(nom, cognom, email, password)
2 values ('sebastian', 'burghelea', 'mburghele@iesebre.com', 'test')
```

## Comprovació del insert.

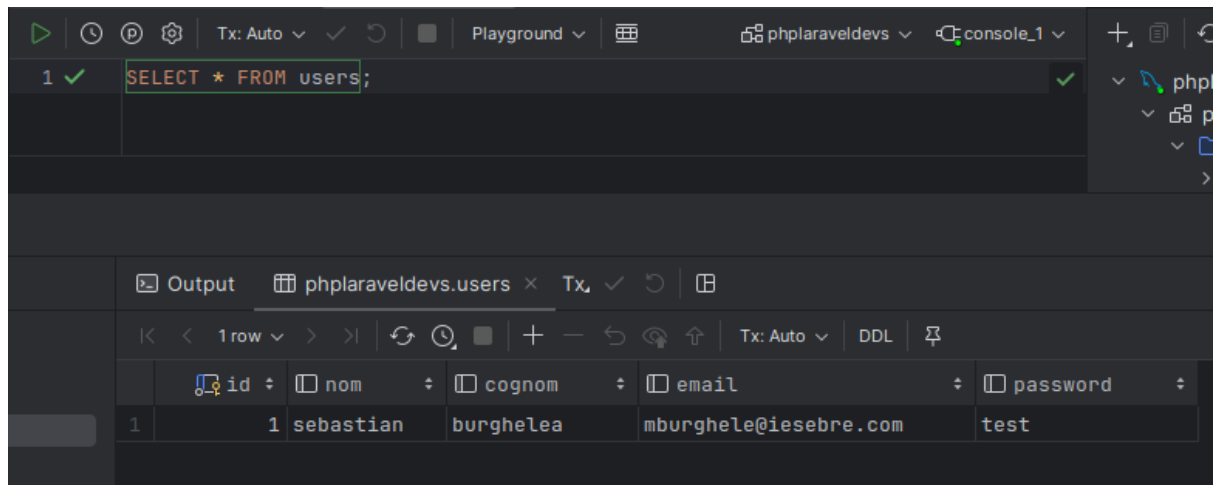

The screenshot shows a database playground interface. At the top, a SQL query `SELECT * FROM users;` is entered and executed successfully, indicated by a green checkmark. Below the query, the results are displayed in a table with 5 columns: `id`, `nom`, `cognom`, `email`, and `password`. The table contains one row of data.

id	nom	cognom	email	password
1	sebastian	burghlea	mburghele@iesebre.com	test

## Users.php

Select de la informació de la taula users.

Amb el require crido la vista users.blade.php.

```
1 <?php
2
3 use framework\App;
4
5 $users = App::get('database')->selectAll('users');
6
7 require '../resources/views/users.blade.php';
```


## NAV

Afegeixo una ruta per a mostrar un nou camp a la barra de navegació.

```
<a href="/users"
class="text-gray-300 hover:bg-gray-700 hover:text-white rounded-md px-3 py-2 text-sm font-medium">Users</a>
```

## Resultat:

Ara surt el camp users per navegar entre vistes.



## Routes

Afegeixo la ruta per a poder navegar pel navegador.

```
'/users' => '../app/users.php',
];
```

## users.blade.php

Afegeixo un HEADER i utilitzo els layouts nav i html\_header.

```
1 <?php require '../resources/views/layout/html_header.blade.php'; ?>
2 <?php require '../resources/views/layout/nav.blade.php'; ?>
3
4 <header class="bg-white shadow">
5     <div class="mx-auto max-w-7xl px-4 py-6 sm:px-6 lg:px-8">
6         <h1 class="text-3xl font-bold tracking-tight text-gray-900">USERS LIST</h1>
7     </div>
8 </header>
```

Contingut del users.blade.php:

```
<main >
    <div class="mx-auto max-w-7xl px-4 py-6 sm:px-6 lg:px-8">
        <div class="px-4 sm:px-6 lg:px-8">
            <div class="sm:flex sm:items-center">
                <div class="sm:flex-auto">
                    <h1 class="text-base font-semibold leading-6 text-gray-900">Users</h1>
                    <p class="mt-2 text-sm text-gray-700">A list of users.</p>
                </div>
                <!-- <div class="mt-4 sm:ml-16 sm:mt-0 sm:flex-none">
                    <button type="button" class="block rounded-md bg-indigo-600 px-3 py-2 tex
                </div>
            -->
        </div>
```

Creo una taula amb les columnes **ID**, **NAME**, **LAST NAME**, **EMAIL** i **PASSWORD**, faig un bucle per a recórrer els camps de la select users i afegeixo tants td com camps vull mostrar.


```
<div class="mt-8 flow-root">
  <div class="-mx-4 -my-2 overflow-x-auto sm:-mx-6 lg:-mx-8">
    <div class="inline-block min-w-full py-2 align-middle sm:px-6 lg:px-8">
      <table class="min-w-full divide-y divide-gray-300">
        <thead>
          <tr>
            <th scope="col" class="py-3.5 pl-4 pr-3 text-left text-sm font-semibold text-gray-900 sm:pl-0">ID</th>
            <th scope="col" class="px-3 py-3.5 text-left text-sm font-semibold text-gray-900">Name</th>
            <th scope="col" class="px-3 py-3.5 text-left text-sm font-semibold text-gray-900">Last Name</th>
            <th scope="col" class="px-3 py-3.5 text-left text-sm font-semibold text-gray-900">Email</th>
            <th scope="col" class="px-3 py-3.5 text-left text-sm font-semibold text-gray-900">Password</th>
            <th scope="col" class="relative py-3.5 pl-3 pr-4 sm:pr-0">
              <span class="sr-only">Edit</span>
            </th>
          </tr>
        </thead>
        <tbody class="divide-y divide-gray-200">
          <?php foreach ($users as $user): ?>
            <tr>
              <td class="whitespace-nowrap py-4 pl-4 pr-3 text-sm font-medium text-gray-900 sm:pl-0"><?= $user->id; ?></td>
              <td class="whitespace-nowrap px-3 py-4 text-sm text-gray-500"><?= $user->nom; ?></td>
              <td class="whitespace-nowrap px-3 py-4 text-sm text-gray-500"><?= $user->cognom; ?></td>
              <td class="whitespace-nowrap px-3 py-4 text-sm text-gray-500"><?= $user->email; ?></td>
              <td class="whitespace-nowrap px-3 py-4 text-sm text-gray-500"><?= $user->password; ?></td>
              <td class="relative whitespace-nowrap py-4 pl-3 pr-4 text-right text-sm font-medium sm:pr-0">
                <a href="#" class="text-indigo-600 hover:text-indigo-900">Edit<span class="sr-only">, Lindsay Walton</span></a>
              </td>
            </tr>
          <?php endforeach; ?>
          <!-- More people... -->
        </tbody>
      </table>
    </div>
  </div>
</div>
```

Per últim fico el **layout del footer**.



```
</div>
</div>

</main>
<?php require '../resources/views/layout/footer.blade.php'; ?>
```

**Resultat final:**



TasksAboutContactUsers



### USERS LIST

**Users**

A list of users.

ID	Name	Last Name	Email	Password	
1	sebastian	burghelea	mburghelle@iesebre.com	test	<a href="#">Edit</a>